



1.6dB Bandwidth


Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
BLE	2402	Ant1	0.5090	0.5	PASS
BLE	2440	Ant1	0.5060	0.5	PASS
BLE	2480	Ant1	0.5109	0.5	PASS




6dB Bandwidth_BLE_2402_Ant1

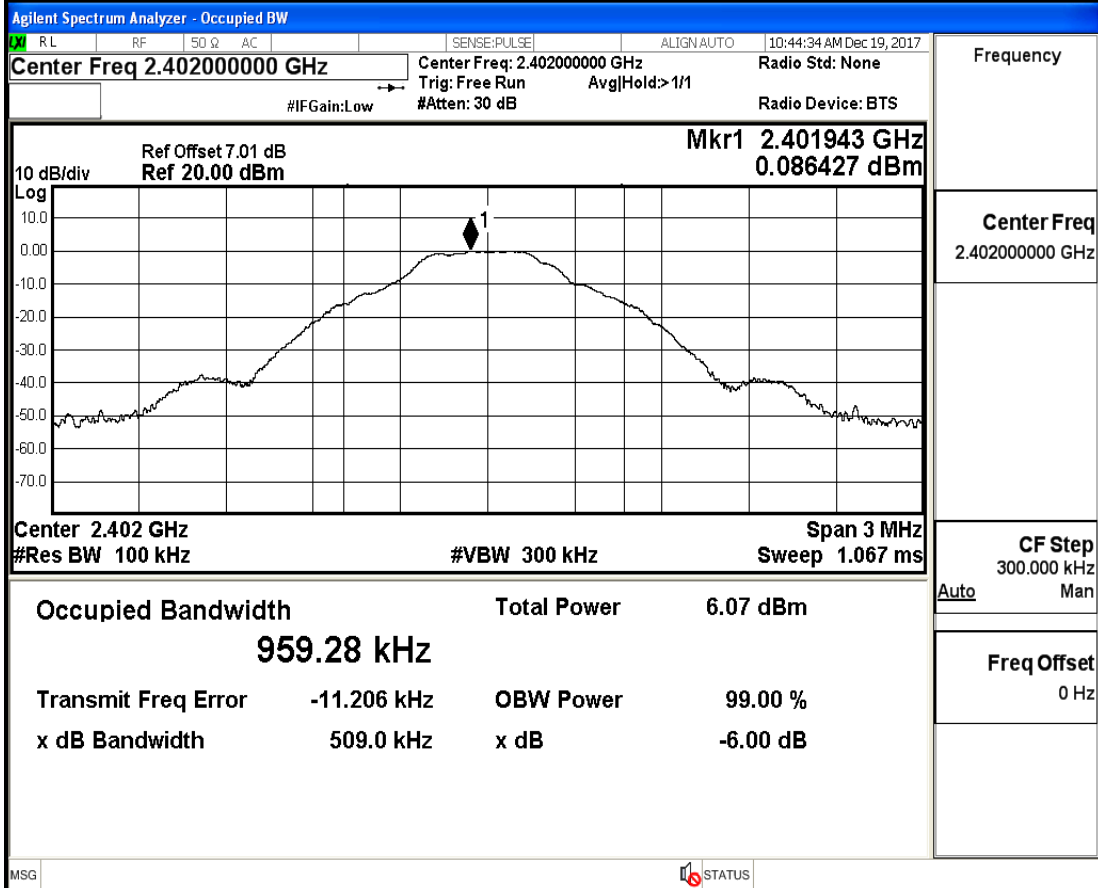

6dB Bandwidth_BLE_2440_Ant1

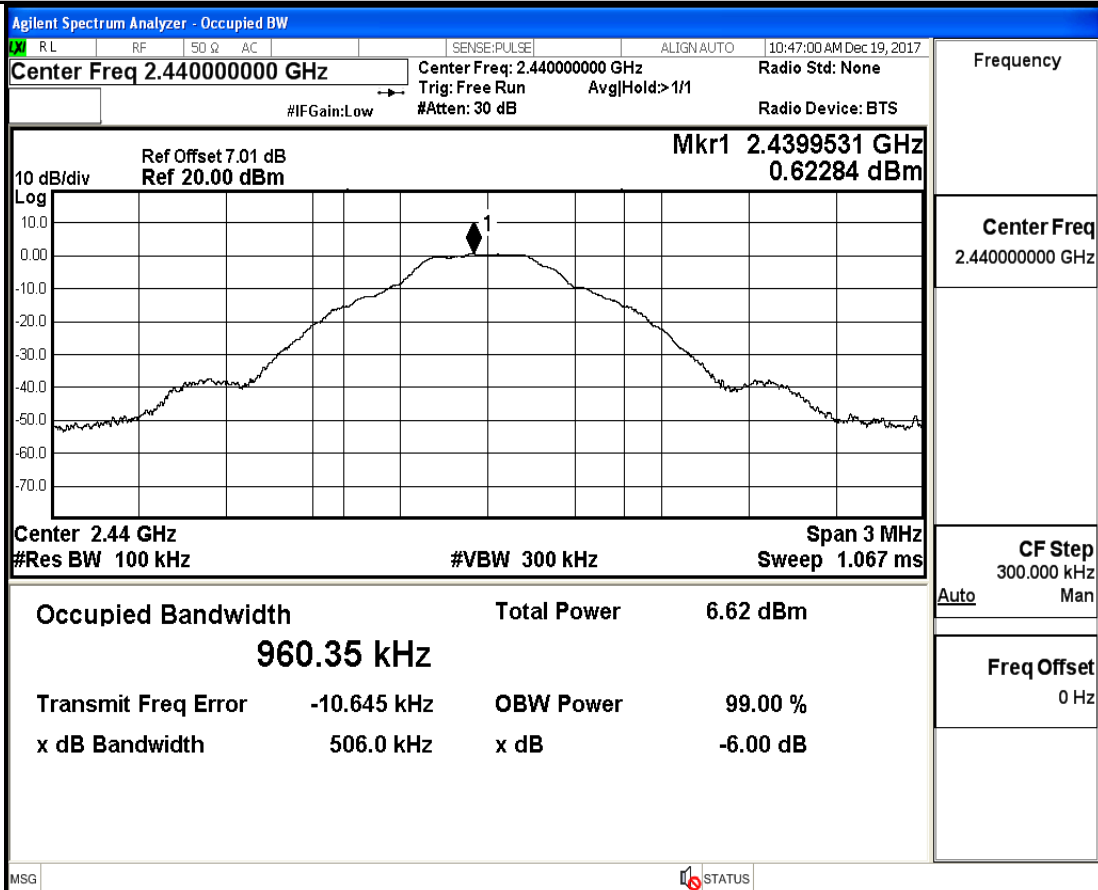


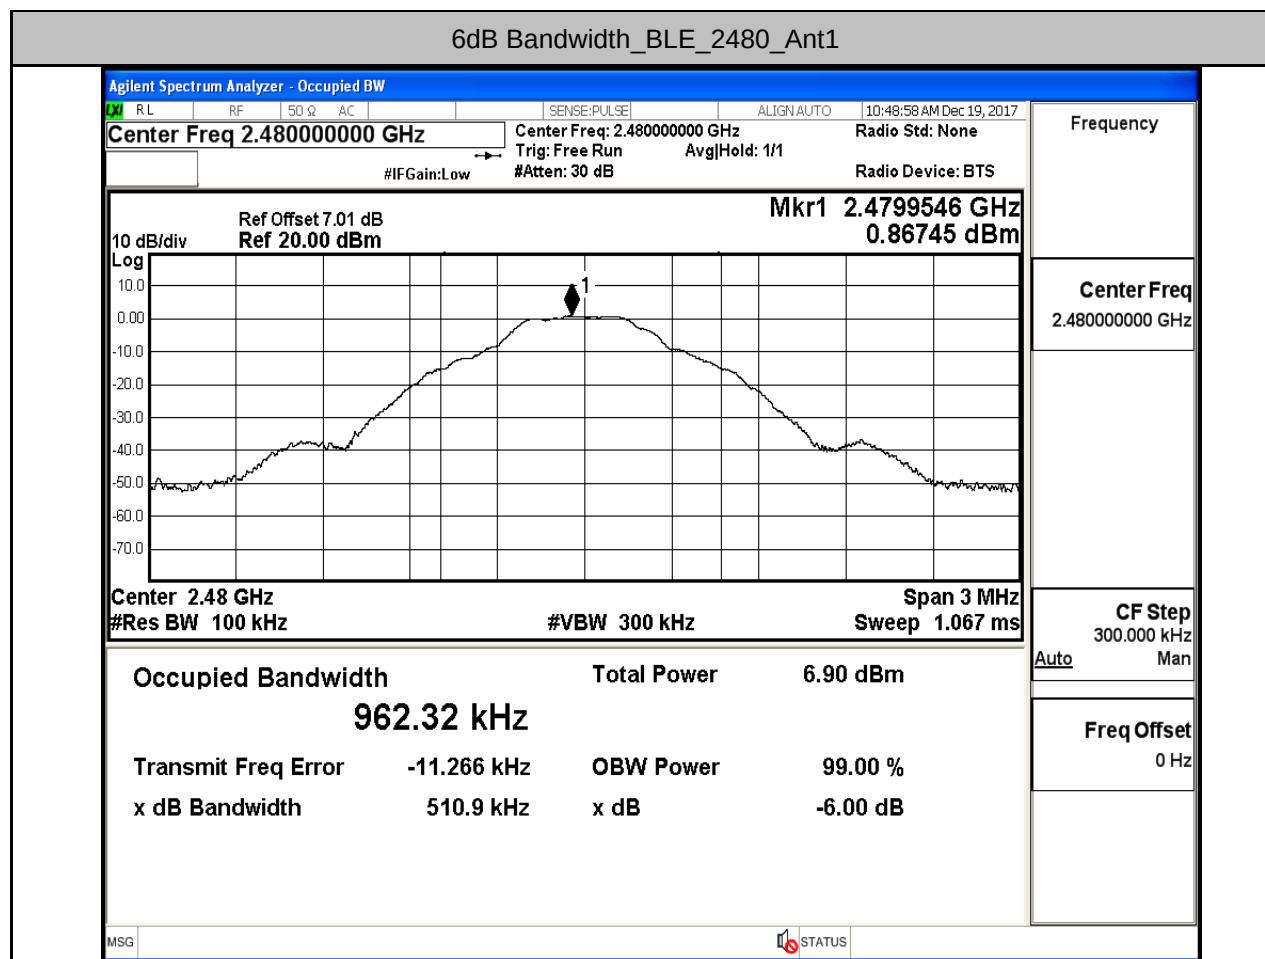


2.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	1.269	30	PASS
BLE	2440	Ant1	1.741	30	PASS
BLE	2480	Ant1	2.034	30	PASS


Maximum peak conducted output power_BLE_2402_Ant1

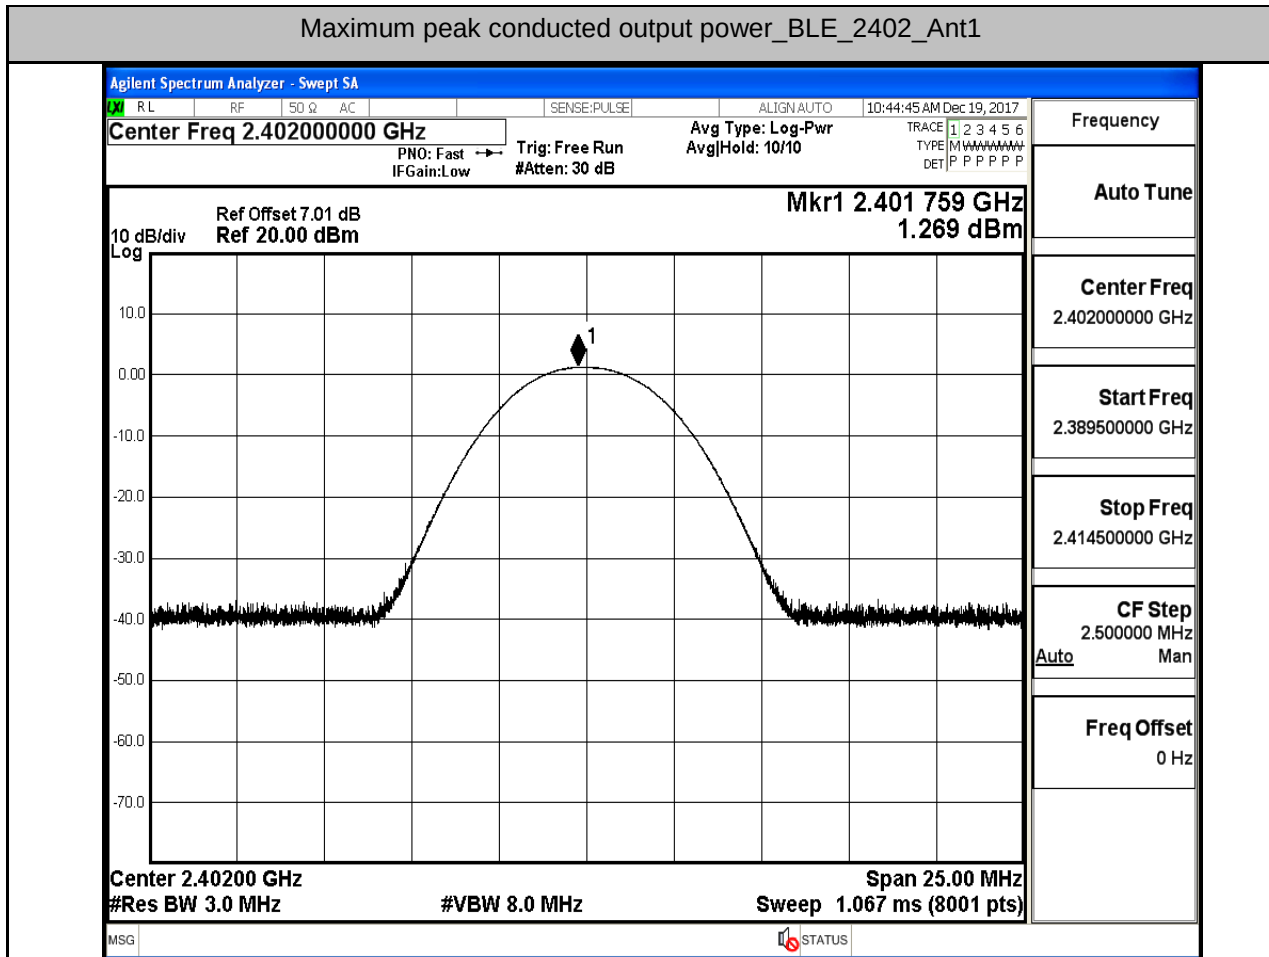

Maximum peak conducted output power_BLE_2440_Ant1

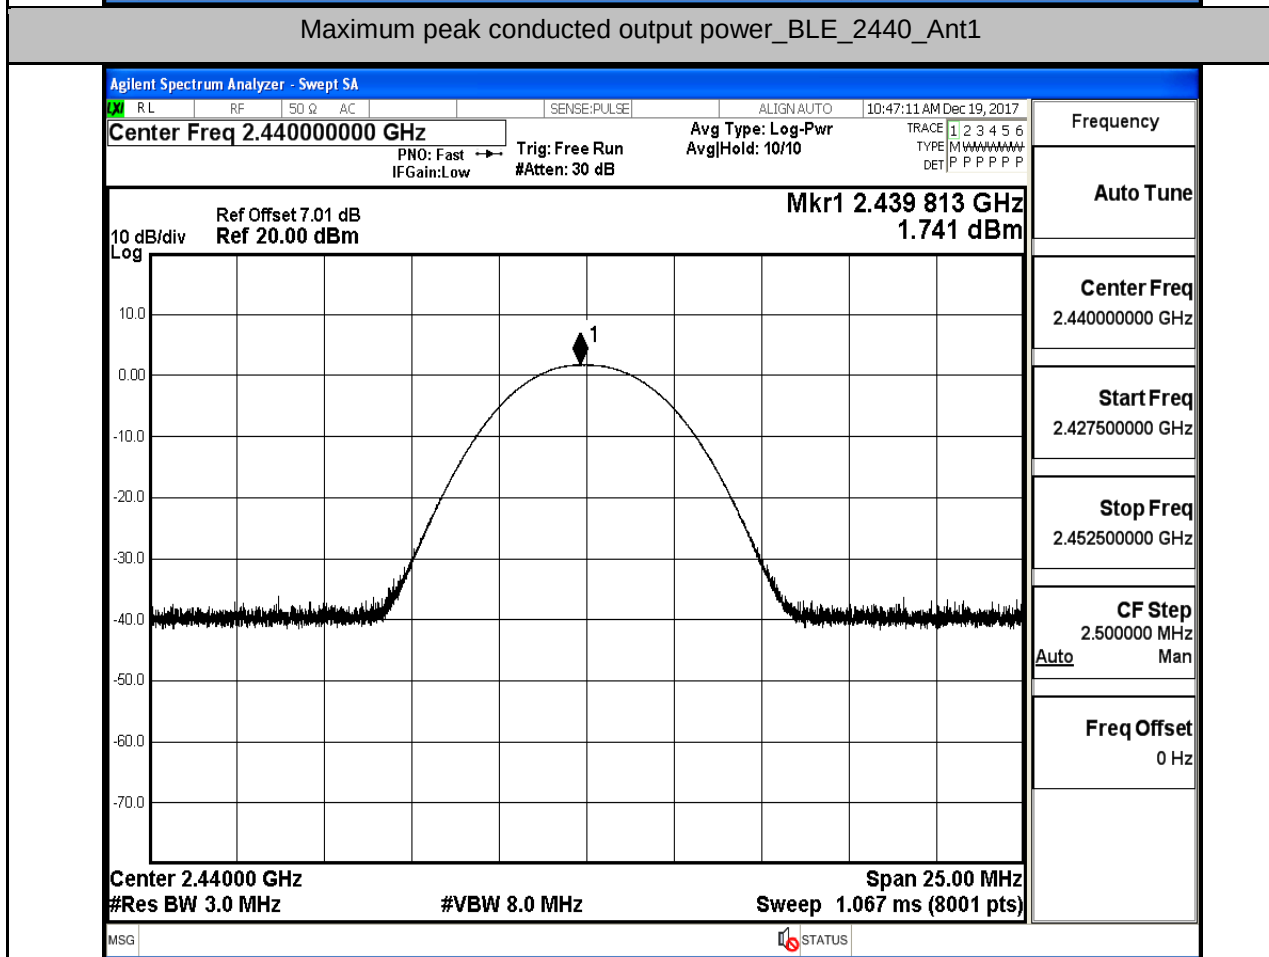


Maximum peak conducted output power_BLE_2480_Ant1

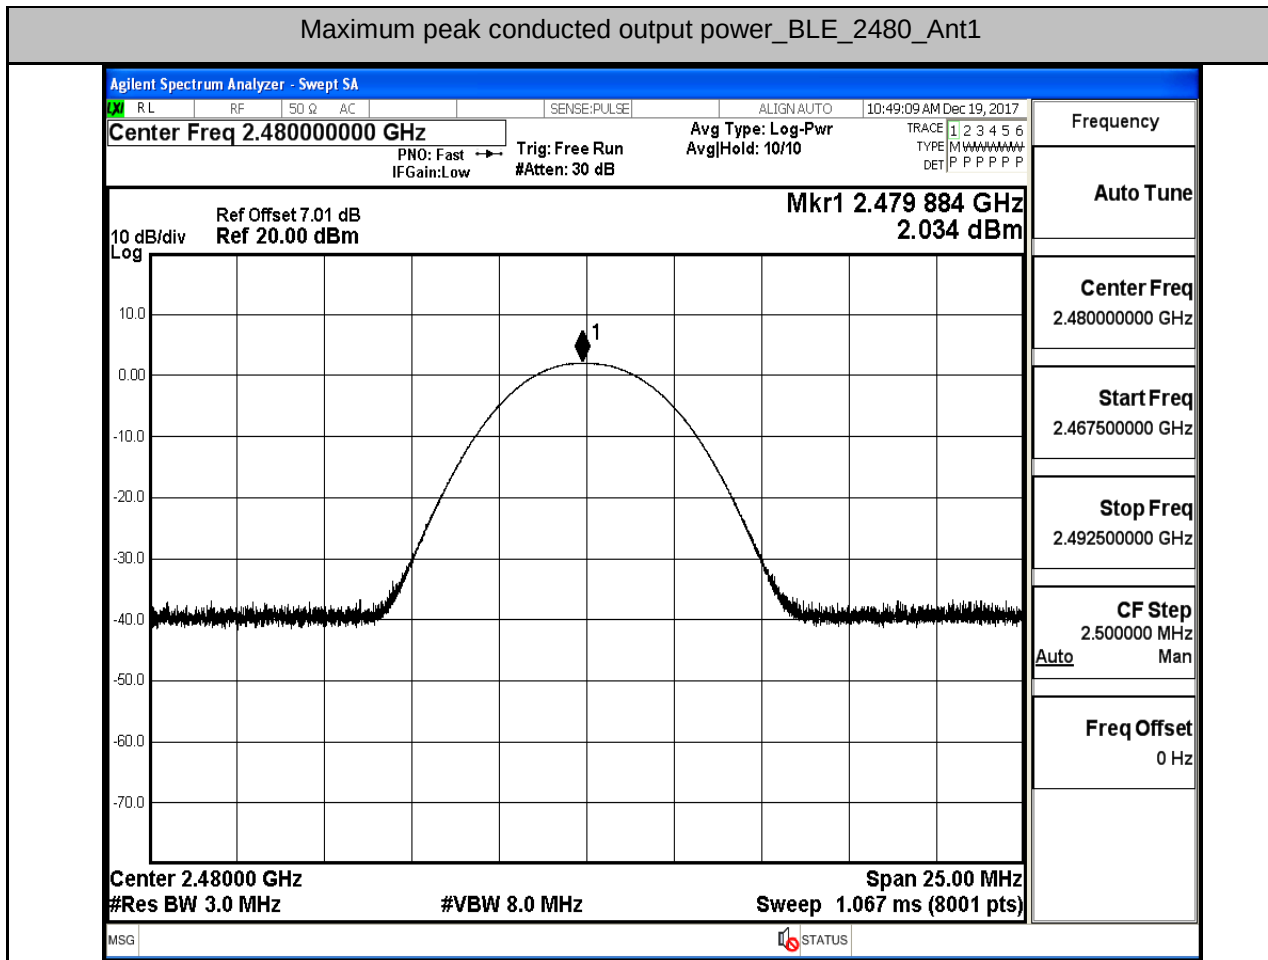


3.Maximum Peak power spectral density

Test Mode	Test Channel	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
BLE	2402	Ant1	-9.524	8.00	PASS
BLE	2440	Ant1	-8.908	8.00	PASS
BLE	2480	Ant1	-8.767	8.00	PASS


Maximum Peak power spectral density_BLE_2402_Ant1

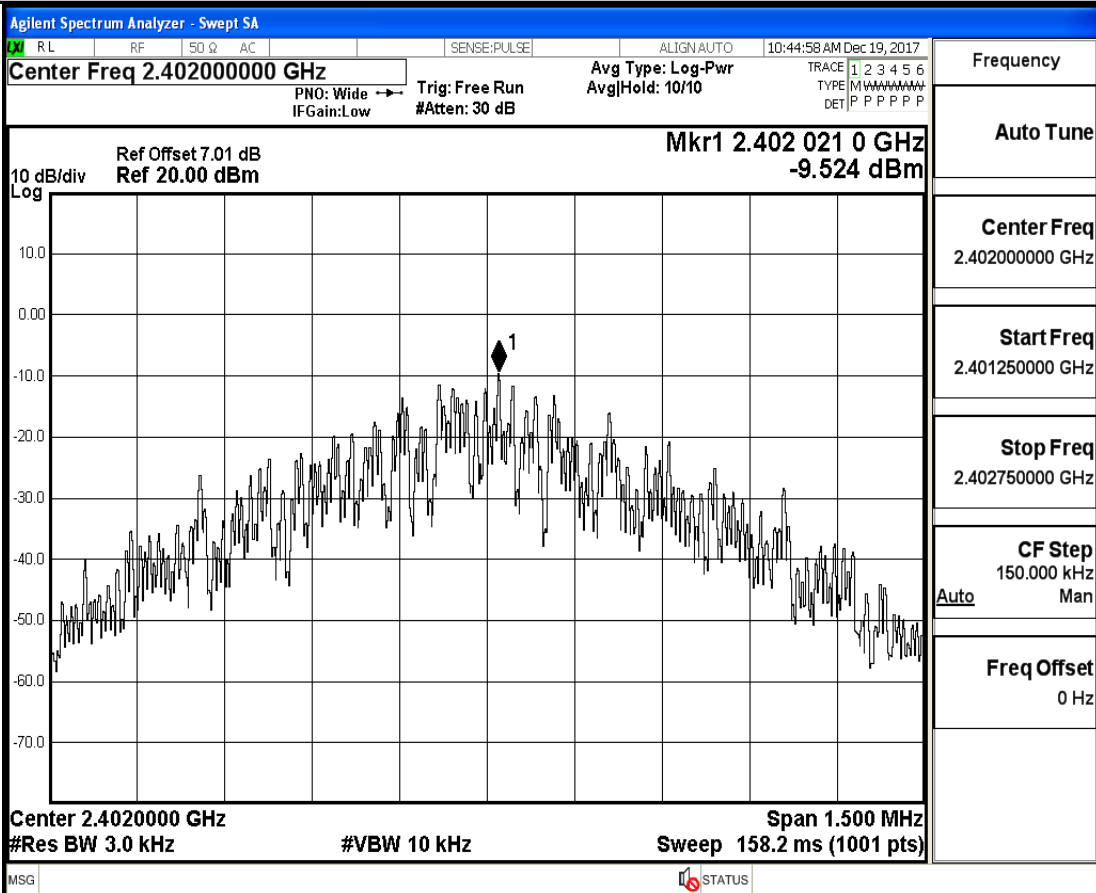

Maximum Peak power spectral density_BLE_2440_Ant1

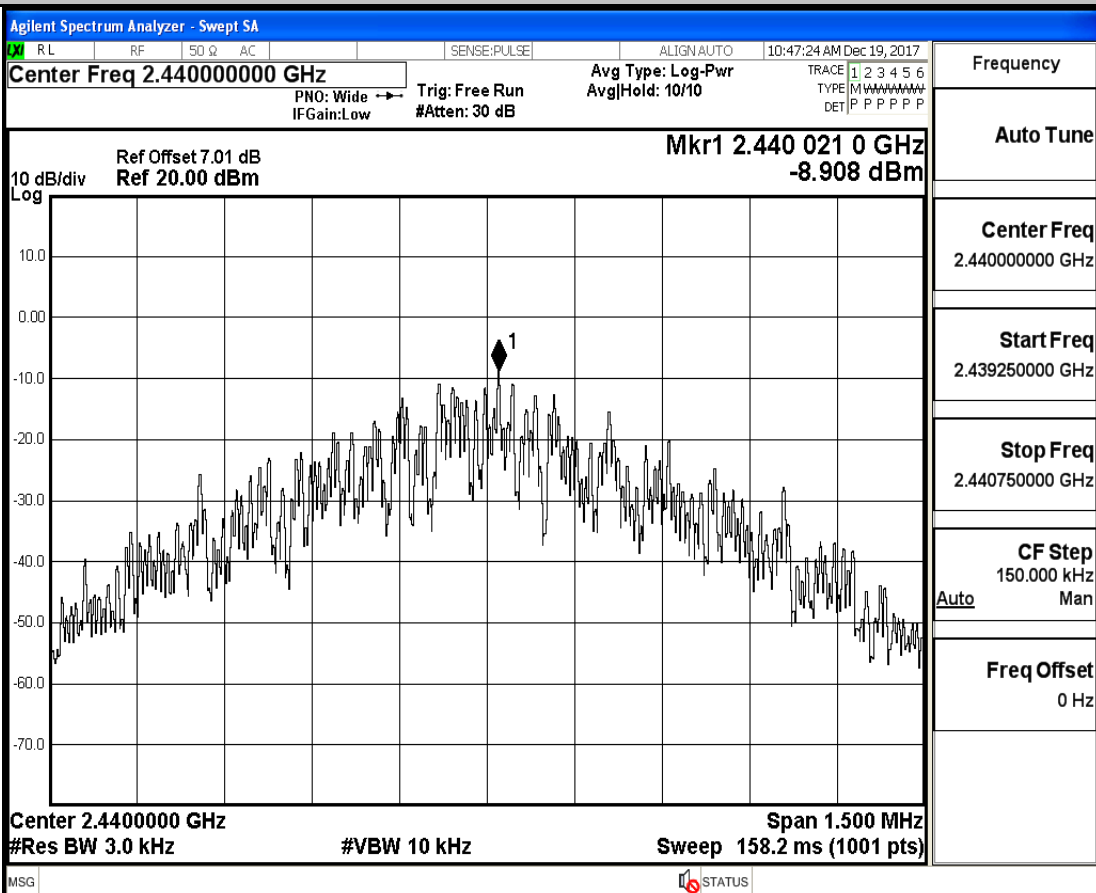


Maximum Peak power spectral density_BLE_2480_Ant1

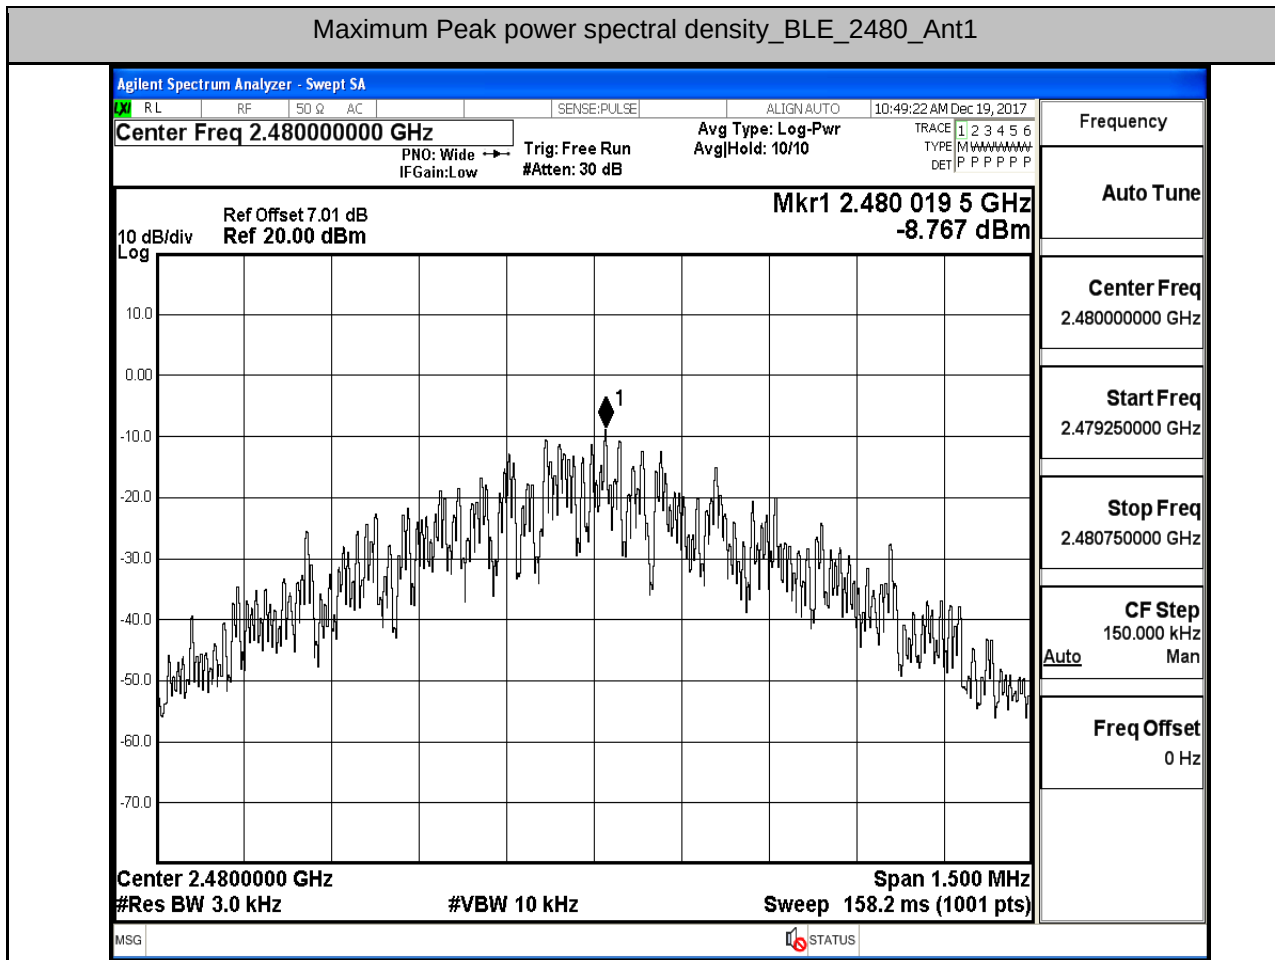


4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	0.289	-51.526	-19.71	PASS
BLE	2480	Ant1	1.285	-51.045	-18.72	PASS

Band-edge for RF Conducted Emissions_BLE_2402_Ant1

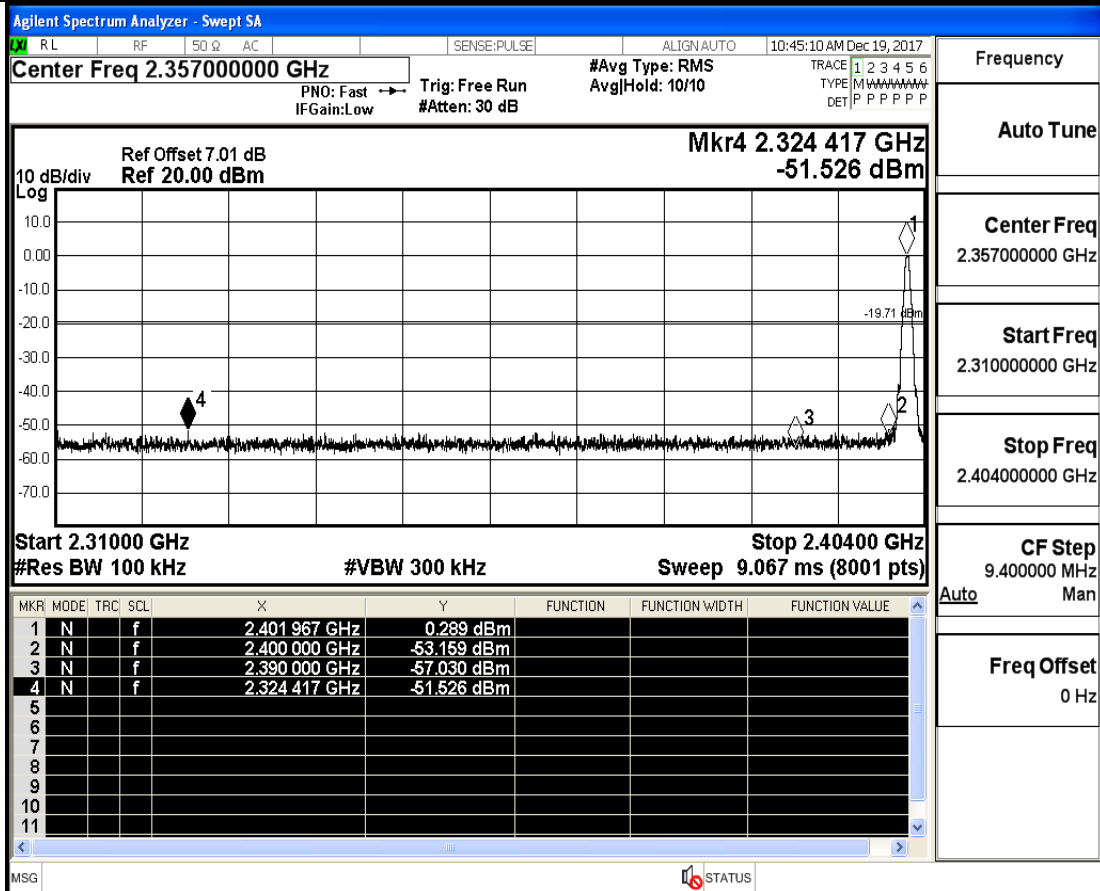


Band-edge for RF Conducted Emissions_BLE_2480_Ant1

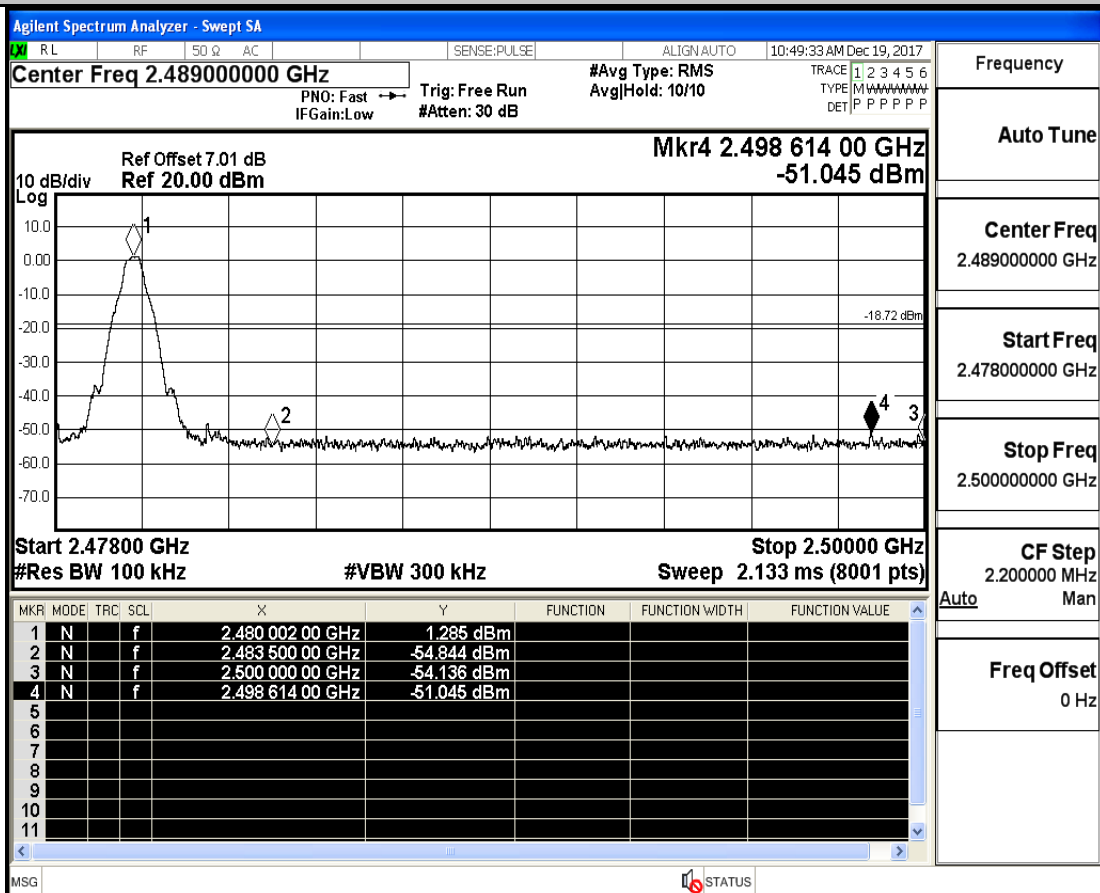


5.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	30	25000	100	300	0.102	-45.379	<-19.898	PASS
BLE	2440	Ant1	30	25000	100	300	0.626	-45.226	<-19.374	PASS
BLE	2480	Ant1	30	25000	100	300	0.911	-44.738	<-19.089	PASS


RF Conducted Spurious Emissions_BLE_2402_Ant1

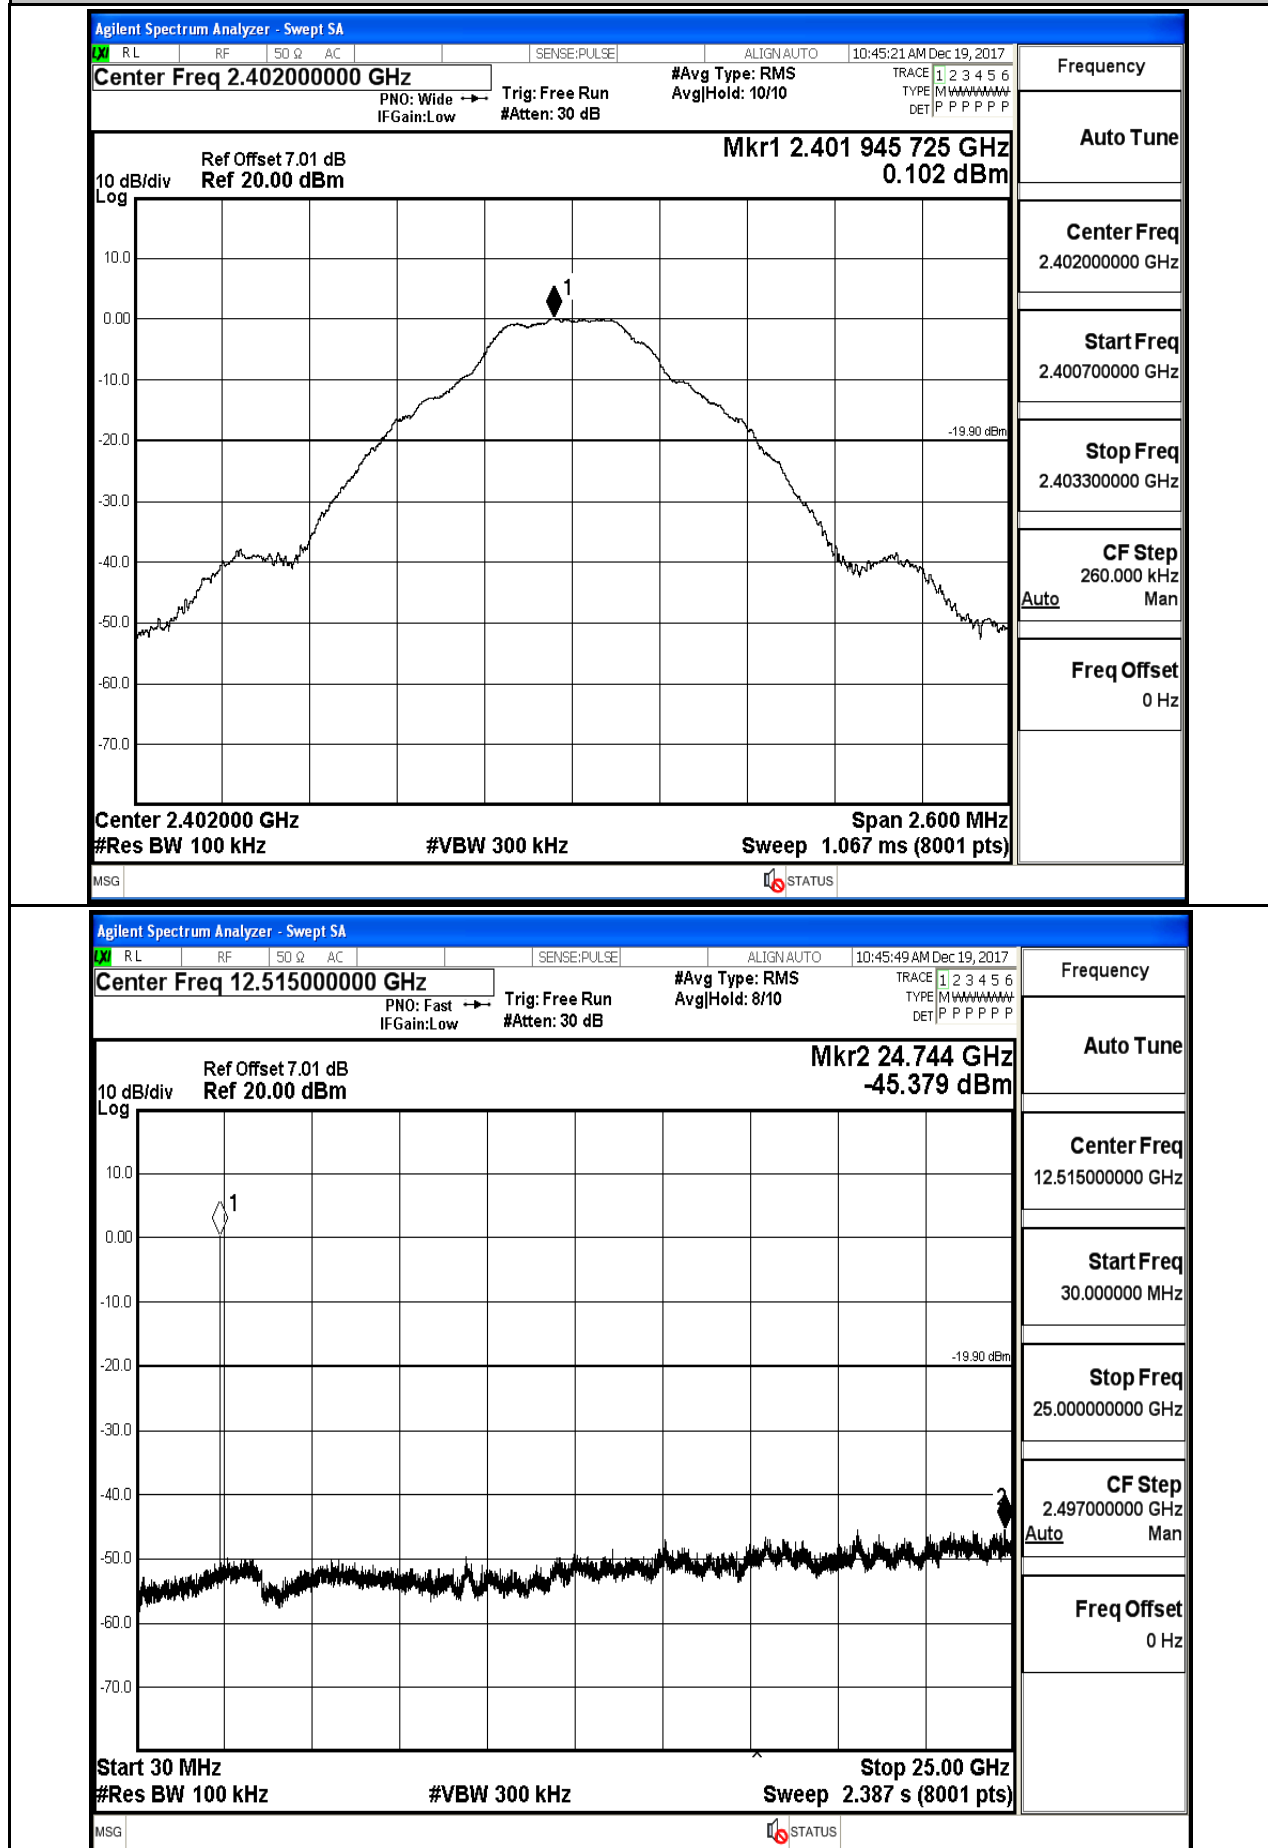

RF Conducted Spurious Emissions_BLE_2440_Ant1

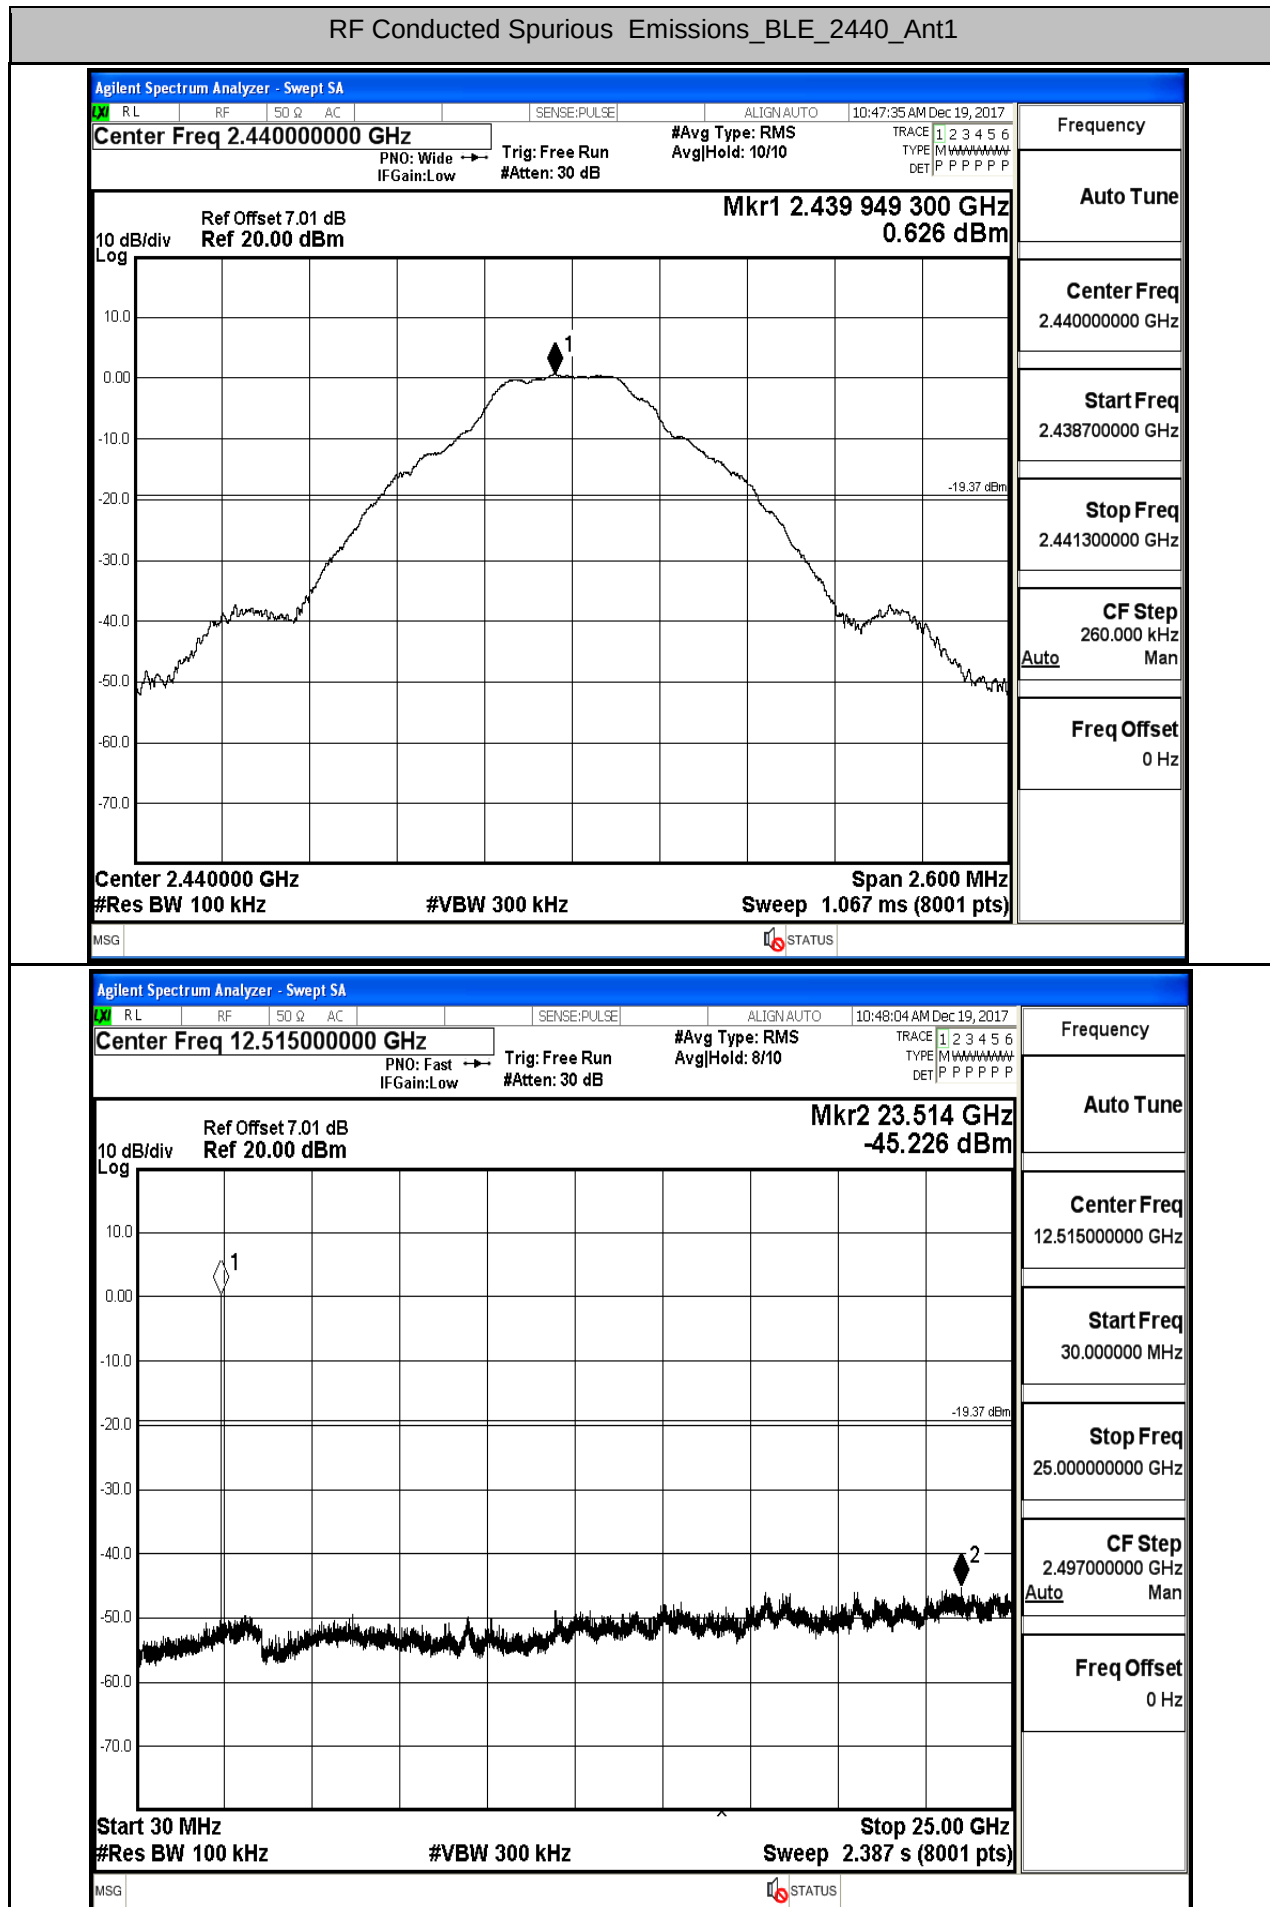


RF Conducted Spurious Emissions_BLE_2480_Ant1

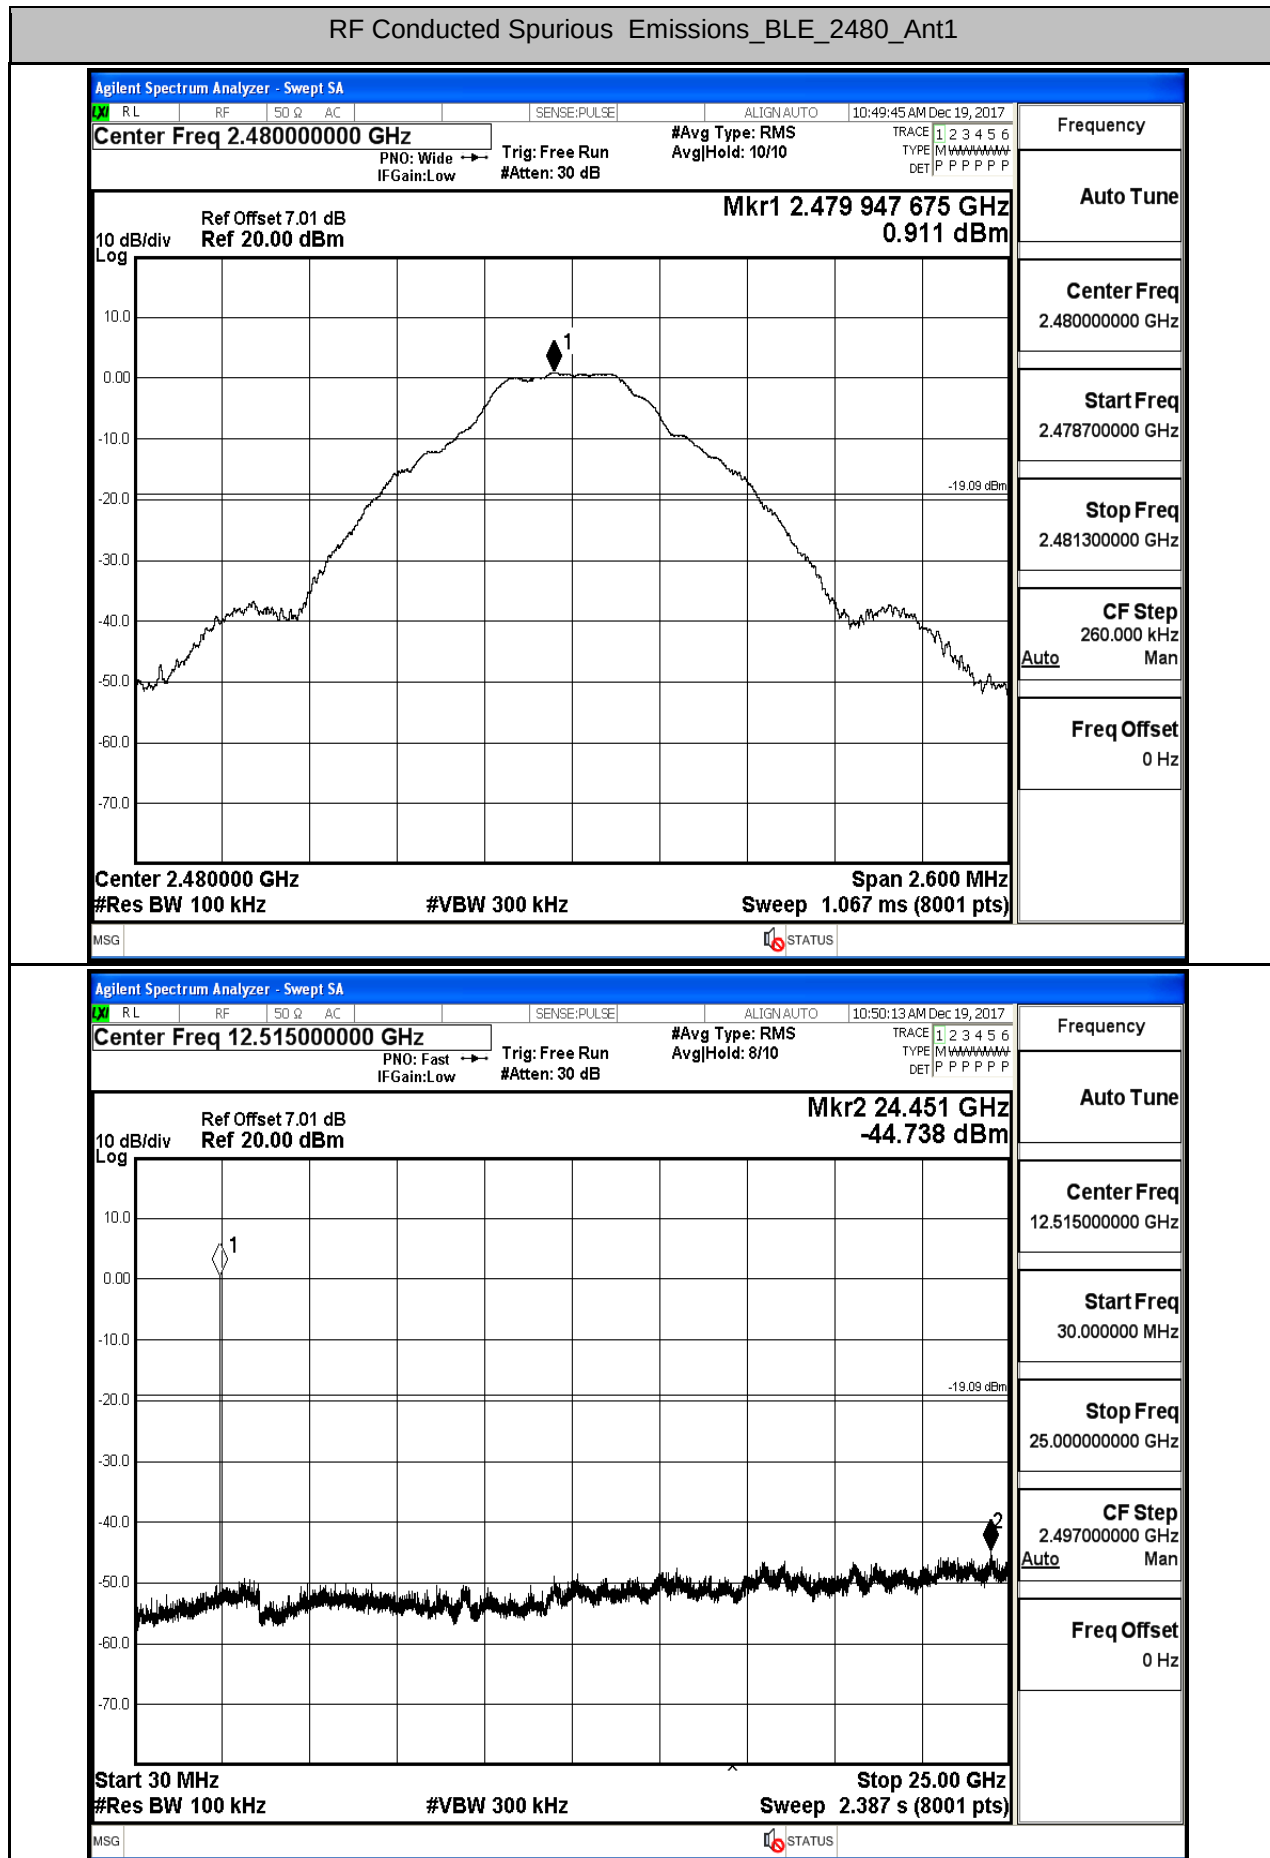


6.Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BLE	2402	Ant1	2310.0	-44.50	2.15	0	52.76	PEAK	74	PASS
BLE	2402	Ant1	2310.0	-55.31	2.15	0	41.95	AV	54	PASS
BLE	2402	Ant1	2390.0	-43.37	2.15	0	53.89	PEAK	74	PASS
BLE	2402	Ant1	2390.0	-55.01	2.15	0	42.25	AV	54	PASS
BLE	2480	Ant1	2483.5	-44.01	2.15	0	53.25	PEAK	74	PASS
BLE	2480	Ant1	2483.5	-53.88	2.15	0	42.38	AV	54	PASS
BLE	2480	Ant1	2500.0	-44.28	2.15	0	52.98	PEAK	74	PASS
BLE	2480	Ant1	2500.0	-54.67	2.15	0	42.59	AV	54	PASS

Restrict-band band-edge measurements_BLE_2480_Ant1_PEAK

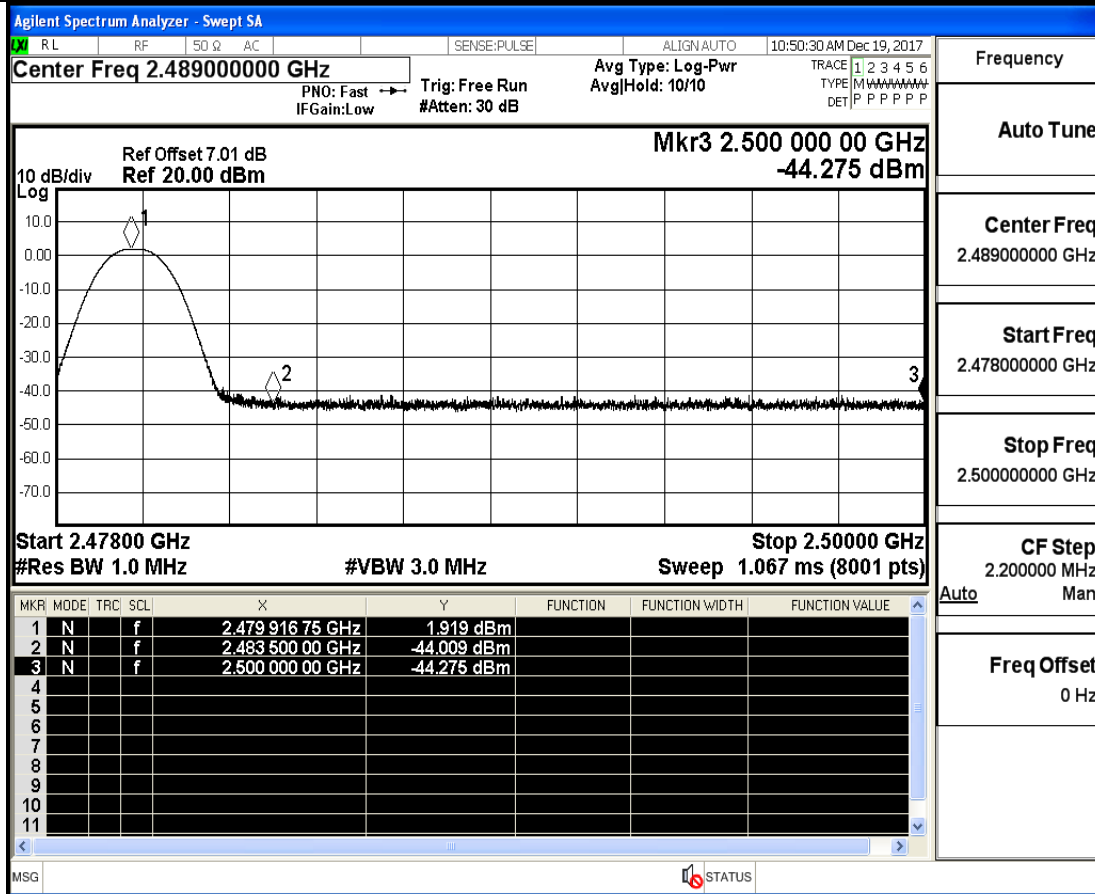

Restrict-band band-edge measurements_BLE_2480_Ant1_AV

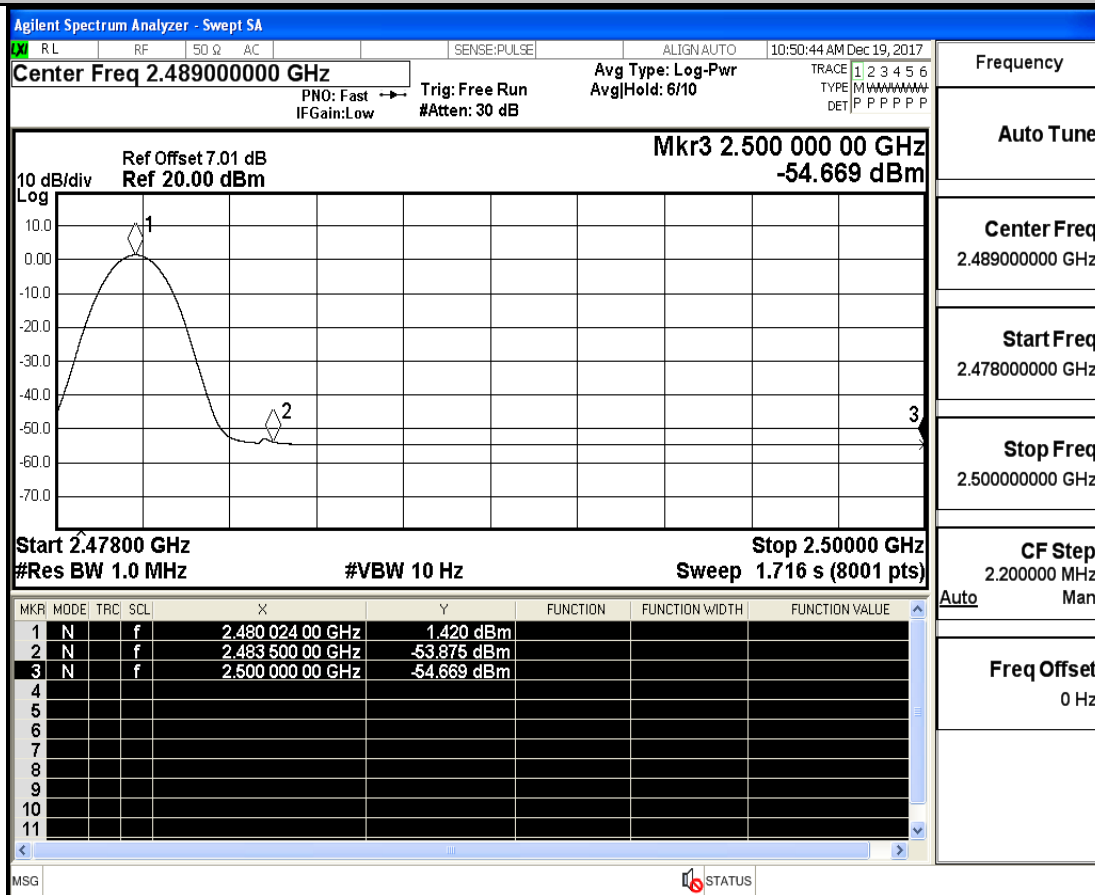

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BLE	2440	Ant1	100	PASS

