

FCC Part 15C

Measurement and Test Report

For

Shenzhen Sinopine Technology Co., Ltd

FCC ID: 2APA4-MC7101

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>2.4G Digital 7" LCD Wireless System</u>
Tested Model:	<u>MC7101,MC7102、MC7103、MC7104、MC7105、 MC5101、MC5102、MC5103、MC5104、MC5105</u>
Report No.:	<u>BSL18031049150005Y-ER-3</u>
Tested Date:	<u>Mar. 20-22, 2018</u>
Issued Date:	<u>Mar. 22, 2018</u>
Tested By:	<u>Lisa. Li / Engineer</u> 
Reviewed By:	<u>arno. Liu / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Tel: 86- 755-26508703

Fax: 86- 755-26508703

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS.....	8
3. ANTENNA REQUIREMENTS.....	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. RADIATED EMISSIONS.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	10
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 ENVIRONMENTAL CONDITIONS.....	12
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	12
5. OUT OF BAND EMISSIONS.....	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 ENVIRONMENTAL CONDITIONS.....	17
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
6. EMISSION BANDWIDTH.....	19
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 ENVIRONMENTAL CONDITIONS.....	19
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	20

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Sinopine Technology Co., Ltd
 Address of applicant: Sinopine Technopark, Yuanshan Industrial Park B, Shangcun community, Gongming, Guangming New District, Shenzhen, Guangdong Province, China

Manufacturer: Shenzhen Sinopine Technology Co., Ltd
 Address of manufacturer: Sinopine Technopark, Yuanshan Industrial Park B, Shangcun community, Gongming, Guangming New District, Shenzhen, Guangdong Province, China

General Description of EUT	
Product Name:	2.4G Digital 7" LCD Wireless System
Trade Name:	haloview
Model No.:	MC7101
Adding Model(s):	MC7102、MC7103、MC7104、MC7105、MC5101、MC5102、MC5103、MC5104、MC5105
Rated Voltage:	DC 12V
Power Adapter Model:	N/A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2406MHz-2472.5MHz
Modulation:	FHSS
Quantity of Channels:	20
Channel Separation:	100KHz
Antenna Type:	External
Max. Field Strength:	96.32dBuV/m@1.5m
Antenna Gain:	3dBi
Lowest Internal Frequency of EUT:	16MHz

Channel List

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2406	6	2423.5	11	2441	16	2458
2	2409.5	7	2427	12	2444.5	17	2462
3	2413	8	2430.5	13	2448	18	2465.5
4	2416.5	9	2434	14	2451.5	19	2469

5	2420	10	2437.5	15	2455	20	2472.5
---	------	----	--------	----	------	----	--------

1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Sinopine Technology Co., Ltd in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035

Tel: 86- 755-26508703

Fax: 86- 755-26508703

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2406MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2472.5MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	EB12648265
USB	ESR	S01	19682904994

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRIC	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	PASS
§15.205	Restricted Band of Operation	PASS
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	PASS
§15.249(a)	Field Strength of Emissions	PASS
§15.249(d)	Out of Band Emission	PASS
§15.215 (c)	Emission Bandwidth	PASS

Note: PASS: applicable, N/A: not applicable.

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

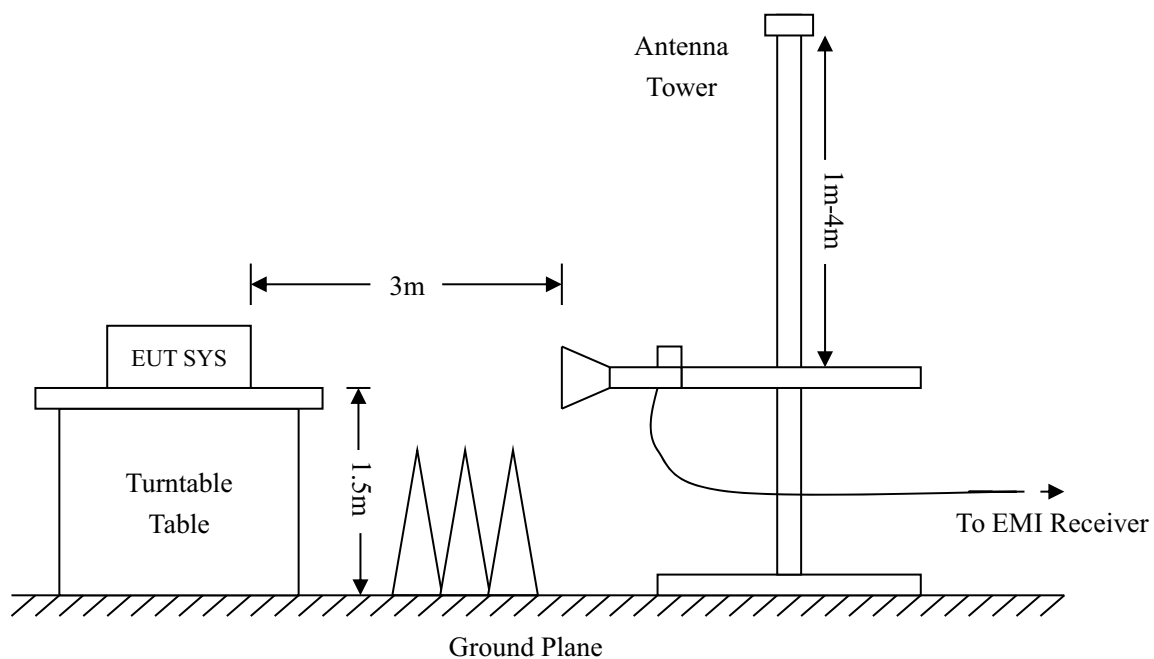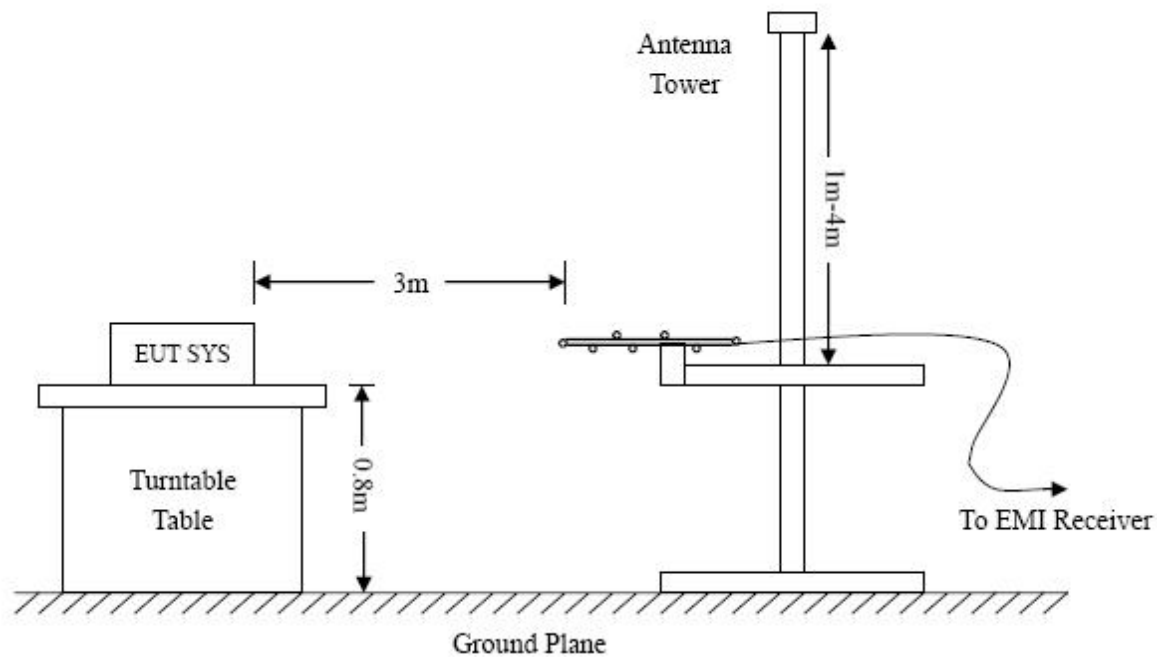

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$


4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst cases.

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

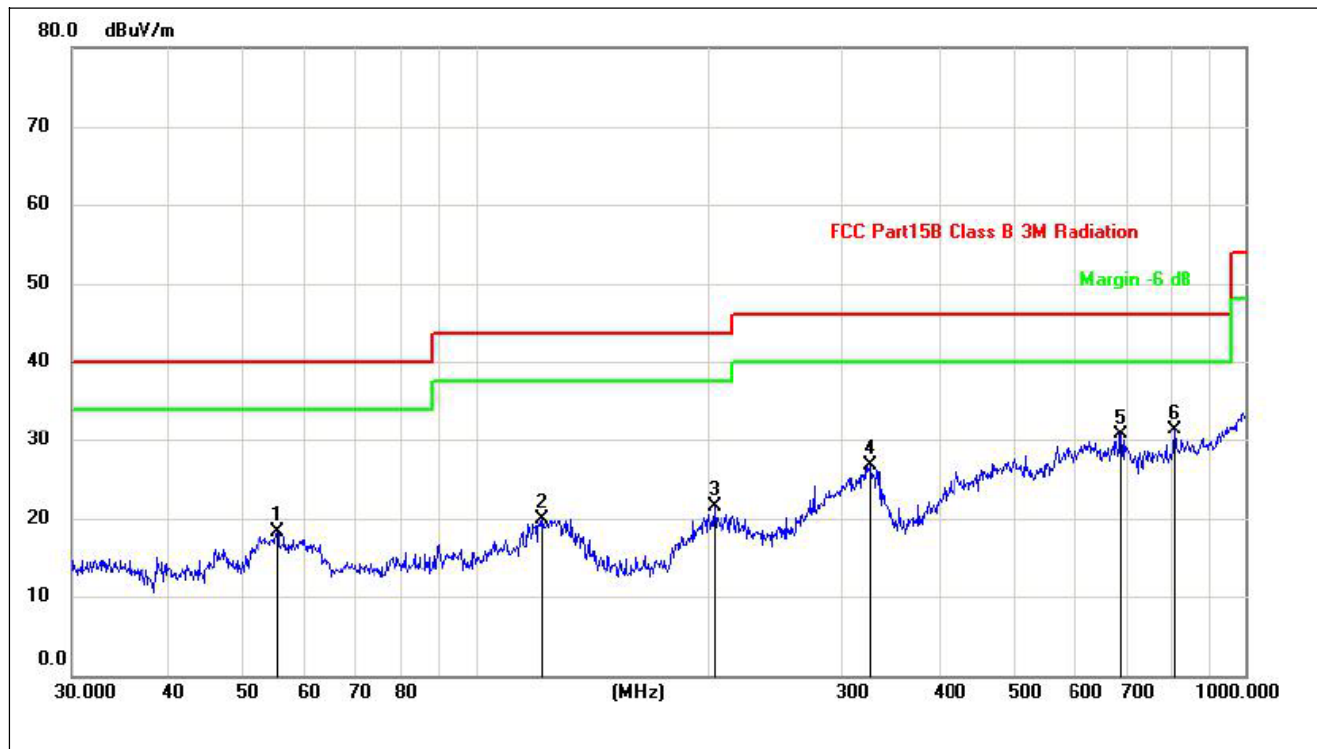Plot of Radiated Emissions Test Data (30MHz to 1GHz):*Test Specification: Horizontal*

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		55.4147	19.75	-1.46	18.29	40.00	-21.71	QP			
2		122.4040	12.74	7.15	19.89	43.50	-23.61	QP			
3		204.2377	15.36	6.21	21.57	43.50	-21.93	QP			
4		326.7395	13.04	13.74	26.78	46.00	-19.22	QP			
5		689.5644	13.45	17.30	30.75	46.00	-15.25	QP			
6	*	807.4291	15.69	15.67	31.36	46.00	-14.64	QP			

Test Specification: Vertical

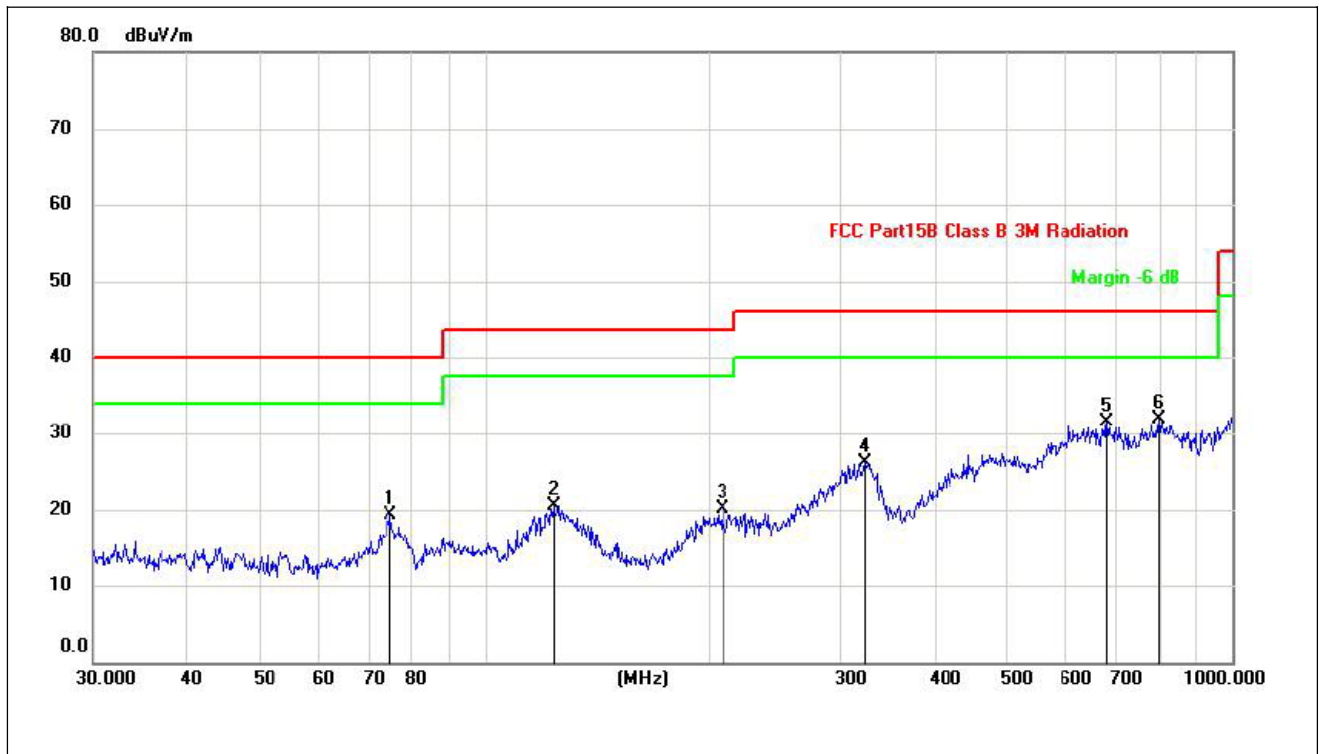

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		55.4147	19.75	-1.46	18.29	40.00	-21.71	QP		
2		122.4040	12.74	7.15	19.89	43.50	-23.61	QP		
3		204.2377	15.36	6.21	21.57	43.50	-21.93	QP		
4		326.7395	13.04	13.74	26.78	46.00	-19.22	QP		
5		689.5644	13.45	17.30	30.75	46.00	-15.25	QP		
6	*	807.4291	15.69	15.67	31.36	46.00	-14.64	QP		

Frequency	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	H/V	
2406MHz-Low channel					
2406	96.32	114	-17.68	H	PK
2406	82.85	94	-11.15	H	AV
4814	58.18	74	-15.82	H	PK
4814	46.98	54	-7.02	H	AV
7218	59.08	74	-14.92	H	PK
7218	44.07	54	-9.93	H	AV
2406	94.78	114	-19.22	V	PK
2406	81.84	94	-12.16	V	AV
4814	55.91	74	-18.09	V	PK
4814	44.88	54	-9.12	V	AV
7218	59.93	74	-14.07	V	PK
7218	43.97	54	-10.03	V	AV
2441MHz-Middle					
2441	94.41	114	-19.59	H	PK
2441	80.47	94	-13.53	H	AV
4882	55.1	74	-18.9	H	PK
4882	44	54	-10	H	AV
7323	58.13	74	-15.87	H	PK
7323	43.02	54	-10.98	H	AV
2441	94.51	114	-19.49	V	PK
2441	80.49	94	-13.51	V	AV
4882	57.1	74	-16.9	V	PK
4882	45.99	54	-8.01	V	AV
7323	60	74	-14	V	PK
7323	45.03	54	-8.97	V	AV
2472.5MHz-High channel					
2472.5	94.2	114	-19.8	H	PK
2472.5	81.68	94	-12.32	H	AV
4945	61.21	74	-12.79	H	PK
4945	46.49	54	-7.51	H	AV
7417.5	53.38	74	-20.62	H	PK
7417.5	44.09	54	-9.91	H	AV
2472.5	92.52	114	-21.48	V	PK
2472.5	79.46	94	-14.54	V	AV
4945	54.62	74	-19.38	V	PK
4945	41.46	54	-12.54	V	AV
7417.5	59.04	74	-14.96	V	PK
7417.5	43.87	54	-10.13	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are

*attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Worst mode:

Lowest:

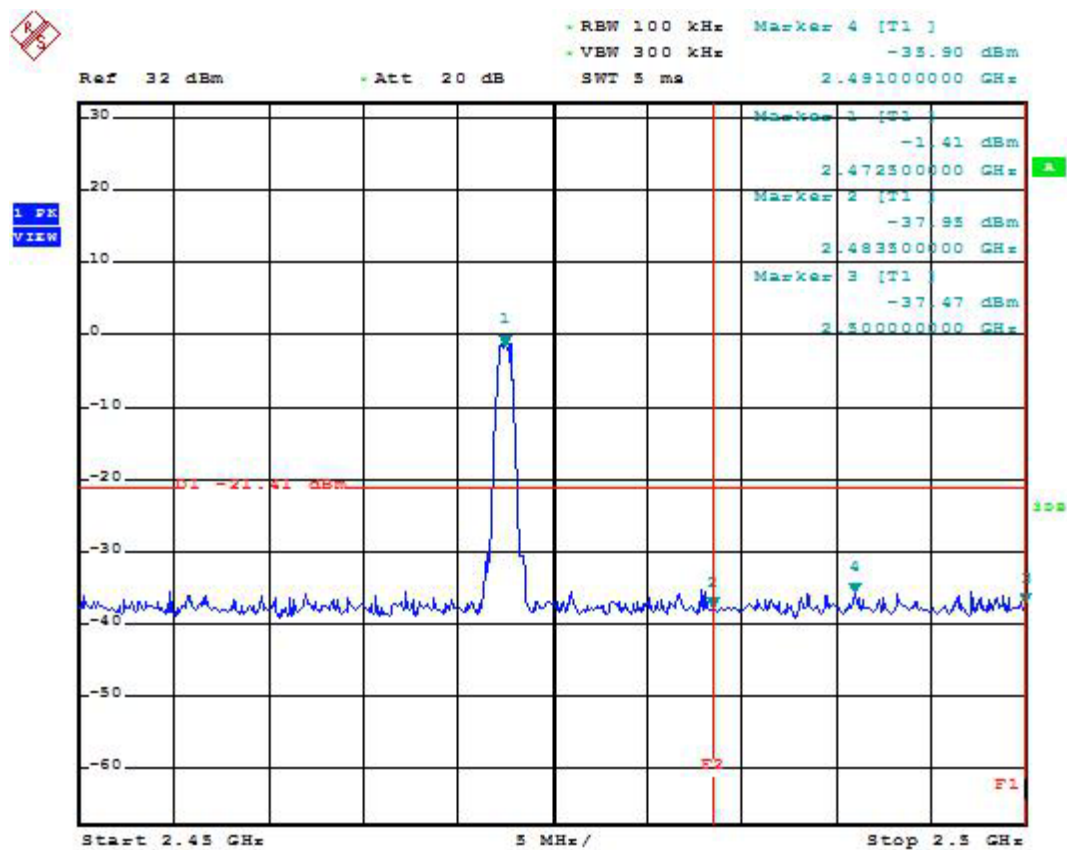

Highest:

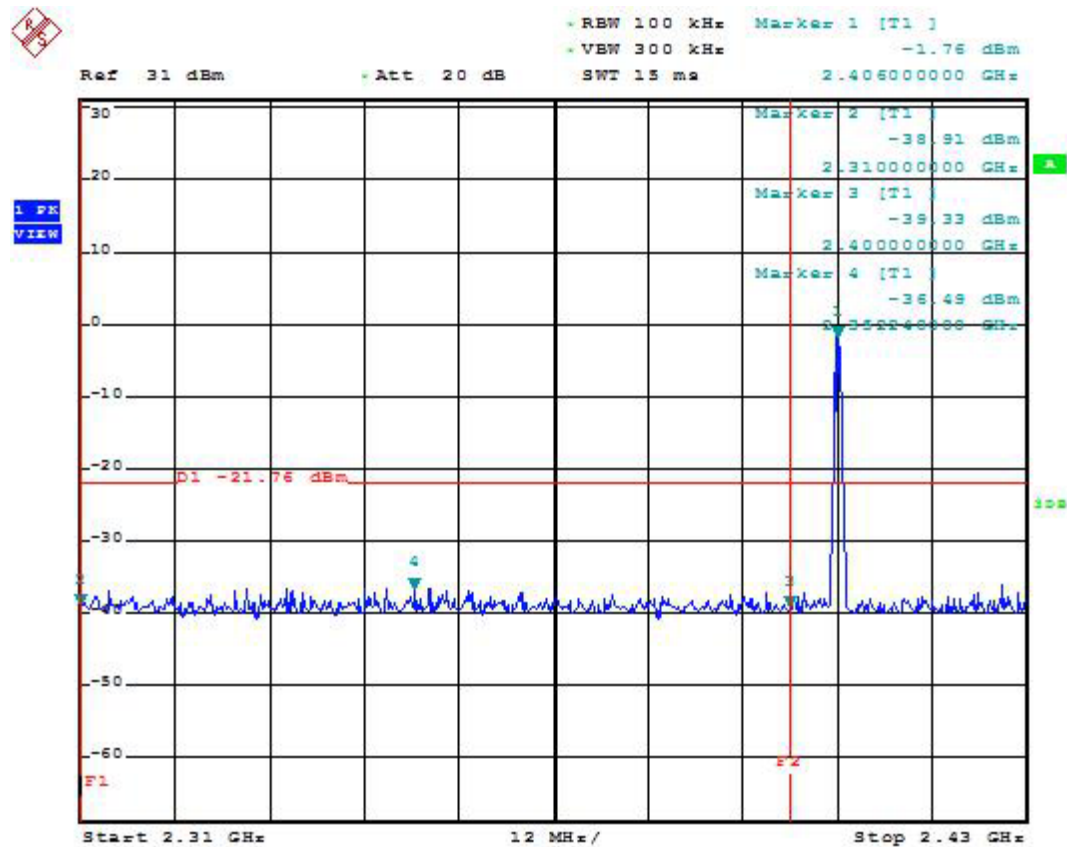

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Worst mode:

Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2406	1208	1064
Middle Channel	2441	1192	1064
High Channel	2472.5	1160	1064


Please refer to the following test plots

Worst mode:


Low Channel:

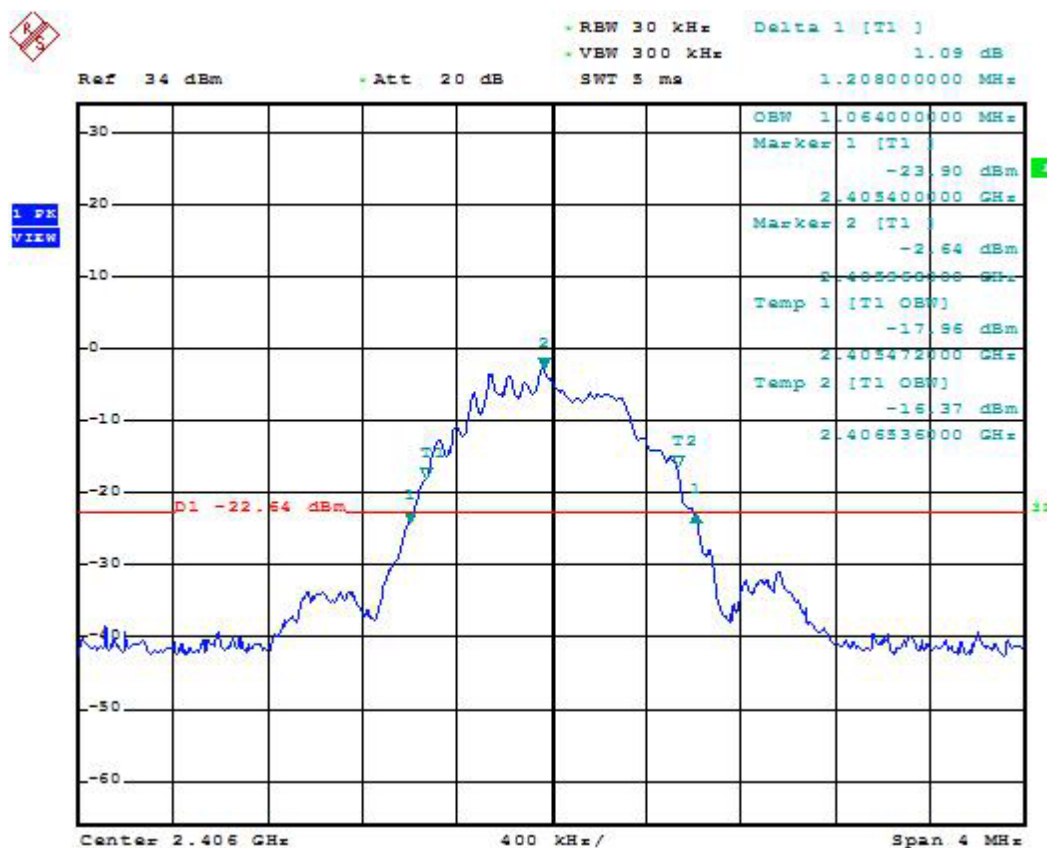

Middle Channel:

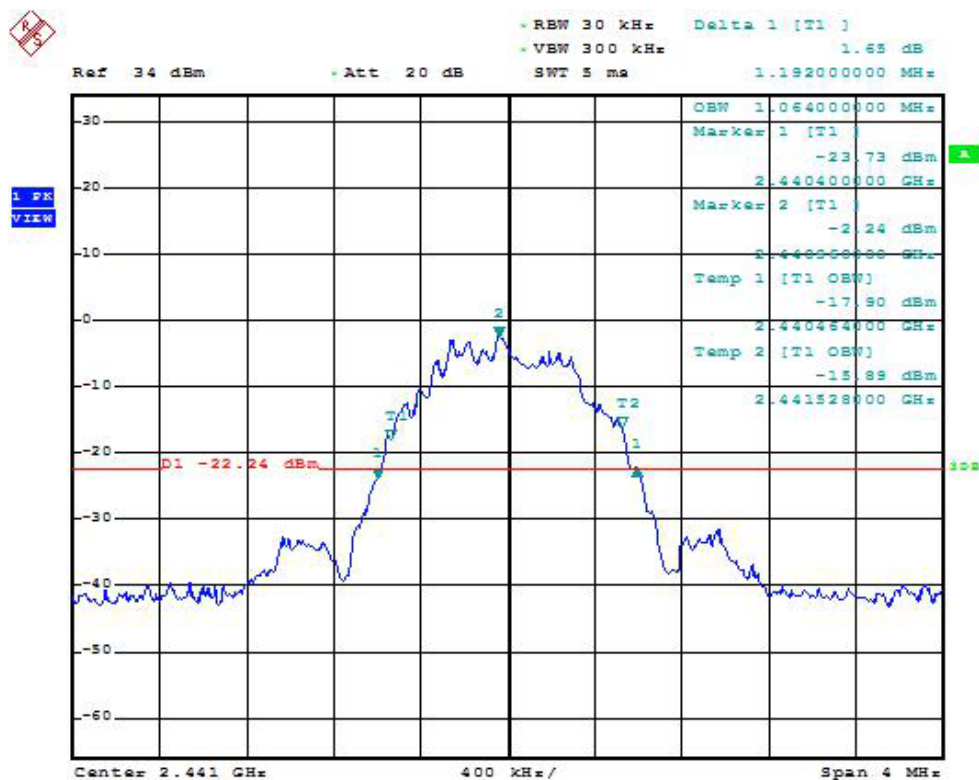

High Channel:

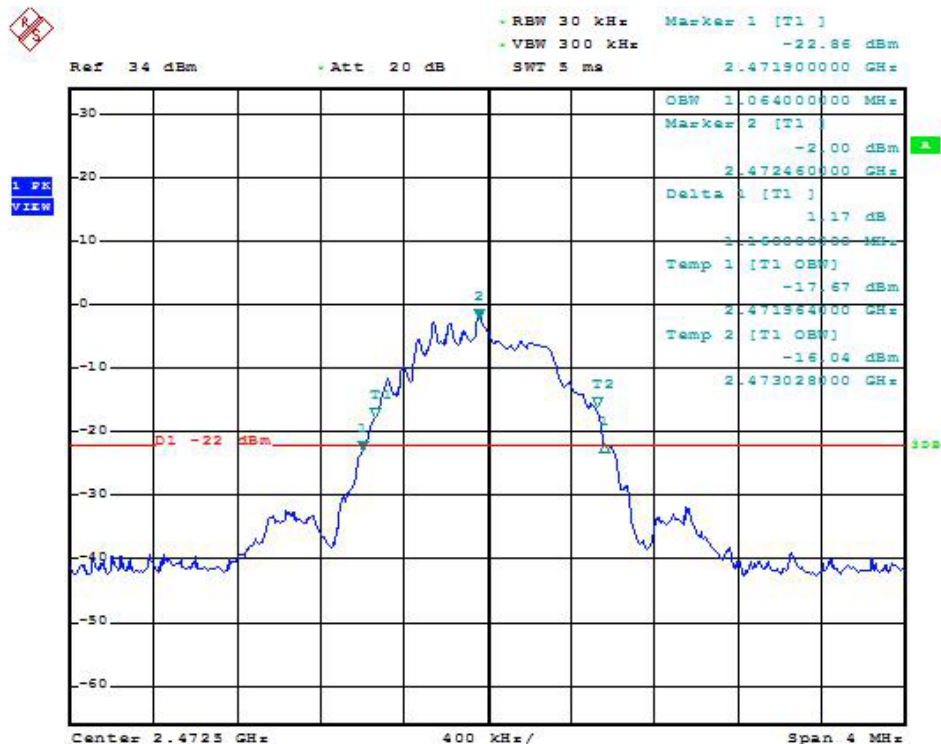

***** END OF REPORT *****