

EMC TEST REPORT

Applicant Gosuncn Technology Group Co., Ltd.
FCC ID 2APNR-GL103G
Product Tracker
Brand GOSUNCN
Model GL103G
Report No. EFTA25110228-IE-01-E1
Issue Date February 4, 2026

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2025)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	7
2.4	Test Mode	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Uncertainty Measurement.....	15
5	Main Test Instruments	16
6	The EUT Appearance.....	17
7	Test Setup Photos	18

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	NA ^{Note 1}
Date of Testing: November 24, 2025 ~ December 7, 2025			
Date of Sample Received: November 17, 2025			
Note: 1. The equipment is not connected to the public network, so test items do not apply. 2. The conformity assessment in this report is based on a direct comparison of the test results with the limits by Eurofins TA Technology (Shanghai) Co., Ltd., without considering measurement uncertainty.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	Gosunch Technology Group Co., Ltd.
Applicant address	6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, Guangdong, China. 510530
Manufacturer	Gosunch Technology Group Co., Ltd.
Manufacturer address	6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, Guangdong, China. 510530

2.2 General Information

EUT Description			
Device Type	Movable Device		
Model	GL103G		
Lab internal SN	251117-24-001		
HW Version	GL103_MB_C		
SW Version	MCU GL103V3.0.0B03		
Power Rating	DC 3V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	LTE-M Band 2	1850 ~ 1910	1930 ~ 1990
	LTE-M Band 4	1710 ~ 1755	2110 ~ 2155
	LTE-M Band 5	824 ~ 849	869 ~ 894
	LTE-M Band 12	699 ~ 716	729 ~ 746
	LTE-M Band 13	777 ~ 787	746 ~ 756
	LTE-M Band 25	1850 ~ 1915	1930 ~ 1995
	LTE-M Band 26	814 ~ 849	859 ~ 894
	LTE-M Band 66	1710 ~ 1780	2110 ~ 2180
	LTE-M Band 85	698~716	728~746
	NB-IoT Band 2	1850 ~ 1910	1930 ~ 1990
	NB-IoT Band 4	1710 ~ 1755	2110 ~ 2155
	NB-IoT Band 5	824 ~ 849	869 ~ 894
	NB-IoT Band 12	699 ~ 716	729 ~ 746
	NB-IoT Band 13	777 ~ 787	746 ~ 756

	NB-IoT Band 25	1850 ~ 1915	1930 ~ 1995
	NB-IoT Band 66	1710 ~ 1780	2110 ~ 2180
	NB-IoT Band 71	663 ~ 698	617 ~ 652
	NB-IoT Band 85	698~716	728~746
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5

Note:

1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2025)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Battery powered + EUT + LTE-M/NB-IoT/Bluetooth LE Receiver

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1	Mode 1
Conducted Emission	Mode 1	Mode 1
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 10 meters below 1GHz; 3 meters for above 1GHz. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


Test Setup

Below 1GHz

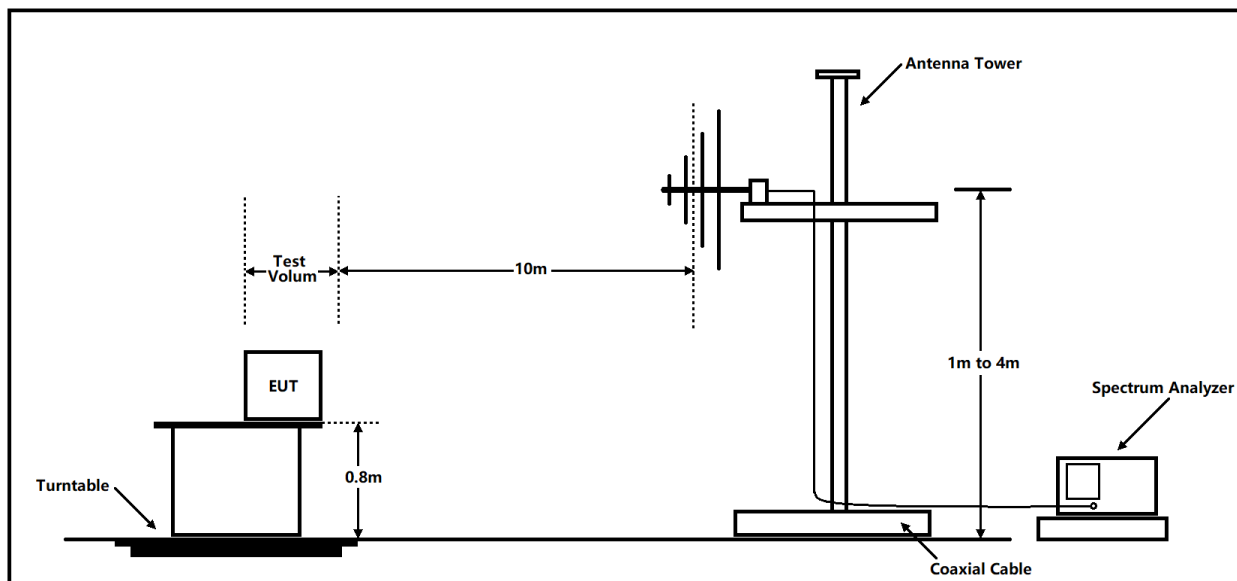

Note: Area side: 21m x 12m

Above 1GHz

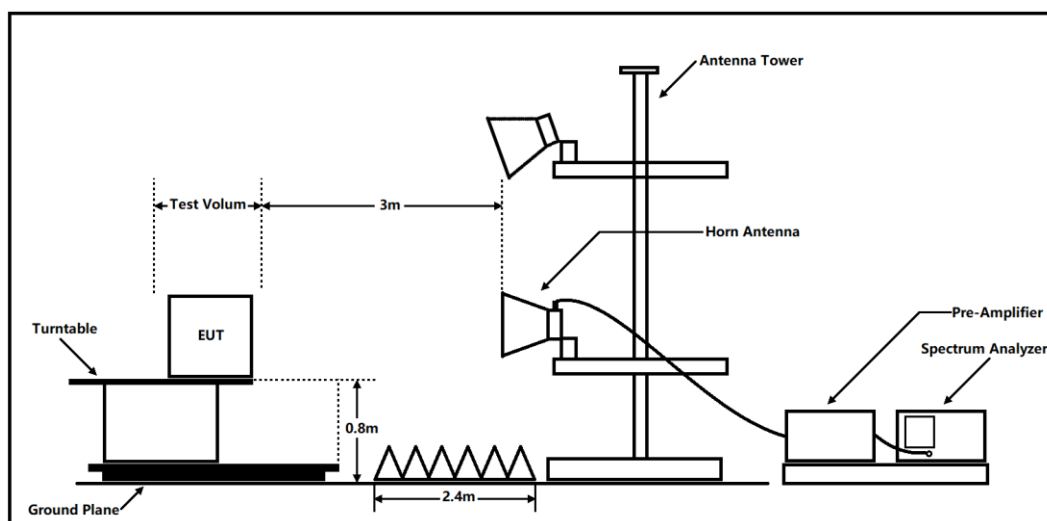

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	30.0	Quasi-peak
88-216	33.5	Quasi-peak
216 – 960	36.0	Quasi-peak
960-1000	44.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

Spectrum Overview H/V




Radiated Emission from 30MHz to 1GHz

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
49.072	8.68	30.00	21.32	-8.07	H	173.4	1.92	120.000	1.000
101.773	7.32	33.50	26.18	-9.81	H	298.4	1.02	120.000	1.000
188.862	6.40	33.50	27.10	-10.79	H	270.1	1.82	120.000	1.000
306.279	9.49	36.00	26.51	-7.21	H	220.8	1.75	120.000	1.000
404.030	12.24	36.00	23.76	-4.67	V	167.3	1.89	120.000	1.000
571.394	15.53	36.00	20.47	-1.89	V	206.3	2.23	120.000	1.000

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

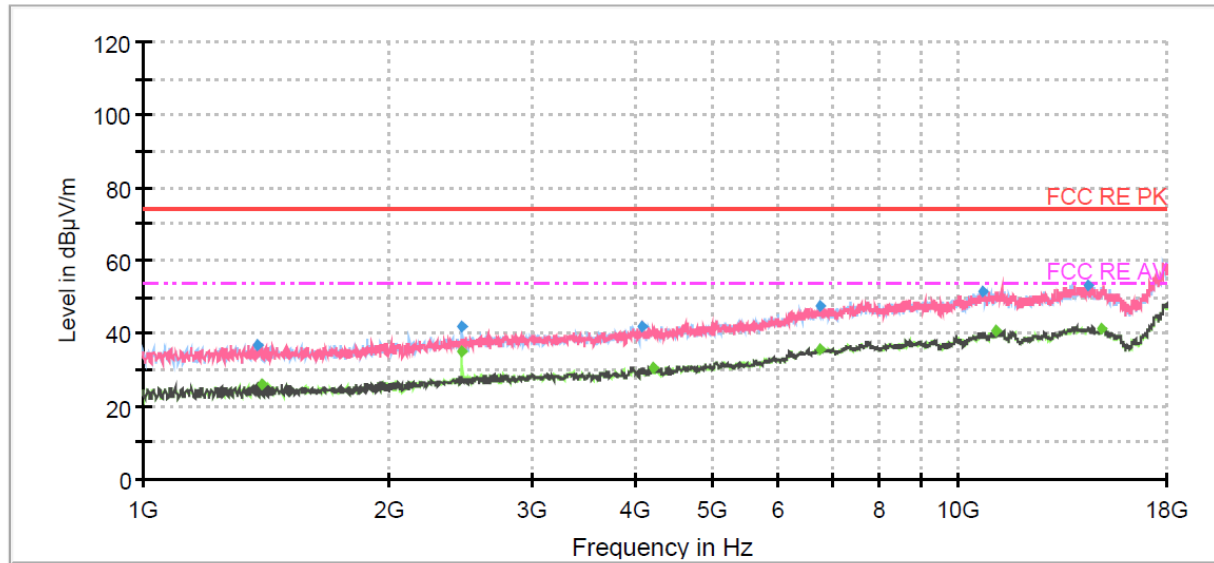

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit

Radiated Emission from 1GHz to 18GHz

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1380.38	36.98	---	74.00	37.02	500.00	114.0	H	193.00	-14
1395.25	---	25.88	54.00	28.12	500.00	200.0	H	278.00	-14
2462.00	---	35.28	54.00	18.72	500.00	201.0	H	186.00	-9
2462.00	41.65	---	74.00	32.35	500.00	200.0	H	186.00	-9
4077.00	41.89	---	74.00	32.11	500.00	100.0	V	0.00	-5
4223.63	---	30.60	54.00	23.40	500.00	188.0	V	2.00	-4
6737.50	47.47	---	74.00	26.53	500.00	100.0	H	38.00	1
6748.13	---	35.88	54.00	18.12	500.00	224.0	H	12.00	1
10673.00	51.53	---	74.00	22.47	500.00	100.0	V	12.00	6
11102.25	---	41.00	54.00	13.00	500.00	214.0	V	346.00	7
14393.88	53.48	---	74.00	20.52	500.00	100.0	V	358.00	9
14937.88	---	41.57	54.00	12.43	500.00	178.0	V	0.00	8

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

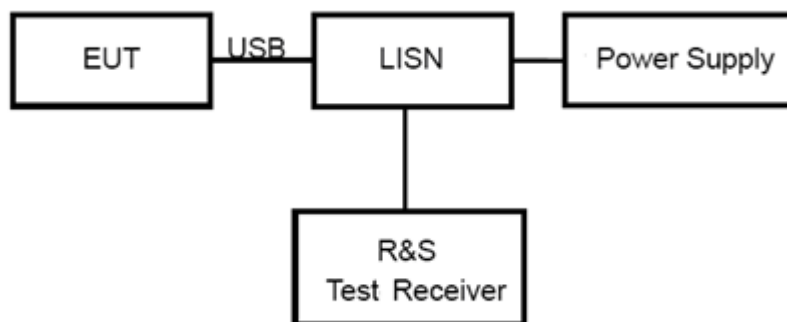

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

Test Results

The equipment is not connected to the public network, so test items do not apply.

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 30MHz – 200MHz	3.39 dB	1.96
Radiated Emission 200MHz – 1GHz	3.82 dB	1.96

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number/ Version	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2025-05-07	2026-05-06
Signal Analyzer	R&S	FSV40	101186	2025-05-06	2026-05-05
Triple-Loop antenna	R&S	HM020E	101140	2024-06-05	2027-06-04
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	R&S	SCU18F	101022	2025-05-06	2026-05-05
Software	R&S	EMC32	9.26.01	/	/

6 The EUT Appearance

Refer to *EUT Appearance*.

7 Test Setup Photos

Refer to *EMC Test Setup*.

***** END OF REPORT *****