Wi-Fi 802.11 n(HT20) mode, MCS0

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2412 MHz; 30.000 dBm; 20 MHz(11n_20Mhz))

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	---	---	2403.050000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

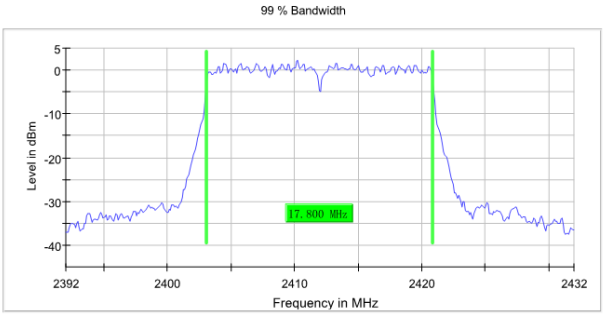

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	24 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2437 MHz; 30.000 dBm; 20 MHz(11 n20_20Mhz))

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.900000	---	---	2428.050000	2445.950000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

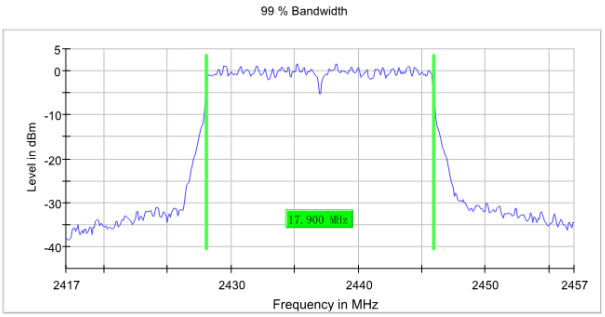

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	24 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2462 MHz; 30.000 dBm; 20 MHz(11n_20Mhz))

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2462.000000	17.800000	---	---	2453.050000	2470.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2462.000000	PASS

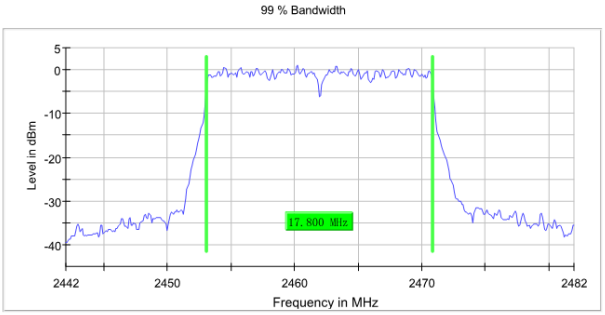

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	47.266 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	33 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.30 dB

Wi-Fi 802.11 n(HT40) mode, MCS0

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2422 MHz; 30.000 dBm; 11n_40 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.750000	---	---	2403.625000	2440.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

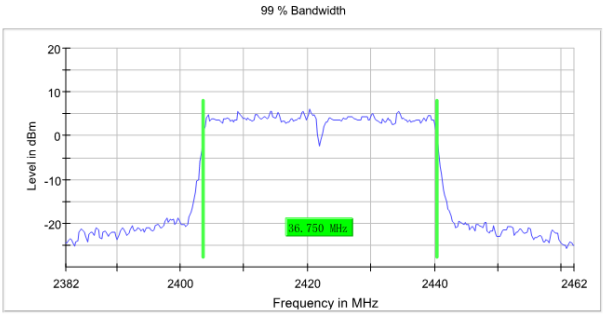

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	25 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2437 MHz; 30.000 dBm; 11n_40 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.750000	---	---	2418.625000	2455.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

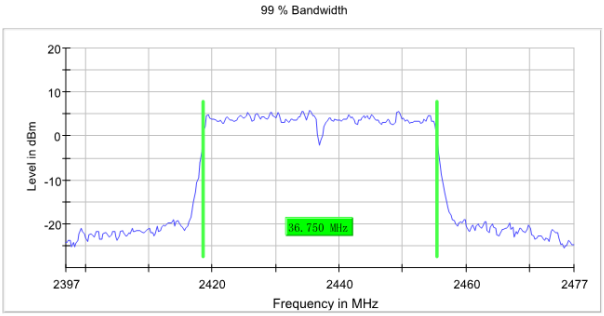

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	38 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2452 MHz; 30.000 dBm; 11n_40 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.750000	---	---	2433.625000	2470.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

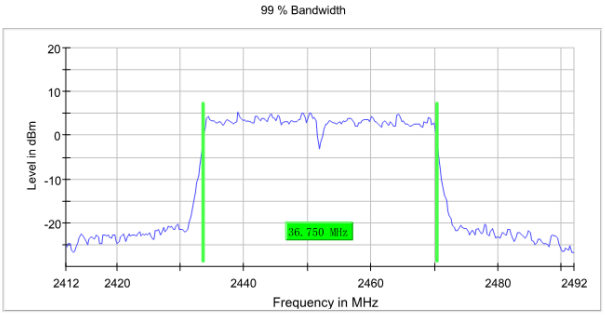

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	33 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Wi-Fi 802.11 b mode, 1 Mbps

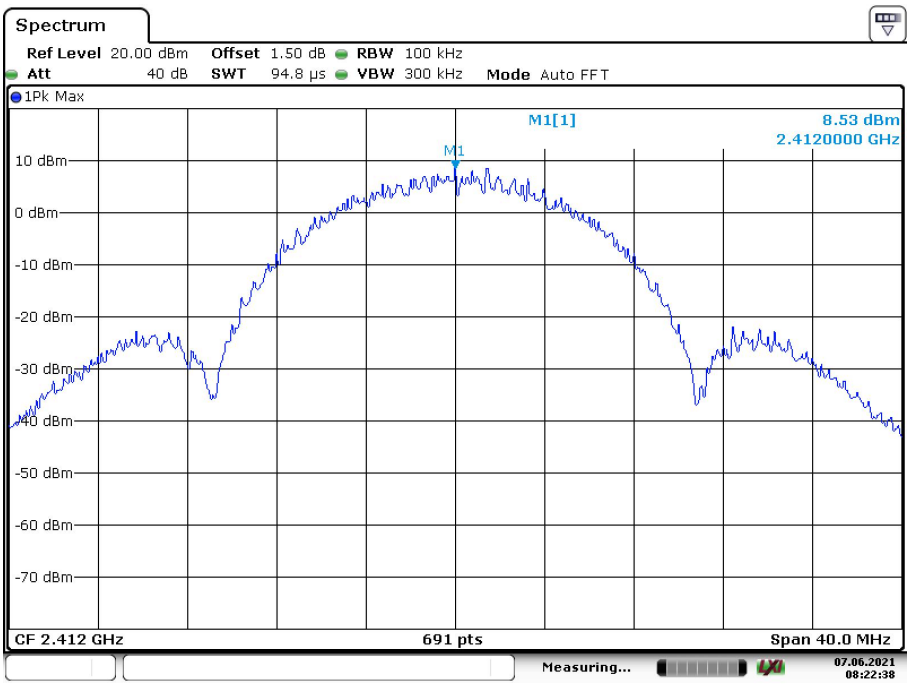

Date: 7.JUN.2021 08:22:37

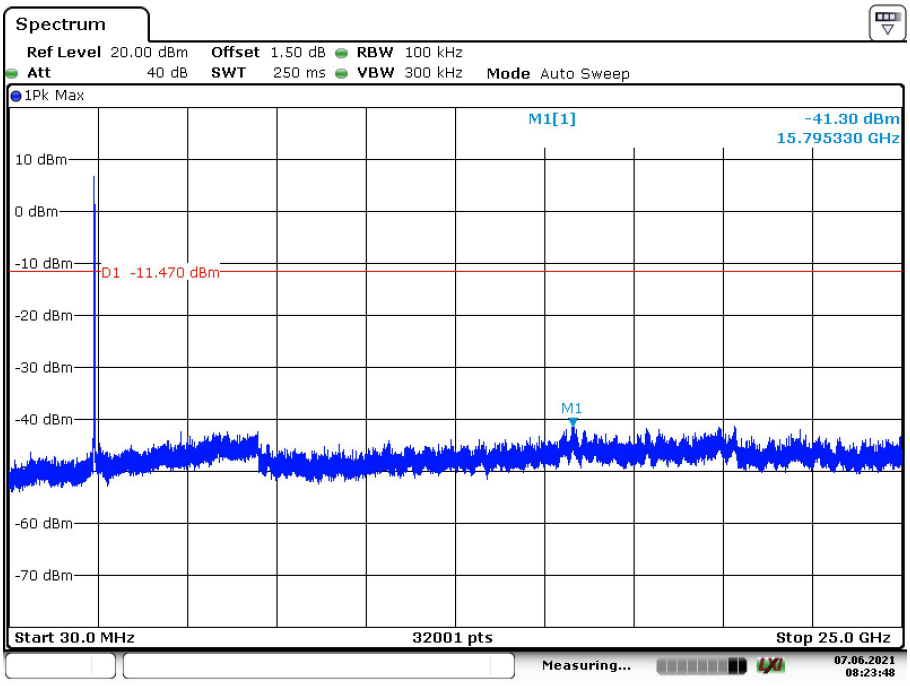

Date: 7.JUN.2021 08:23:48

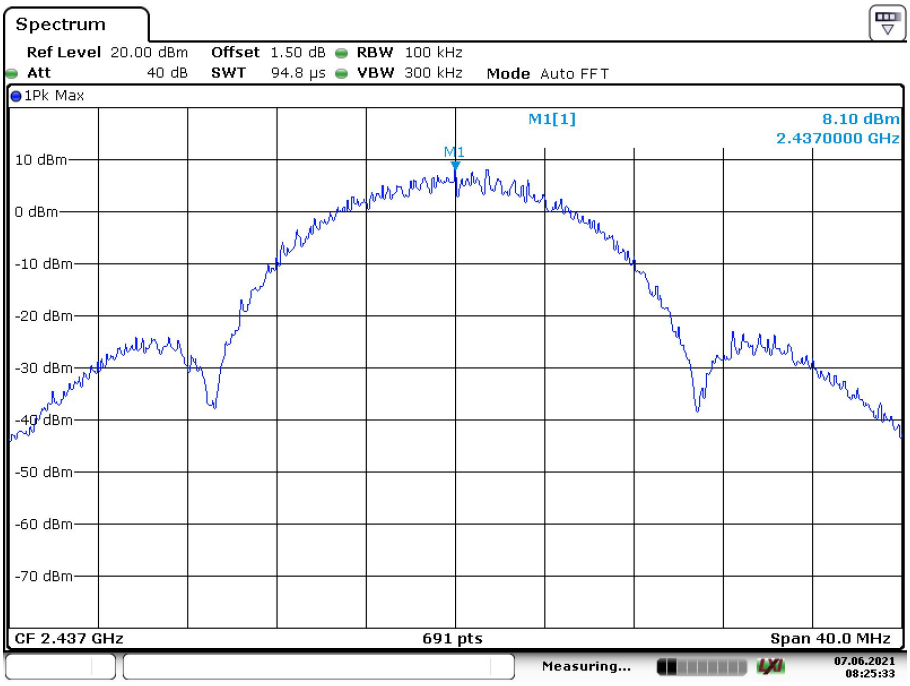

Date: 7.JUN.2021 08:25:33

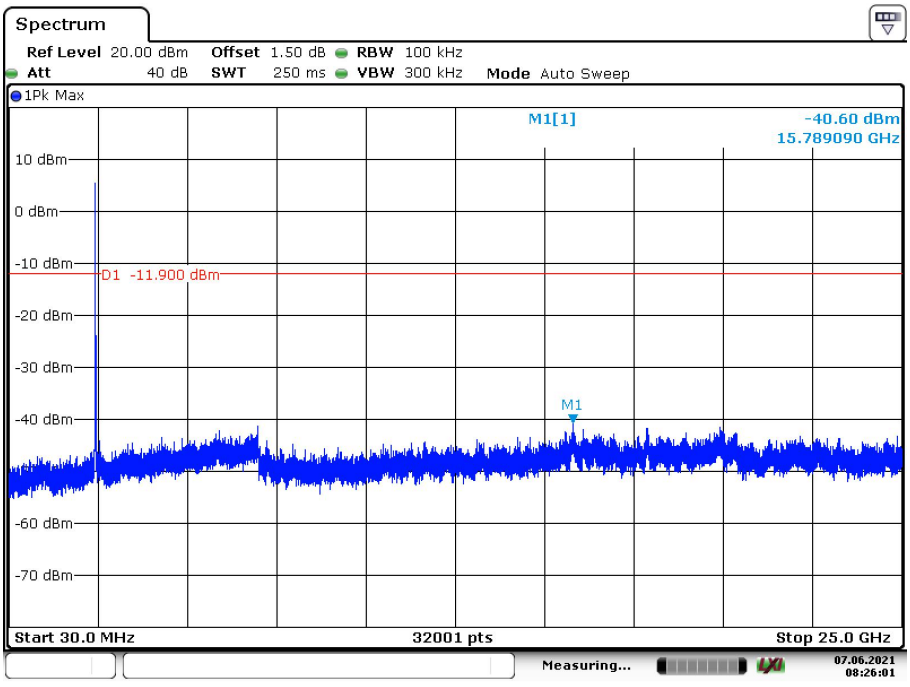

Date: 7.JUN.2021 08:26:01

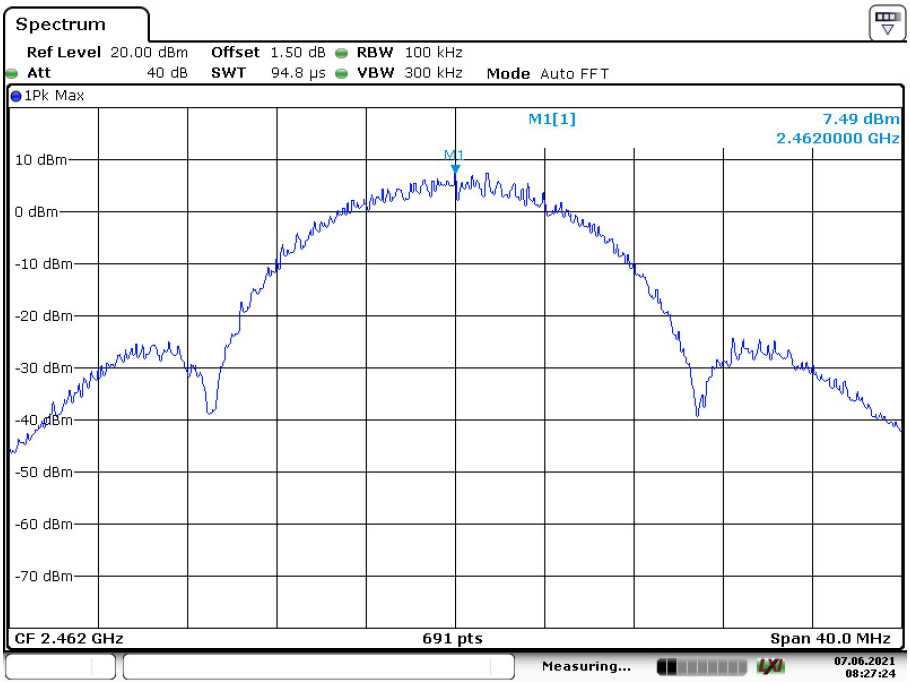

Date: 7.JUN.2021 08:27:24

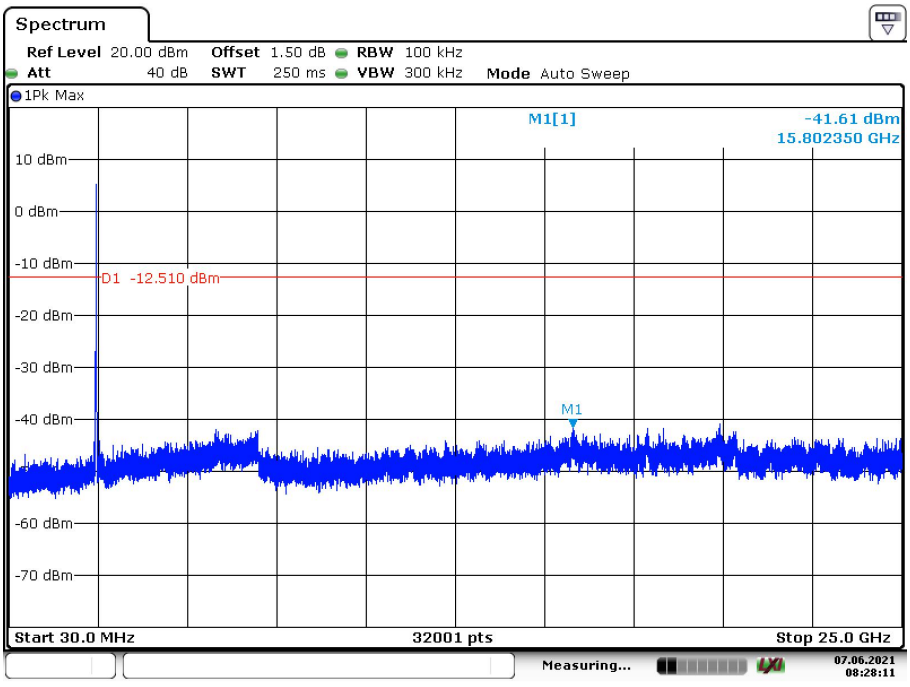

Date: 7.JUN.2021 08:28:11

Wi-Fi 802.11 g mode, 6 Mbps

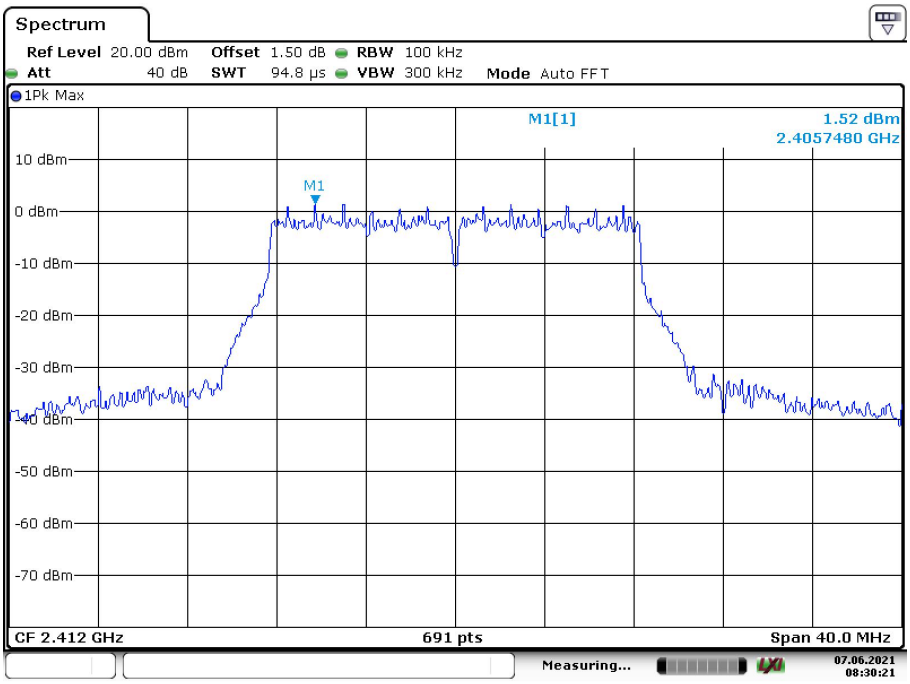

Date: 7.JUN.2021 08:30:21

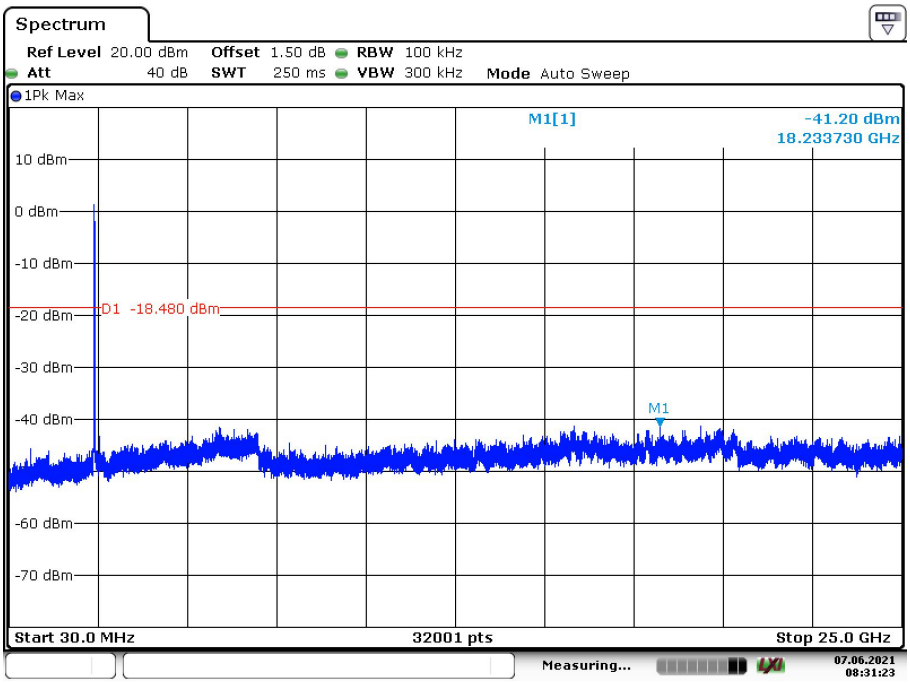

Date: 7.JUN.2021 08:31:23

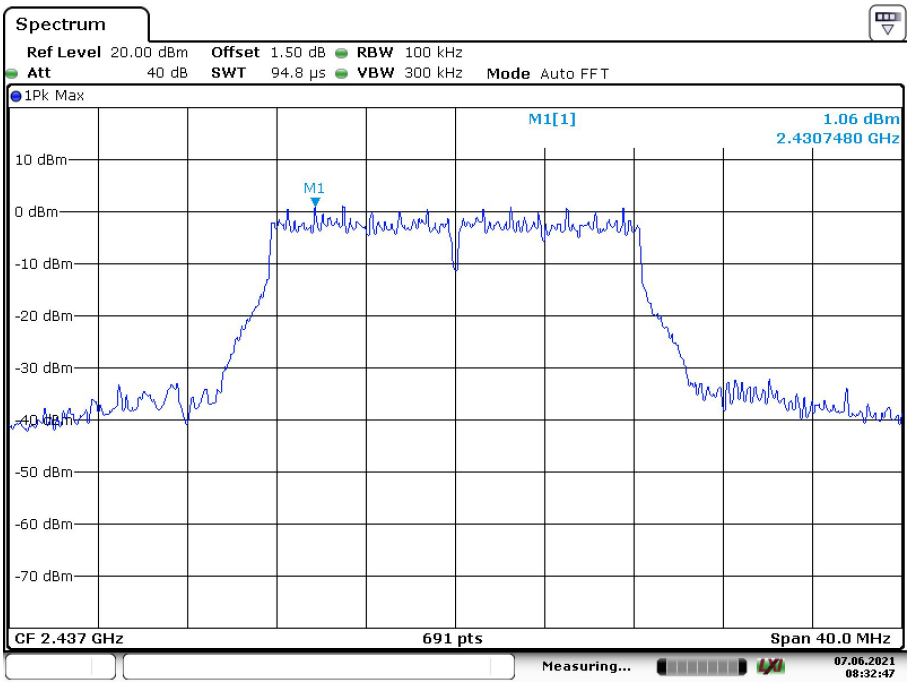

Date: 7.JUN.2021 08:32:47

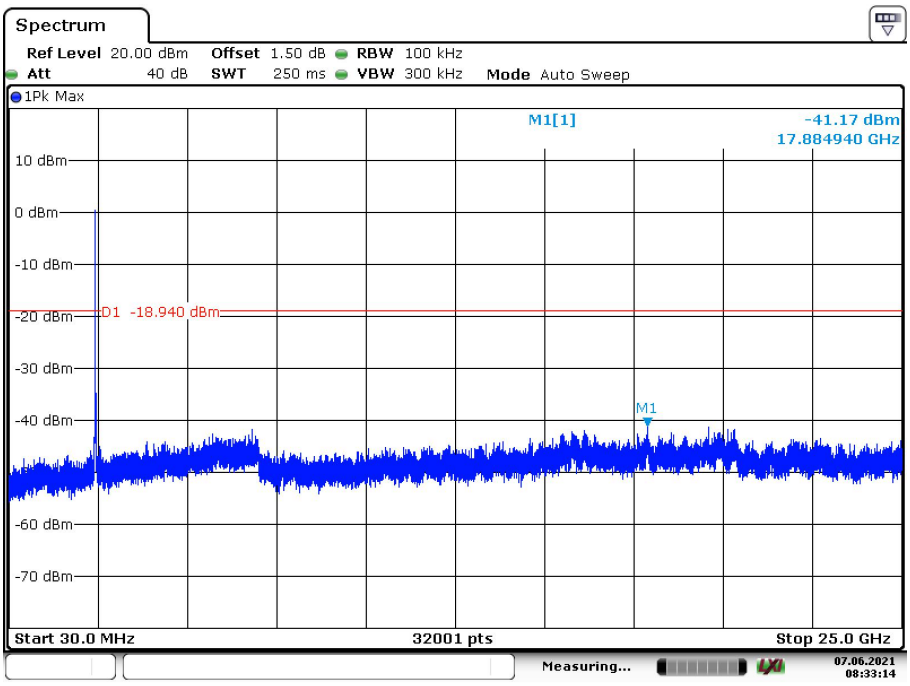

Date: 7.JUN.2021 08:33:15

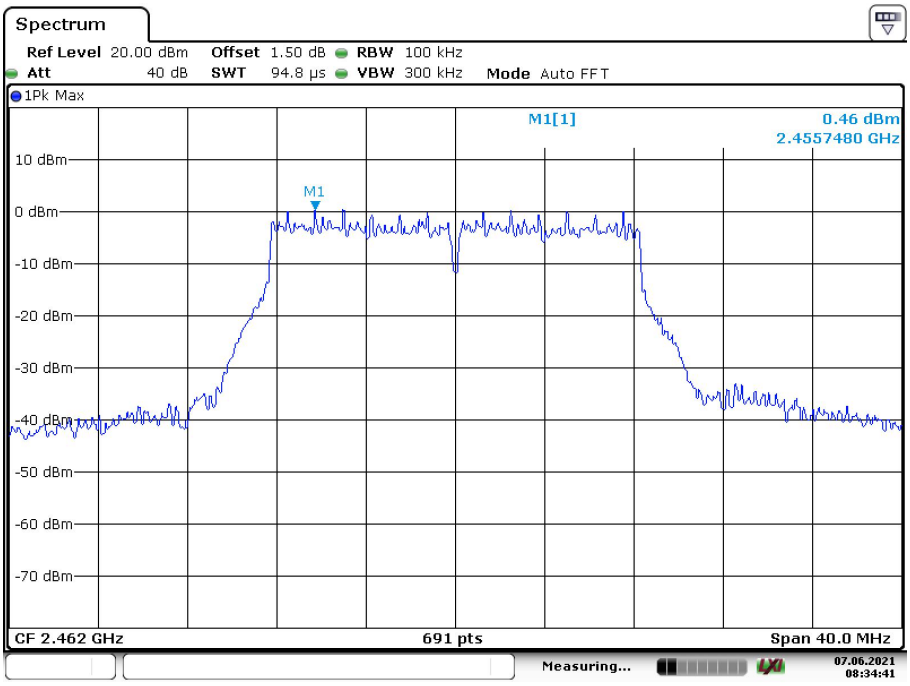

Date: 7.JUN.2021 08:34:42

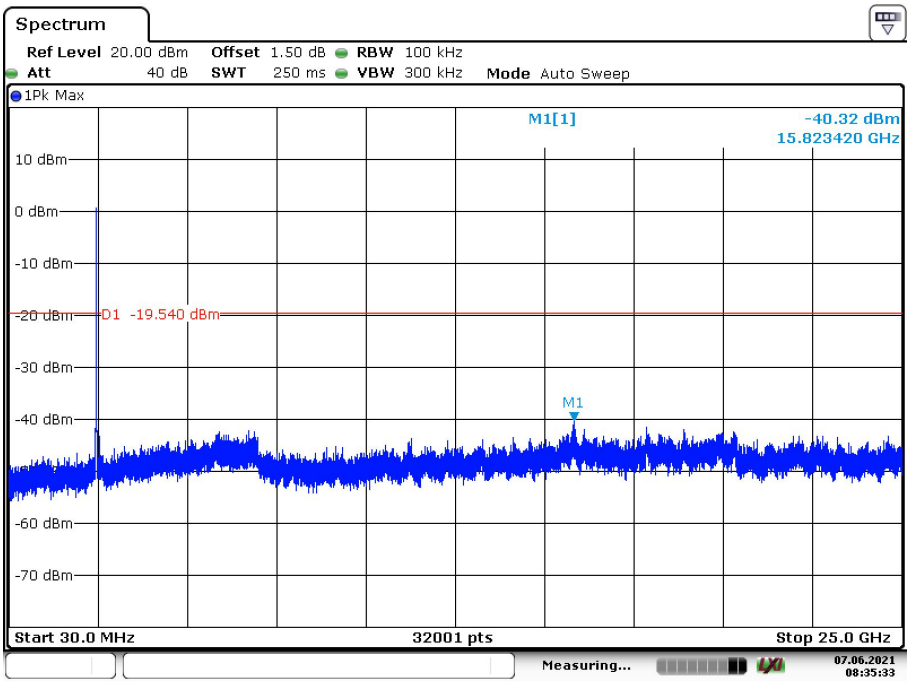

Date: 7.JUN.2021 08:35:34

Wi-Fi 802.11 n(HT20) mode, MCS0

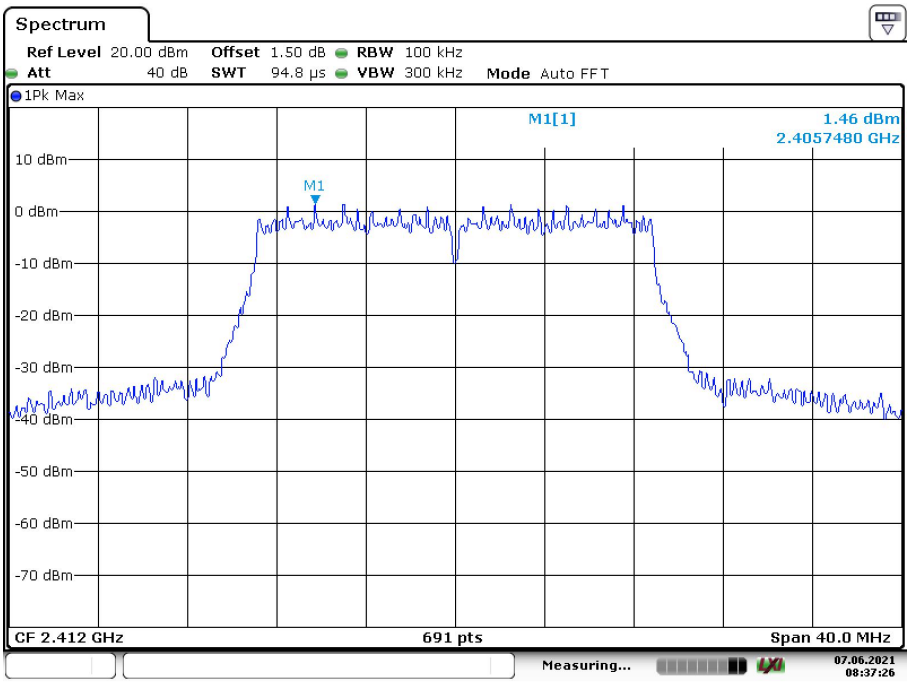

Date: 7.JUN.2021 08:37:26

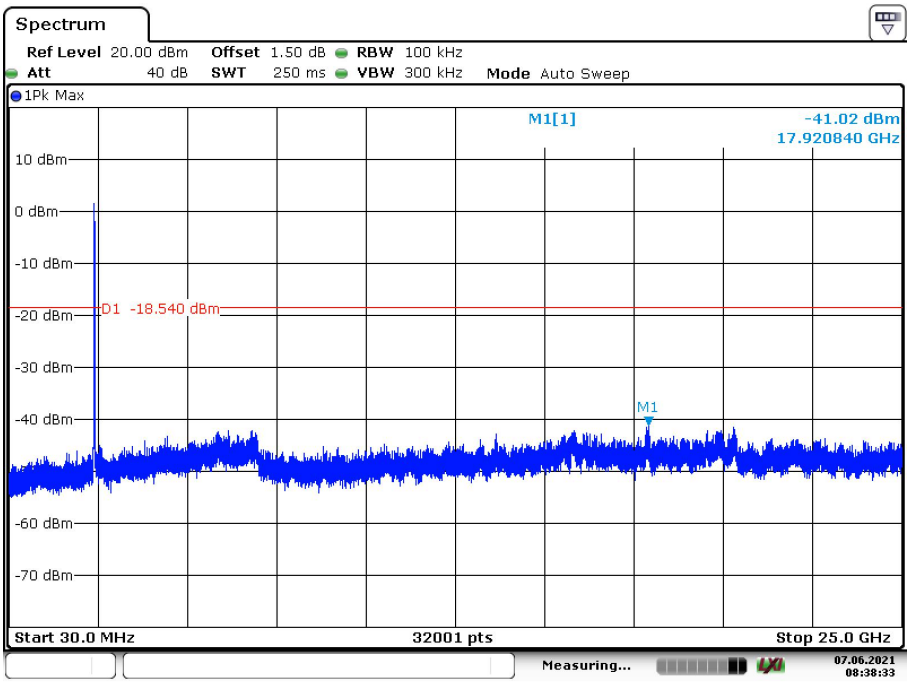

Date: 7.JUN.2021 08:38:34

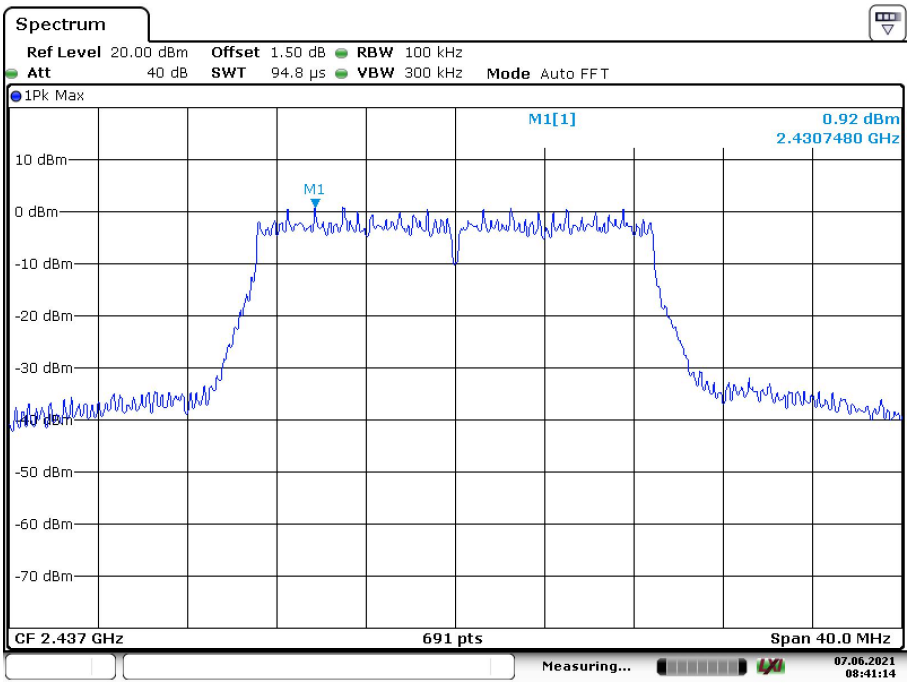

Date: 7.JUN.2021 08:41:14

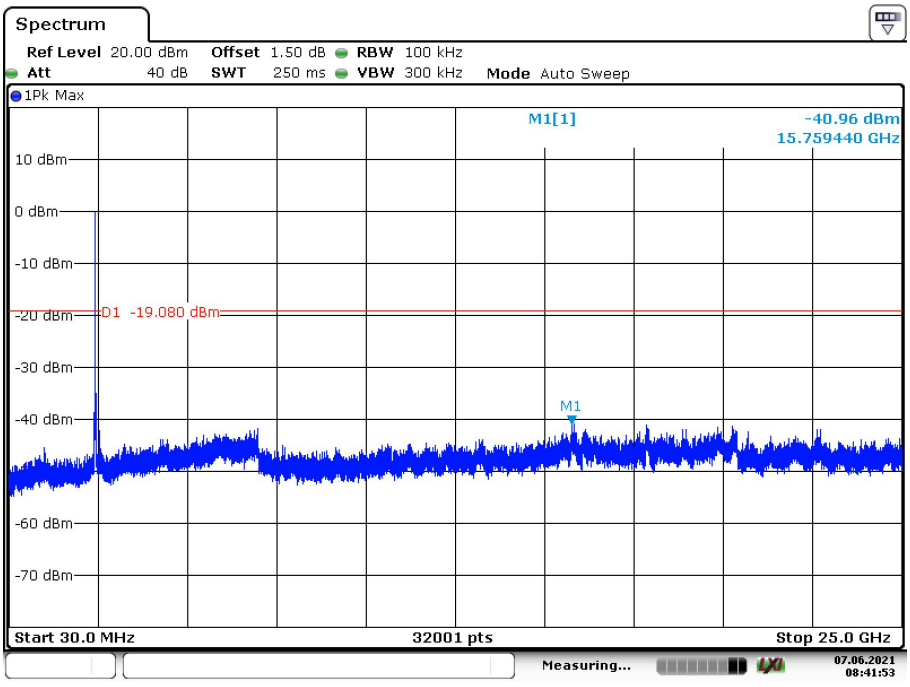

Date: 7.JUN.2021 08:41:54

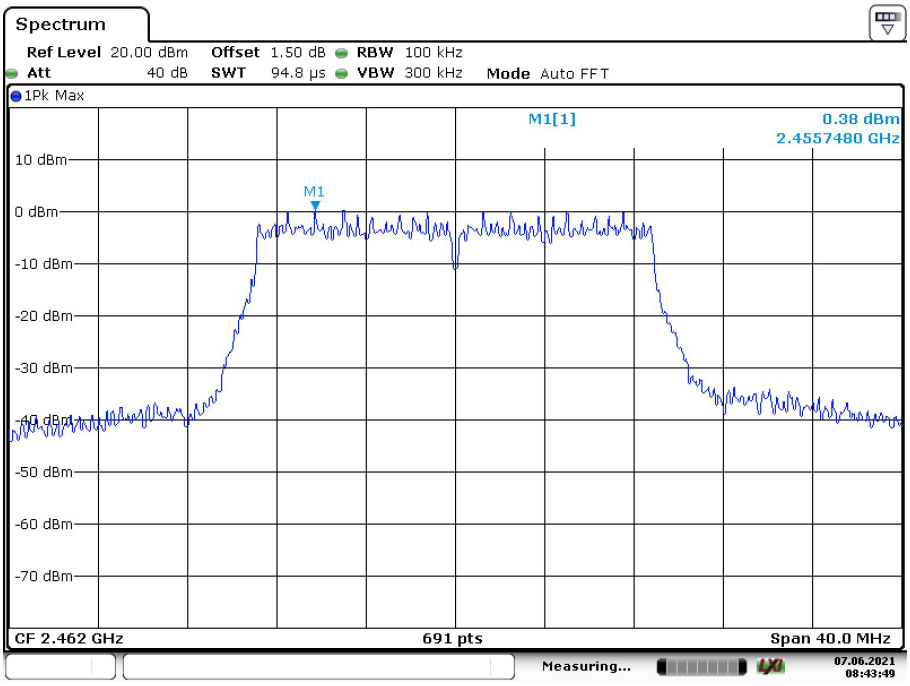

Date: 7.JUN.2021 08:43:49

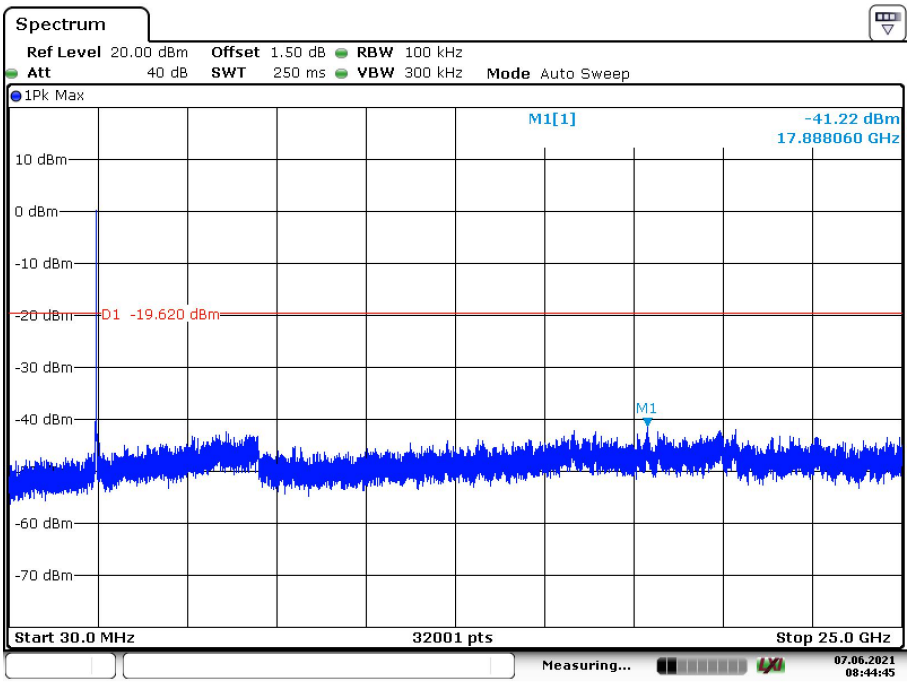

Date: 7.JUN.2021 08:44:45

Wi-Fi 802.11 n(HT40) mode, MCS0

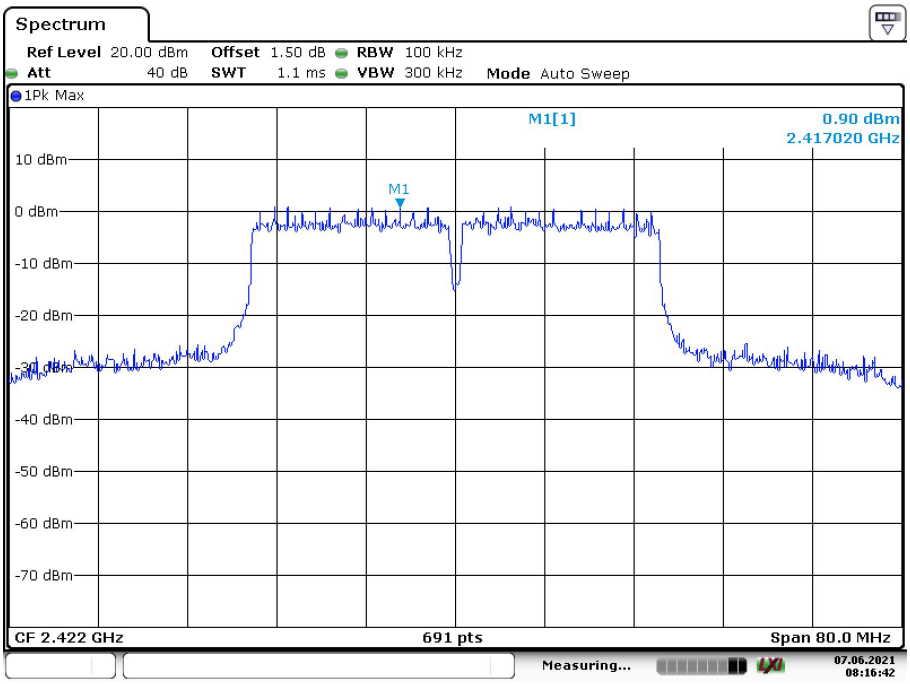

Date: 7.JUN.2021 08:16:42

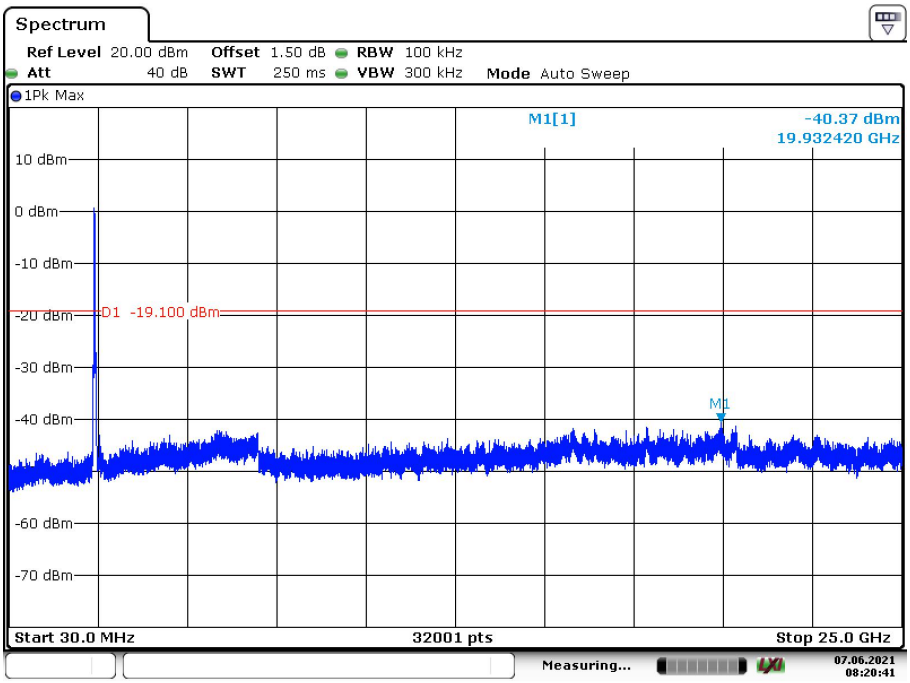

Date: 7.JUN.2021 08:20:41

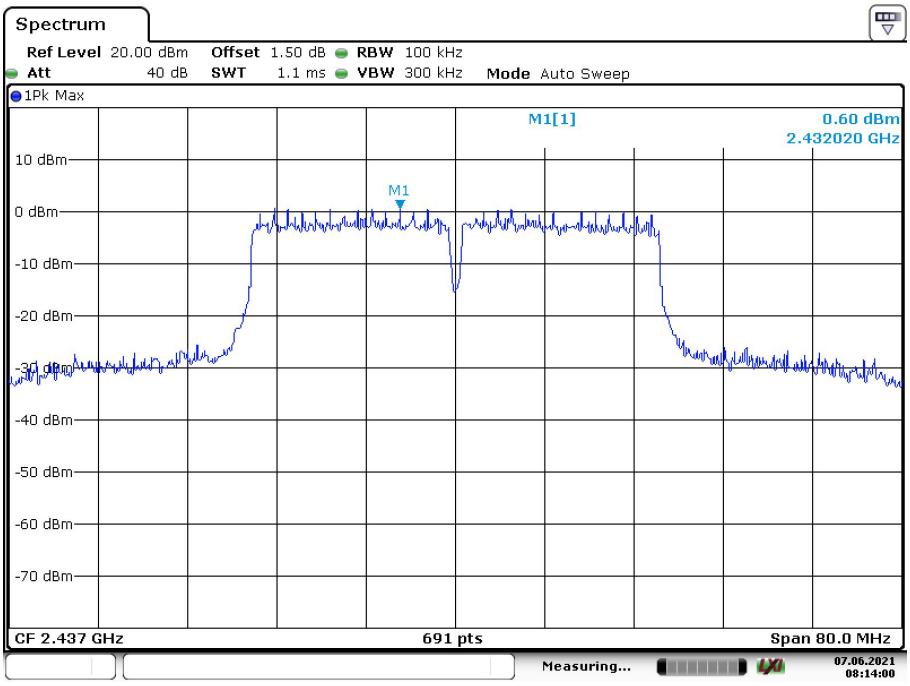

Date: 7.JUN.2021 08:14:00

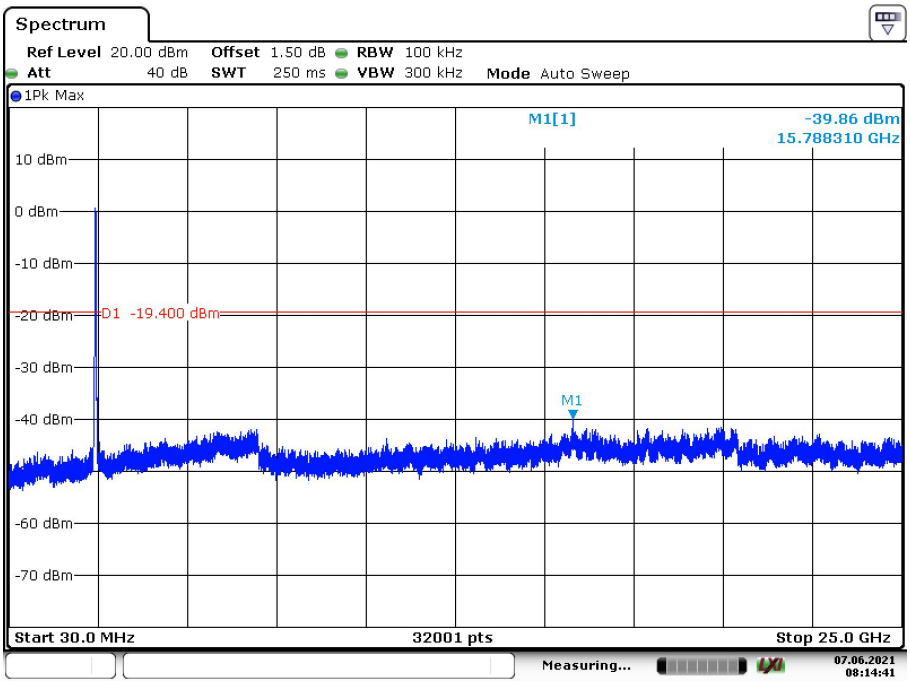

Date: 7.JUN.2021 08:14:41

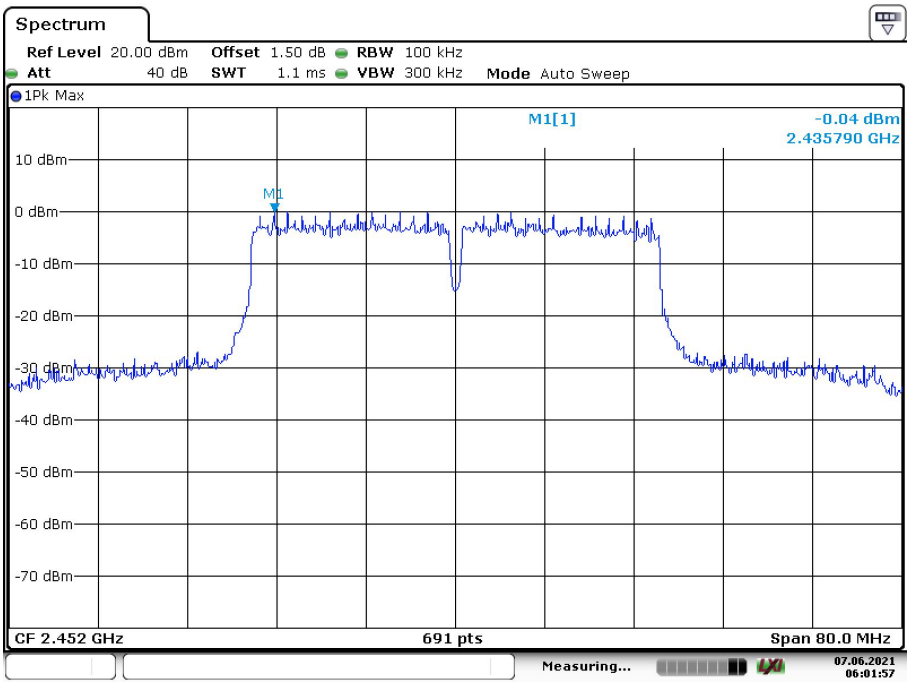

Date: 7.JUN.2021 06:01:58

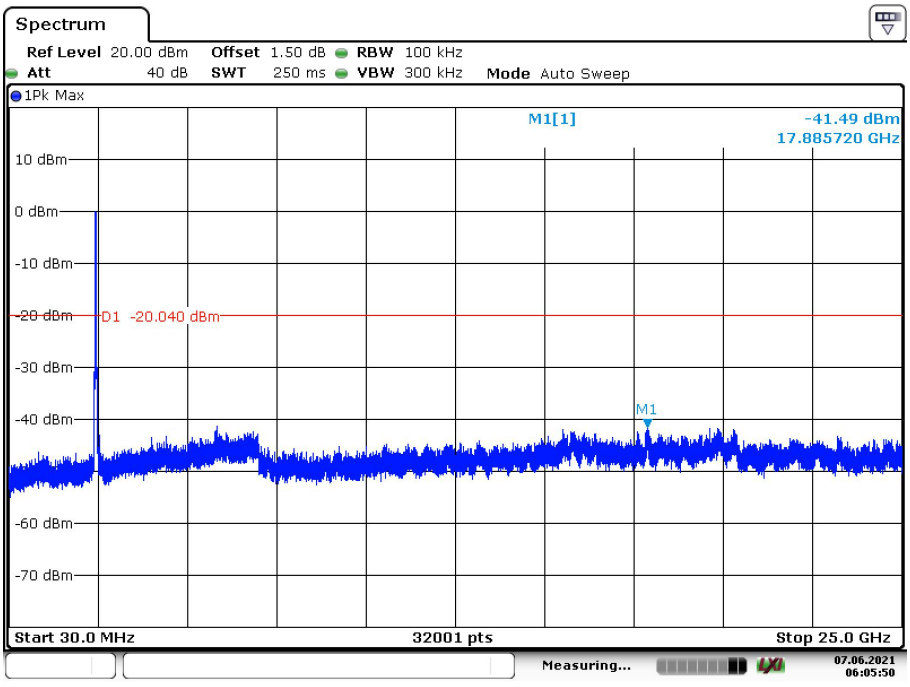

Date: 7.JUN.2021 06:05:51

Wi-Fi 802.11 b mode, Band Edge

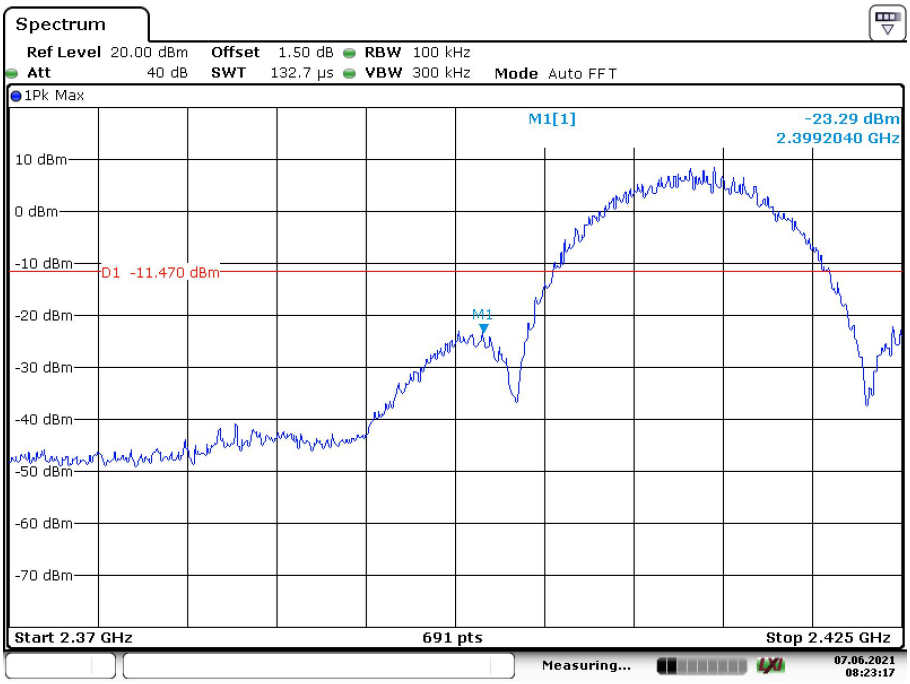

Date: 7.JUN.2021 08:23:17

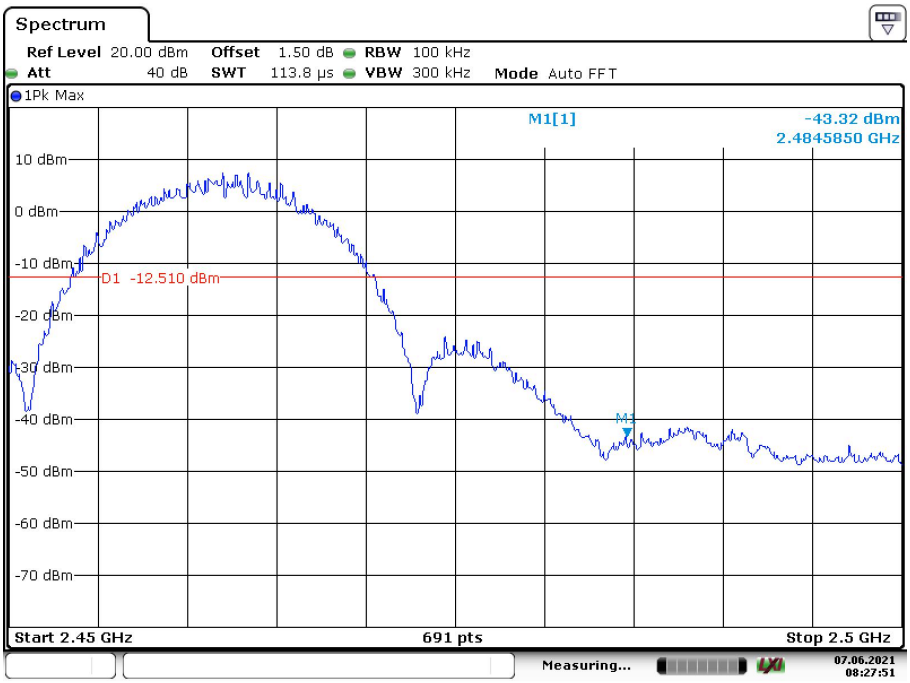

Date: 7.JUN.2021 08:27:51