

FCC PART 15.247 TEST REPORT

For

Bolt Modus Corp

Oficina N.33 Edificio Ofidepositos Central Calidonia - Distrito Federal
Panama

FCC ID: 2APW4ART2P

Report Type: Original Report	Product Name: 4G Smart Phone
Report Number: SZ1210513-16948E-00B	
Report Date: 2021-07-01	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	36

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	38
FCC §15.247(e) - POWER SPECTRAL DENSITY	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		4G Smart Phone
EUT Model:		ART2PRO
Operation Frequency:		2412-2462 MHz(802.11b/g/n ht20), 2402-2480MHz(BLE)
Maximum Peak Output Power (Conducted):		17.96dBm(802.11b/g/n) -0.40 dBm(BLE)
Modulation Type:		DSSS, OFDM,GFSK
Antenna Gain▲:		0.97 dBi
Adapter Information	Model:	CART2P
	Input:	100-240V 50/60Hz
	Output:	5V 2A
Rated Input Voltage:		DC 3.85V from battery or DC 5V from adapter
Serial Number:		SZ1210513-16948E-RF-S1
EUT Received Date:		2021.05.13
EUT Received Status:		Good

Objective

This report is prepared on behalf of **Bolt Modus Corp** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1, 6, 11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.


EUT Exercise Software

The software “Engineering mode” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer ▲:

Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
802.11 b	Low	2412	1 Mbps	14
	Middle	2437	1 Mbps	15
	High	2462	1 Mbps	13
802.11 g	Low	2412	6 Mbps	13
	Middle	2437	6 Mbps	13
	High	2462	6 Mbps	12
802.11n ht20	Low	2412	MCS0	14
	Middle	2437	MCS0	14
	High	2462	MCS0	13
BLE	Low	2402	1Mbps	Default
	Middle	2440	1Mbps	Default
	High	2480	1Mbps	Default


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100.00
802.11g	2.080	2.128	97.74
802.11n ht20	1.952	1.968	99.19
BLE	1.696	1.920	88.33

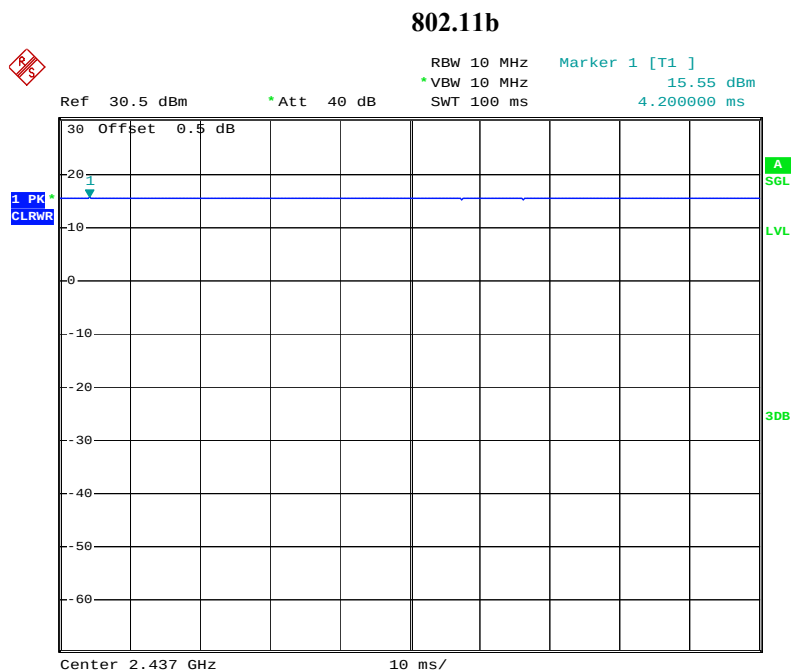


Date: 23.MAY.2021 11:15:06

802.11g

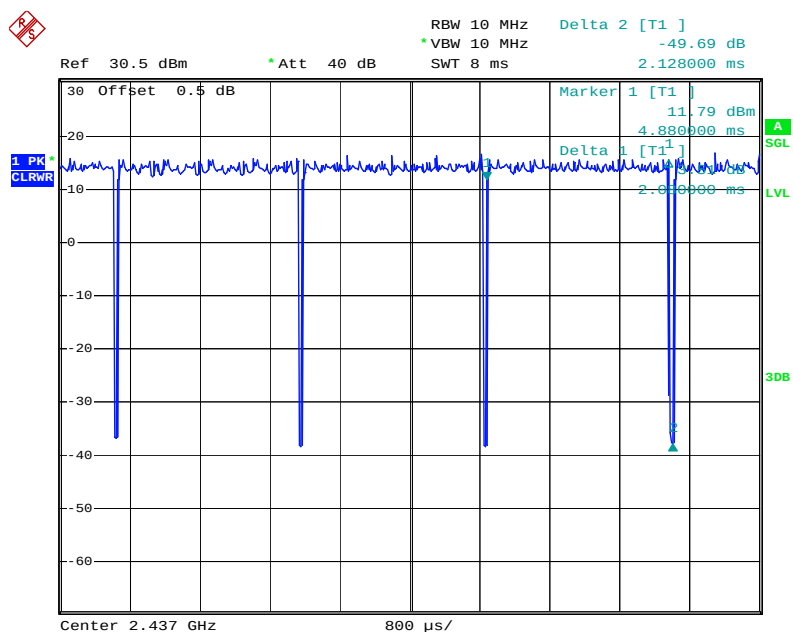


Date: 23.MAY.2021 11:13:53

802.11n ht20

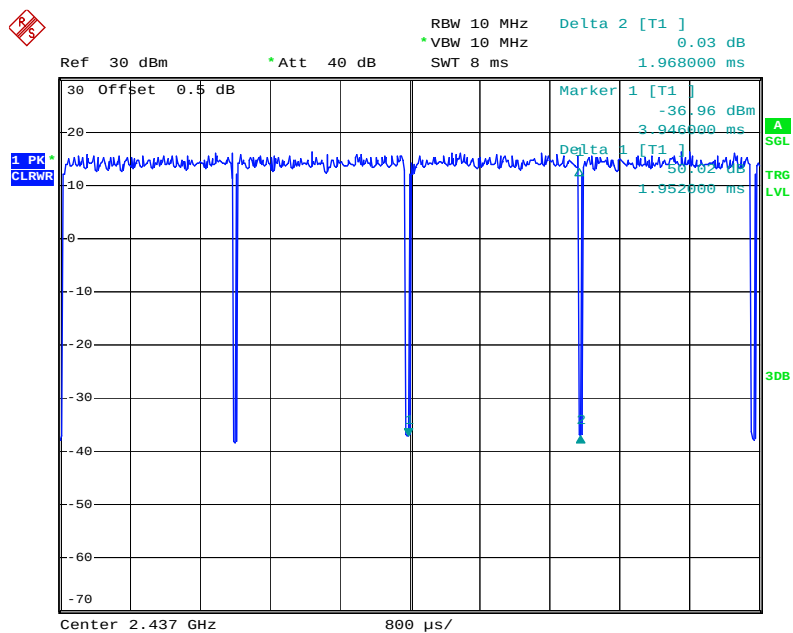

Date: 23.MAY.2021 11:10:56

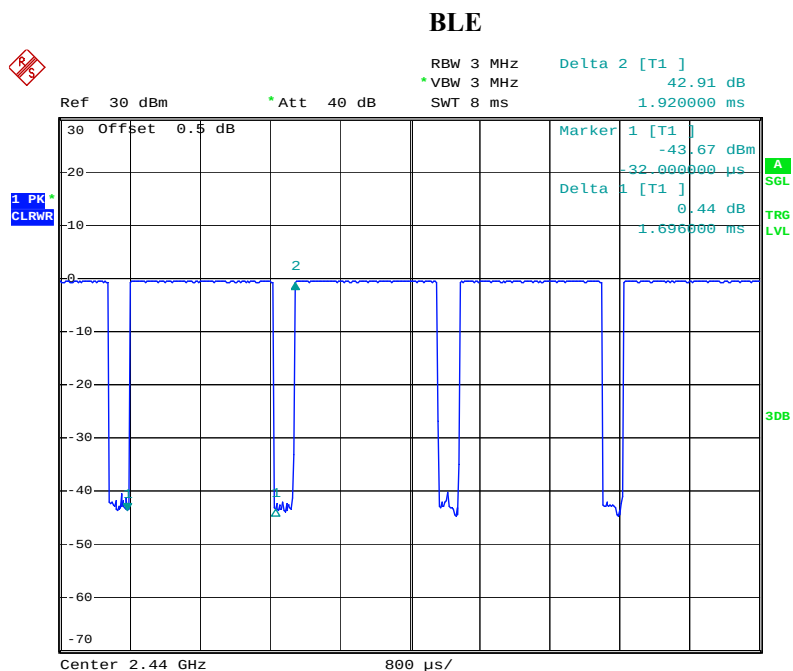

Date: 19.MAY.2021 08:48:15


Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	Yes	No	1.2	Adapter	EUT

Block Diagram of Test Setup

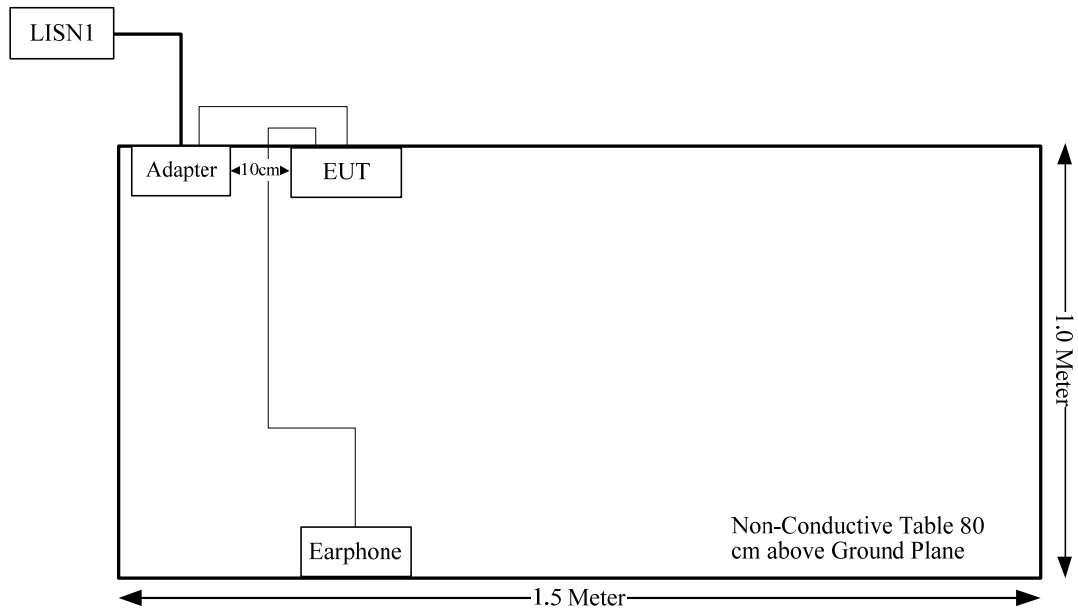

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result**For BLE:**

The max conducted power including tune-up tolerance is -0.2 dBm (0.95 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 0.95/5 \cdot (\sqrt{2.480}) = 0.3 \leq 3.0$

For WiFi:

The max conducted power including tune-up tolerance is 9.67 dBm (9.27 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 9.27/5 \cdot (\sqrt{2.462}) = 2.9 \leq 3.0$

Compliance, the stand-alone SAR evaluation is not necessary.

For 802.11b/g/n:

Compliance, Please refer to the SAR report: RXZ210607008SA01.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal FPC antenna arrangement, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	0.97 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

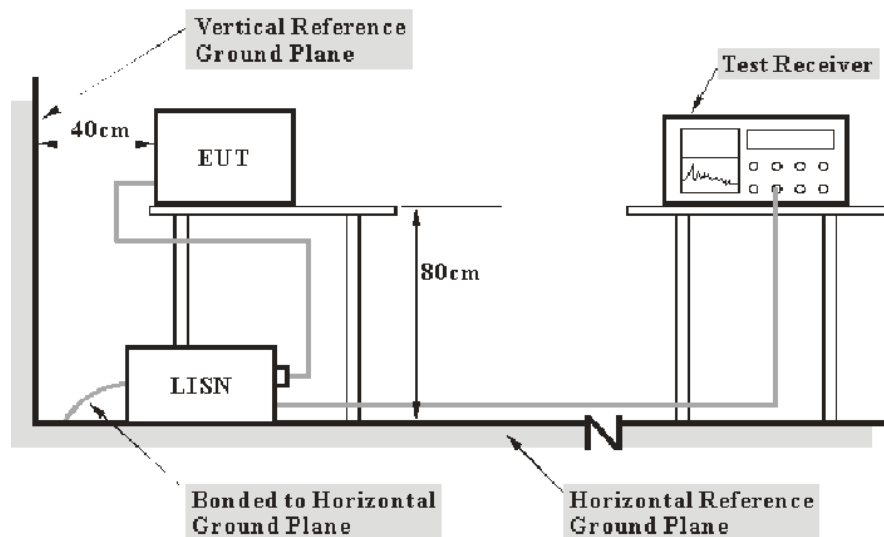

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.7°C
Relative Humidity:	65%
ATM Pressure:	100.0kPa
Tester:	Mia Huang
Test Date:	2021-06-01

Test Result: Compliance


Test Mode: Transmitting(802.11b mode high channel was the worst)

AC120 V, 60 Hz, Line:

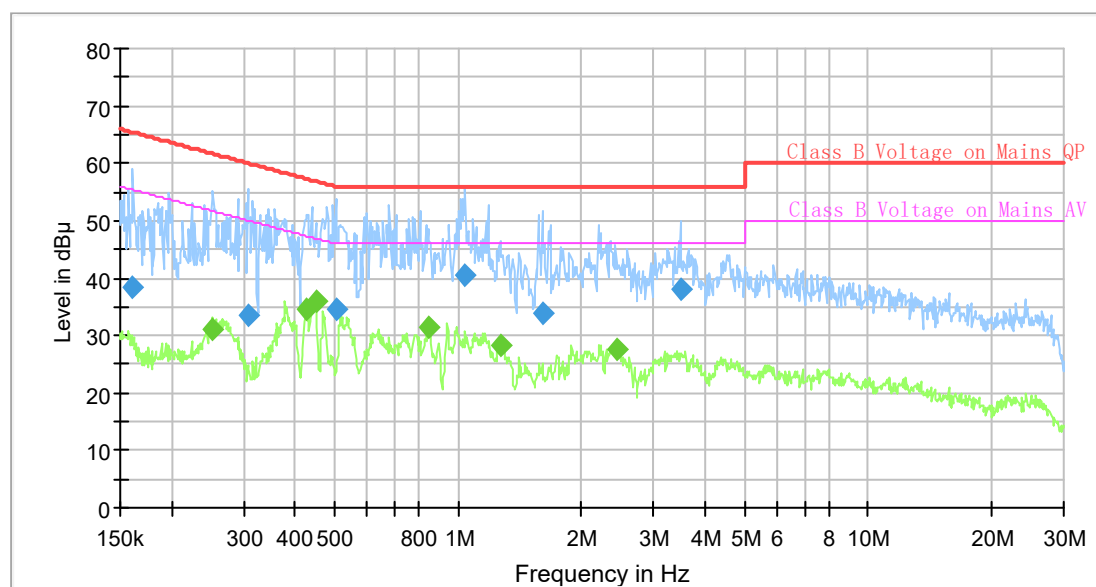

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.160848	38.52	---	65.42	26.90	9.000	L1	9.6
0.251977	---	31.11	51.69	20.58	9.000	L1	9.6
0.307613	33.66	---	60.03	26.37	9.000	L1	9.6
0.427528	---	34.49	47.30	12.81	9.000	L1	9.6
0.449391	---	35.83	46.89	11.06	9.000	L1	9.6
0.504016	34.62	---	56.00	21.38	9.000	L1	9.6
0.846671	---	31.40	46.00	14.60	9.000	L1	9.7
1.043973	40.55	---	56.00	15.45	9.000	L1	9.7
1.268136	---	28.15	46.00	17.85	9.000	L1	9.7
1.603137	33.98	---	56.00	22.02	9.000	L1	9.7
2.449547	---	27.68	46.00	18.32	9.000	L1	9.7
3.490408	38.15	---	56.00	17.85	9.000	L1	9.7

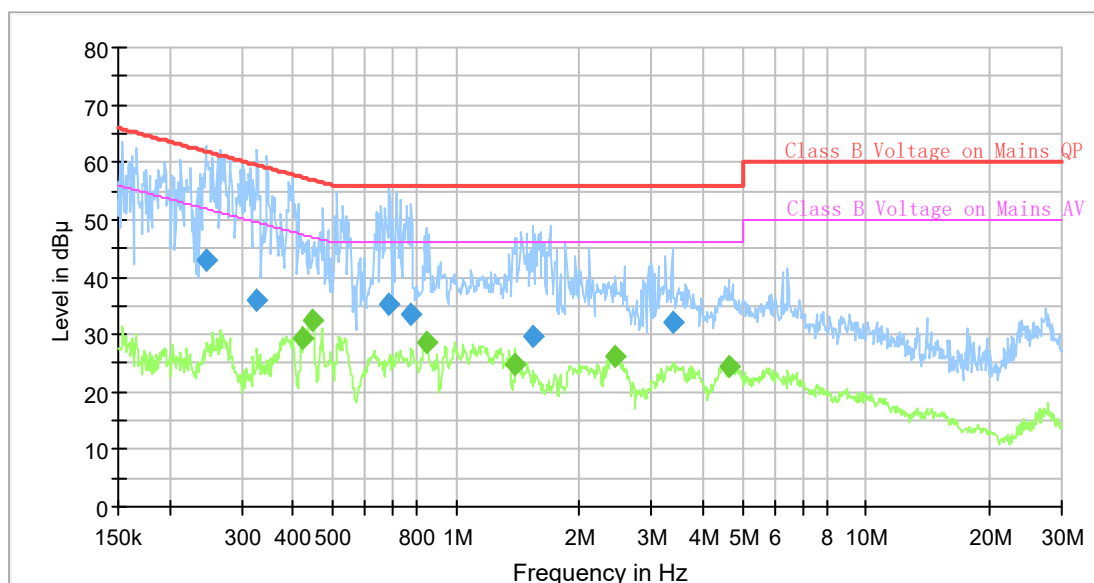AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.245771	43.08	---	61.90	18.82	9.000	N	9.6
0.326585	35.88	---	59.54	23.66	9.000	N	9.6
0.423284	---	29.49	47.38	17.89	9.000	N	9.6
0.444931	---	32.41	46.97	14.56	9.000	N	9.6
0.686657	35.42	---	56.00	20.58	9.000	N	9.6
0.777842	33.40	---	56.00	22.60	9.000	N	9.6
0.850904	---	28.78	46.00	17.22	9.000	N	9.6
1.394186	---	24.67	46.00	21.33	9.000	N	9.6
1.548133	29.78	---	56.00	26.22	9.000	N	9.6
2.449547	---	26.26	46.00	19.74	9.000	N	9.6
3.370651	31.99	---	56.00	24.01	9.000	N	9.6
4.638118	---	24.52	46.00	21.48	9.000	N	9.6


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

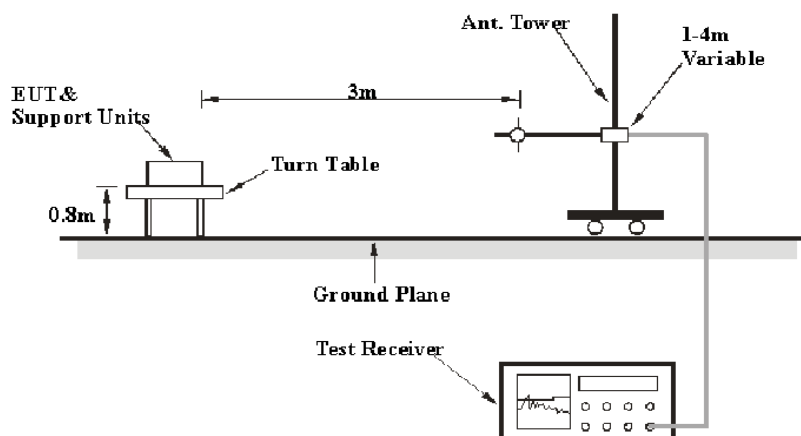

Above 1GHz:

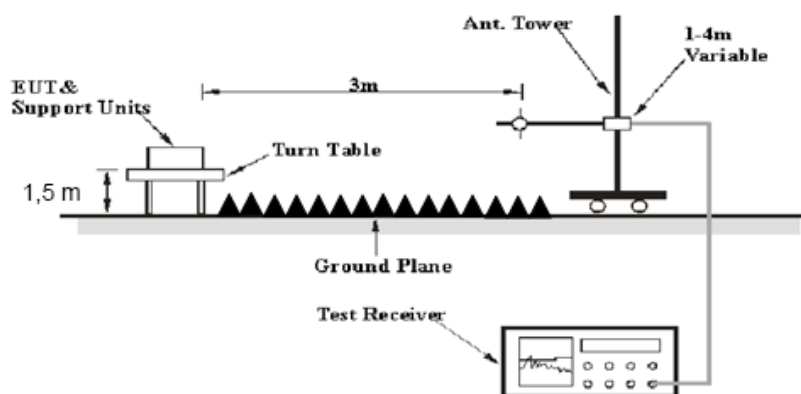

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Agilent	Spectrum Analyzer	E4440A	MY44303352	2021-04-25	2022-04-24
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26E A	2020-09-25	2021-09-25
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2020-06-16	2021-06-16
Mini Circuits	High Pass Filter	VHF-6010+	31118	2020-06-16	2021-06-16

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	24.2°C	28.5°C
Relative Humidity:	53.9%	43%
ATM Pressure:	100kPa	100.4kPa
Tester:	Walker Yuan	Alex Hu
Test Date:	2021-05-29	2021-05-28


Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting

1) 30MHz-1GHz

Horizontal:


100.0 dBuV/m

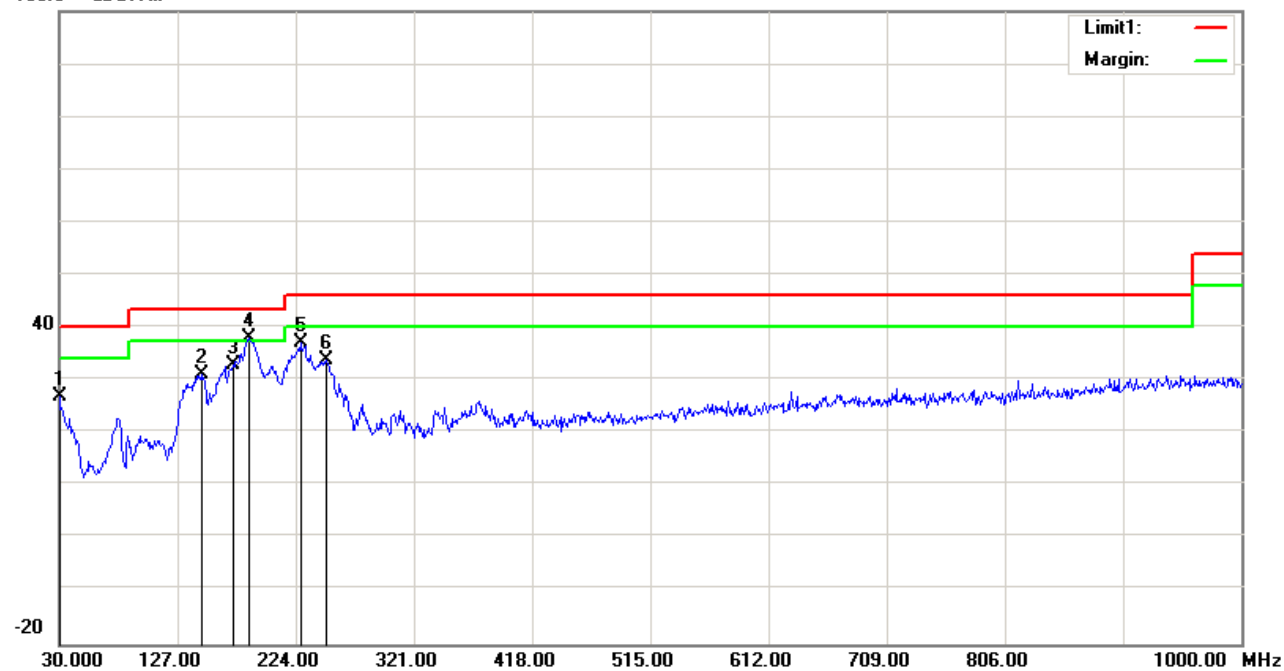

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	31.06	peak	-4.10	26.96	40.00	13.04
146.4000	40.23	peak	-9.17	31.06	43.50	12.44
172.5900	42.48	peak	-9.53	32.95	43.50	10.55
185.2000	48.25	peak	-10.12	38.13	43.50	5.37
227.8800	47.87	peak	-10.68	37.19	46.00	8.81
249.2200	43.57	peak	-9.76	33.81	46.00	12.19

Vertical:

100.0 dBuV/m

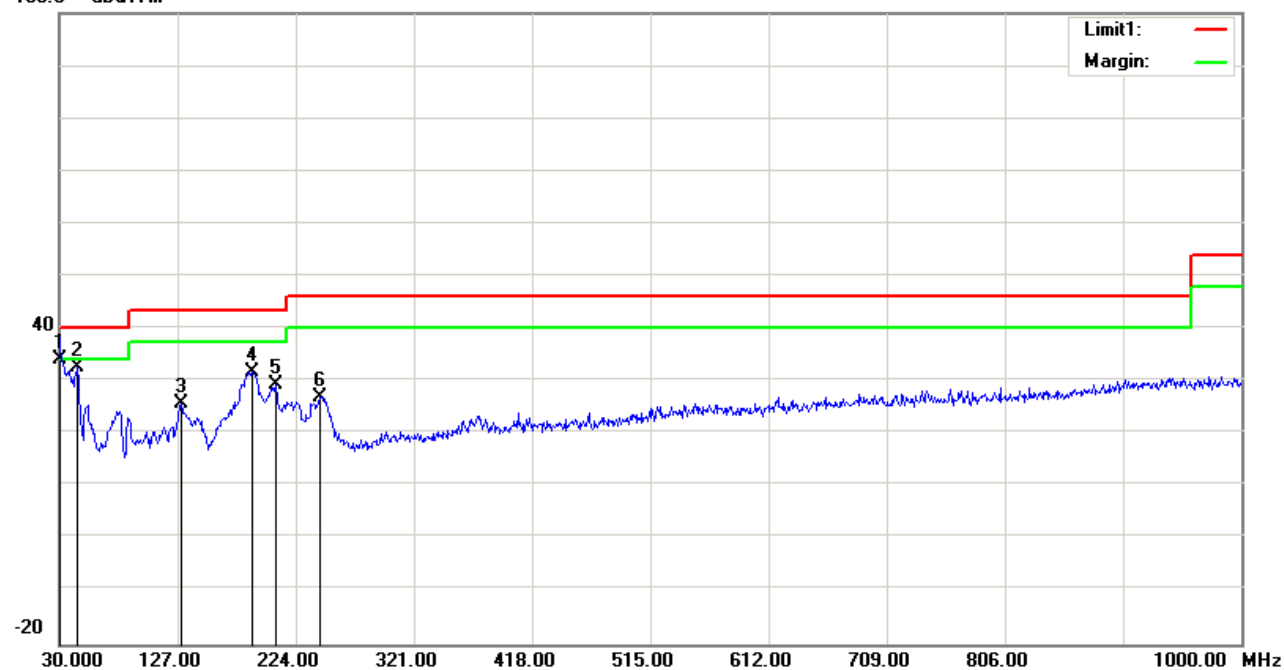

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	38.20	QP	-4.10	34.10	40.00	5.90
44.5500	45.12	peak	-12.41	32.71	40.00	7.29
129.9100	35.29	peak	-9.68	25.61	43.50	17.89
188.1100	42.13	peak	-10.43	31.70	43.50	11.80
207.5100	40.13	peak	-10.81	29.32	43.50	14.18
243.4000	36.84	peak	-9.82	27.02	46.00	18.98

2) 1-25GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	25.16	PK	H	28.08	2.50	0.00	55.74	74.00	18.26
2390.00	13.58	AV	H	28.08	2.50	0.00	44.16	54.00	9.84
4824.00	40.34	PK	H	32.92	3.59	27.41	49.44	74.00	24.56
4824.00	32.88	AV	H	32.92	3.59	27.41	41.98	54.00	12.02
7236.00	36.42	PK	H	35.62	4.67	27.22	49.49	74.00	24.51
7236.00	23.46	AV	H	35.62	4.67	27.22	36.53	54.00	17.47
Middle Channel: 2437 MHz									
4874.00	38.67	PK	H	33.00	3.58	27.54	47.71	74.00	26.29
4874.00	28.04	AV	H	33.00	3.58	27.54	37.08	54.00	16.92
7311.00	36.46	PK	H	35.78	4.65	27.28	49.61	74.00	24.39
7311.00	23.44	AV	H	35.78	4.65	27.28	36.59	54.00	17.41
High Channel: 2462 MHz									
2483.50	25.75	PK	H	28.27	2.53	0.00	56.55	74.00	17.45
2483.50	13.78	AV	H	28.27	2.53	0.00	44.58	54.00	9.42
4924.00	38.76	PK	H	33.08	3.58	27.51	47.91	74.00	26.09
4924.00	28.13	AV	H	33.08	3.58	27.51	37.28	54.00	16.72
7386.00	36.75	PK	H	35.95	4.62	27.18	50.14	74.00	23.86
7386.00	23.56	AV	H	35.95	4.62	27.18	36.95	54.00	17.05

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	29.25	PK	H	28.08	2.50	0.00	59.83	74.00	14.17
2390.00	13.97	AV	H	28.08	2.50	0.00	44.55	54.00	9.45
4824.00	38.74	PK	H	32.92	3.59	27.41	47.84	74.00	26.16
4824.00	25.14	AV	H	32.92	3.59	27.41	34.24	54.00	19.76
7236.00	36.54	PK	H	35.62	4.67	27.22	49.61	74.00	24.39
7236.00	23.42	AV	H	35.62	4.67	27.22	36.49	54.00	17.51
Middle Channel: 2437 MHz									
4874.00	38.63	PK	H	33.00	3.58	27.54	47.67	74.00	26.33
4874.00	25.11	AV	H	33.00	3.58	27.54	34.15	54.00	19.85
7311.00	36.53	PK	H	35.78	4.65	27.28	49.68	74.00	24.32
7311.00	23.39	AV	H	35.78	4.65	27.28	36.54	54.00	17.46
High Channel: 2462 MHz									
2483.50	29.34	PK	H	28.27	2.53	0.00	60.14	74.00	13.86
2483.50	14.59	AV	H	28.27	2.53	0.00	45.39	54.00	8.61
4924.00	38.57	PK	H	33.08	3.58	27.51	47.72	74.00	26.28
4924.00	25.08	AV	H	33.08	3.58	27.51	34.23	54.00	19.77
7386.00	36.57	PK	H	35.95	4.62	27.18	49.96	74.00	24.04
7386.00	23.41	AV	H	35.95	4.62	27.18	36.80	54.00	17.20

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	28.03	PK	H	28.08	2.50	0.00	58.61	74.00	15.39
2390.00	14.94	AV	H	28.08	2.50	0.00	45.52	54.00	8.48
4824.00	38.74	PK	H	32.92	3.59	27.41	47.84	74.00	26.16
4824.00	25.47	AV	H	32.92	3.59	27.41	34.57	54.00	19.43
7236.00	36.59	PK	H	35.62	4.67	27.22	49.66	74.00	24.34
7236.00	23.42	AV	H	35.62	4.67	27.22	36.49	54.00	17.51
Middle Channel: 2437 MHz									
4874.00	38.56	PK	H	33.00	3.58	27.54	47.60	74.00	26.40
4874.00	25.32	AV	H	33.00	3.58	27.54	34.36	54.00	19.64
7311.00	36.49	PK	H	35.78	4.65	27.28	49.64	74.00	24.36
7311.00	23.35	AV	H	35.78	4.65	27.28	36.50	54.00	17.50
High Channel: 2462 MHz									
2483.50	30.80	PK	H	28.27	2.53	0.00	61.60	74.00	12.40
2483.50	15.16	AV	H	28.27	2.53	0.00	45.96	54.00	8.04
4924.00	38.63	PK	H	33.08	3.58	27.51	47.78	74.00	26.22
4924.00	25.39	AV	H	33.08	3.58	27.51	34.54	54.00	19.46
7386.00	36.52	PK	H	35.95	4.62	27.18	49.91	74.00	24.09
7386.00	23.37	AV	H	35.95	4.62	27.18	36.76	54.00	17.24




BLE:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	26.50	PK	H	28.08	1.80	0.00	56.38	74.00	17.62
2390.00	14.13	AV	H	28.08	1.80	0.00	44.01	54.00	9.99
4804.00	37.18	PK	H	32.91	3.17	25.60	47.66	74.00	26.34
4804.00	24.59	AV	H	32.91	3.17	25.60	35.07	54.00	18.93
7206.00	36.82	PK	H	35.74	4.82	25.60	51.78	74.00	22.22
7206.00	24.41	AV	H	35.74	4.82	25.60	39.37	54.00	14.63
Middle Channel: 2440 MHz									
4880.00	37.22	PK	H	33.06	3.27	25.66	47.89	74.00	26.11
4880.00	24.63	AV	H	33.06	3.27	25.66	35.30	54.00	18.70
7320.00	36.74	PK	H	36.03	4.62	25.72	51.67	74.00	22.33
7320.00	24.37	AV	H	36.03	4.62	25.72	39.30	54.00	14.70
High Channel: 2480 MHz									
2483.50	26.53	PK	H	28.27	1.84	0.00	56.64	74.00	17.36
2483.50	14.38	AV	H	28.27	1.84	0.00	44.49	54.00	9.51
4960.00	36.46	PK	H	33.22	3.23	25.63	47.28	74.00	26.72
4960.00	24.41	AV	H	33.22	3.23	25.63	35.23	54.00	18.77
7440.00	36.72	PK	H	36.34	4.41	25.85	51.62	74.00	22.38
7440.00	24.36	AV	H	36.34	4.41	25.85	39.26	54.00	14.74

Test plots(BLE Low channel was the worst)




Horizontal:

Fundamental
Test with Band
Rejection Filter

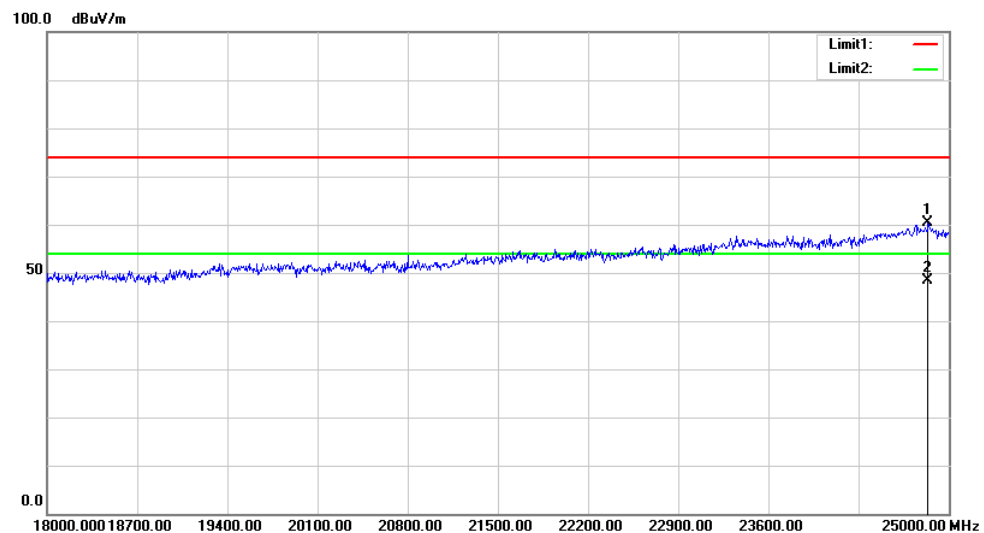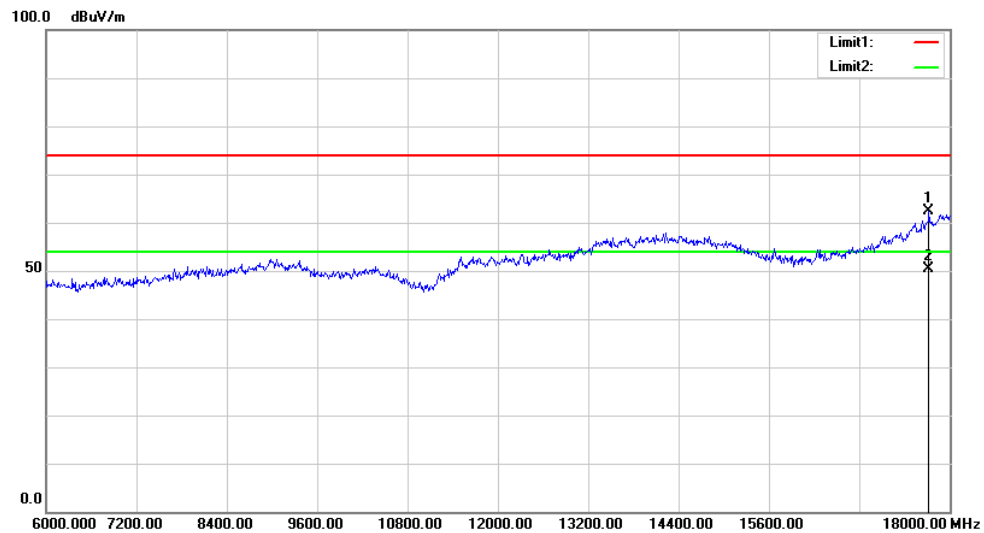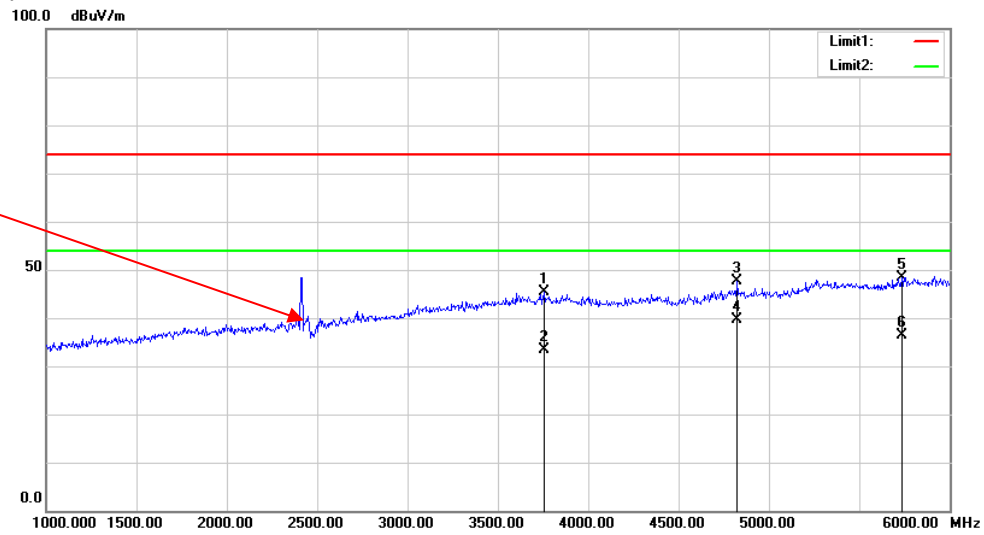

Vertical:

Fundamental
Test with Band
Rejection Filter

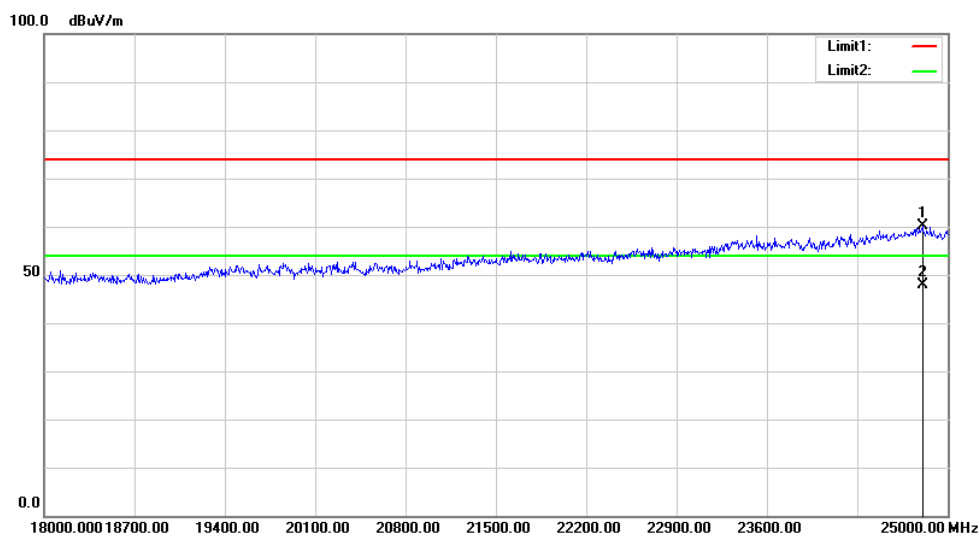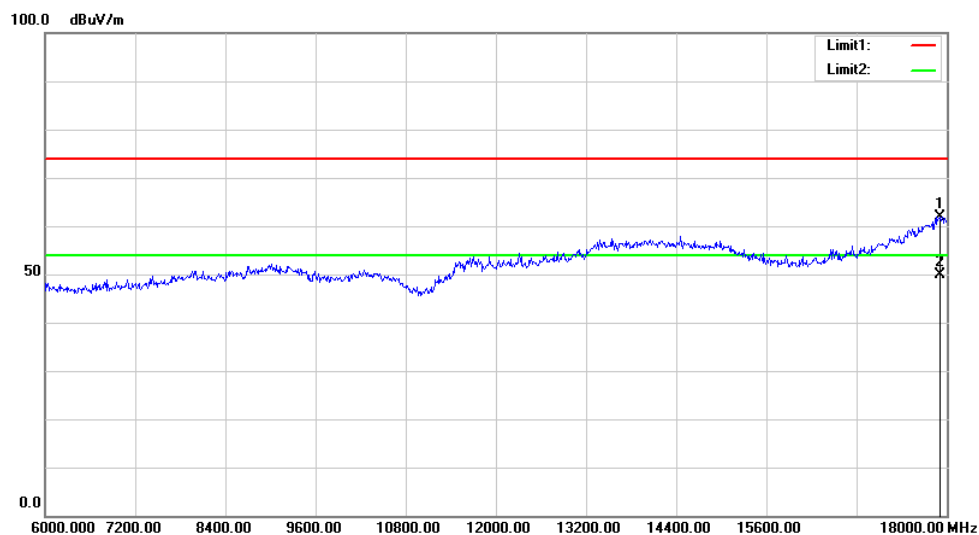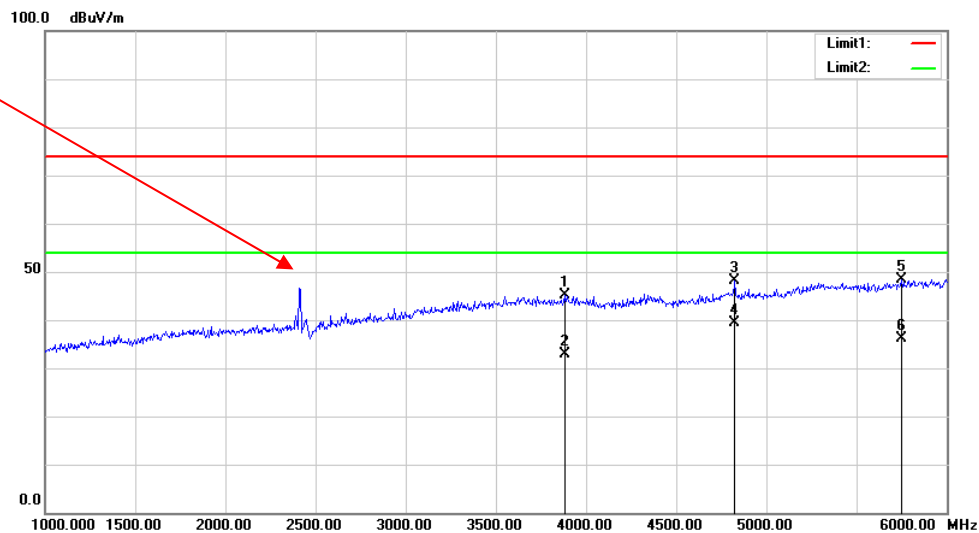

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.6~24.8°C
Relative Humidity:	55~61%
ATM Pressure:	100.2~100.8 kPa
Tester:	Thehsy Xie
Test Date:	2021-05-19~2021-05-23


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.280	≥ 0.5
	Middle	2437	9.440	≥ 0.5
	High	2462	9.120	≥ 0.5
802.11g	Low	2412	16.320	≥ 0.5
	Middle	2437	16.480	≥ 0.5
	High	2462	16.320	≥ 0.5
802.11n ht20	Low	2412	17.520	≥ 0.5
	Middle	2437	17.760	≥ 0.5
	High	2462	17.120	≥ 0.5
BLE	Low	2402	0.668	≥ 0.5
	Middle	2440	0.668	≥ 0.5
	High	2480	0.664	≥ 0.5

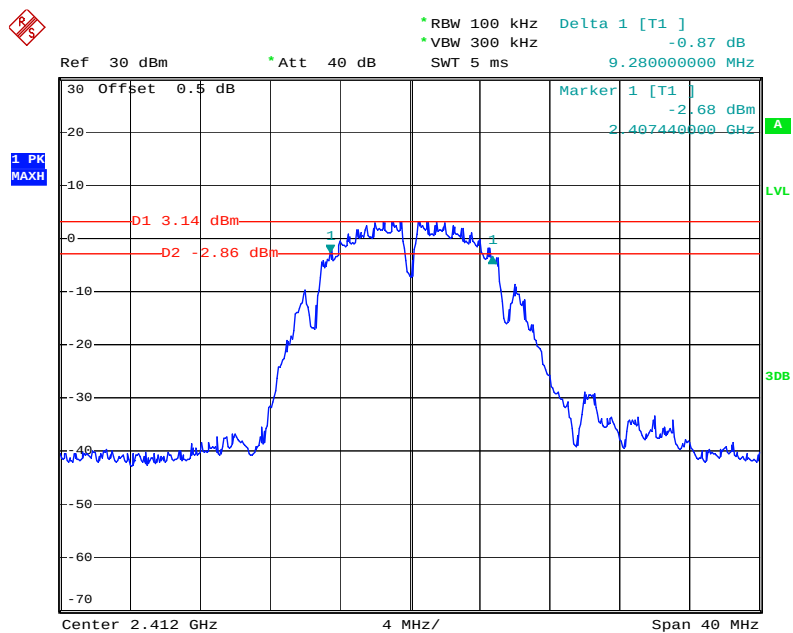
6dB Emission Bandwidth:**802.11b Low Channel**

Date: 23.MAY.2021 10:32:09

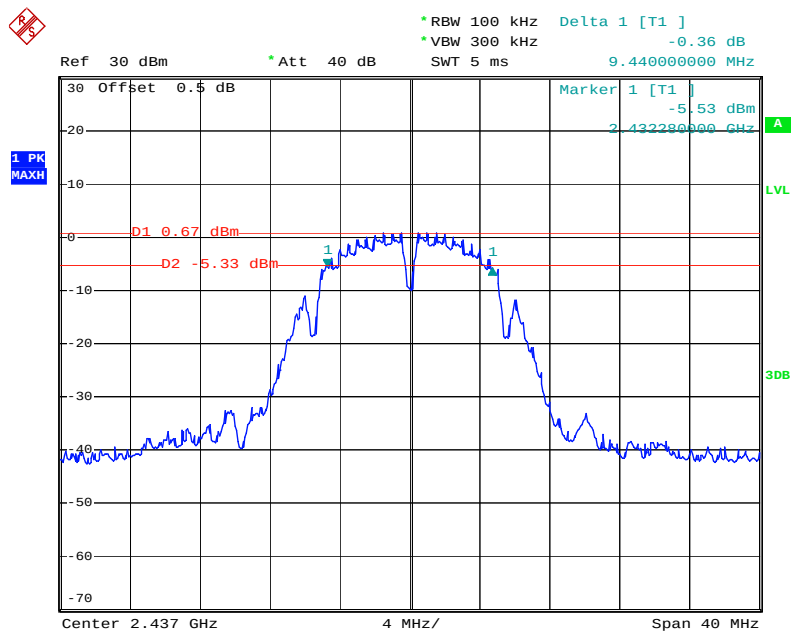802.11b Middle Channel


Date: 23.MAY.2021 10:34:00

802.11b High Channel

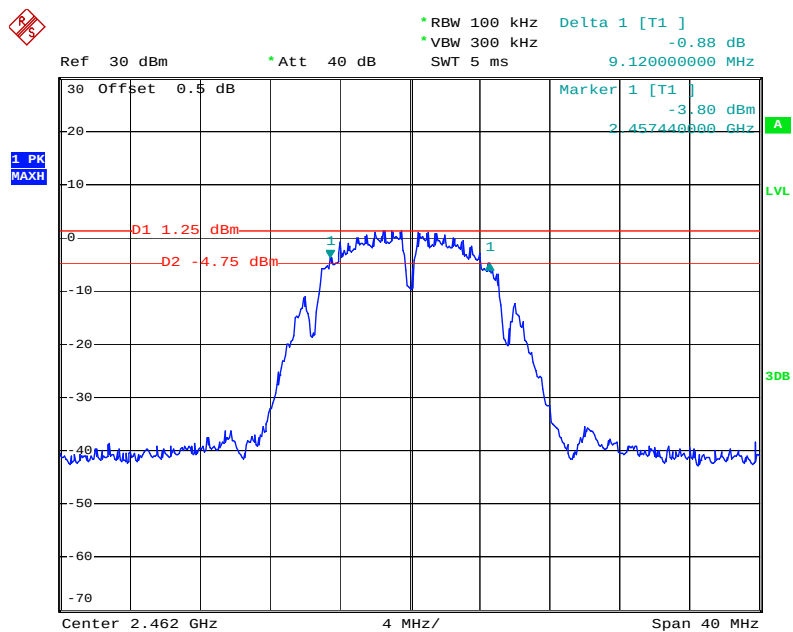


Date: 23.MAY.2021 10:46:34

802.11g Low Channel

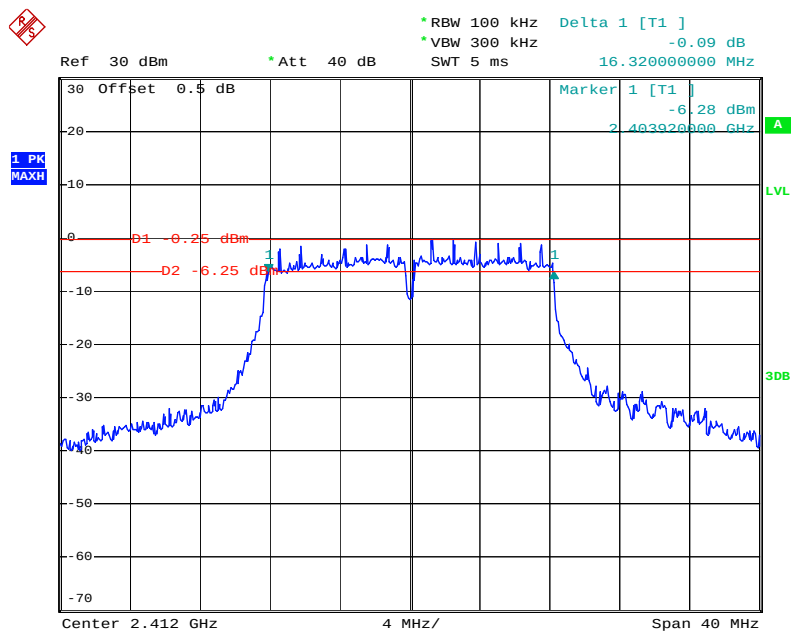


Date: 23.MAY.2021 10:51:18

802.11g Middle Channel

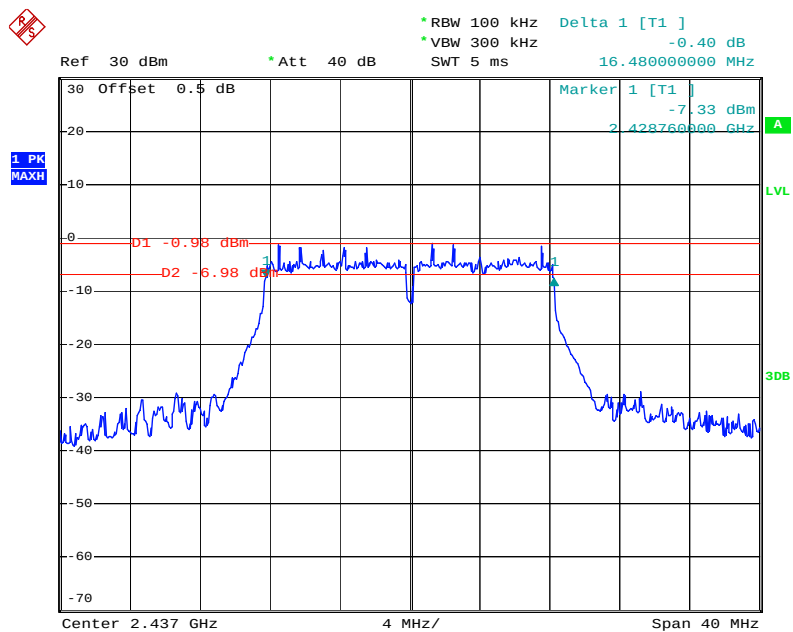


Date: 23.MAY.2021 10:49:48

802.11g High Channel

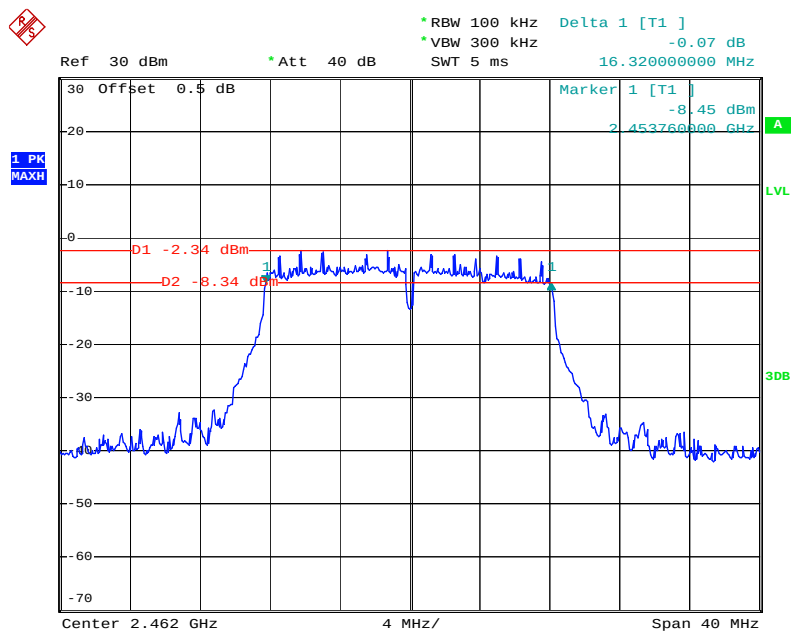


Date: 23.MAY.2021 10:48:18

802.11n ht20 Low Channel

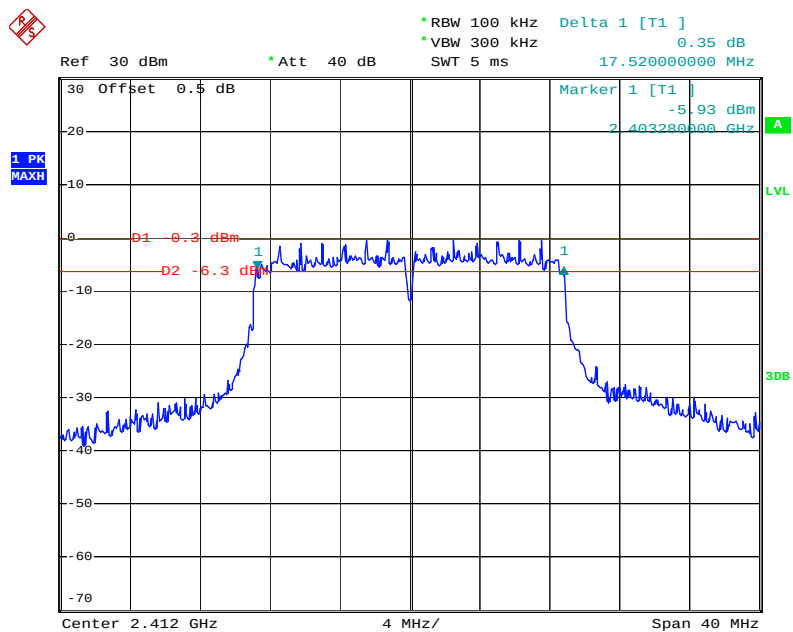


Date: 23.MAY.2021 10:53:00

802.11n ht20 Middle Channel

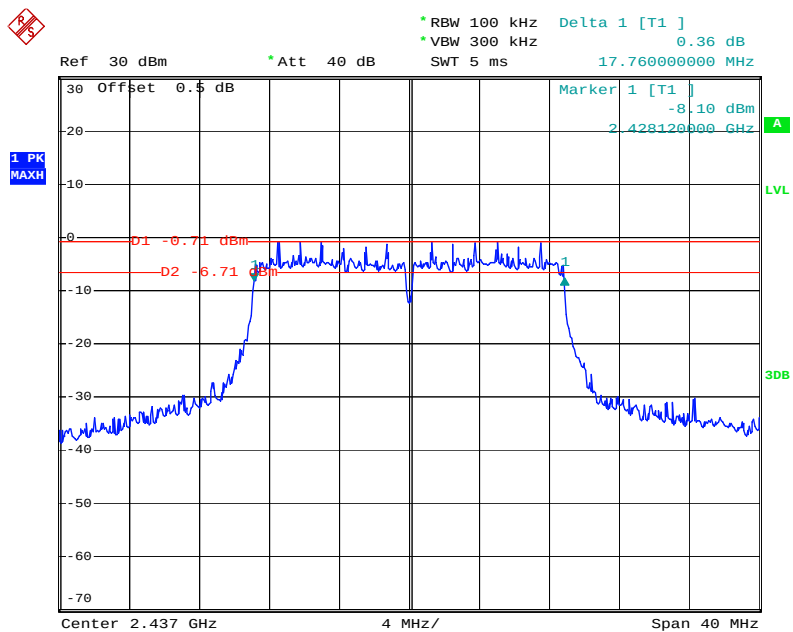


Date: 23.MAY.2021 10:54:24

802.11n ht20 High Channel

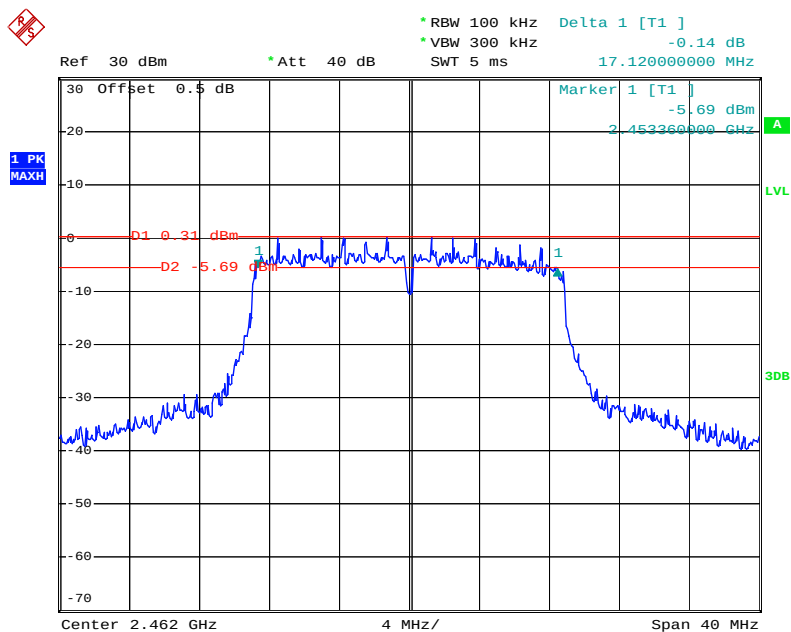


Date: 23.MAY.2021 11:06:31

BLE, Low Channel

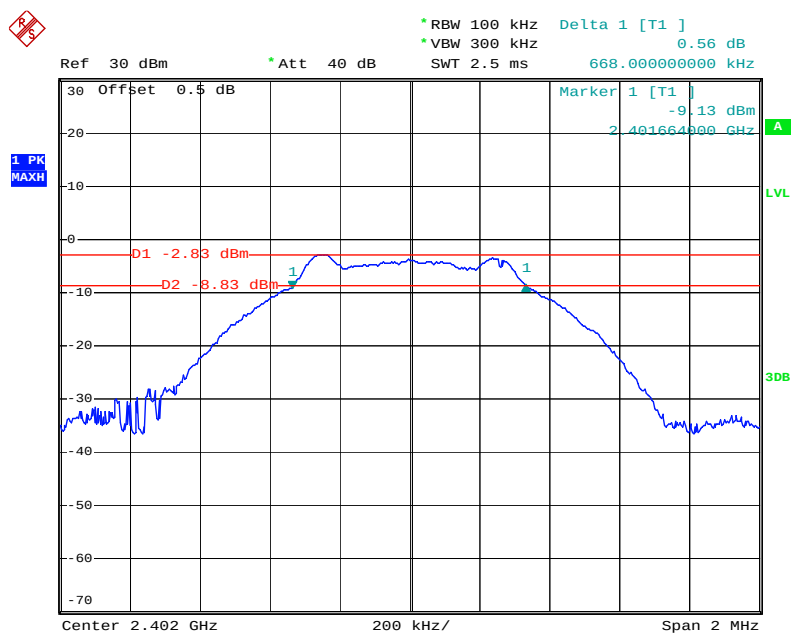


Date: 19.MAY.2021 08:38:50

BLE, Middle Channel

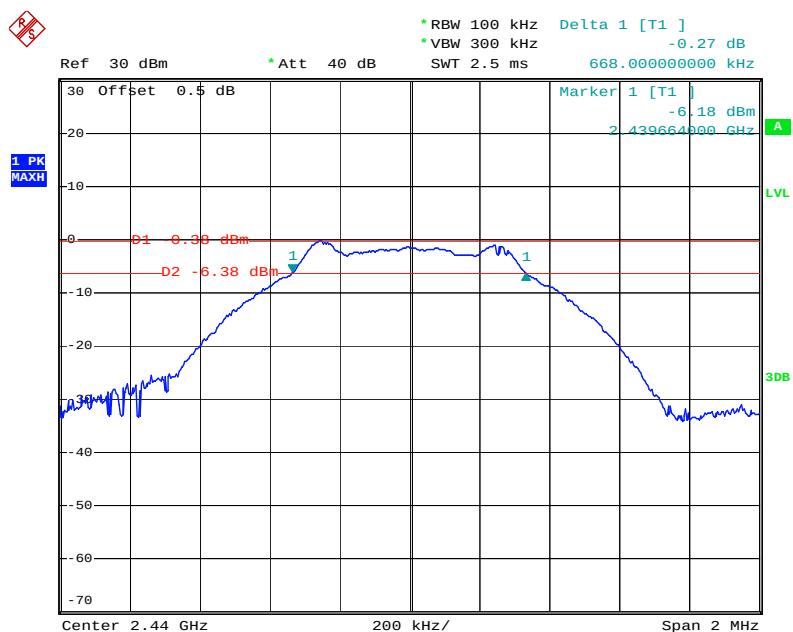

Date: 19.MAY.2021 08:40:24

BLE,High Channel

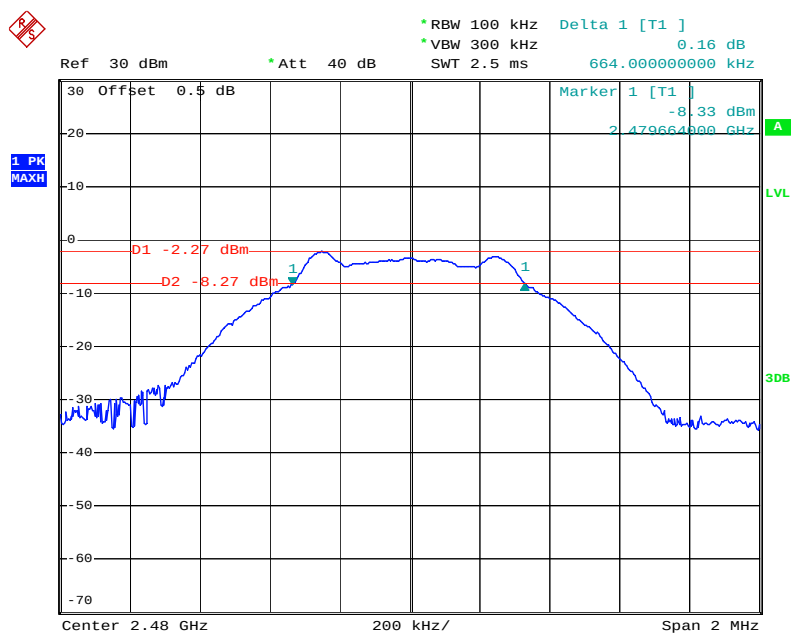

Date: 19.MAY.2021 08:41:25

FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080014	2020-09-12	2021-09-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.6~24.8°C
Relative Humidity:	55~61%
ATM Pressure:	100.2~100.8 kPa
Tester:	Thehsy Xie
Test Date:	2021-05-19~2021-05-23

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Frequency (MHz)	Conducted Peak Output Power (dBm)	Conducted Average Output Power (dBm)	Limit (dBm)
802.11b	2412	13.87	9.67	30
	2437	13.35	9.45	30
	2462	13.58	9.42	30
802.11g	2412	16.84	9.03	30
	2437	16.97	8.92	30
	2462	16.95	9.44	30
802.11n ht20	2412	17.76	9.57	30
	2437	17.67	9.32	30
	2462	17.96	9.52	30
BLE	2402	-2.81	/	30
	2440	-0.40	/	30
	2480	-2.38	/	30

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.6~24.8°C
Relative Humidity:	55~61%
ATM Pressure:	100.2~100.8 kPa
Tester:	Thehsy Xie
Test Date:	2021-05-19~2021-05-23


Test mode: Transmitting

Test Result: Compliance. Please refer to following plots.

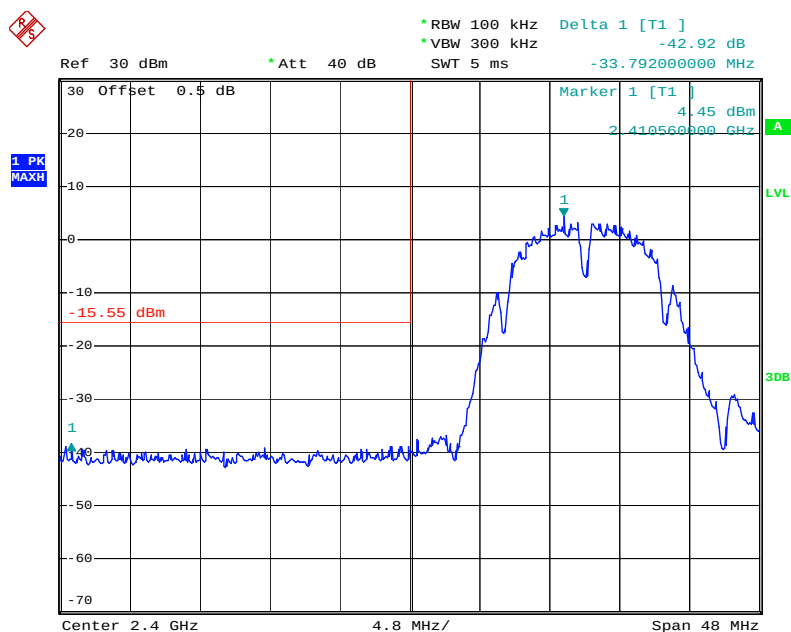802.11b: Band Edge, Left Side


Date: 23.MAY.2021 10:33:01

802.11b: Band Edge, Right Side

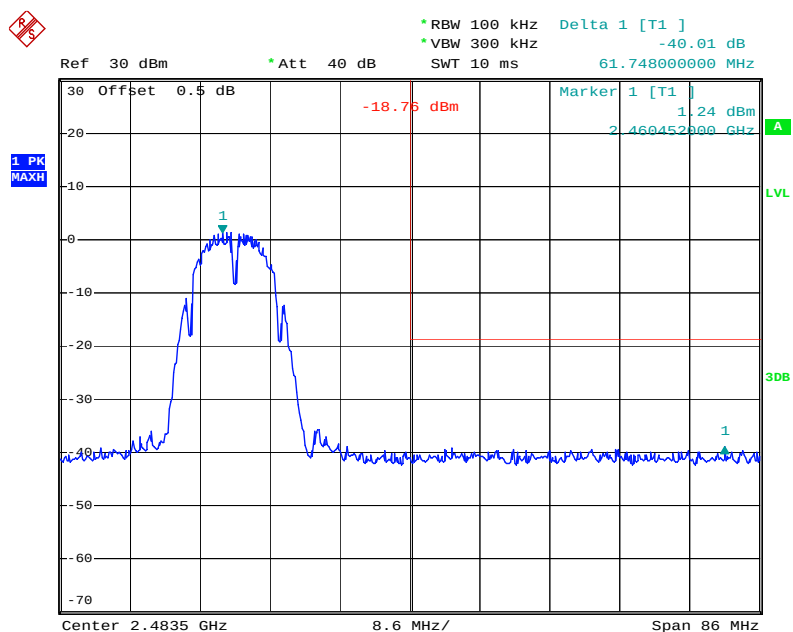


Date: 23.MAY.2021 10:47:25

802.11g: Band Edge, Left Side

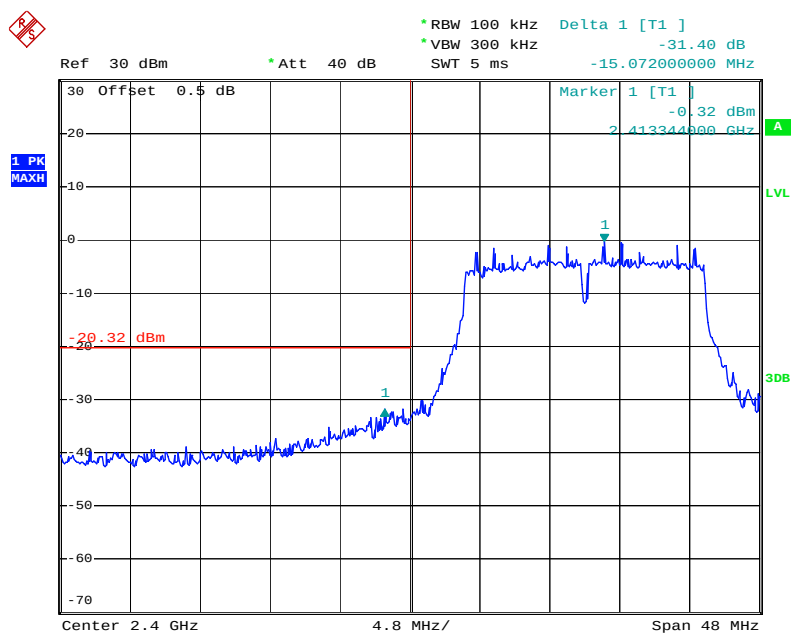


Date: 23.MAY.2021 10:52:16

802.11g: Band Edge, Right Side

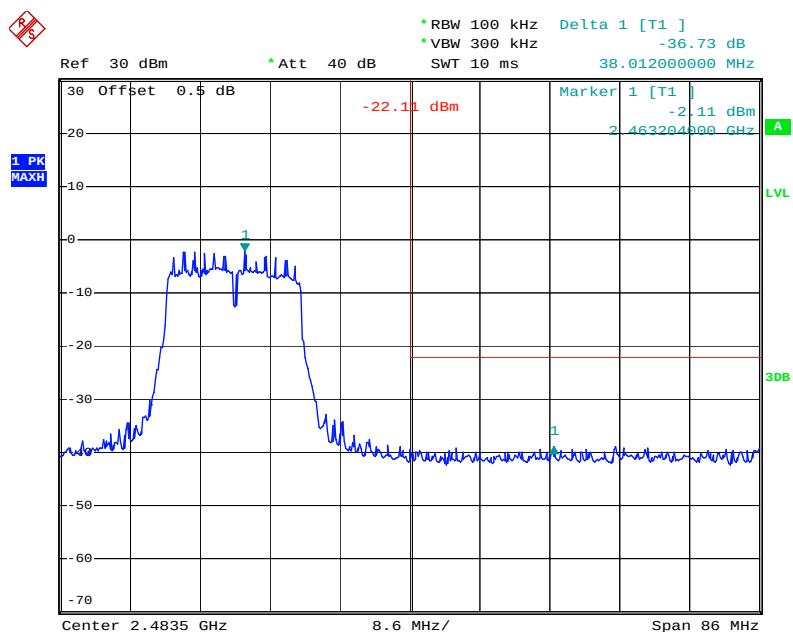


Date: 23.MAY.2021 10:49:20


802.11n ht20 Band Edge, Left Side

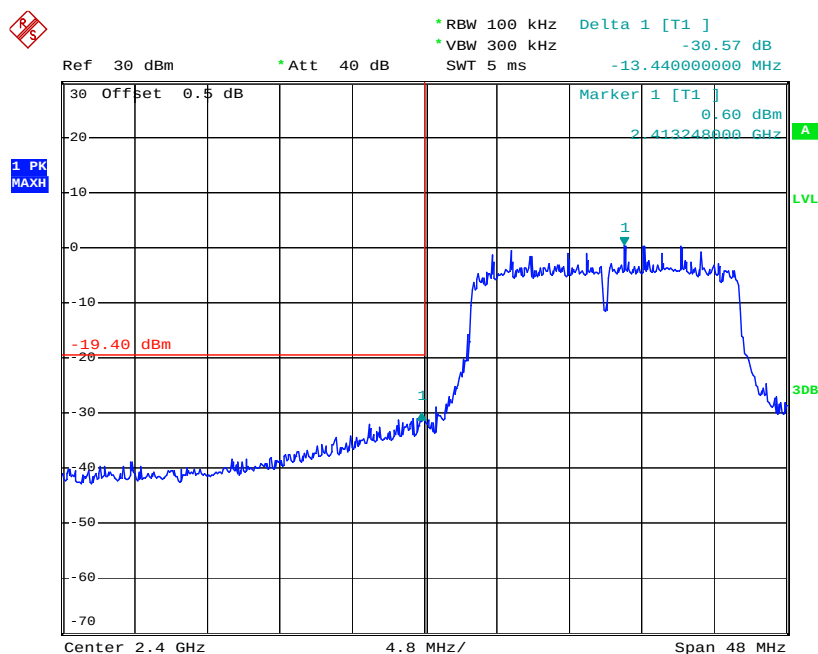

Date: 23.MAY.2021 10:53:51

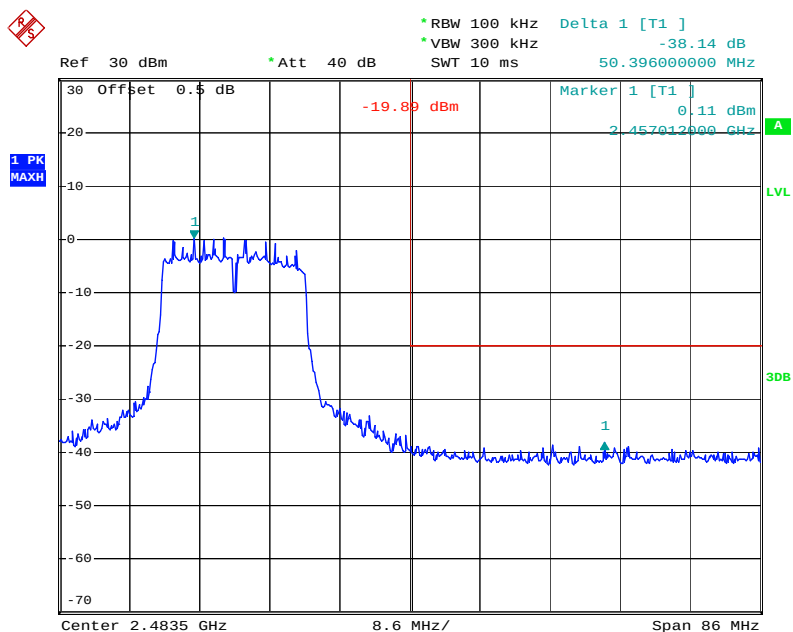
802.11n ht20 Band Edge, Right Side

Date: 23.MAY.2021 11:07:31

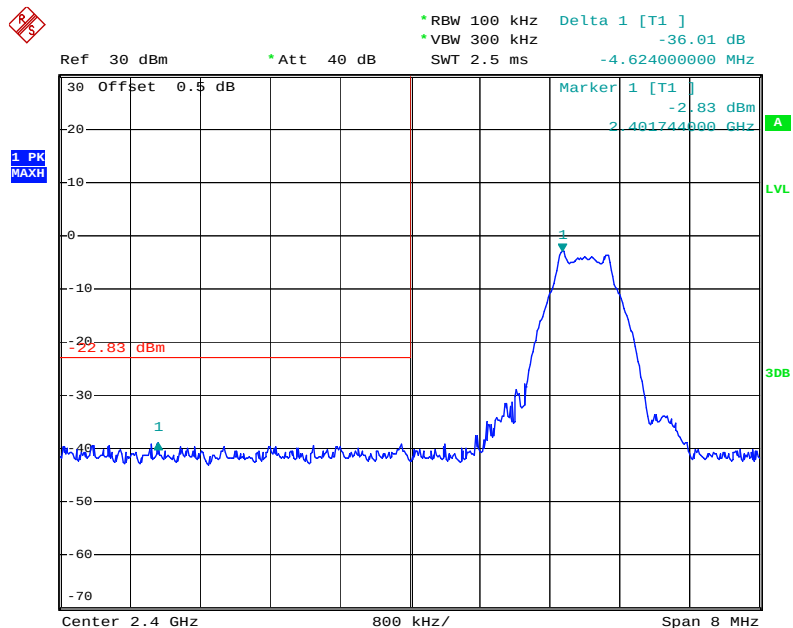BLE, Band Edge, Left Side

Date: 19.MAY.2021 08:39:45

BLE, Band Edge, Right Side

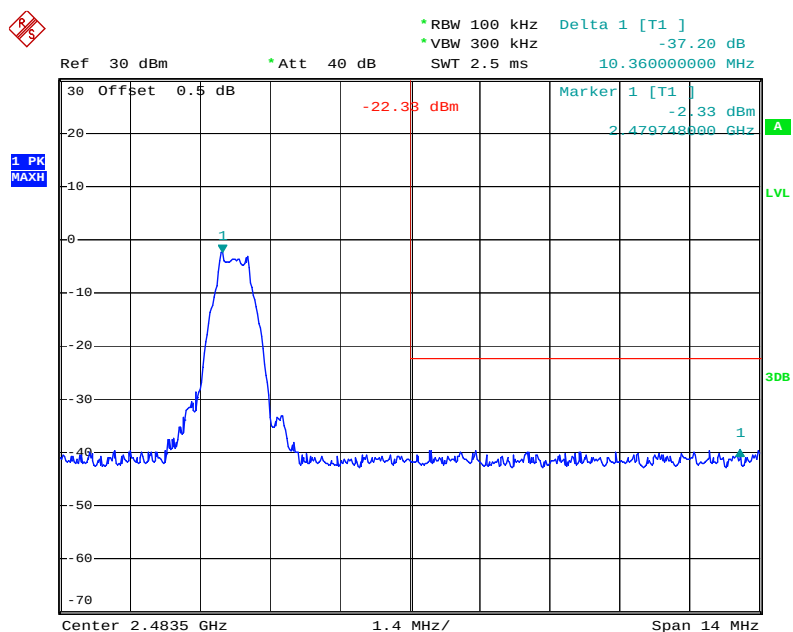

Date: 19.MAY.2021 08:42:16

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.6~24.8°C
Relative Humidity:	55~61%
ATM Pressure:	100.2~100.8 kPa
Tester:	Thehsy Xie
Test Date:	2021-05-19~2021-05-23

Test Result: Compliance. Please refer to the following table and plots

Test Mode: Transmitting


Test mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-2.11	≤8
	2437	0.13	≤8
	2462	-0.12	≤8
802.11g	2412	-16.85	≤8
	2437	-17.07	≤8
	2462	-17.06	≤8
802.11n ht20	2412	-15.69	≤8
	2437	-16.22	≤8
	2462	-15.63	≤8
BLE	2402	-19.21	≤8
	2440	-16.83	≤8
	2480	-18.82	≤8

Power Spectral Density, 802.11b Low Channel

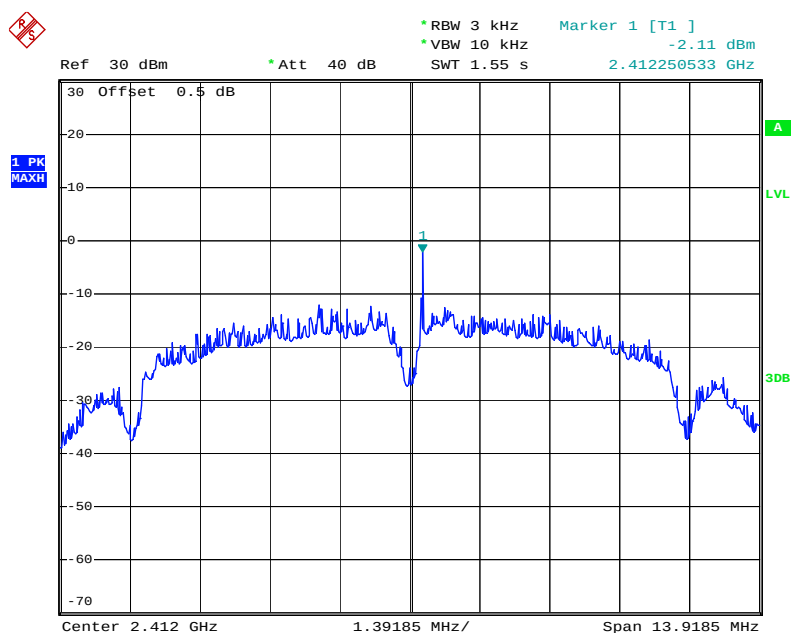


Date: 23.MAY.2021 10:32:48

Power Spectral Density, 802.11b Middle Channel

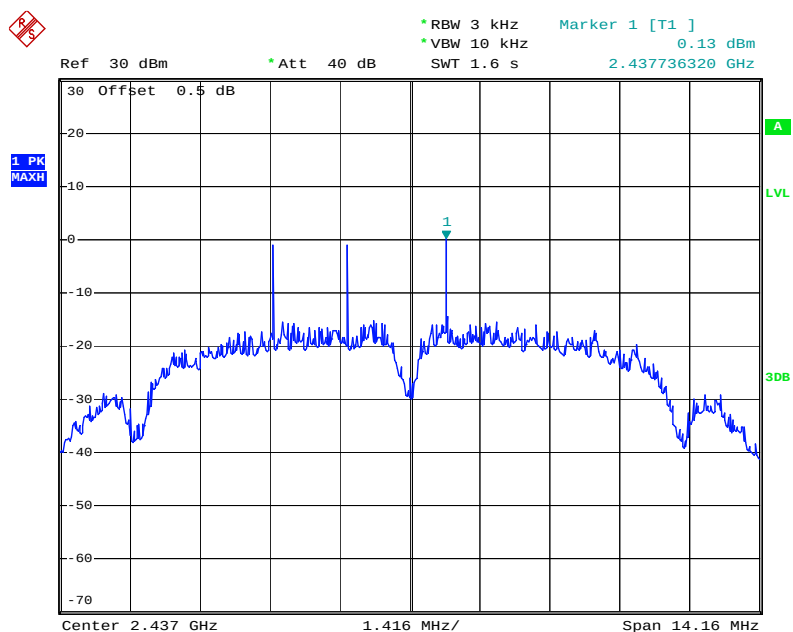


Date: 23.MAY.2021 10:34:36

Power Spectral Density, 802.11b High Channel

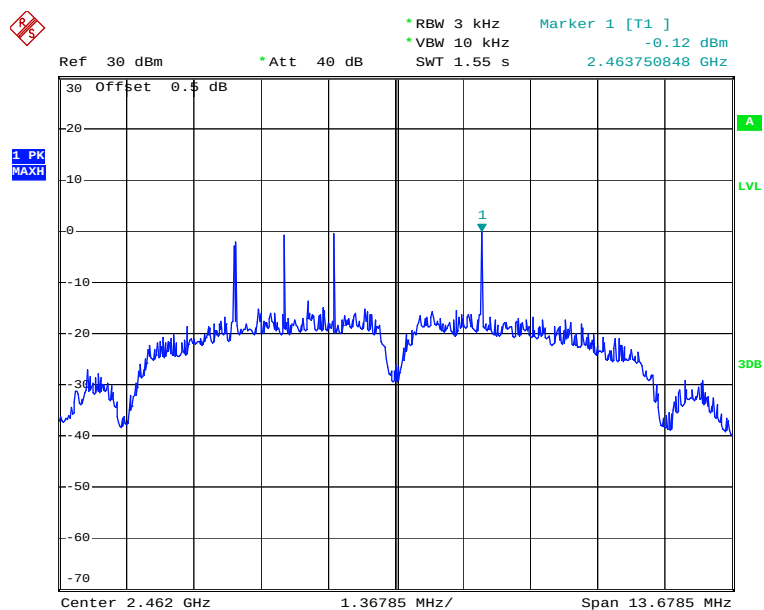


Date: 23.MAY.2021 10:47:13

Power Spectral Density, 802.11g Low Channel

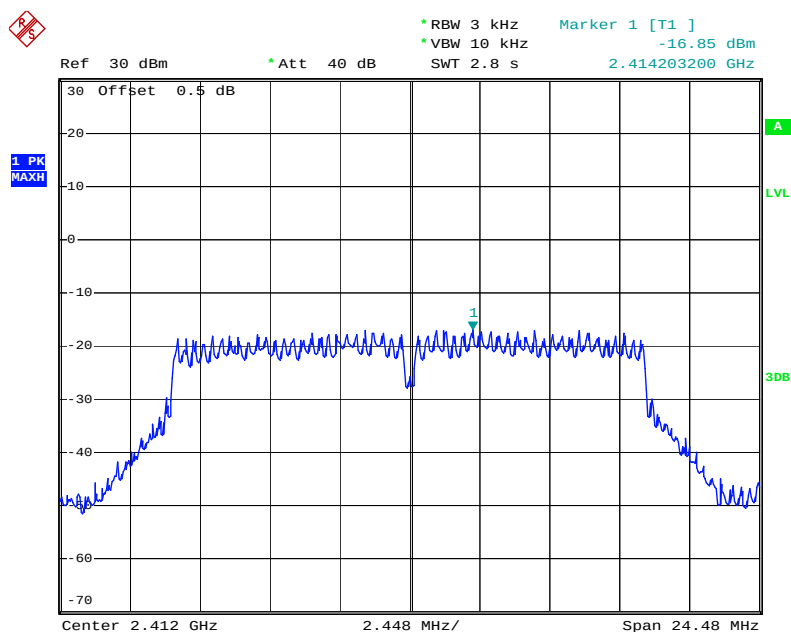


Date: 23.MAY.2021 10:52:04


Power Spectral Density, 802.11g Middle Channel

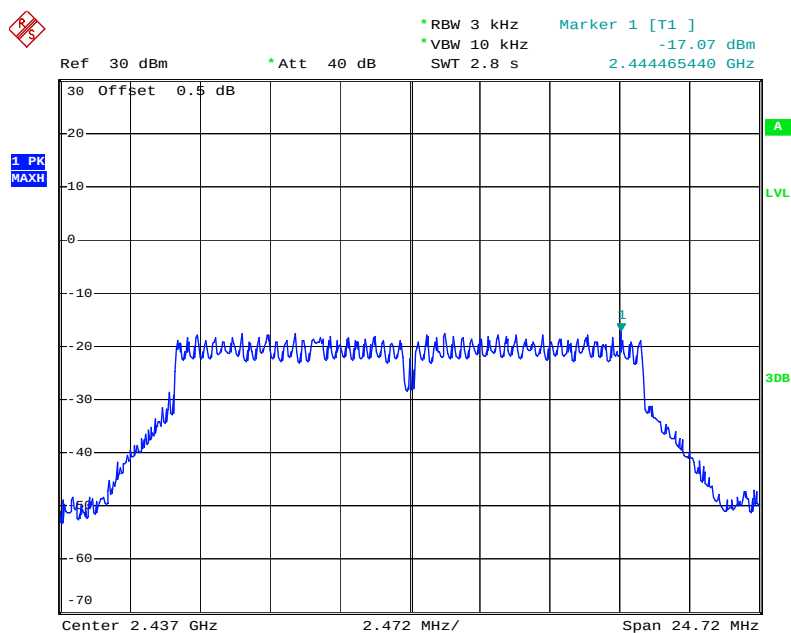

Date: 23.MAY.2021 10:50:38

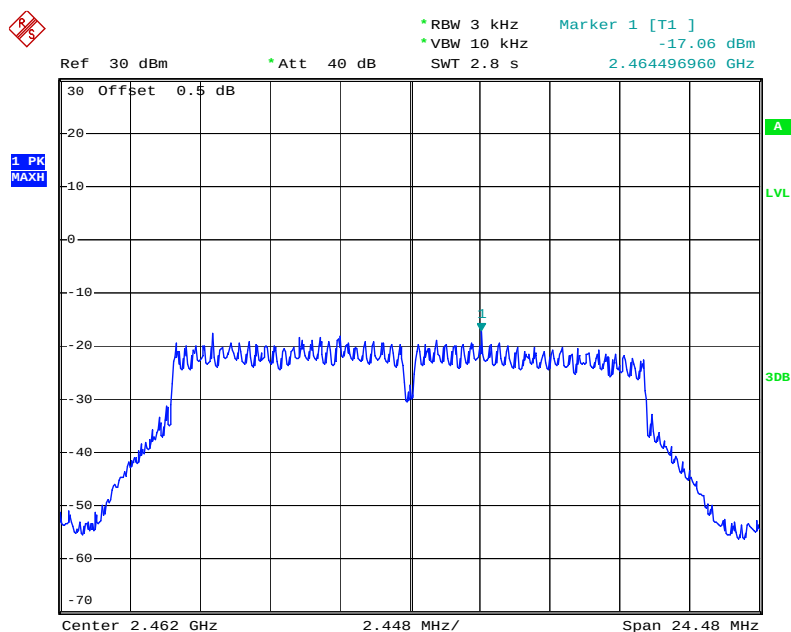
Power Spectral Density, 802.11g High Channel

Date: 23.MAY.2021 10:49:07

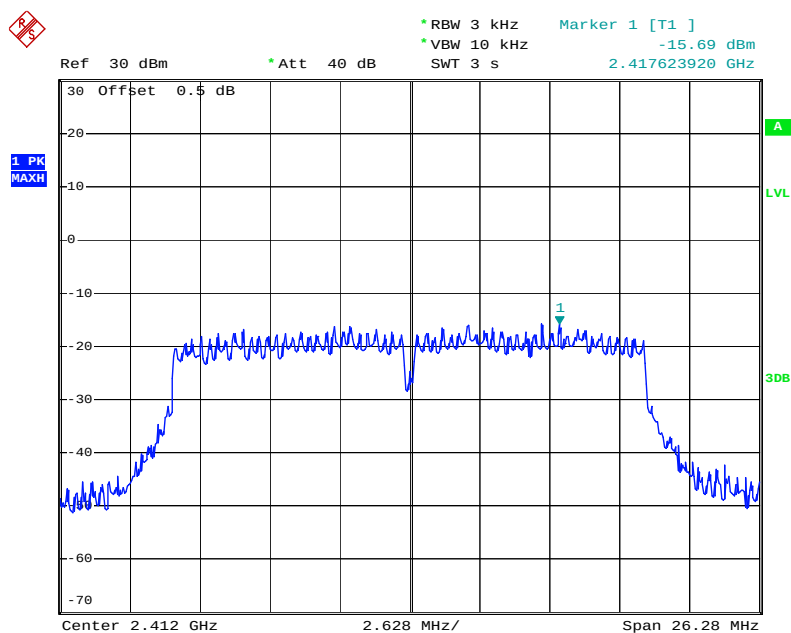Power Spectral Density, 802.11n ht20 Low Channel


Date: 23.MAY.2021 10:53:38

Power Spectral Density, 802.11n ht20 Middle Channel

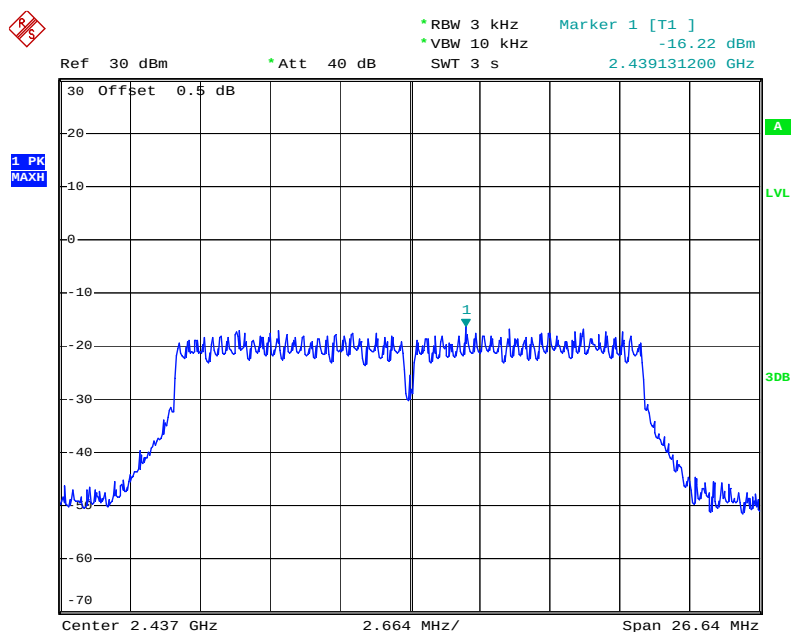


Date: 23.MAY.2021 10:55:02

Power Spectral Density, 802.11n ht20 High Channel

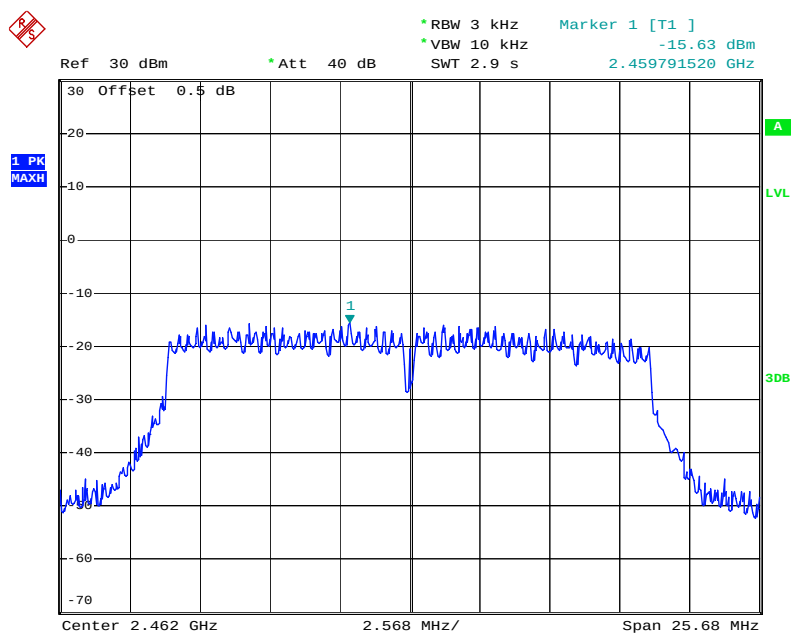


Date: 23.MAY.2021 11:07:18

Power Spectral Density, BLE, Low Channel

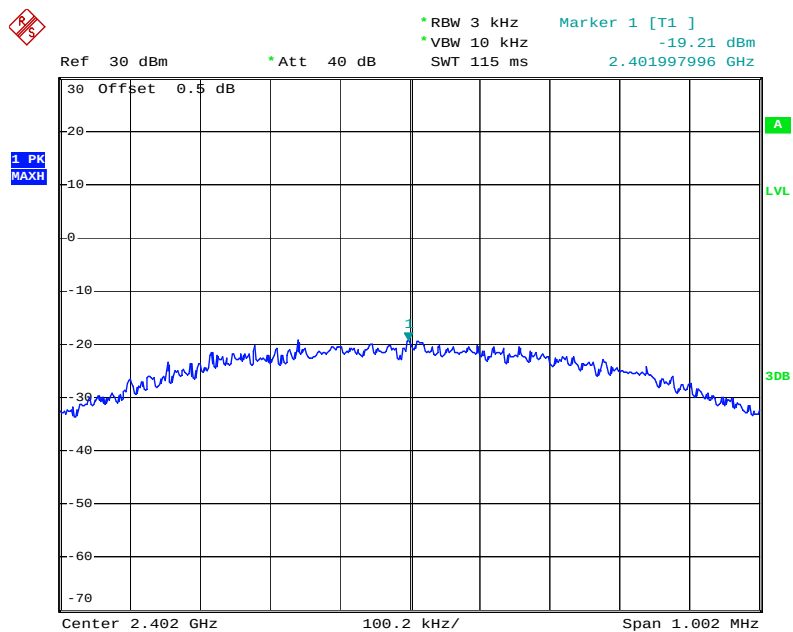


Date: 19.MAY.2021 08:39:29

Power Spectral Density, BLE, Middle Channel

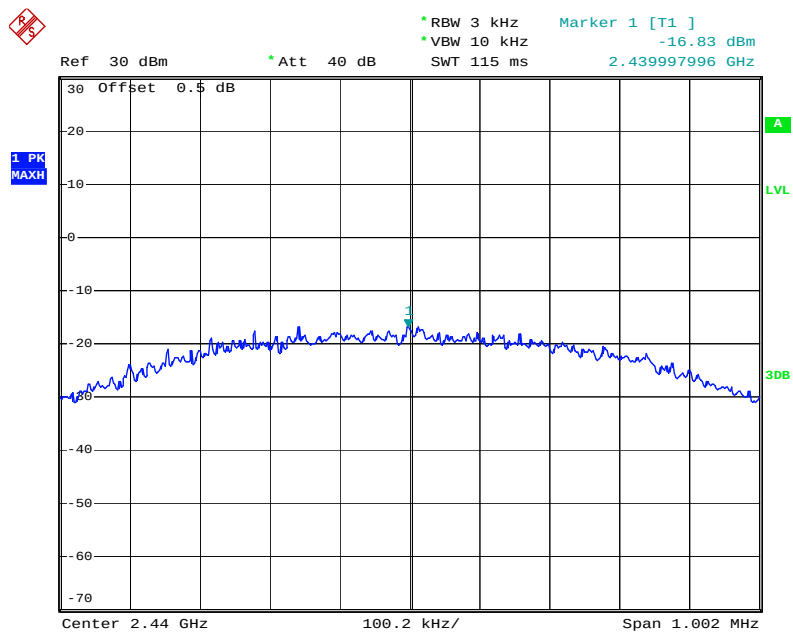

Date: 19.MAY.2021 08:40:59

Power Spectral Density, BLE, High Channel

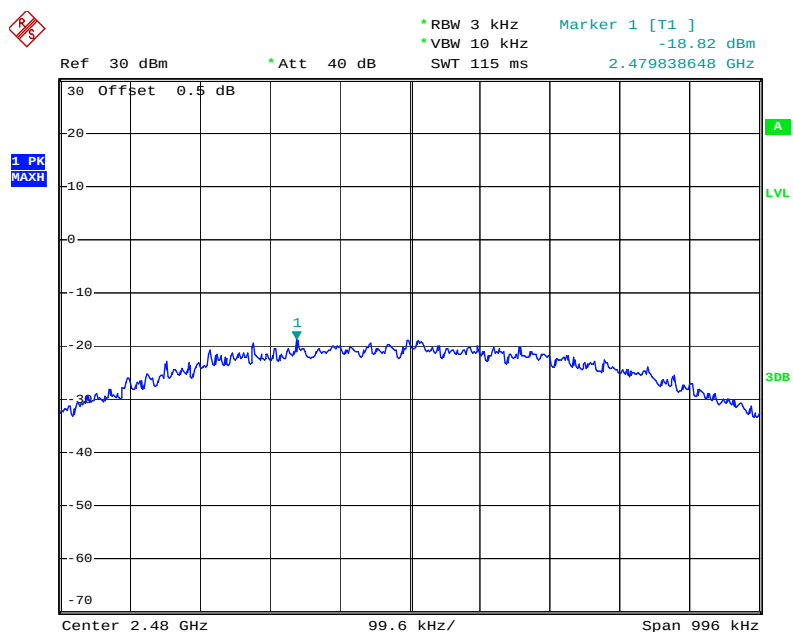

Date: 19.MAY.2021 08:42:03

***** END OF REPORT *****