



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 11             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 20:59 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

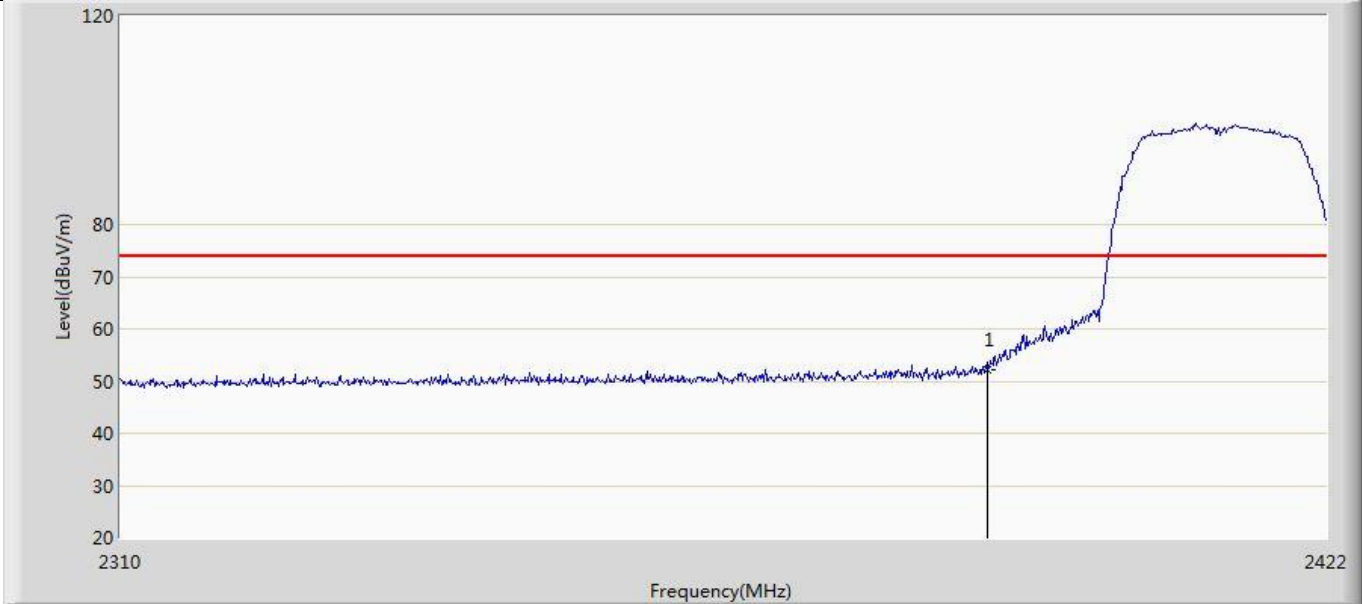


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 52.123                 | 18.022               | -21.877         | 74.000         | 34.102      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 12             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 21:01 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

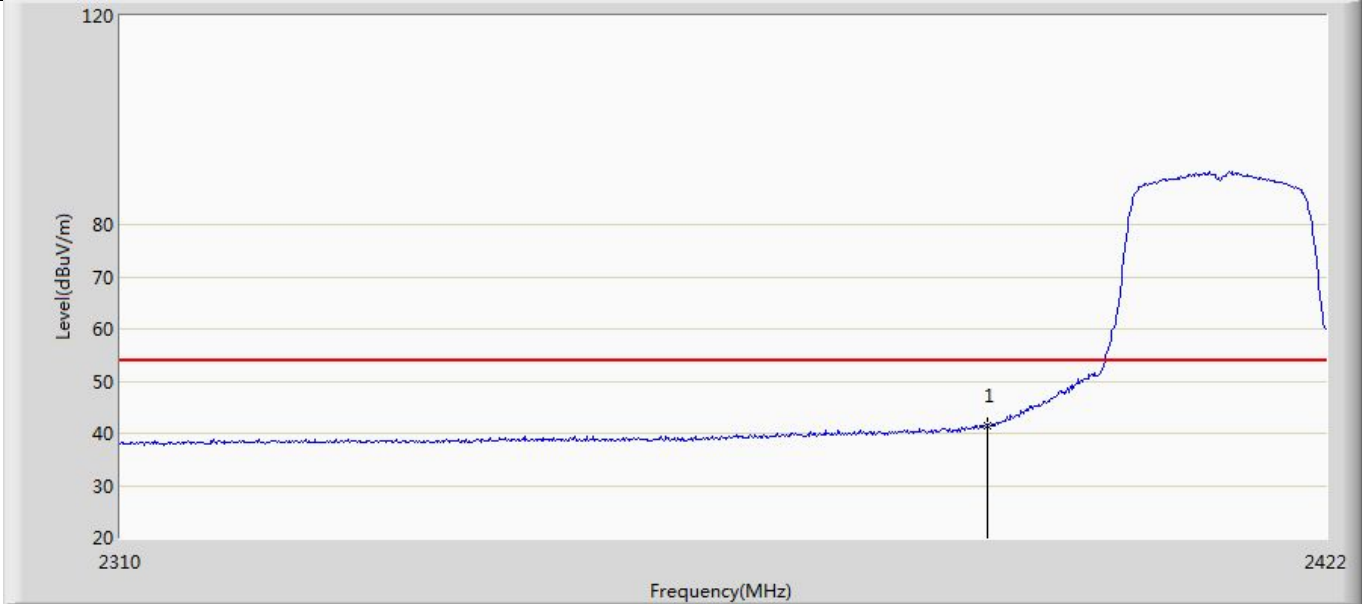


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 41.553                 | 7.452                | -12.447         | 54.000         | 34.102      | AV   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 13             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 21:03 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

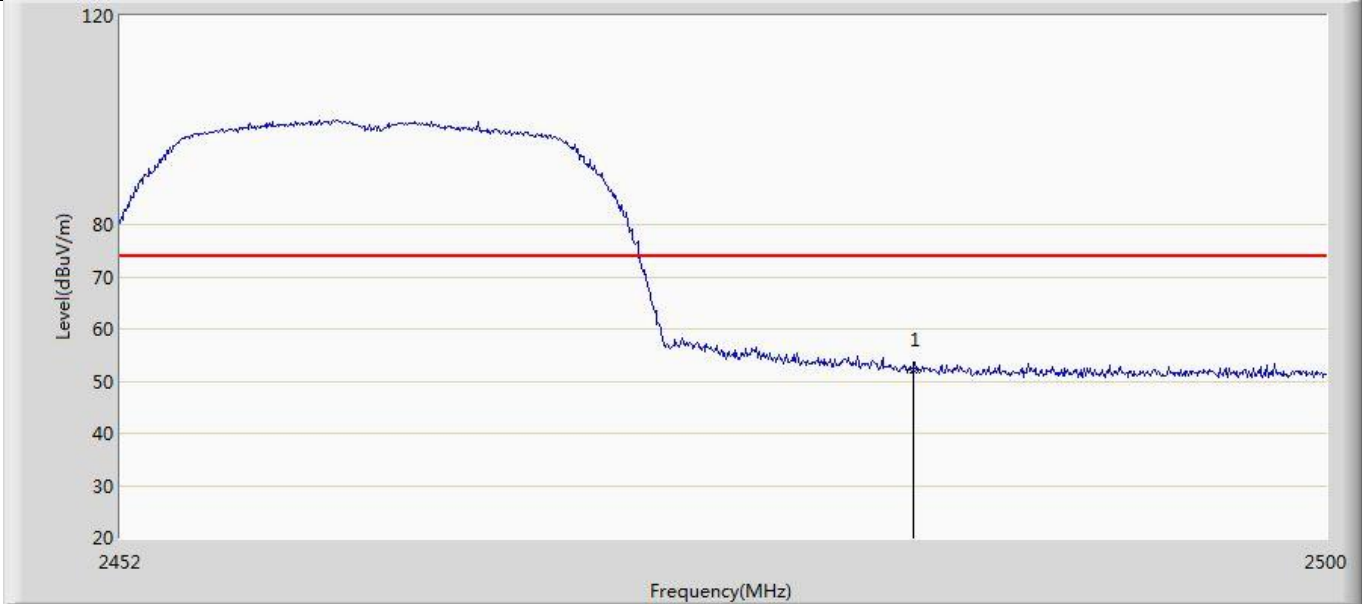


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 52.275                 | 18.162               | -21.725         | 74.000         | 34.114      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 14             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 21:05 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

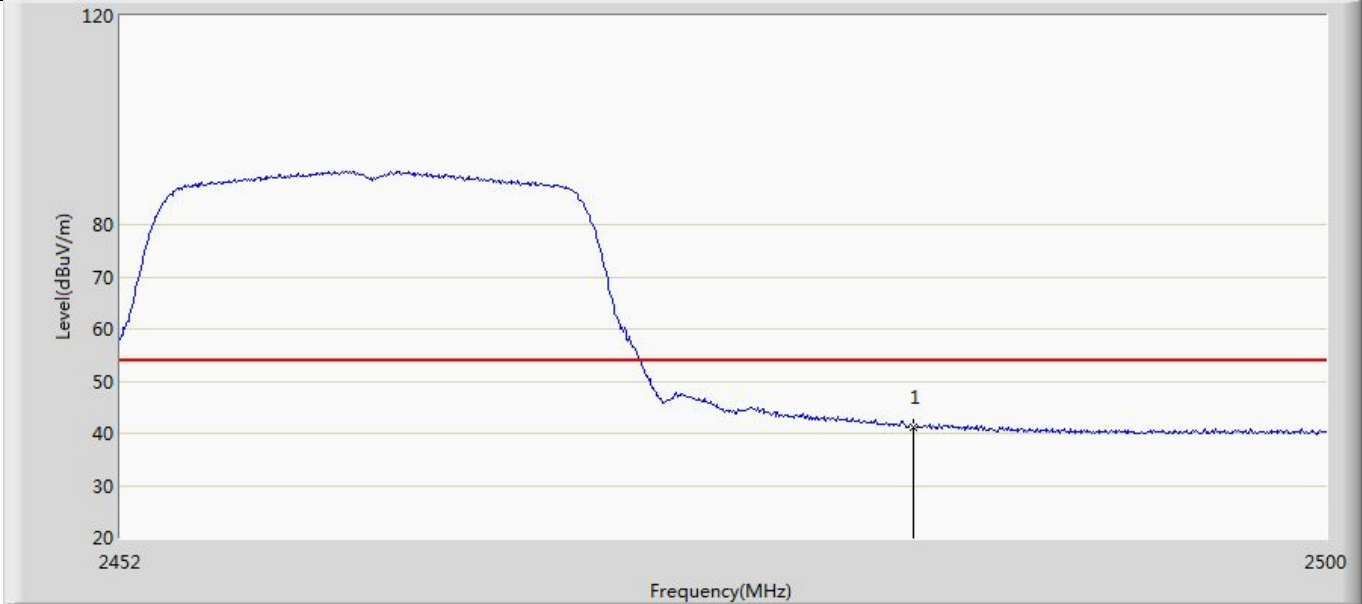

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 41.273                 | 7.160                | -12.727         | 54.000         | 34.114      | AV   |


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 15             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 21:06 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

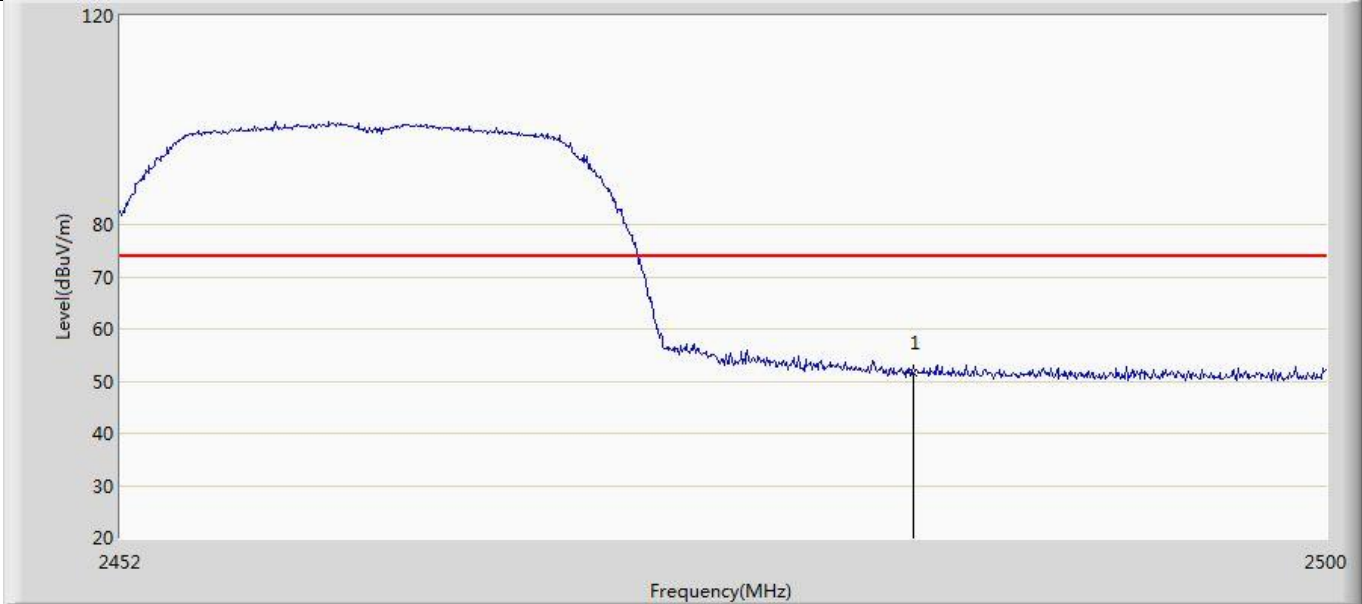

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 51.513                 | 17.400               | -22.487         | 74.000         | 34.114      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 16             |
| Engineer: Yuliu                                        |                          |
| Site: AC5                                              | Time: 2024/11/28 - 21:08 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

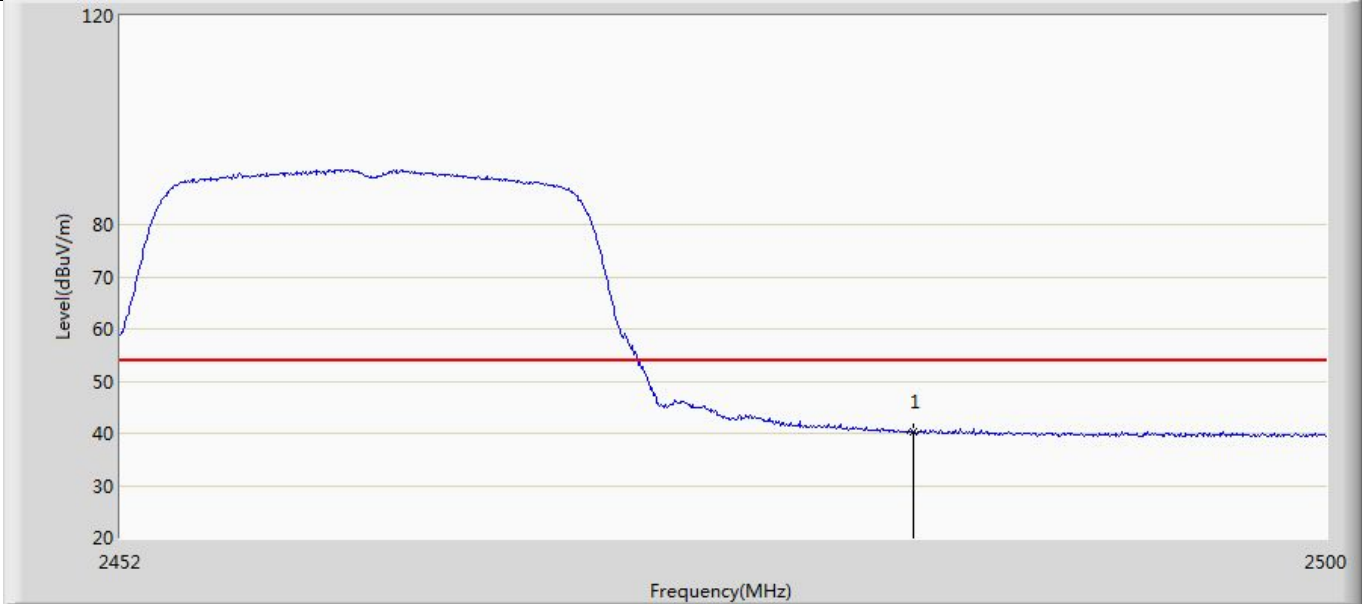


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 40.389                 | 6.276                | -13.611         | 54.000         | 34.114      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 17             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:04 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

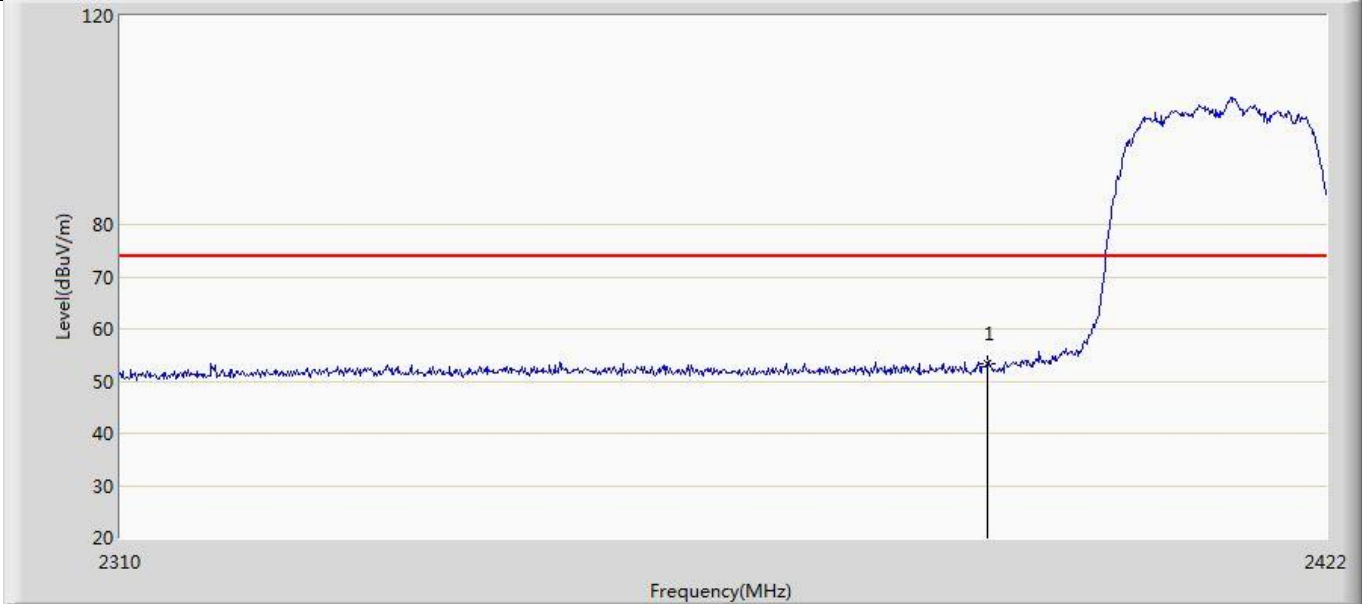


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 53.384                 | 19.283               | -20.616         | 74.000         | 34.102      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 18             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:14 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

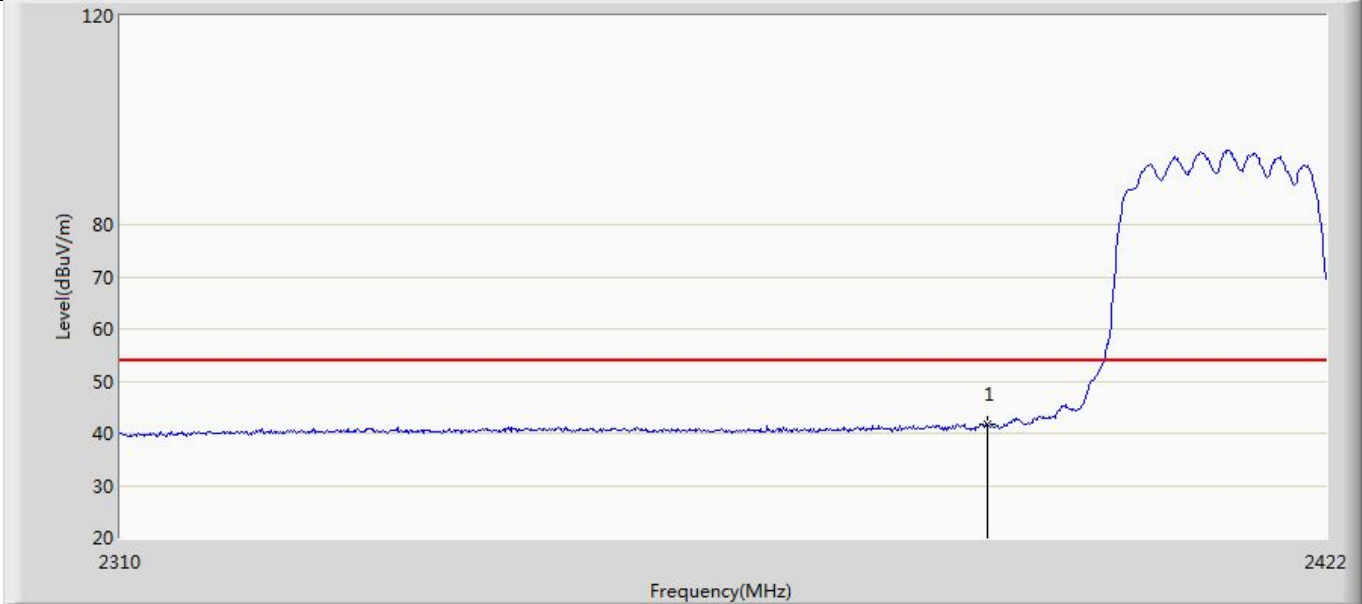


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 41.751                 | 7.650                | -12.249         | 54.000         | 34.102      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 19             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:17 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

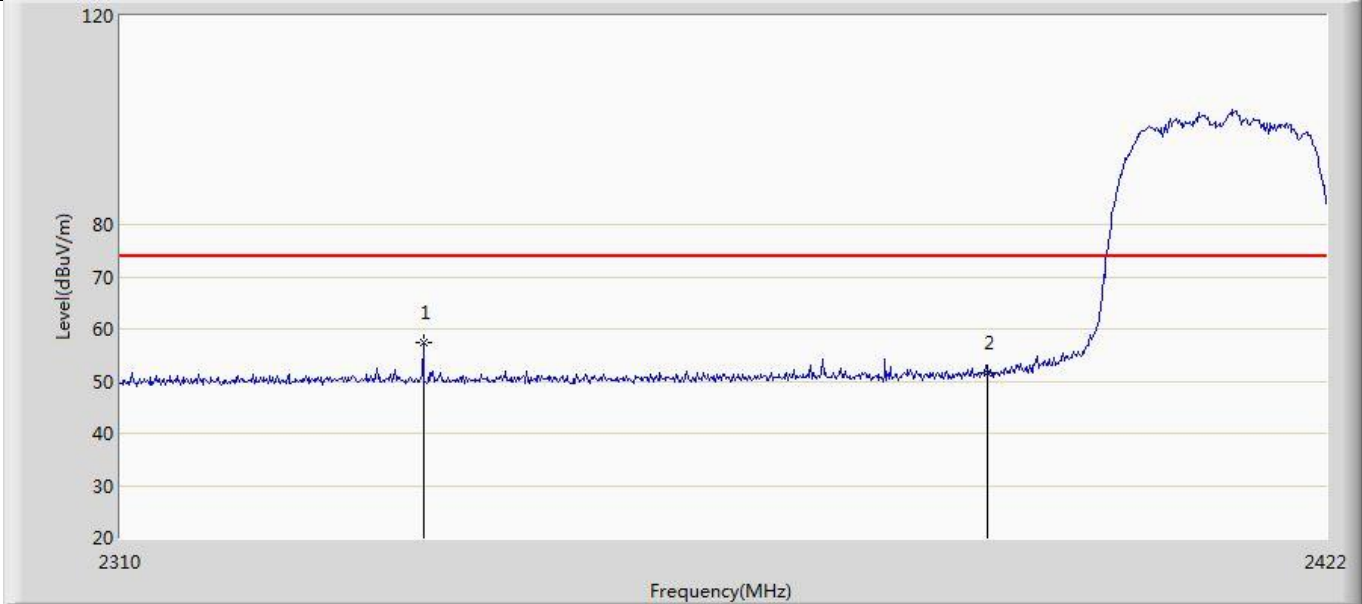


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2337.664        | 57.418                 | 23.454               | -16.582         | 74.000         | 33.964      | PK   |
| 2  |      | 2390.000        | 51.680                 | 17.579               | -22.320         | 74.000         | 34.102      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 20             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:18 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

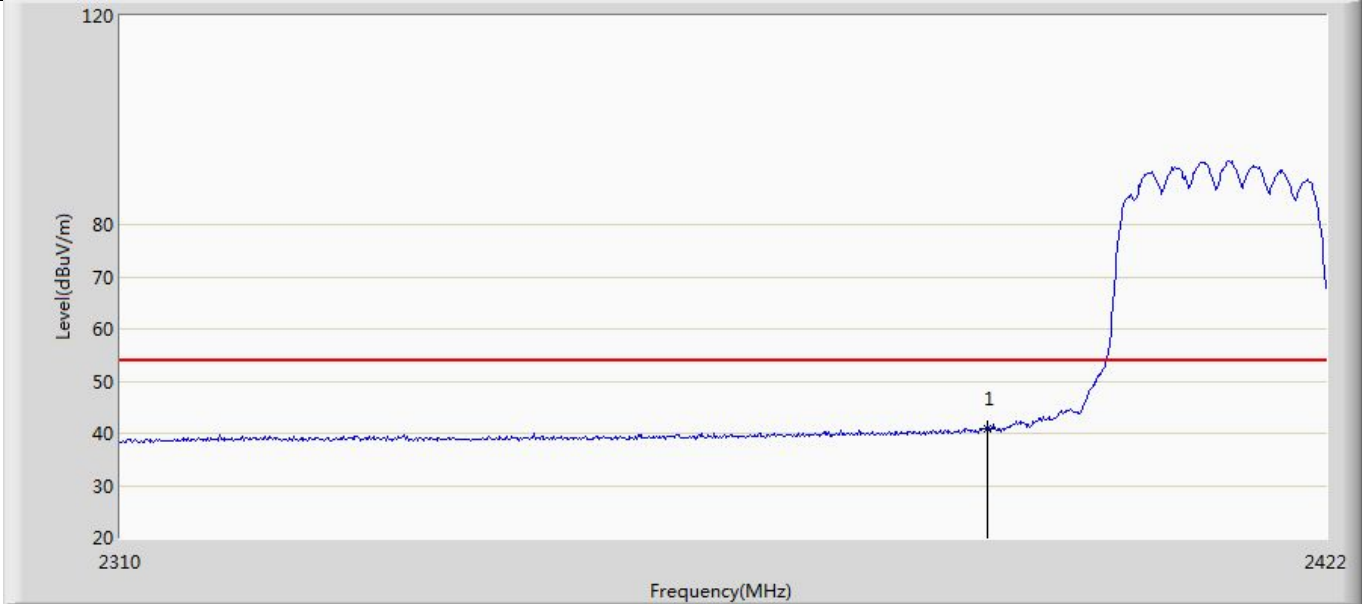


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 40.890                 | 6.789                | -13.110         | 54.000         | 34.102      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 21             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:20 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

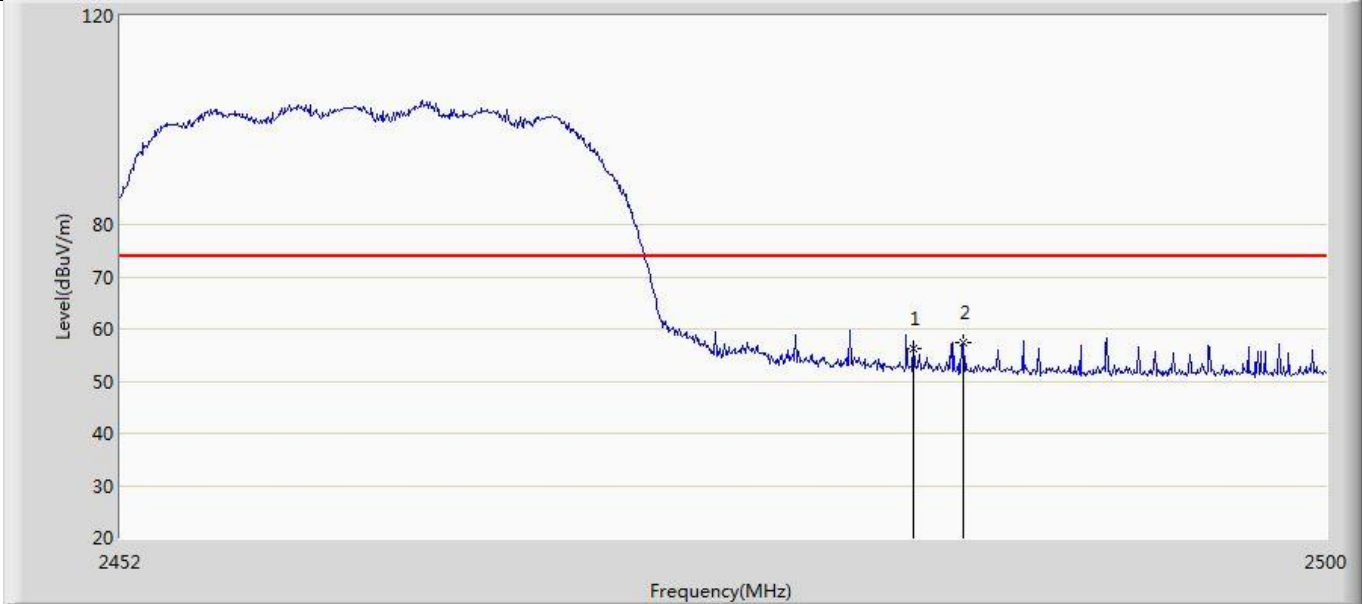


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2483.500        | 56.162                 | 22.049               | -17.838         | 74.000         | 34.114      | PK   |
| 2  | *    | 2485.456        | 57.256                 | 23.127               | -16.744         | 74.000         | 34.129      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 22             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:24 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

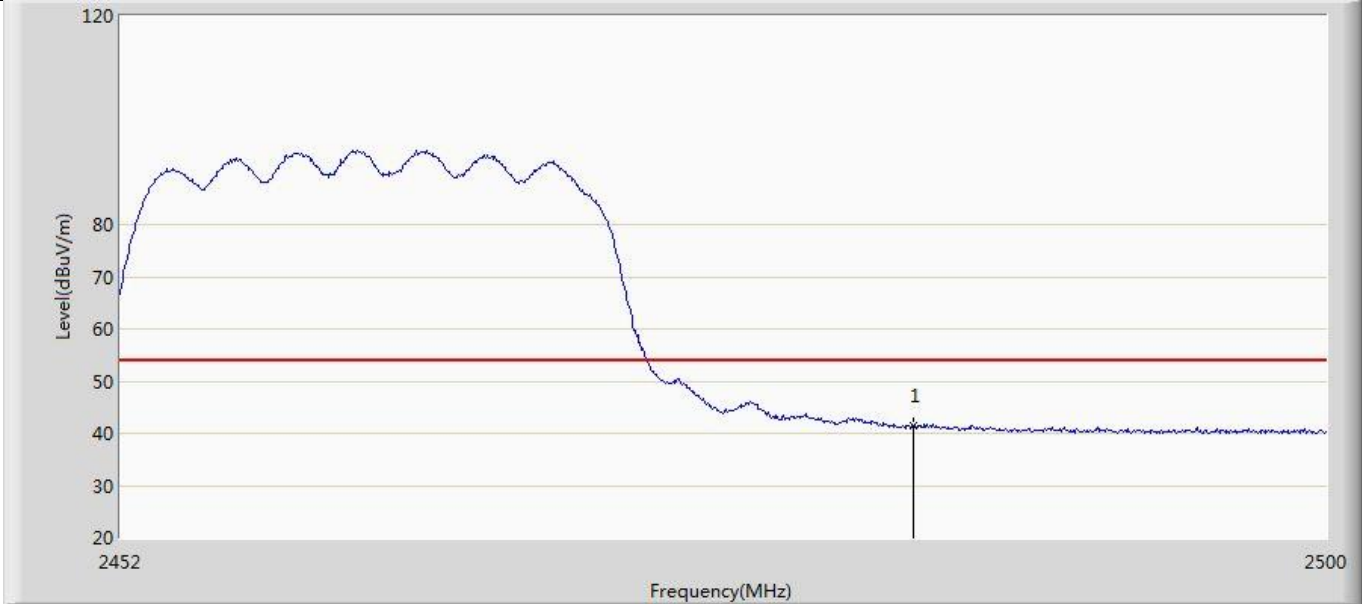


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 41.498                 | 7.385                | -12.502         | 54.000         | 34.114      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 23             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:25 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

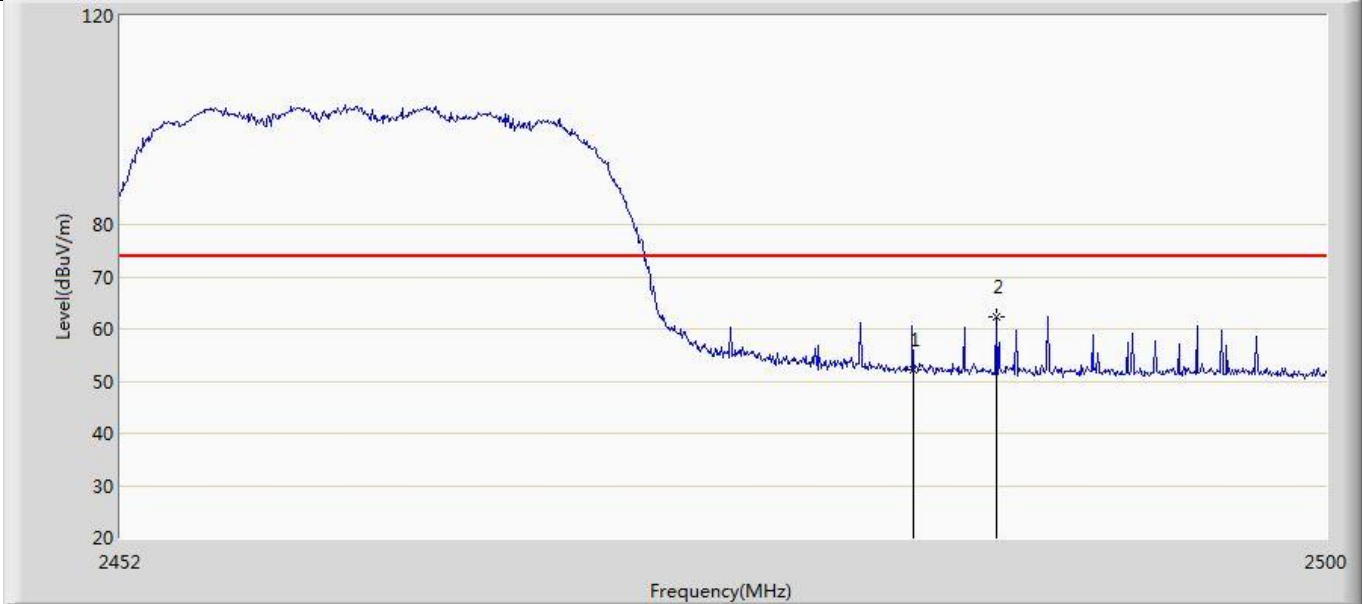


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2483.500        | 52.193                 | 18.080               | -21.807         | 74.000         | 34.114      | PK   |
| 2  | *    | 2486.800        | 62.326                 | 28.187               | -11.674         | 74.000         | 34.139      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 24             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:27 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

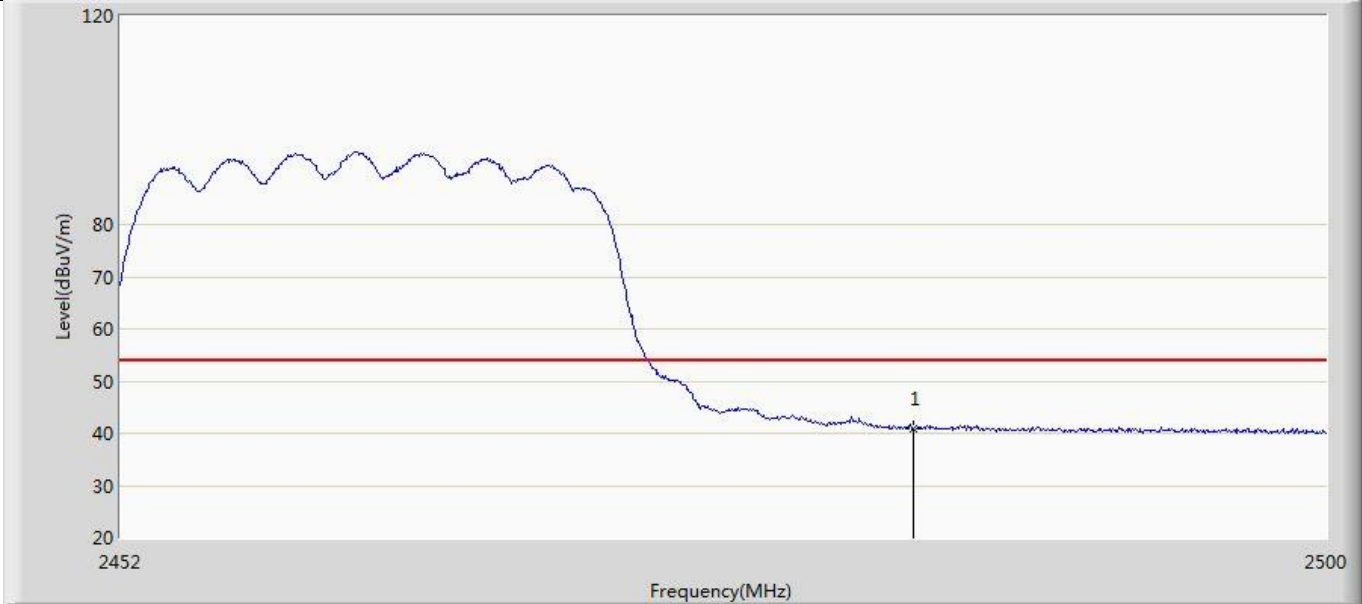


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 40.974                 | 6.861                | -13.026         | 54.000         | 34.114      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 25             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:34 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

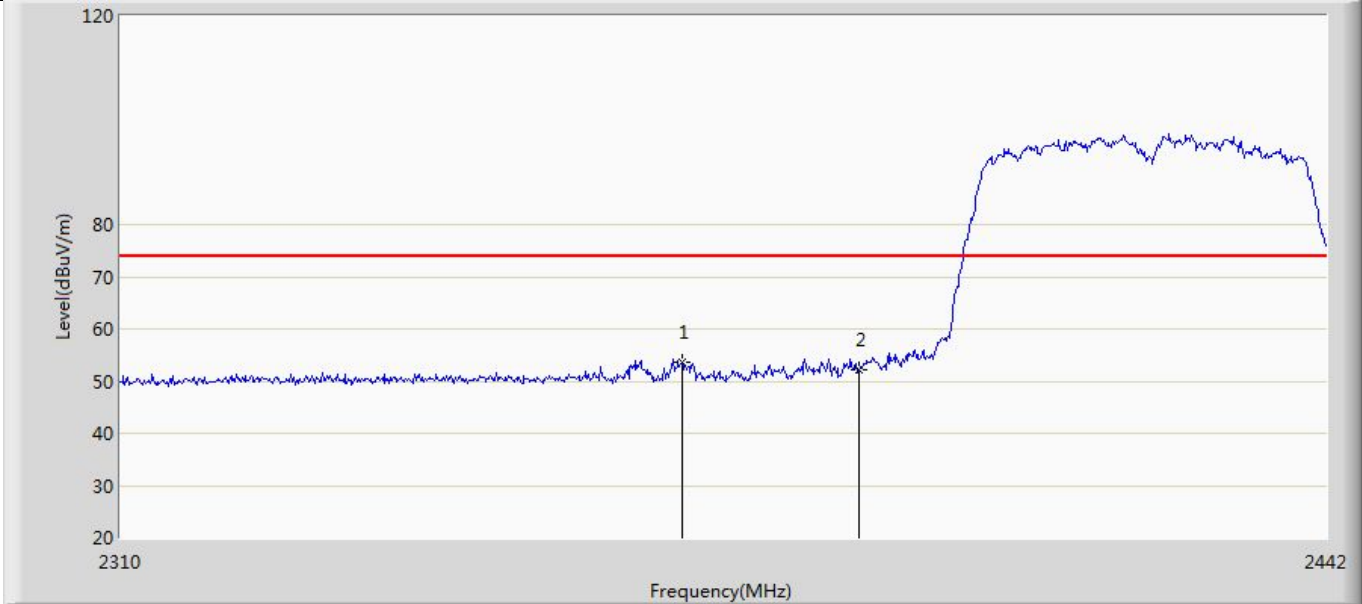


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2370.588        | 53.699                 | 19.640               | -20.301         | 74.000         | 34.059      | PK   |
| 2  |      | 2390.000        | 52.031                 | 17.930               | -21.969         | 74.000         | 34.102      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 26             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

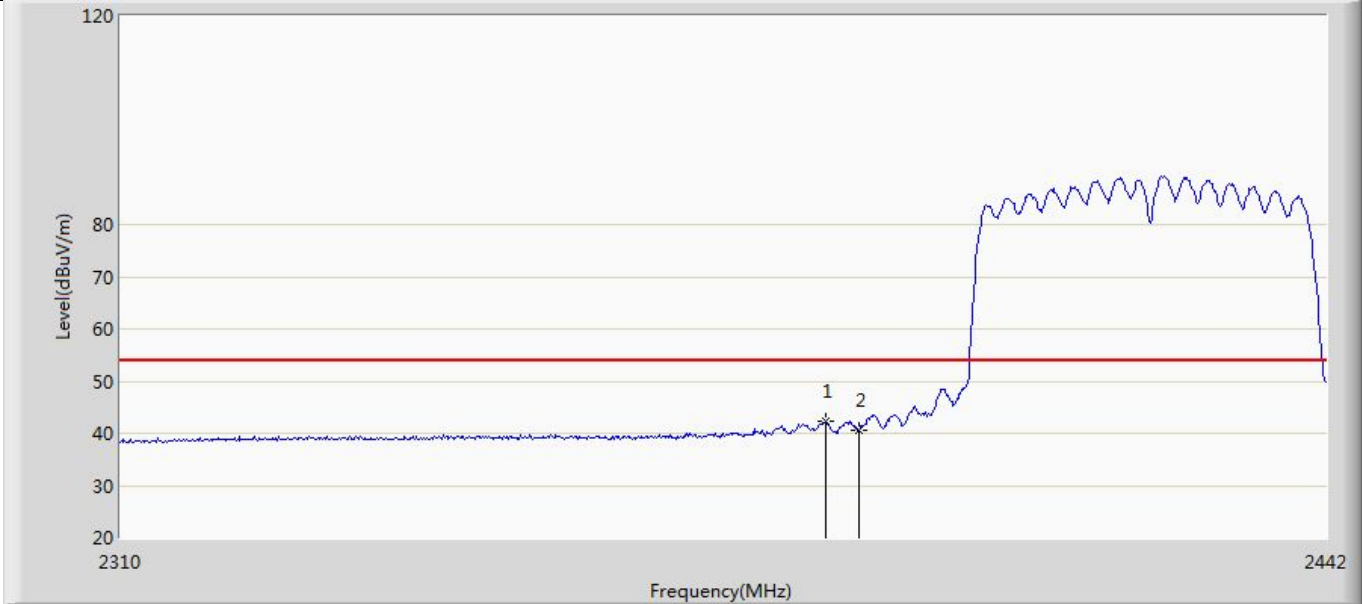


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2386.296        | 42.280                 | 8.184                | -11.720         | 54.000         | 34.096      | AV   |
| 2  |      | 2390.000        | 40.552                 | 6.451                | -13.448         | 54.000         | 34.102      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 27             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

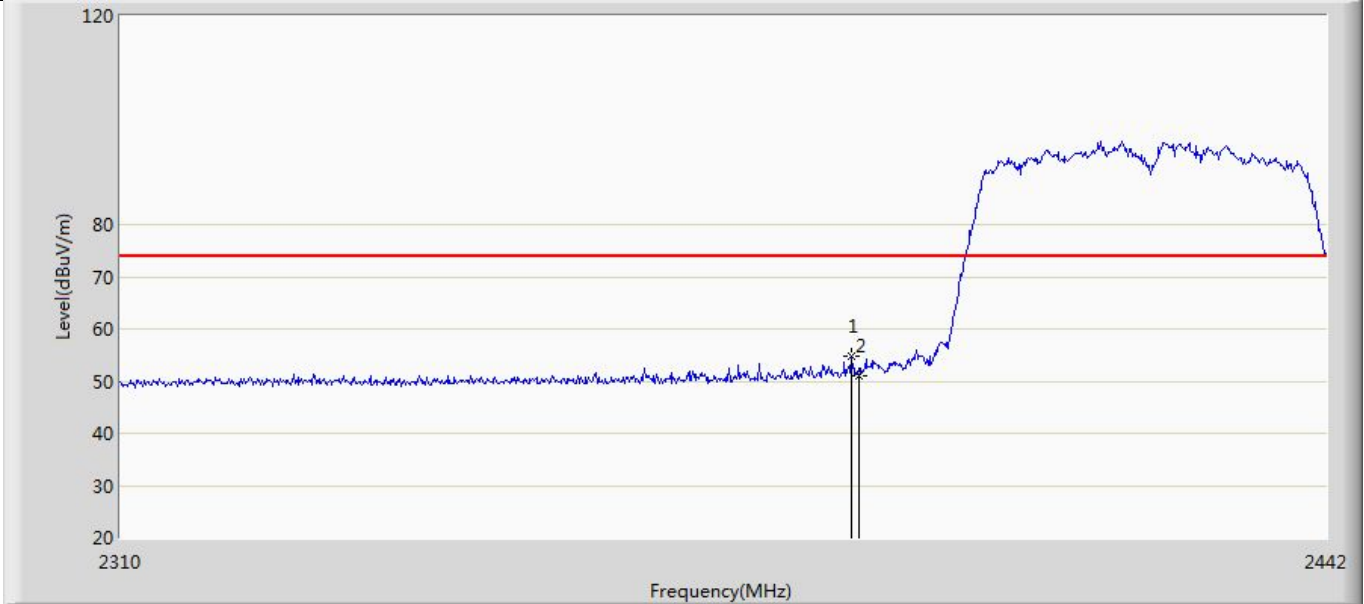


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2389.200        | 54.839                 | 20.739               | -19.161         | 74.000         | 34.100      | PK   |
| 2  |      | 2390.000        | 51.003                 | 16.902               | -22.997         | 74.000         | 34.102      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 28             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:41 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

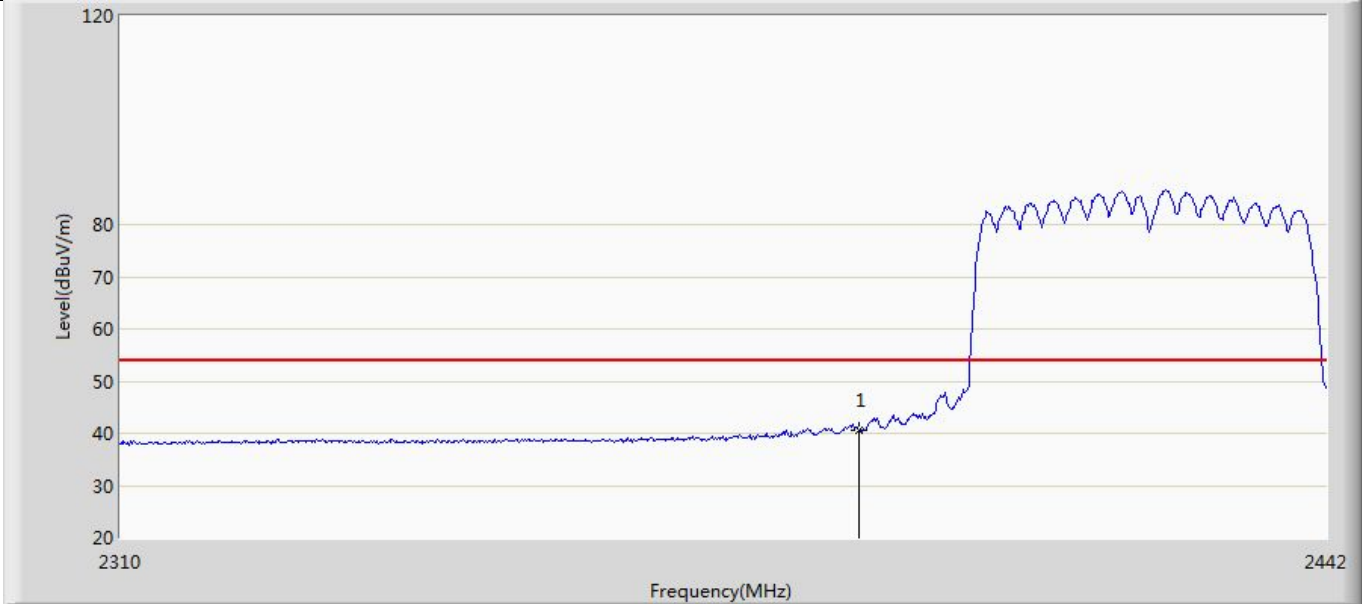


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2390.000        | 40.550                 | 6.449                | -13.450         | 54.000         | 34.102      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 29             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:43 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

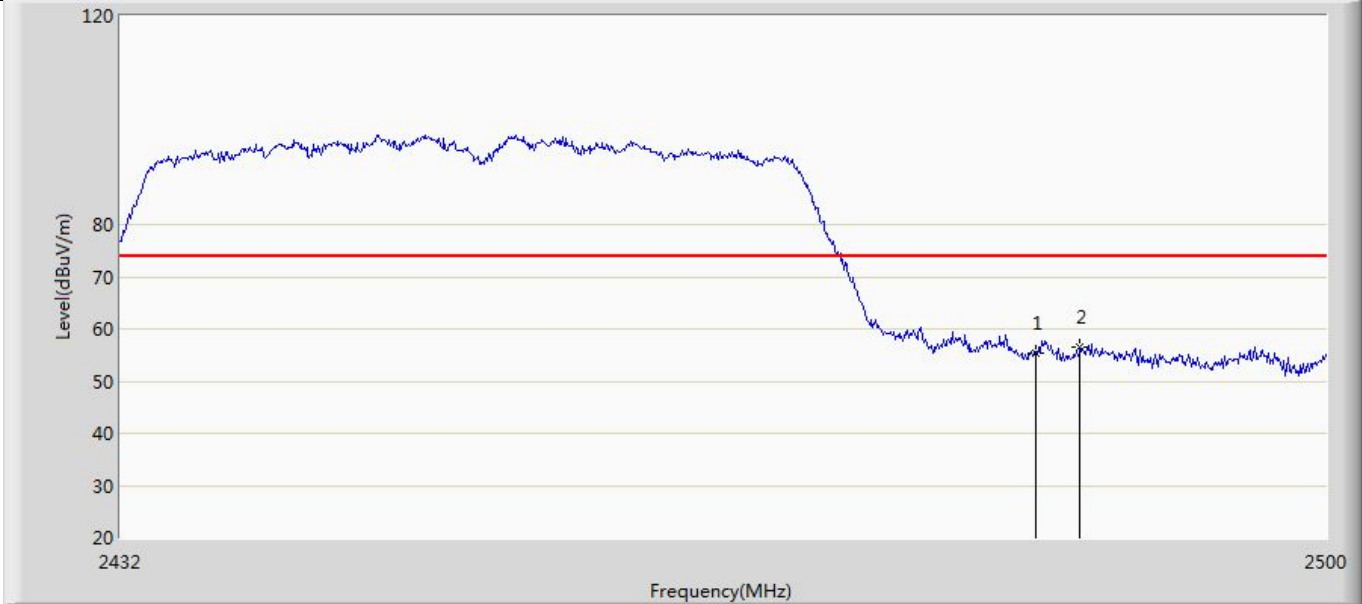


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2483.500        | 55.412                 | 21.299               | -18.588         | 74.000         | 34.114      | PK   |
| 2  | *    | 2485.992        | 56.405                 | 22.272               | -17.595         | 74.000         | 34.133      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 30             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:46 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

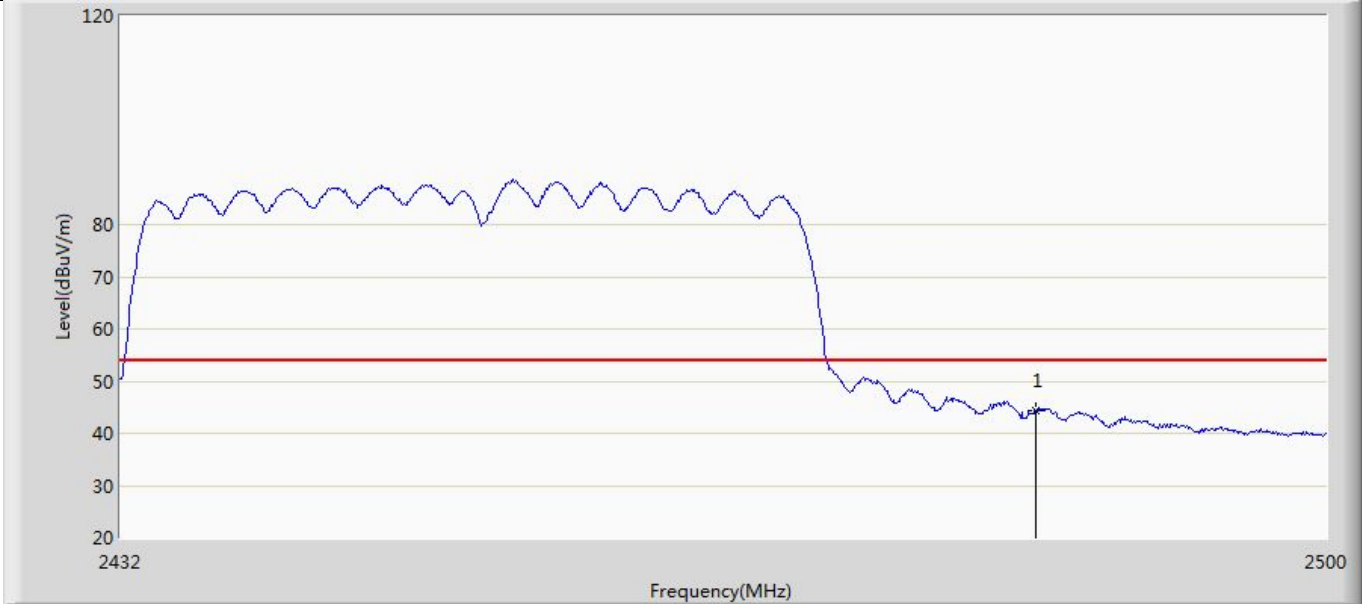


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 44.296                 | 10.183               | -9.704          | 54.000         | 34.114      | AV   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 31             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:47 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

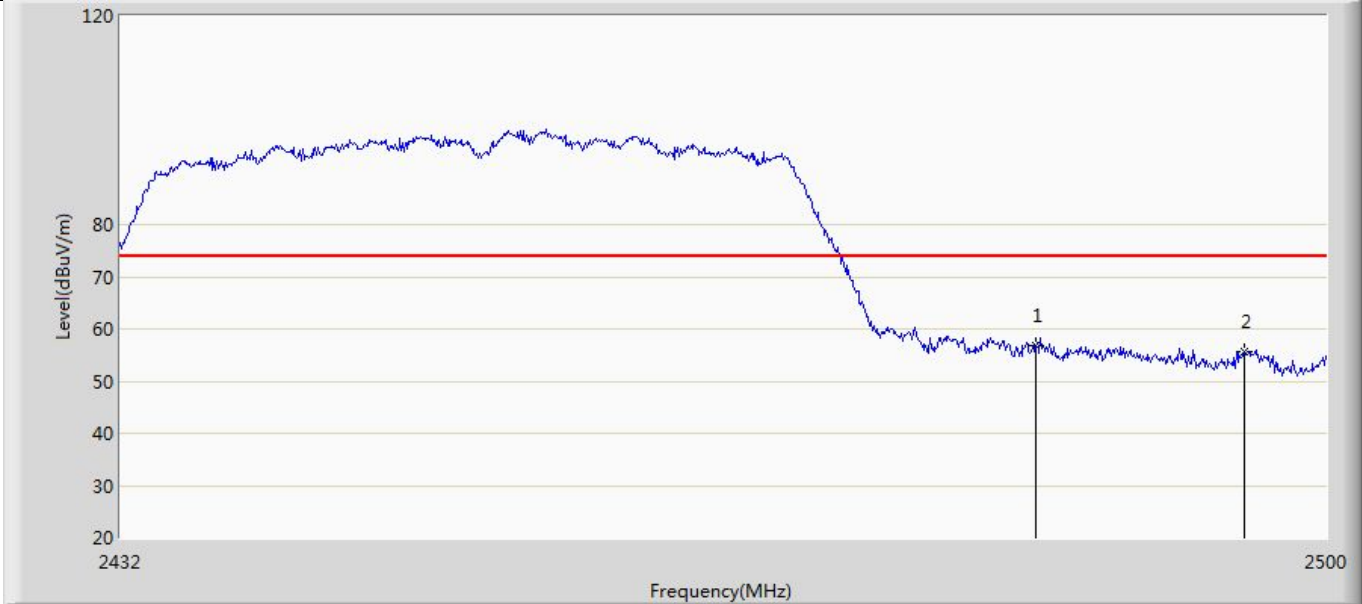

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 56.723                 | 22.610               | -17.277         | 74.000         | 34.114      | PK   |
| 2  |      | 2495.308        | 55.713                 | 21.506               | -18.287         | 74.000         | 34.206      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 32             |
| Engineer: Yuliu                                                    |                          |
| Site: AC5                                                          | Time: 2024/11/28 - 22:48 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

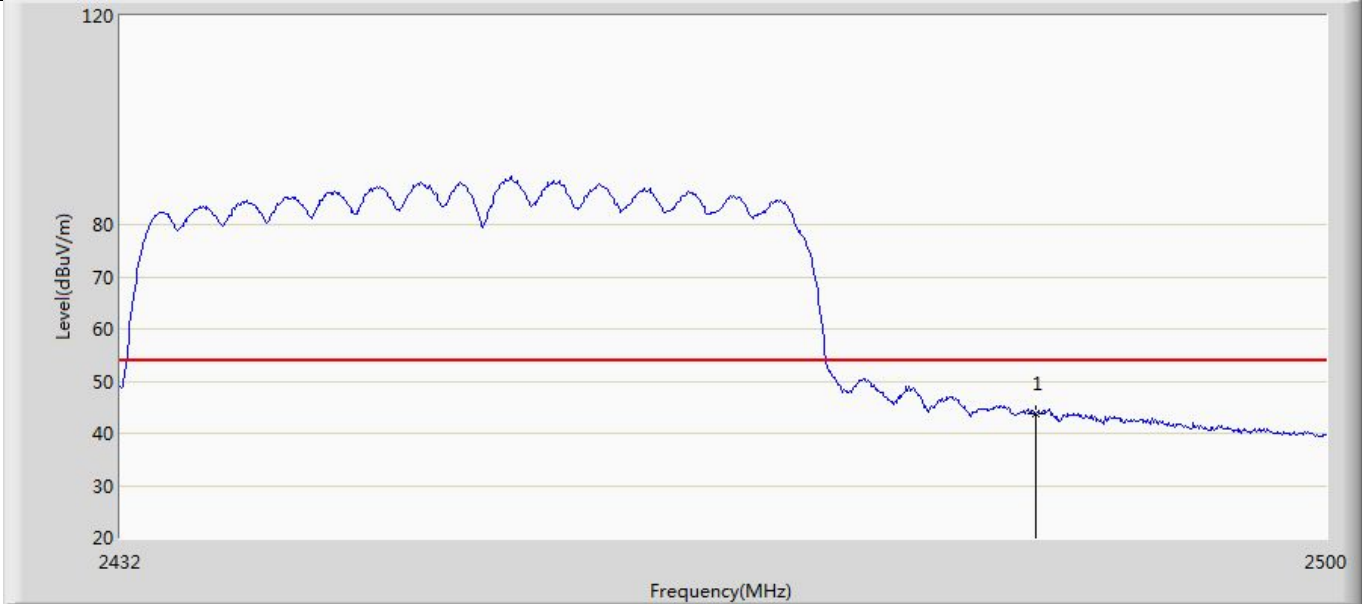


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2483.500        | 43.660                 | 9.547                | -10.340         | 54.000         | 34.114      | AV   |

- Note:
- 1. " \* ", means this data is the worst emission level.
  - 2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). Test Photograph.
  - 3. We evaluated/tested both SISO and MIMO mode,shown in report is the worst data.

Appendix C: Emissions in Restricted Bands


LG North America 43-inch antenna

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 25             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2412MHz by 802.11b with Aux |                          |

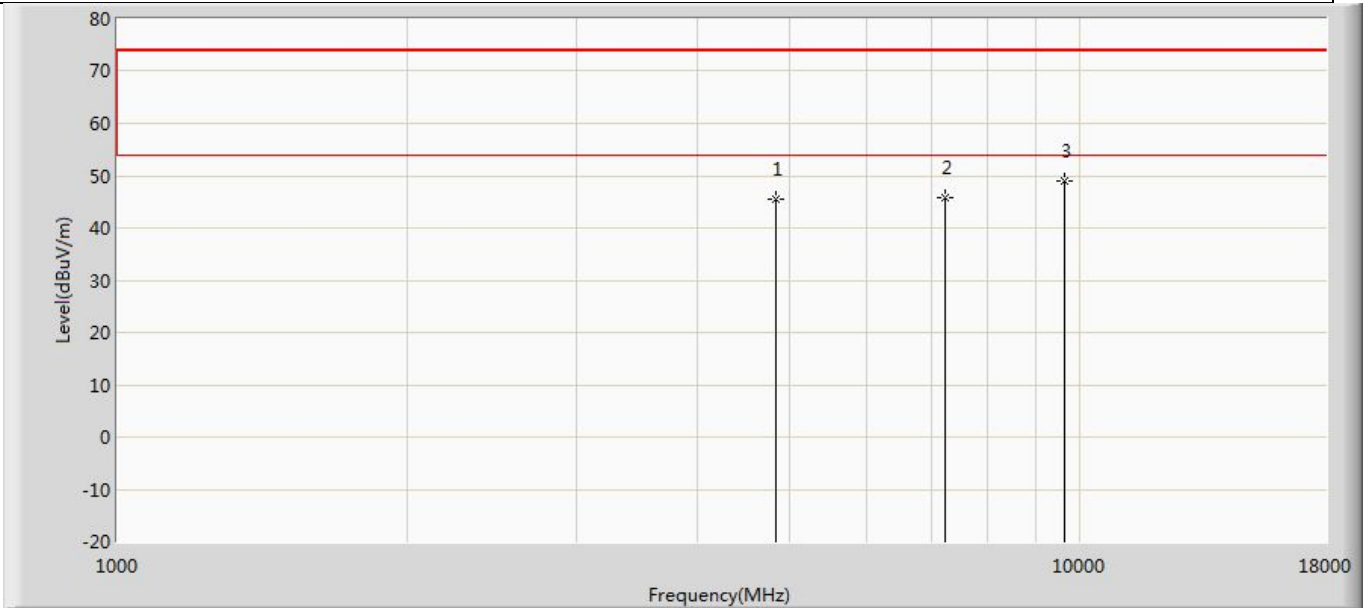


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4825.000        | 45.612                 | 57.703               | -28.388         | 74.000         | -12.091     | PK   |
| 2  |      | 7236.000        | 45.925                 | 52.946               | -28.075         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 48.956                 | 52.688               | -25.044         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 26             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2412MHz by 802.11b with Aux |                          |

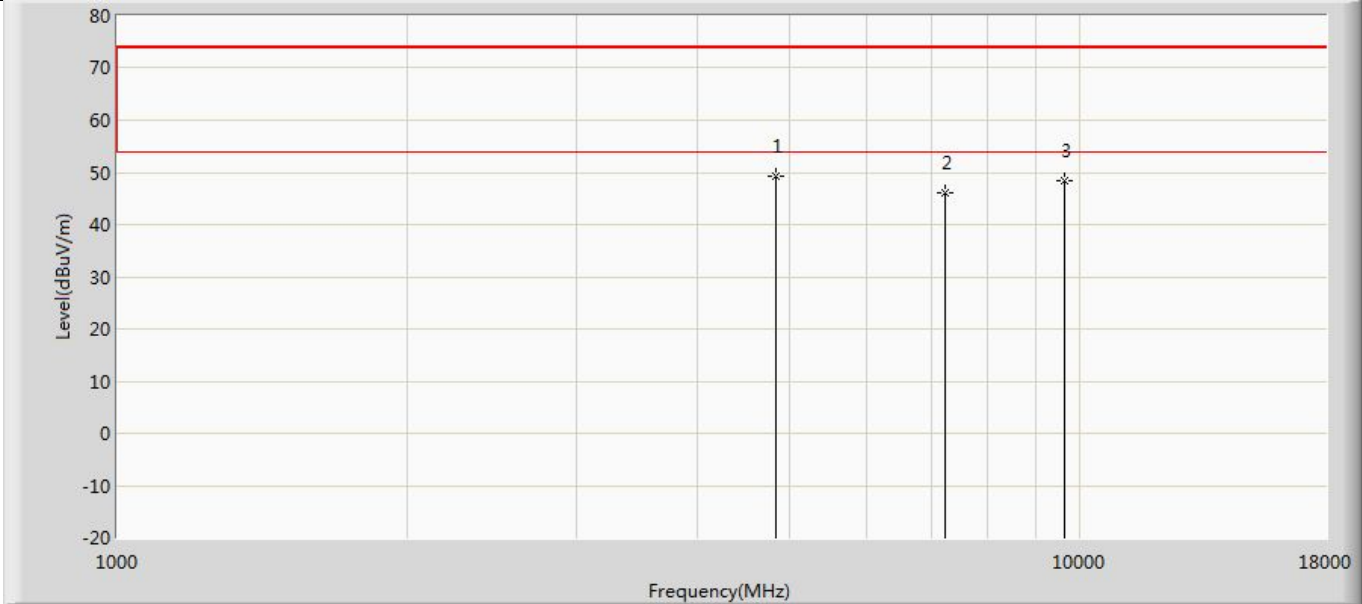


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 4825.000        | 49.226                 | 61.317               | -24.774         | 74.000         | -12.091     | PK   |
| 2  |      | 7236.000        | 46.106                 | 53.127               | -27.894         | 74.000         | -7.021      | PK   |
| 3  |      | 9648.000        | 48.373                 | 52.105               | -25.627         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 27             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2437MHz by 802.11b with Aux |                          |

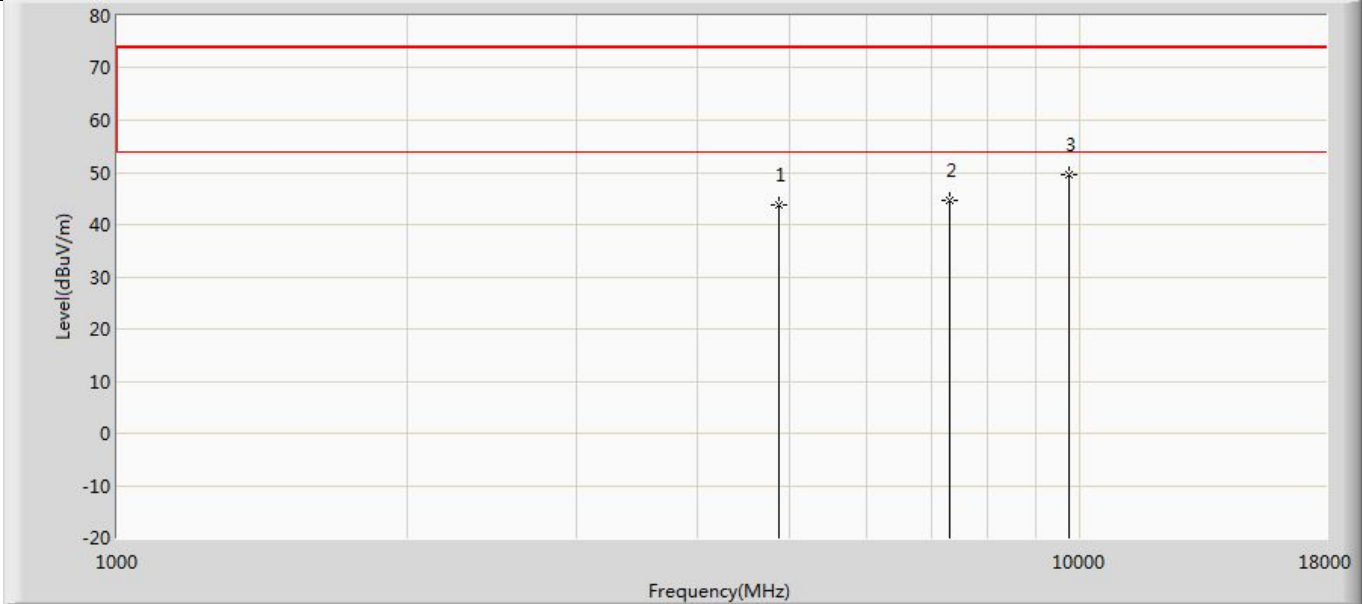


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 43.793                 | 54.440               | -30.207         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 44.666                 | 52.167               | -29.334         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.496                 | 52.380               | -24.504         | 74.000         | -2.883      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 28             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2437MHz by 802.11b with Aux |                          |

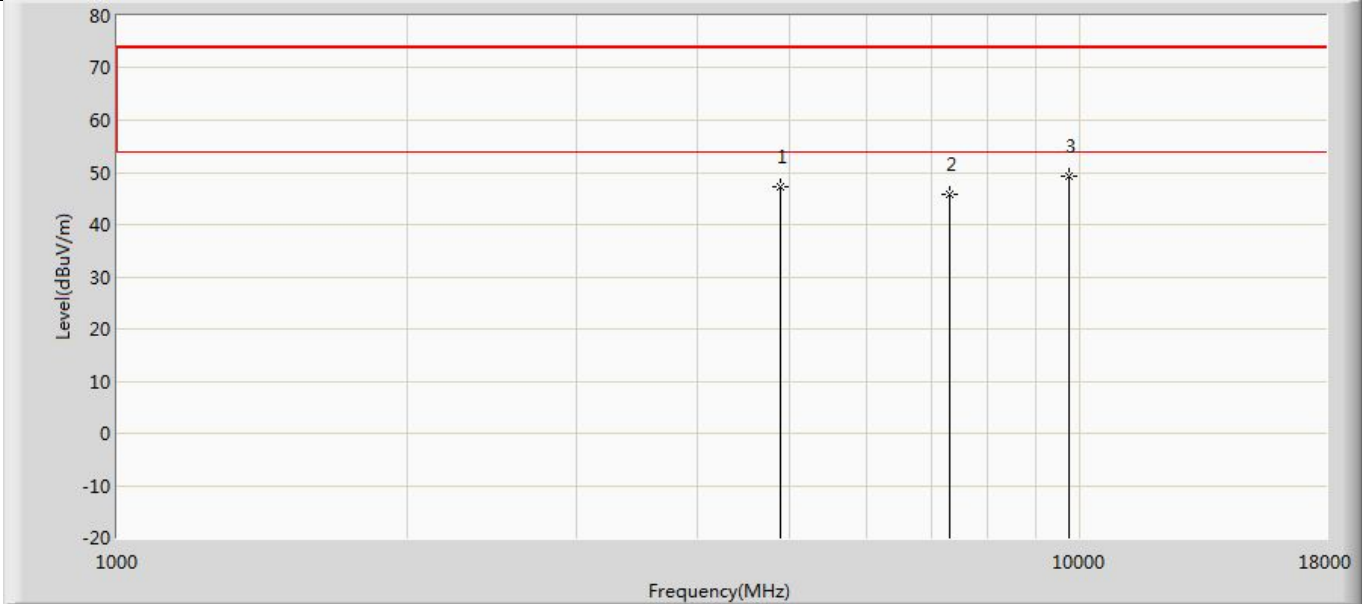


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4876.000        | 47.388                 | 57.988               | -26.612         | 74.000         | -10.600     | PK   |
| 2  |      | 7311.000        | 45.748                 | 53.249               | -28.252         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.353                 | 52.237               | -24.647         | 74.000         | -2.883      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 29             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2462MHz by 802.11b with Aux |                          |

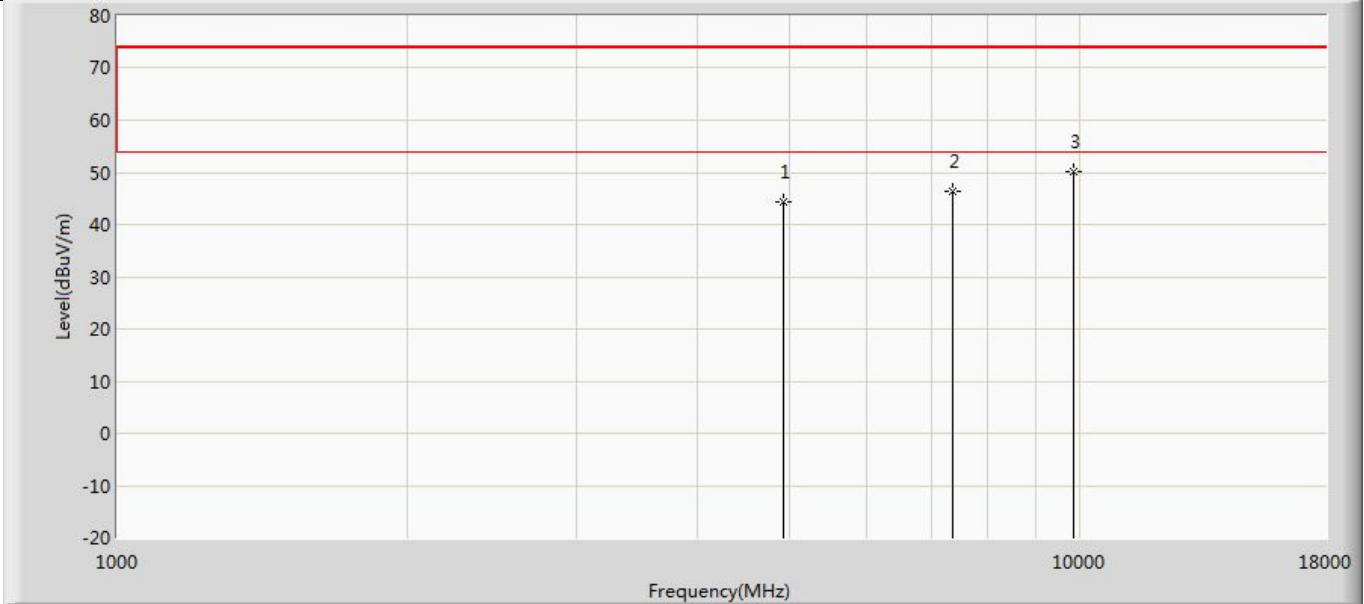


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 44.352                 | 56.141               | -29.648         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 46.265                 | 53.226               | -27.735         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 50.095                 | 52.583               | -23.905         | 74.000         | -2.487      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 30             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2462MHz by 802.11b with Aux |                          |

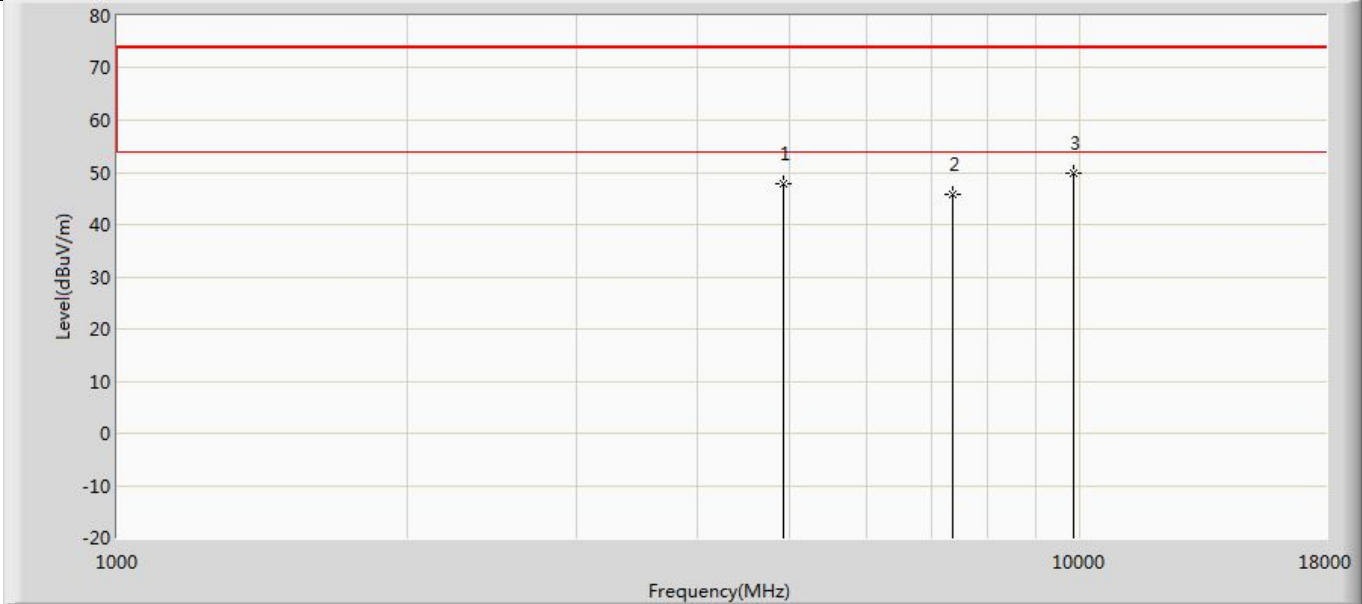


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4927.000        | 47.903                 | 59.654               | -26.097         | 74.000         | -11.751     | PK   |
| 2  |      | 7386.000        | 45.899                 | 52.860               | -28.101         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 49.926                 | 52.414               | -24.074         | 74.000         | -2.487      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 31             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

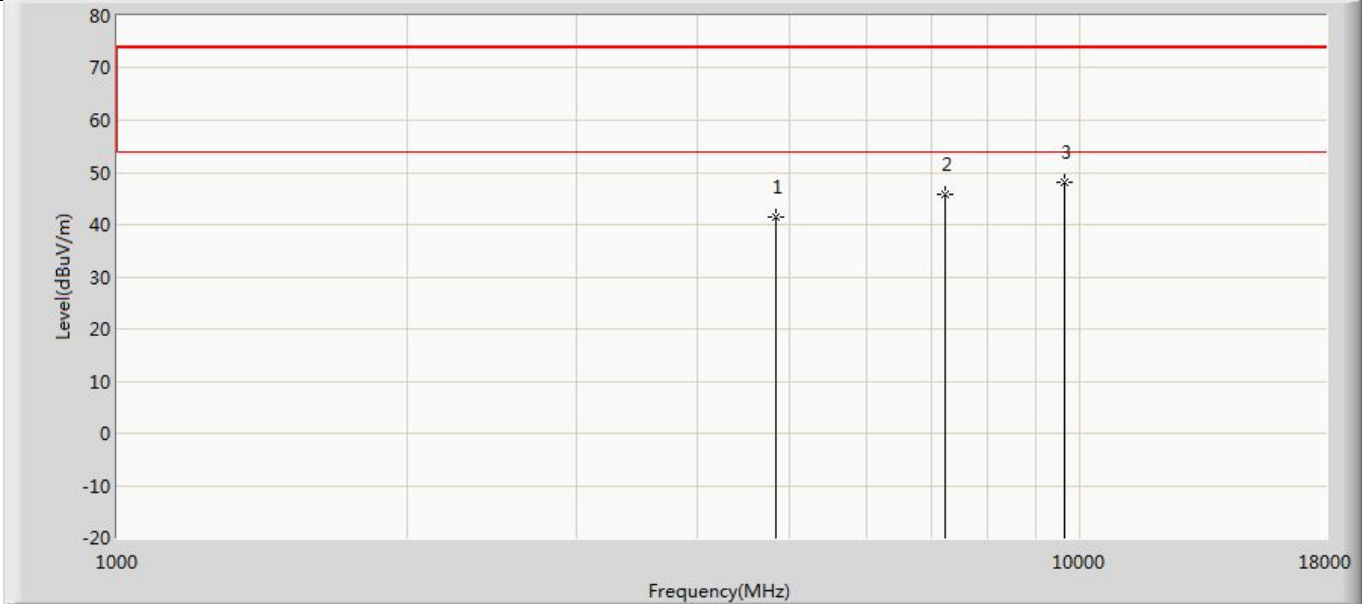


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 41.507                 | 53.595               | -32.493         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 45.830                 | 52.851               | -28.170         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 48.135                 | 51.867               | -25.865         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 32             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

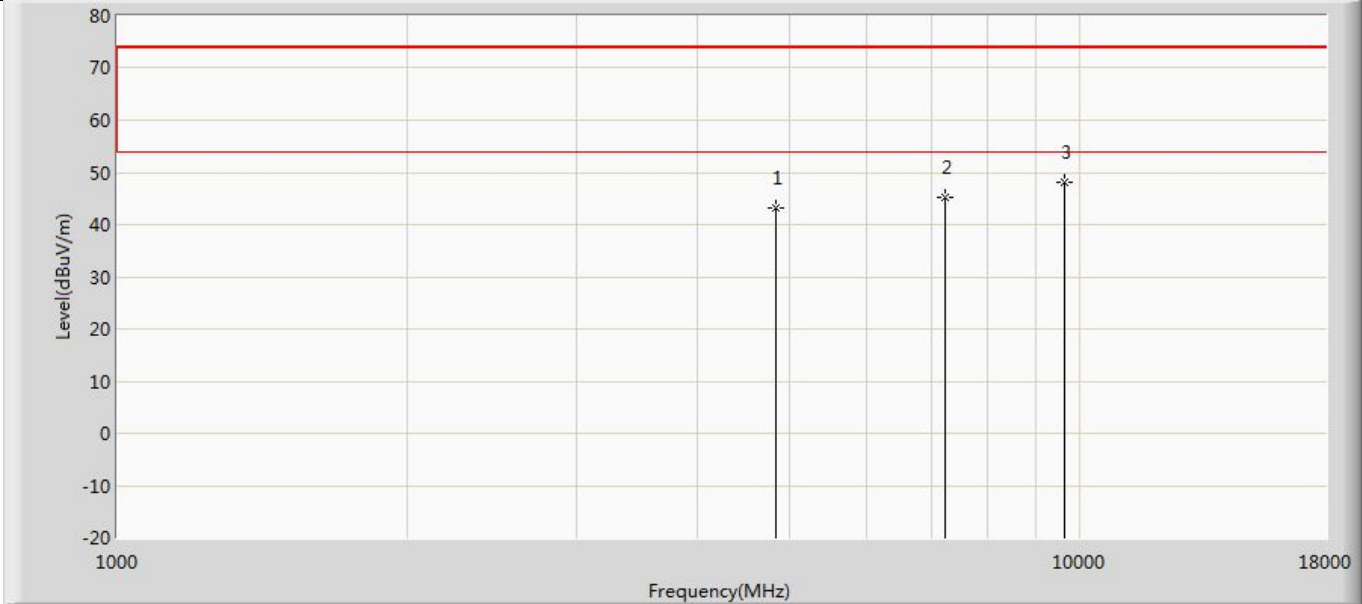


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 43.193                 | 55.281               | -30.807         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 45.280                 | 52.301               | -28.720         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 48.174                 | 51.906               | -25.826         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 33             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2437MHz by 802.11g with Aux |                          |

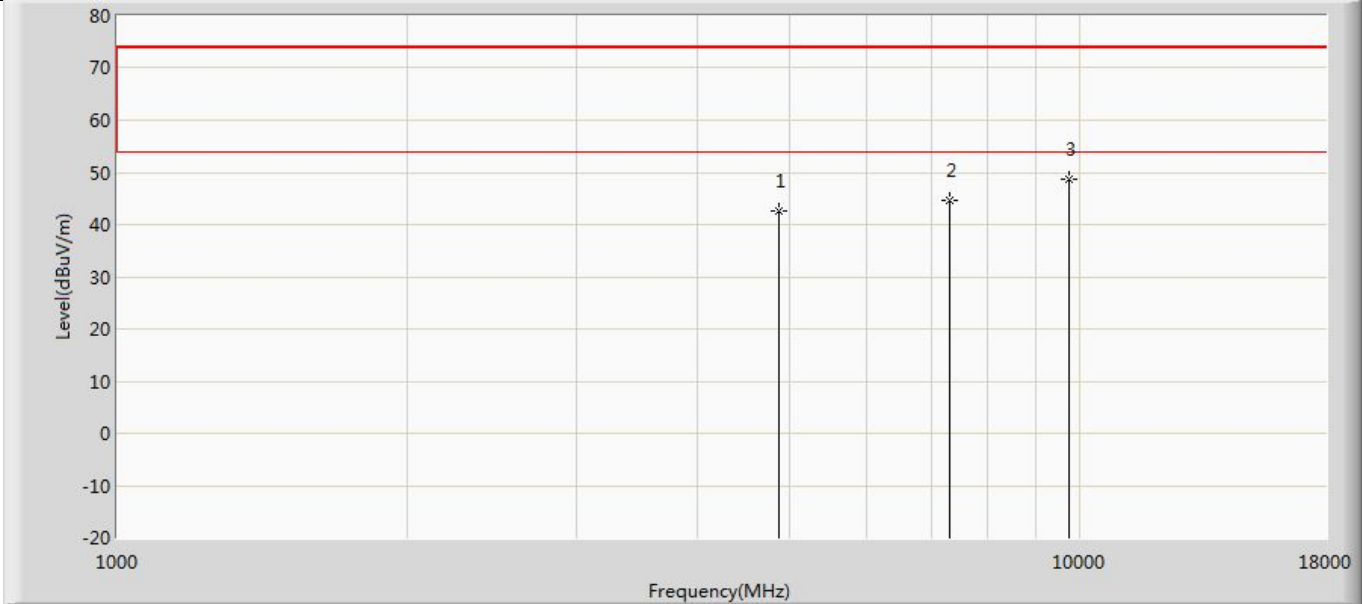


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.654                 | 53.301               | -31.346         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 44.651                 | 52.152               | -29.349         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 48.630                 | 51.514               | -25.370         | 74.000         | -2.883      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 34             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2437MHz by 802.11g with Aux |                          |

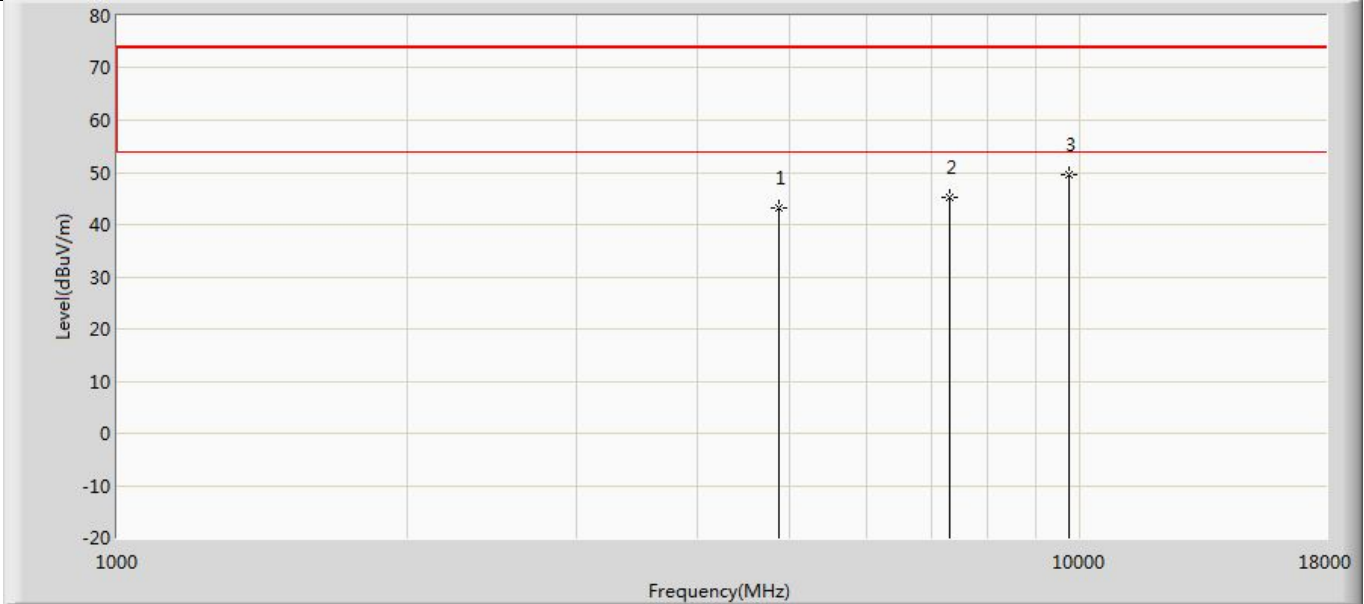


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 43.249                 | 53.896               | -30.751         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 45.250                 | 52.751               | -28.750         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.704                 | 52.588               | -24.296         | 74.000         | -2.883      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 35             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

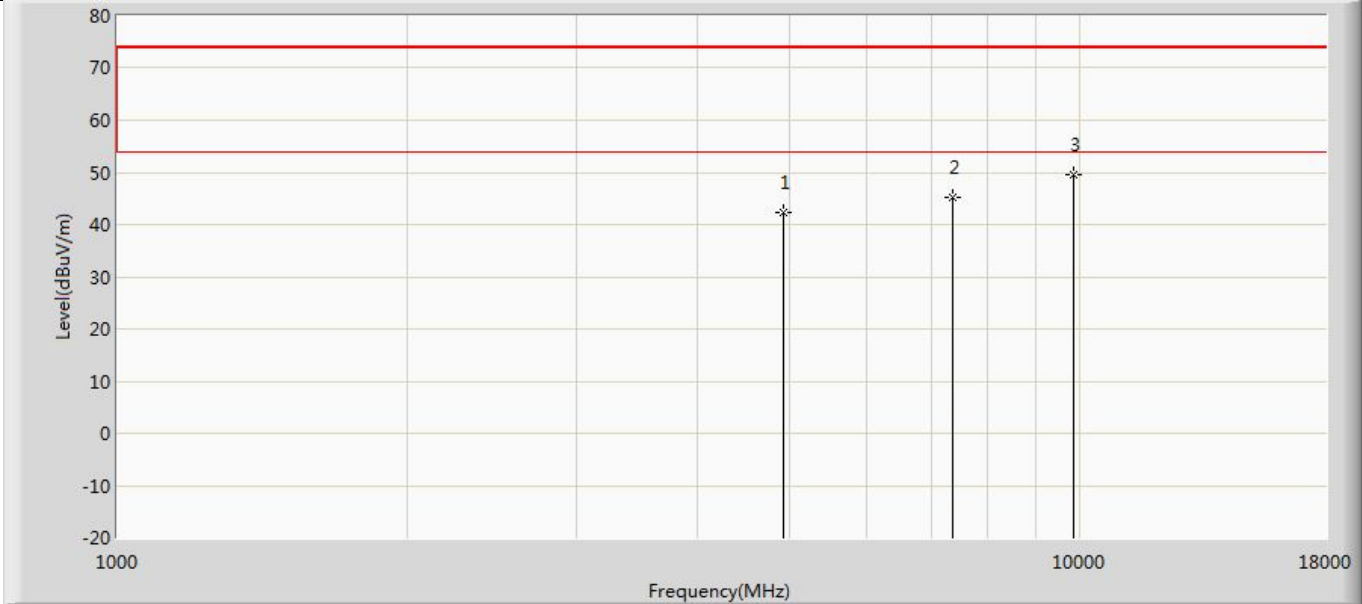


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 42.318                 | 54.107               | -31.682         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 45.196                 | 52.157               | -28.804         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 49.474                 | 51.962               | -24.526         | 74.000         | -2.487      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 36             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

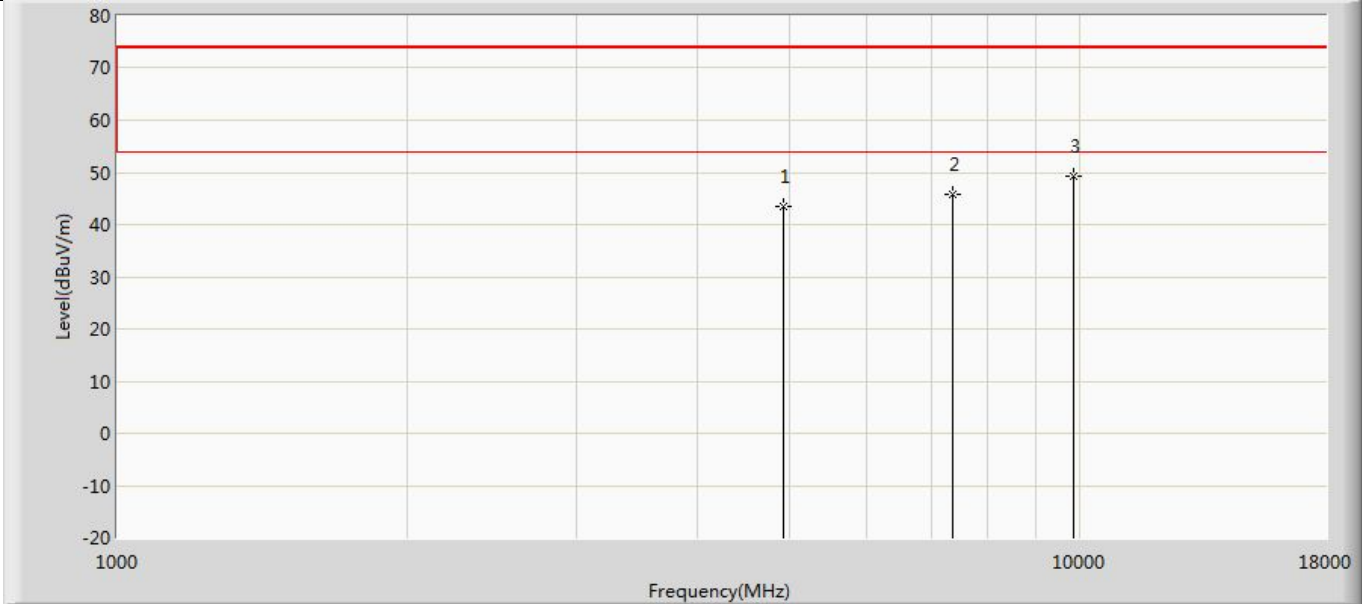


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 43.398                 | 55.187               | -30.602         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 45.906                 | 52.867               | -28.094         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 49.217                 | 51.705               | -24.783         | 74.000         | -2.487      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 37             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

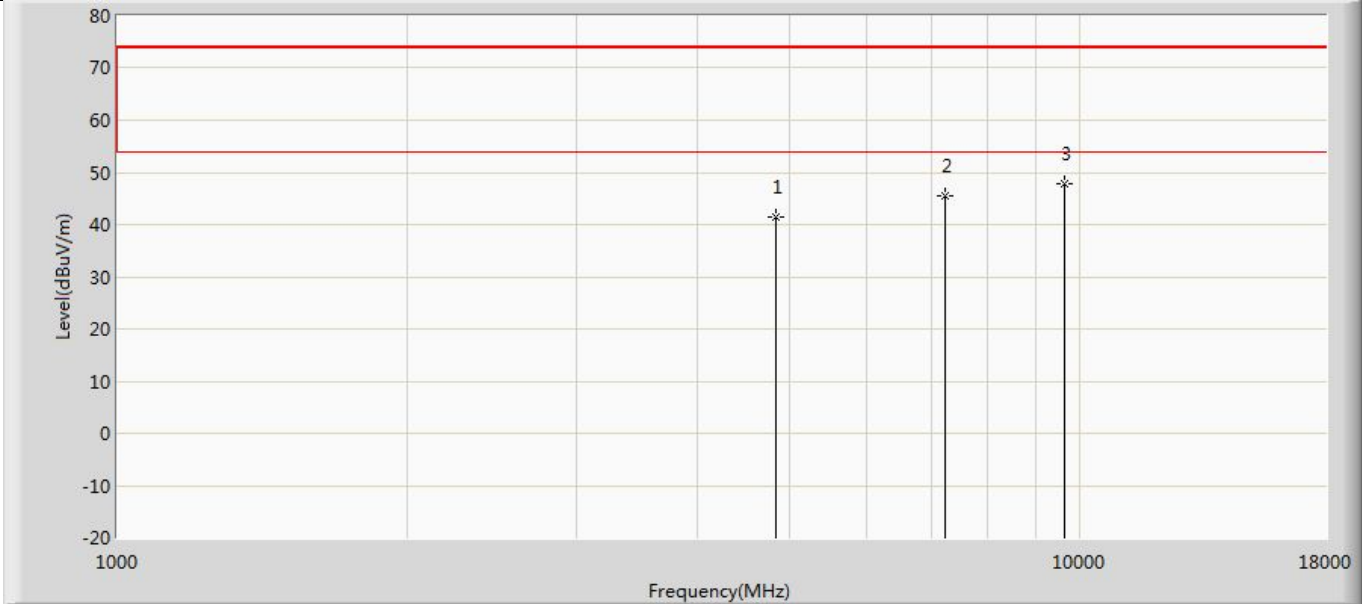


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 41.328                 | 53.416               | -32.672         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 45.587                 | 52.608               | -28.413         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 47.787                 | 51.519               | -26.213         | 74.000         | -3.732      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 38             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

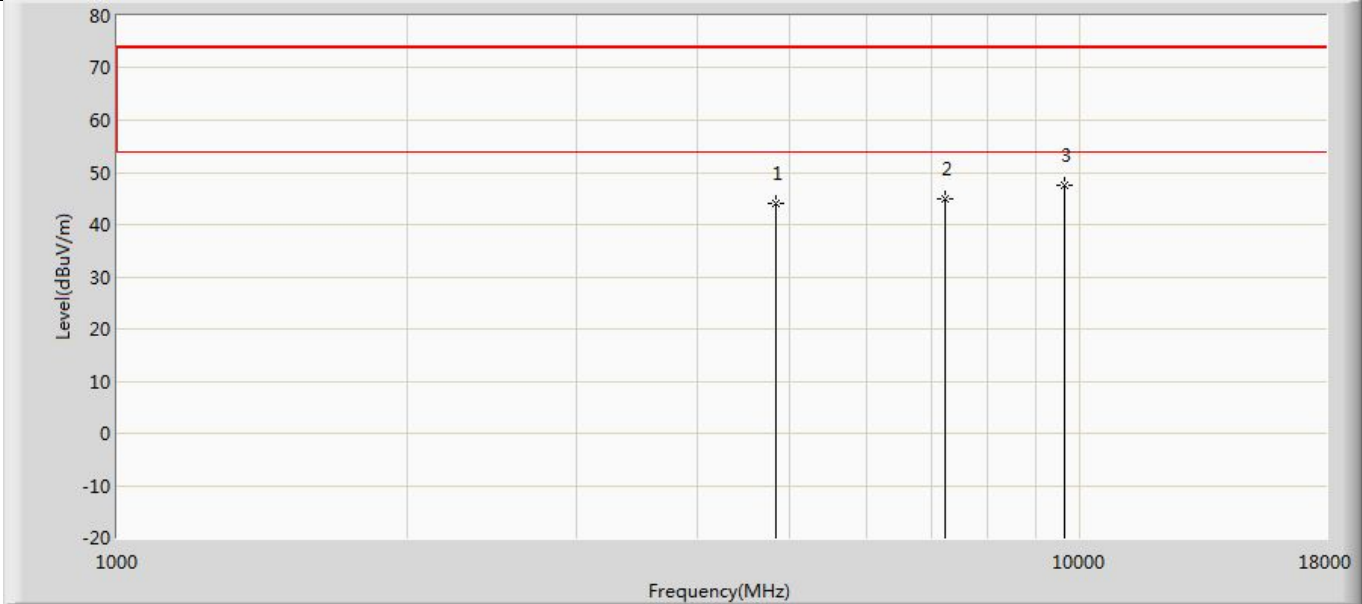


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 44.045                 | 56.133               | -29.955         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 45.068                 | 52.089               | -28.932         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 47.602                 | 51.334               | -26.398         | 74.000         | -3.732      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 39             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2437MHz by 802.11n(20MHz) with Main+Aux |                          |

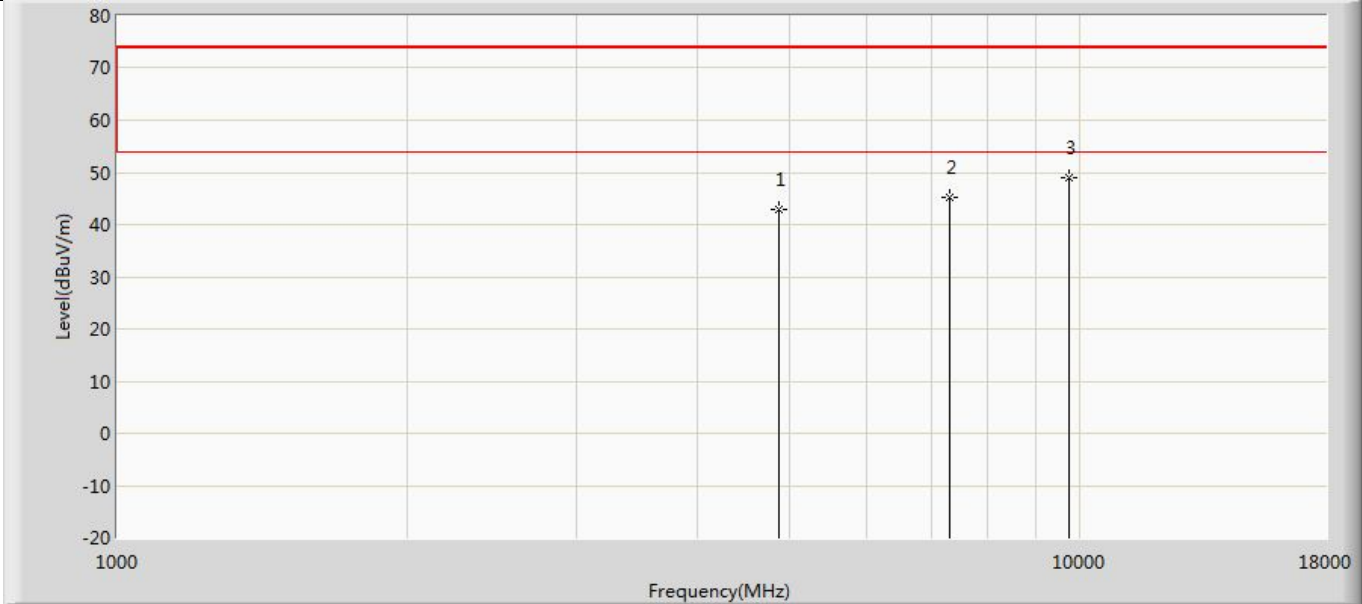


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.856                 | 53.503               | -31.144         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 45.128                 | 52.629               | -28.872         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.093                 | 51.977               | -24.907         | 74.000         | -2.883      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 40             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2437MHz by 802.11n(20MHz) with Main+Aux |                          |

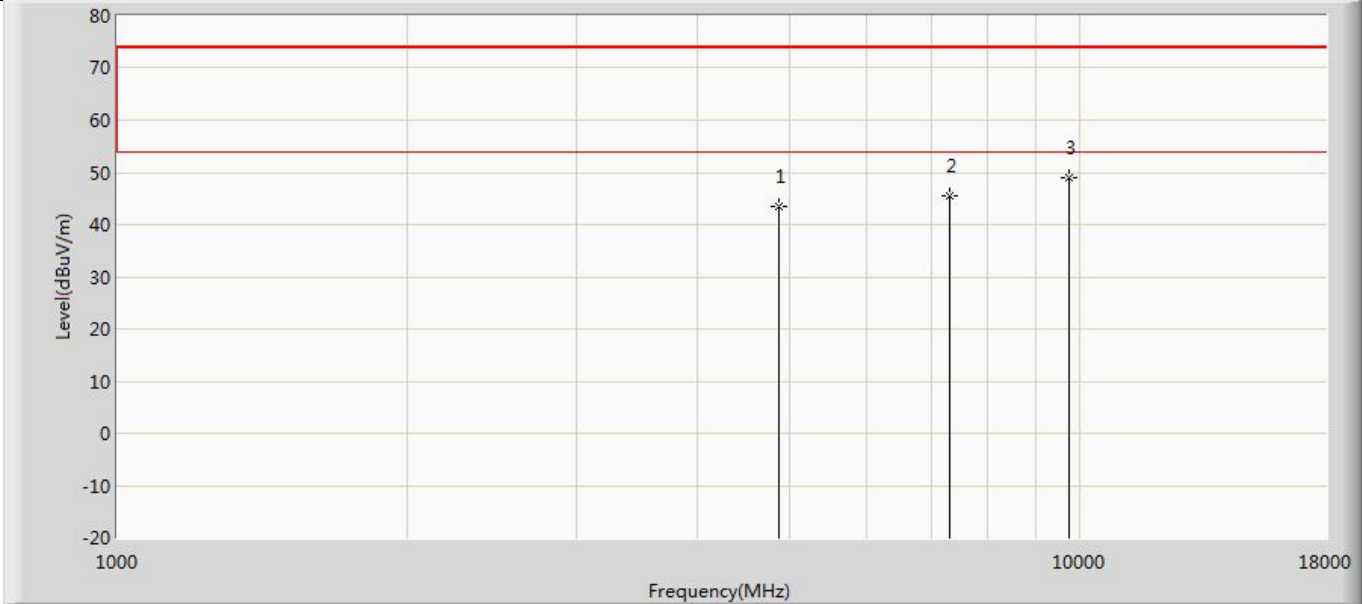


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 43.585                 | 54.232               | -30.415         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 45.540                 | 53.041               | -28.460         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.104                 | 51.988               | -24.896         | 74.000         | -2.883      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 41             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

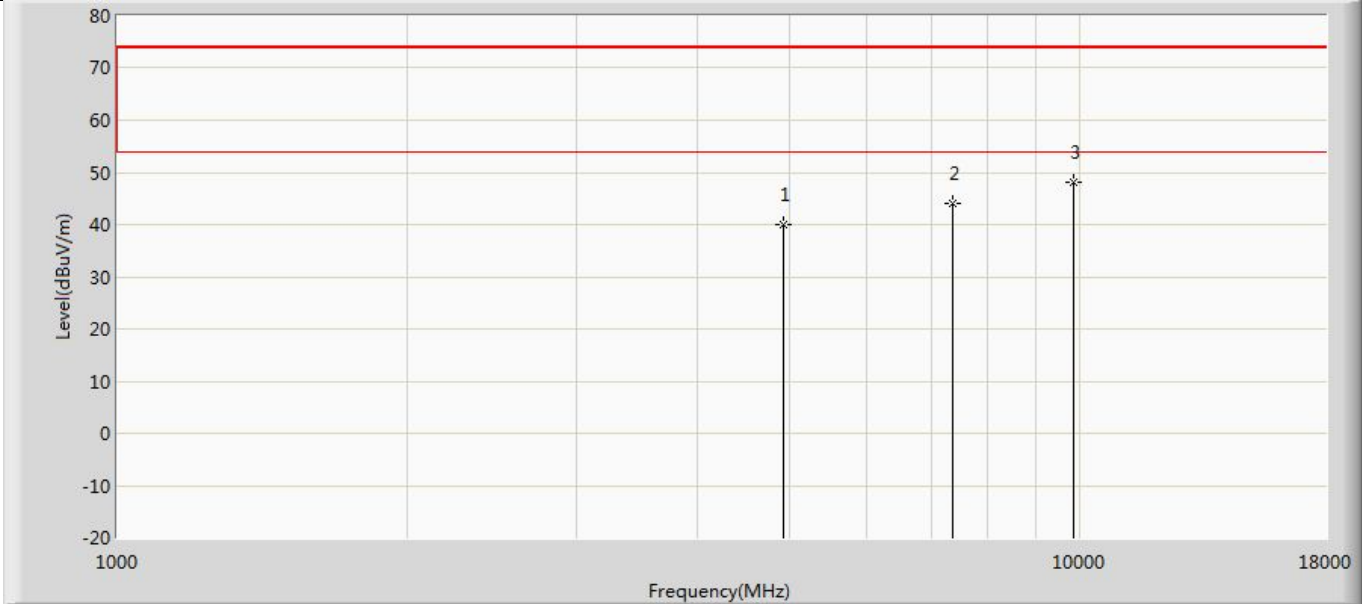


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 40.098                 | 51.887               | -33.902         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 44.108                 | 51.069               | -29.892         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 48.255                 | 50.743               | -25.745         | 74.000         | -2.487      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 42             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

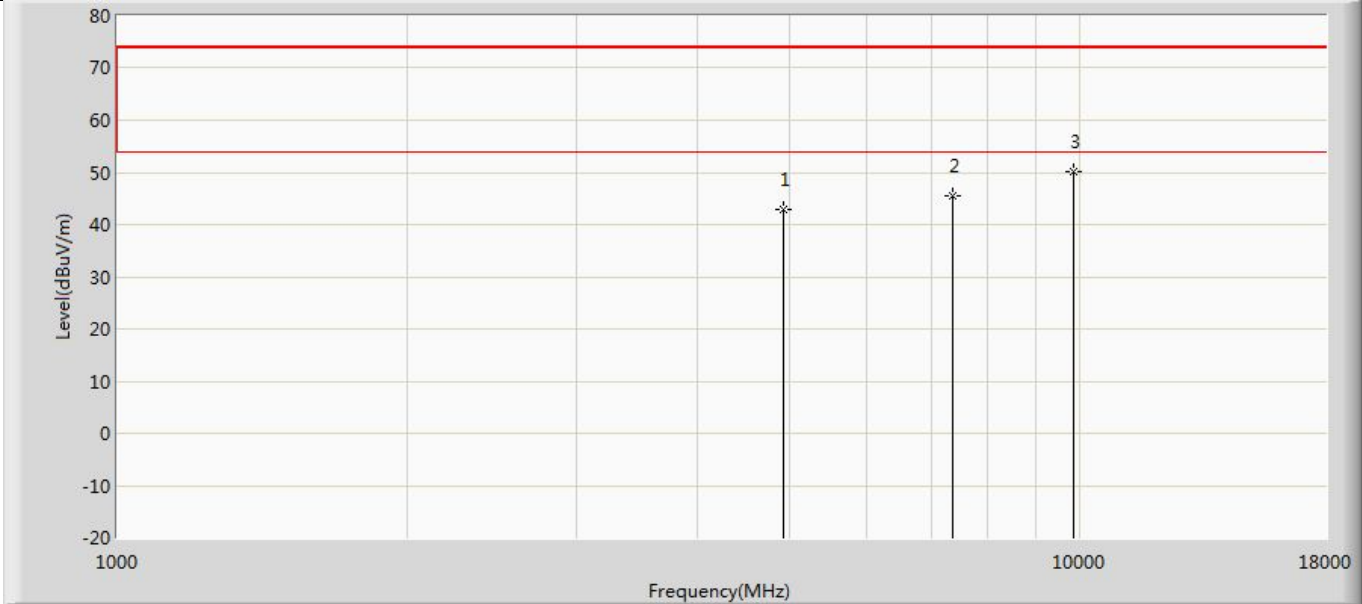


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 42.919                 | 54.708               | -31.081         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 45.502                 | 52.463               | -28.498         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 50.204                 | 52.692               | -23.796         | 74.000         | -2.487      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 43             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

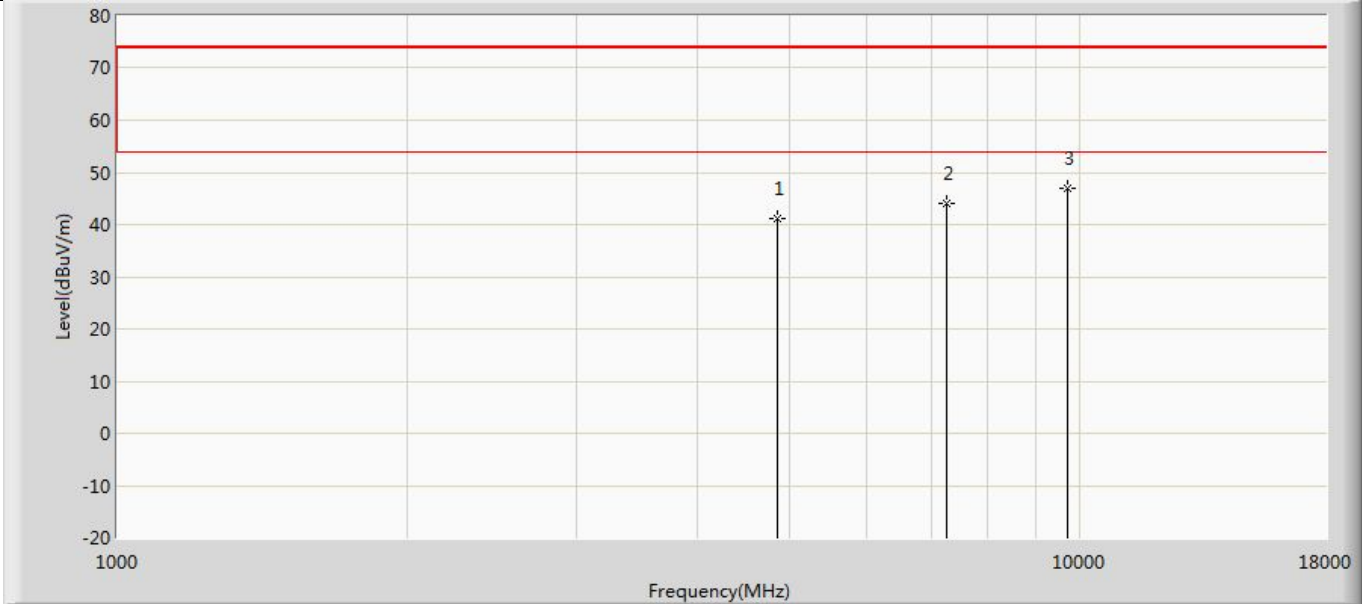


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4844.000        | 41.092                 | 52.530               | -32.908         | 74.000         | -11.438     | PK   |
| 2  |      | 7266.000        | 44.046                 | 51.128               | -29.954         | 74.000         | -7.083      | PK   |
| 3  | *    | 9688.000        | 46.826                 | 49.988               | -27.174         | 74.000         | -3.161      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 44             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

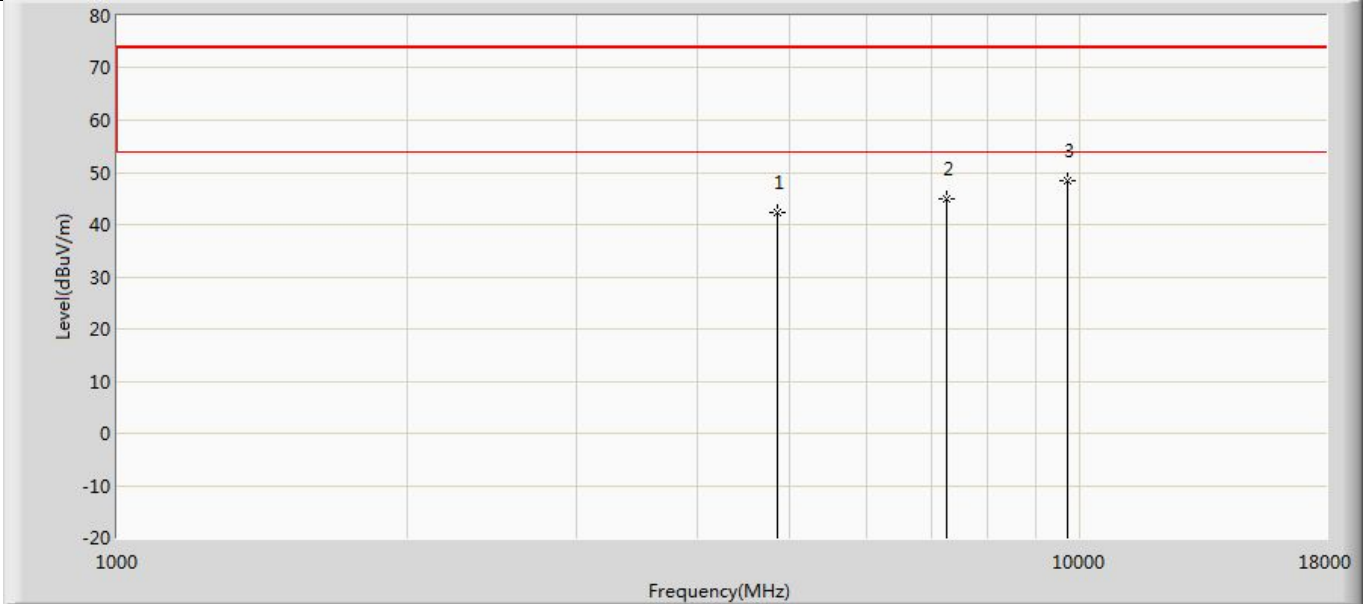


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4844.000        | 42.350                 | 53.788               | -31.650         | 74.000         | -11.438     | PK   |
| 2  |      | 7266.000        | 44.833                 | 51.915               | -29.167         | 74.000         | -7.083      | PK   |
| 3  | *    | 9688.000        | 48.307                 | 51.469               | -25.693         | 74.000         | -3.161      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 45             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2437MHz by 802.11n(40MHz) with Main+Aux |                          |

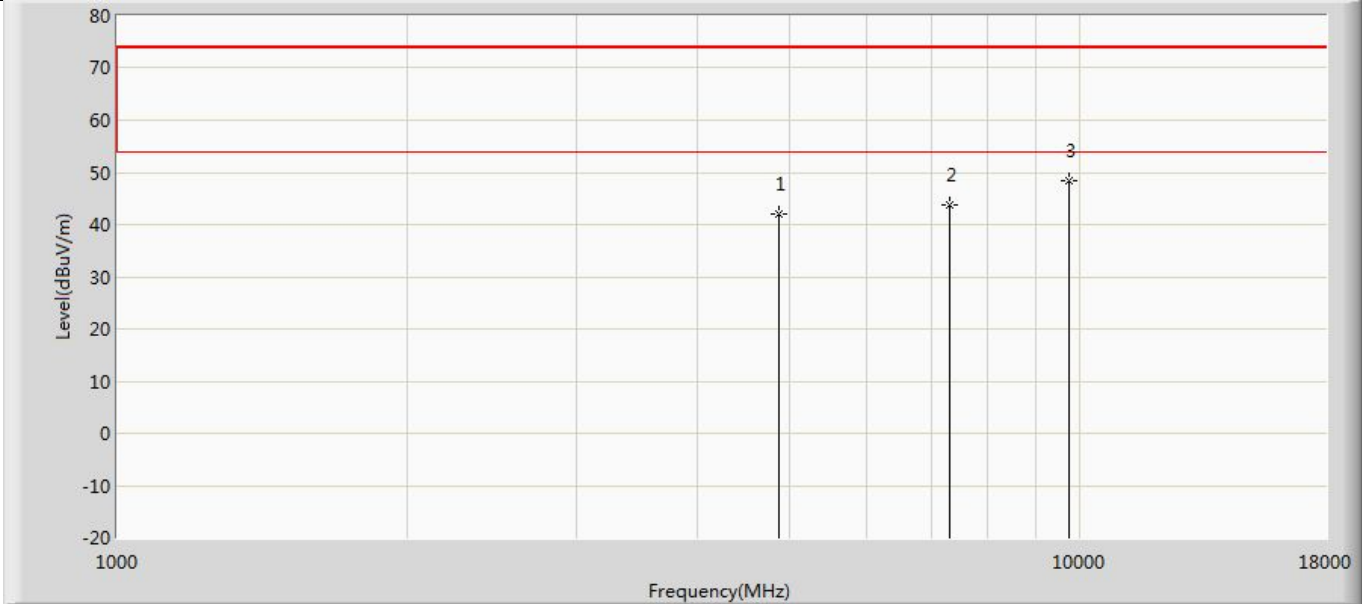


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.011                 | 52.658               | -31.989         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 43.715                 | 51.216               | -30.285         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 48.388                 | 51.272               | -25.612         | 74.000         | -2.883      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 46             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2437MHz by 802.11n(40MHz) with Main+Aux |                          |

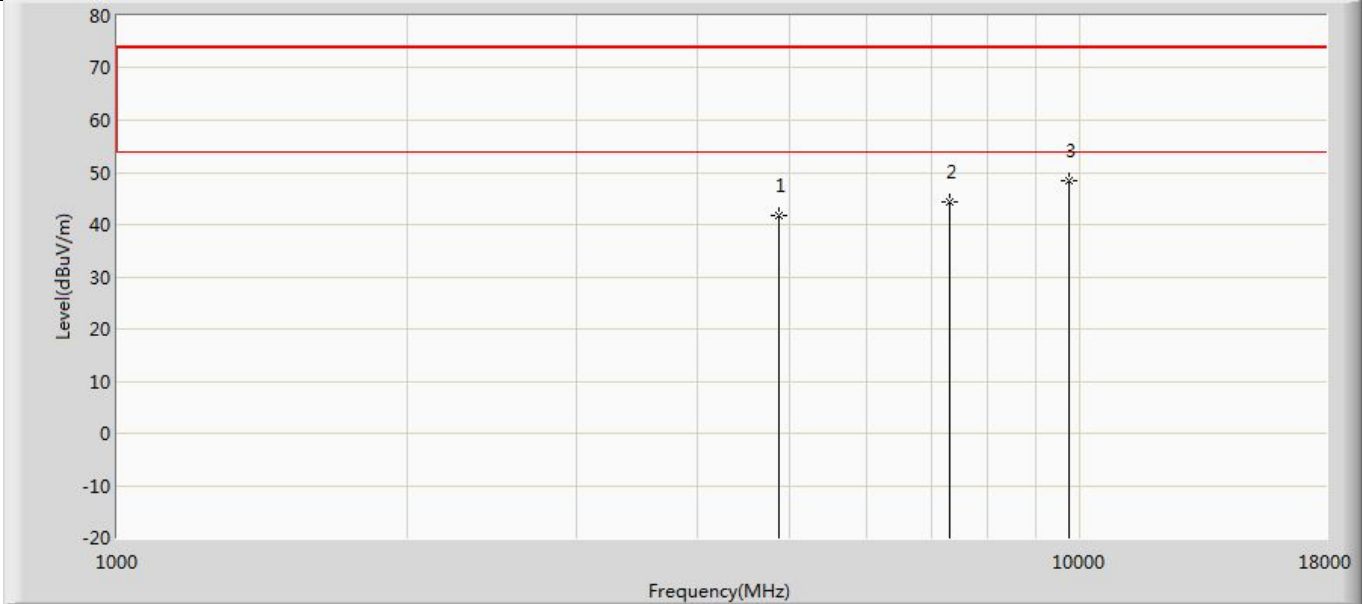

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 41.746                 | 52.393               | -32.254         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 44.278                 | 51.779               | -29.722         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 48.523                 | 51.407               | -25.477         | 74.000         | -2.883      | PK   |


|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 47             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

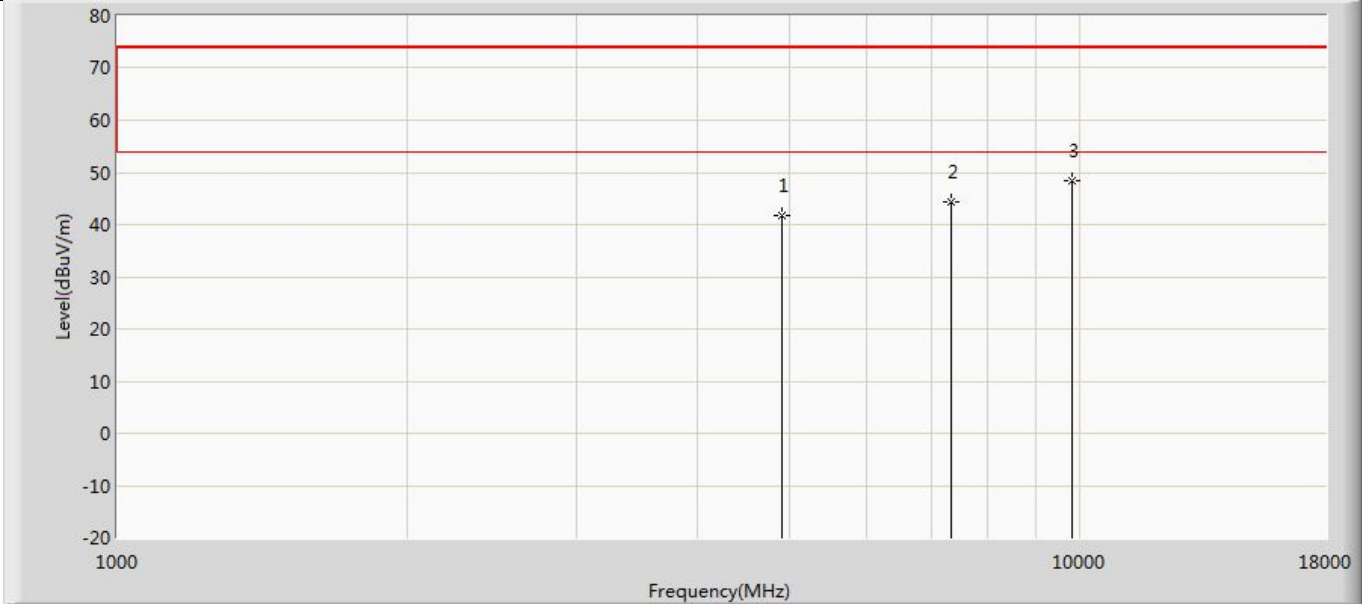

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4904.000        | 41.820                 | 53.569               | -32.180         | 74.000         | -11.749     | PK   |
| 2  |      | 7356.000        | 44.412                 | 51.305               | -29.588         | 74.000         | -6.893      | PK   |
| 3  | *    | 9808.000        | 48.538                 | 51.916               | -25.462         | 74.000         | -3.378      | PK   |



|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 48             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 03:39 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

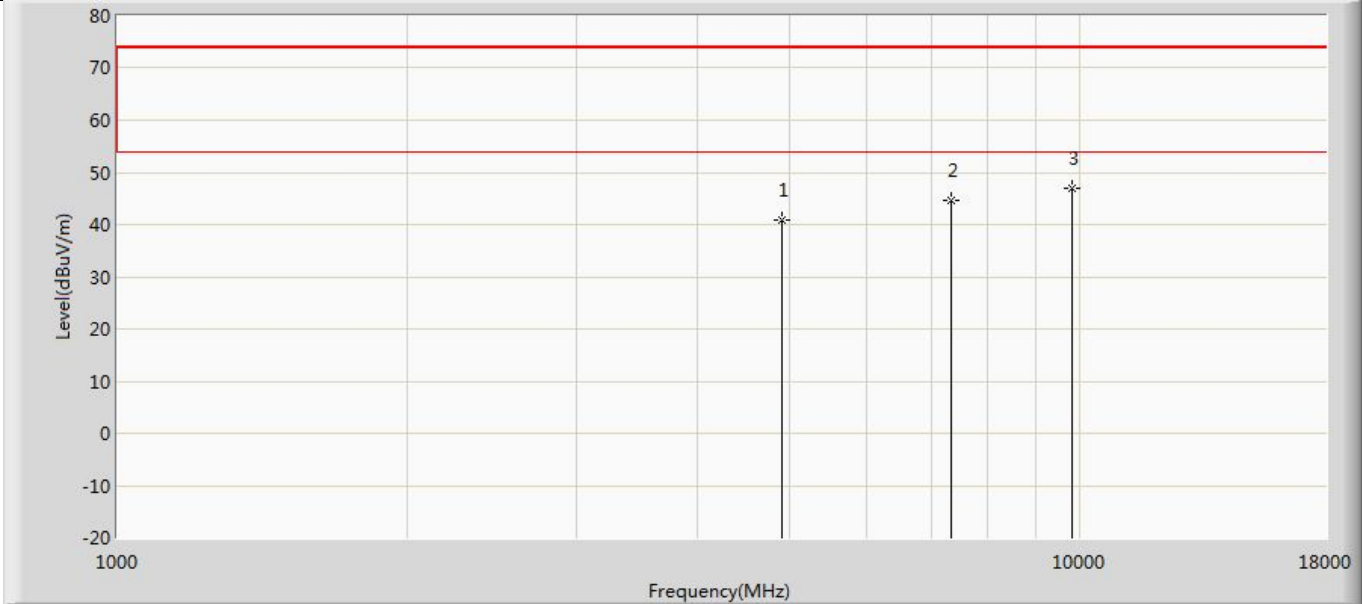


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4904.000        | 40.861                 | 52.610               | -33.139         | 74.000         | -11.749     | PK   |
| 2  |      | 7356.000        | 44.592                 | 51.485               | -29.408         | 74.000         | -6.893      | PK   |
| 3  | *    | 9808.000        | 47.075                 | 50.453               | -26.925         | 74.000         | -3.378      | PK   |




LG North America 65-inch antenna

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 25             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2412MHz by 802.11b with Aux |                          |

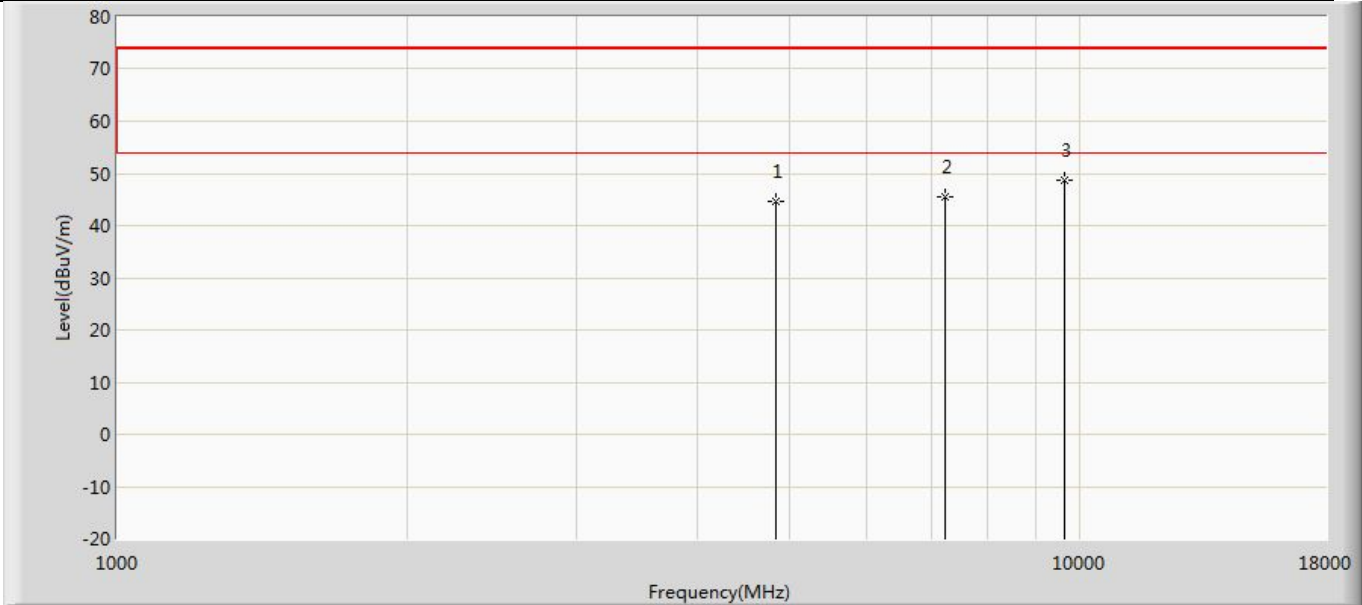


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4825.000        | 44.715                 | 56.806               | -29.285         | 74.000         | -12.091     | PK   |
| 2  |      | 7236.000        | 45.561                 | 52.582               | -28.439         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 48.706                 | 52.438               | -25.294         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 26             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2412MHz by 802.11b with Aux |                          |

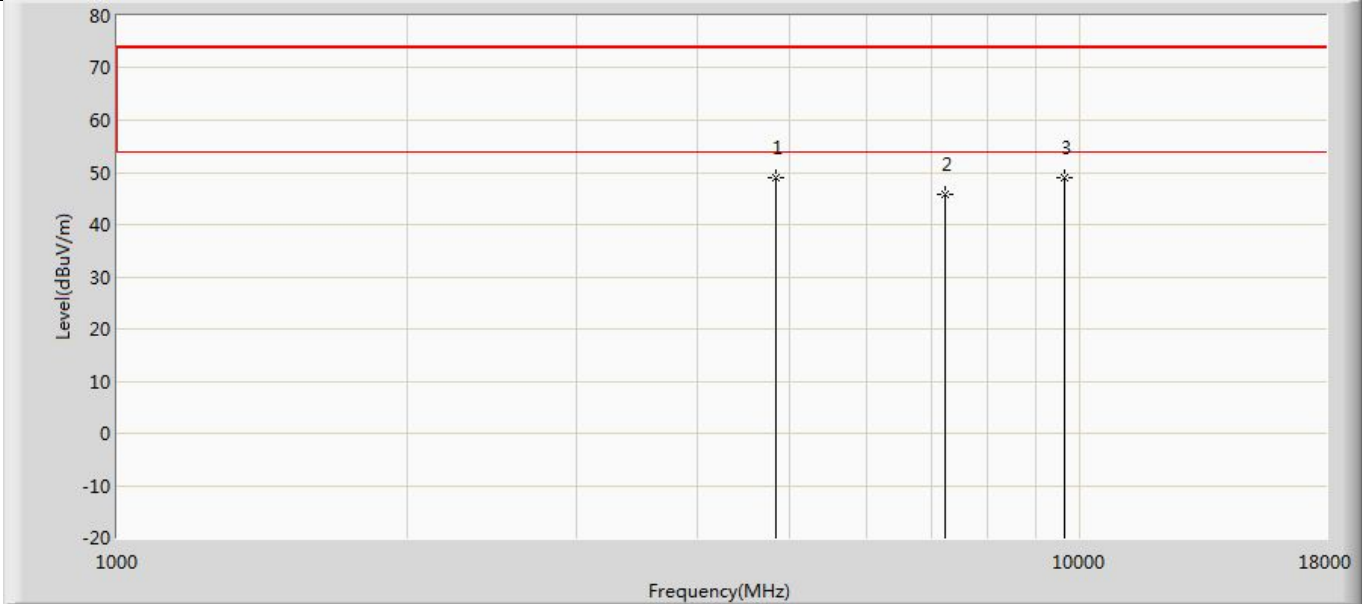


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 4825.000        | 49.046                 | 61.137               | -24.954         | 74.000         | -12.091     | PK   |
| 2  |      | 7236.000        | 45.751                 | 52.772               | -28.249         | 74.000         | -7.021      | PK   |
| 3  |      | 9648.000        | 48.851                 | 52.583               | -25.149         | 74.000         | -3.732      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 27             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2437MHz by 802.11b with Aux |                          |

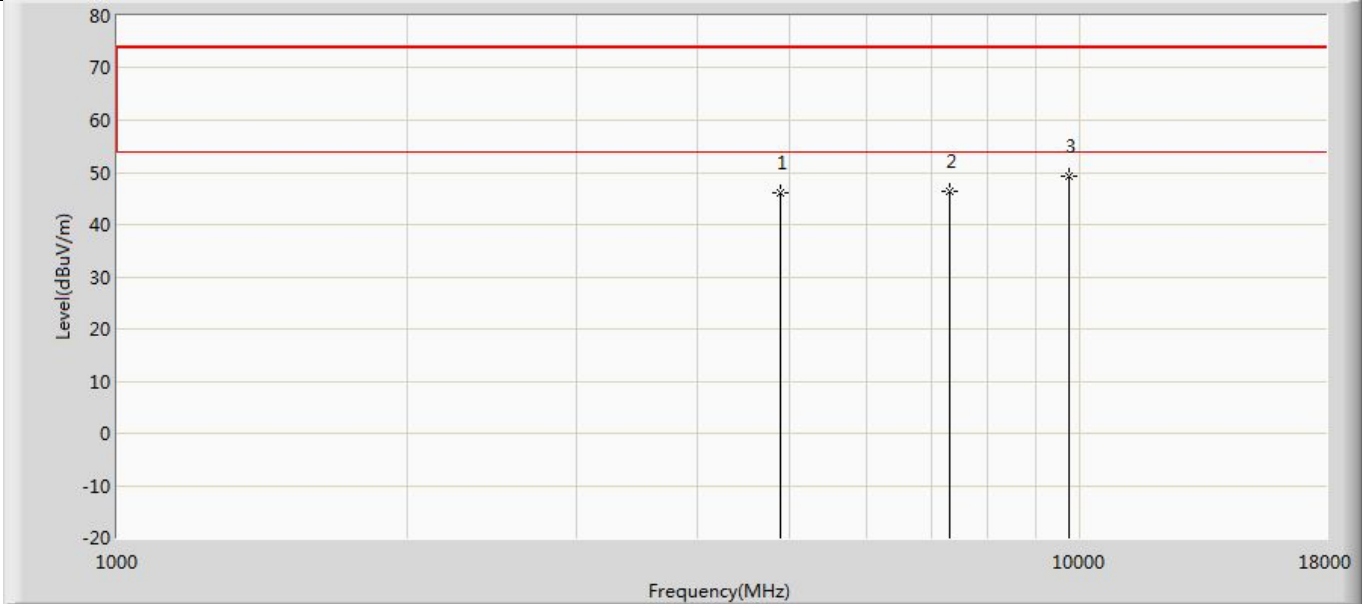

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4876.000        | 46.154                 | 56.754               | -27.846         | 74.000         | -10.600     | PK   |
| 2  |      | 7311.000        | 46.400                 | 53.901               | -27.600         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 49.239                 | 52.123               | -24.761         | 74.000         | -2.883      | PK   |


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 28             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2437MHz by 802.11b with Aux |                          |

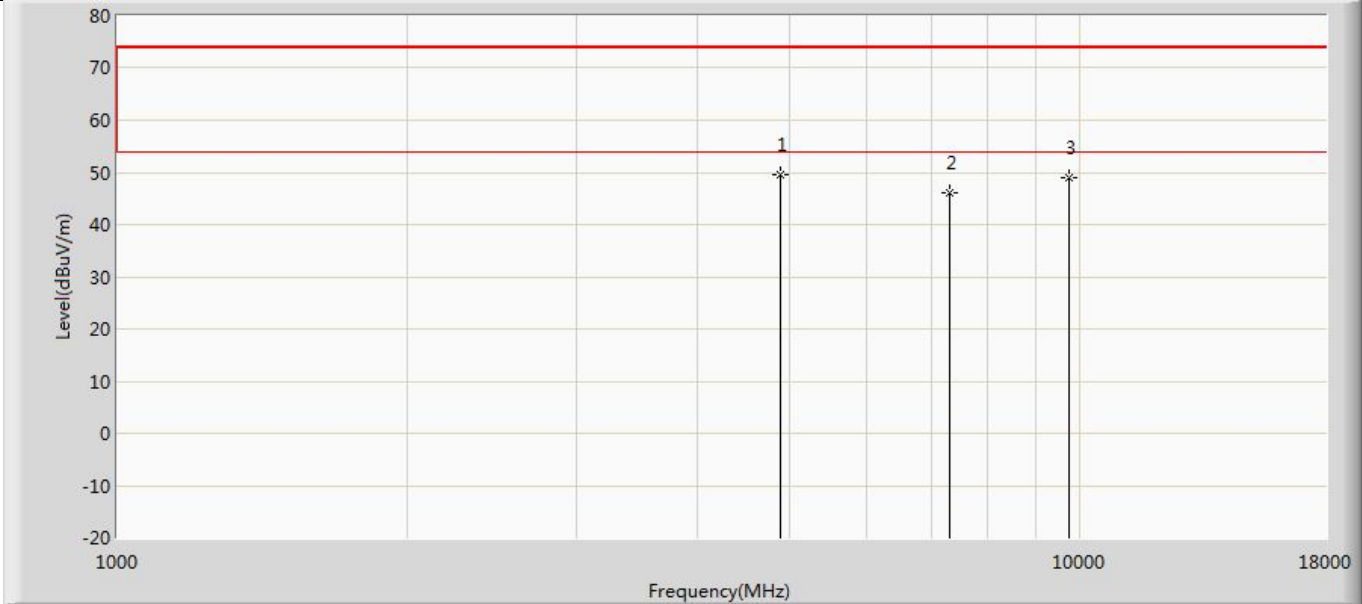

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 4876.000        | 49.674                 | 60.274               | -24.326         | 74.000         | -10.600     | PK   |
| 2  |      | 7311.000        | 45.988                 | 53.489               | -28.012         | 74.000         | -7.501      | PK   |
| 3  |      | 9748.000        | 48.935                 | 51.819               | -25.065         | 74.000         | -2.883      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 29             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2462MHz by 802.11b with Aux |                          |

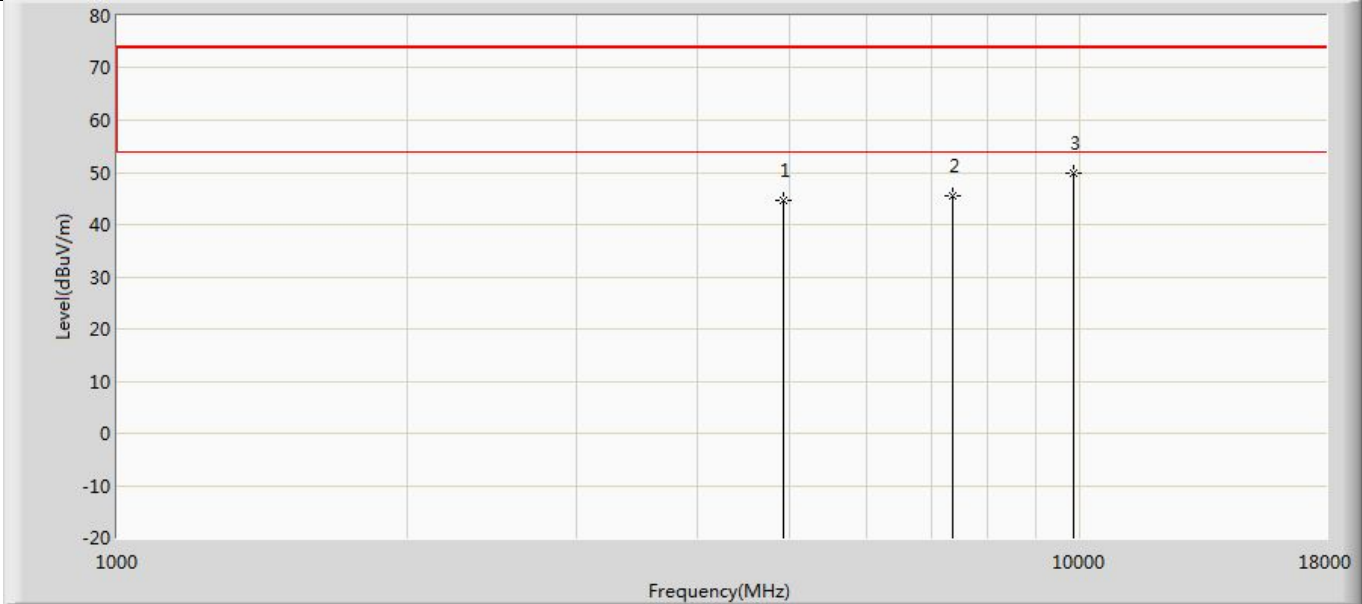

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4927.000        | 44.755                 | 56.506               | -29.245         | 74.000         | -11.751     | PK   |
| 2  |      | 7386.000        | 45.517                 | 52.478               | -28.483         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 49.850                 | 52.338               | -24.150         | 74.000         | -2.487      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 30             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 1 : Transmit at 2462MHz by 802.11b with Aux |                          |

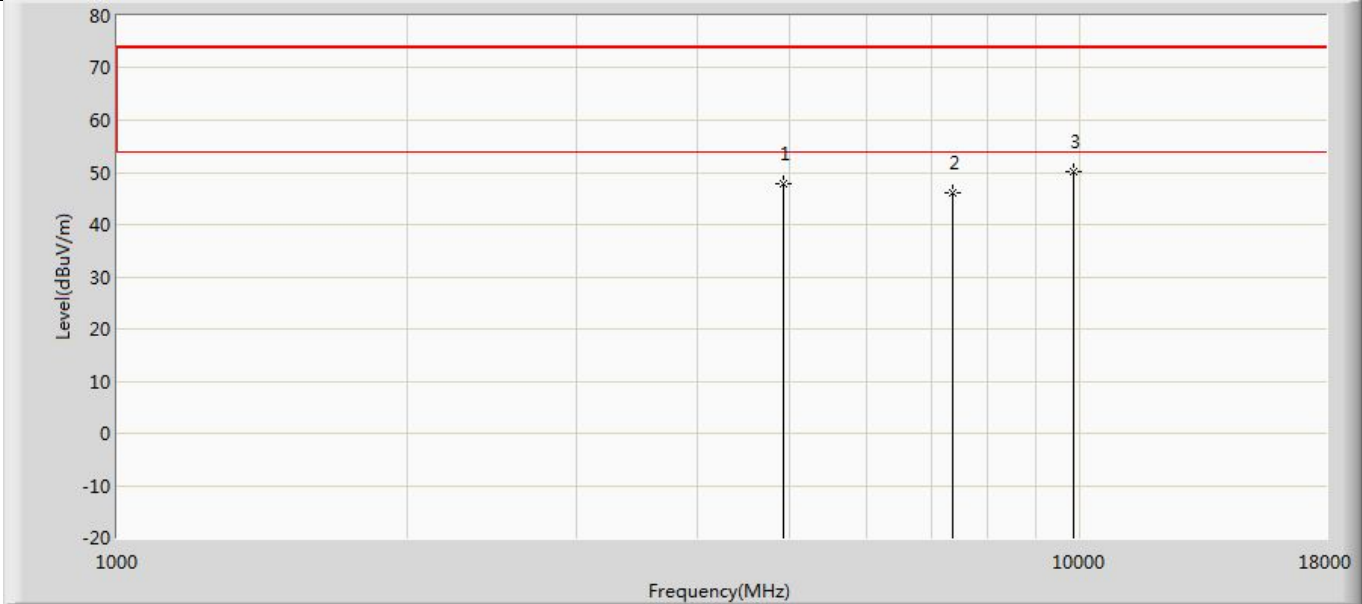

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4927.000        | 47.903                 | 59.654               | -26.097         | 74.000         | -11.751     | PK   |
| 2  |      | 7386.000        | 45.959                 | 52.920               | -28.041         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 50.202                 | 52.690               | -23.798         | 74.000         | -2.487      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 31             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

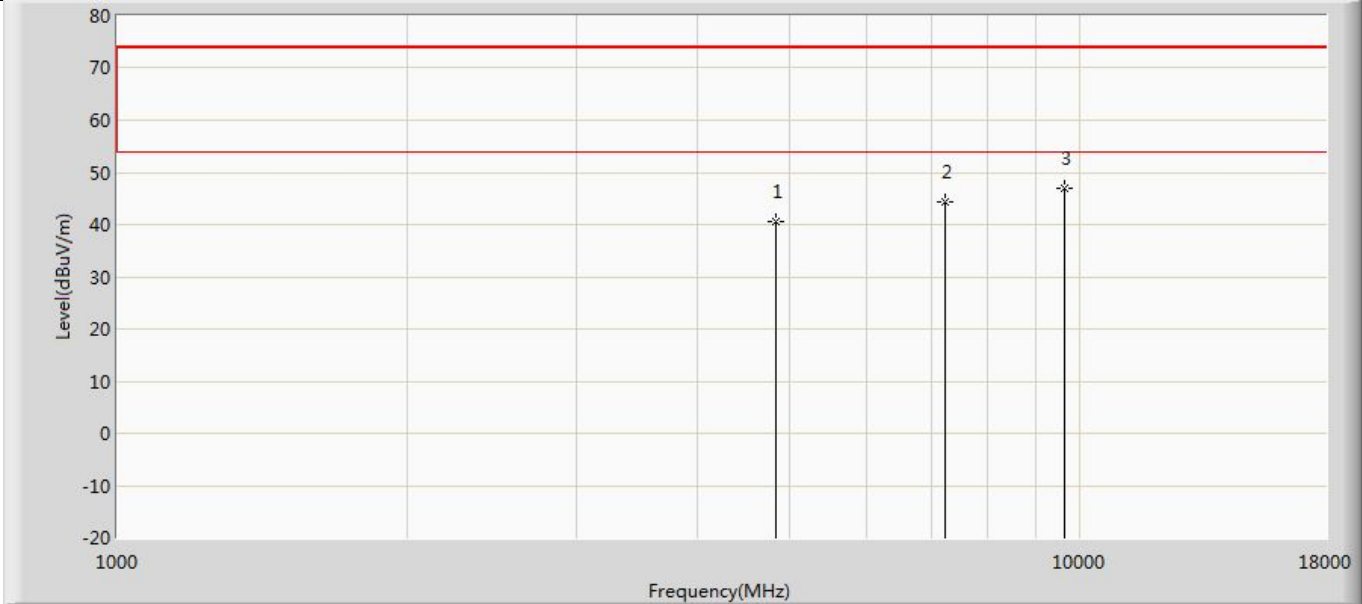

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 40.481                 | 52.569               | -33.519         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 44.408                 | 51.429               | -29.592         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 46.825                 | 50.557               | -27.175         | 74.000         | -3.732      | PK   |


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 32             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2412MHz by 802.11g with Aux |                          |

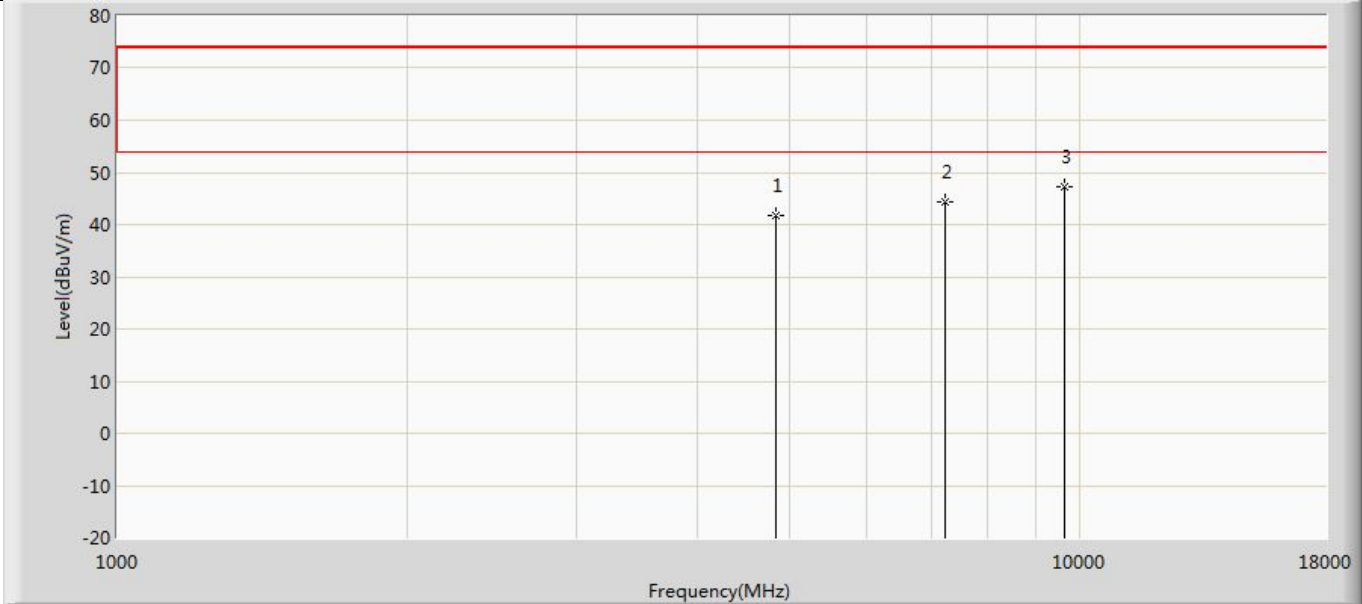

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 41.697                 | 53.785               | -32.303         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 44.348                 | 51.369               | -29.652         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 47.176                 | 50.908               | -26.824         | 74.000         | -3.732      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 33             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2437MHz by 802.11g with Aux |                          |

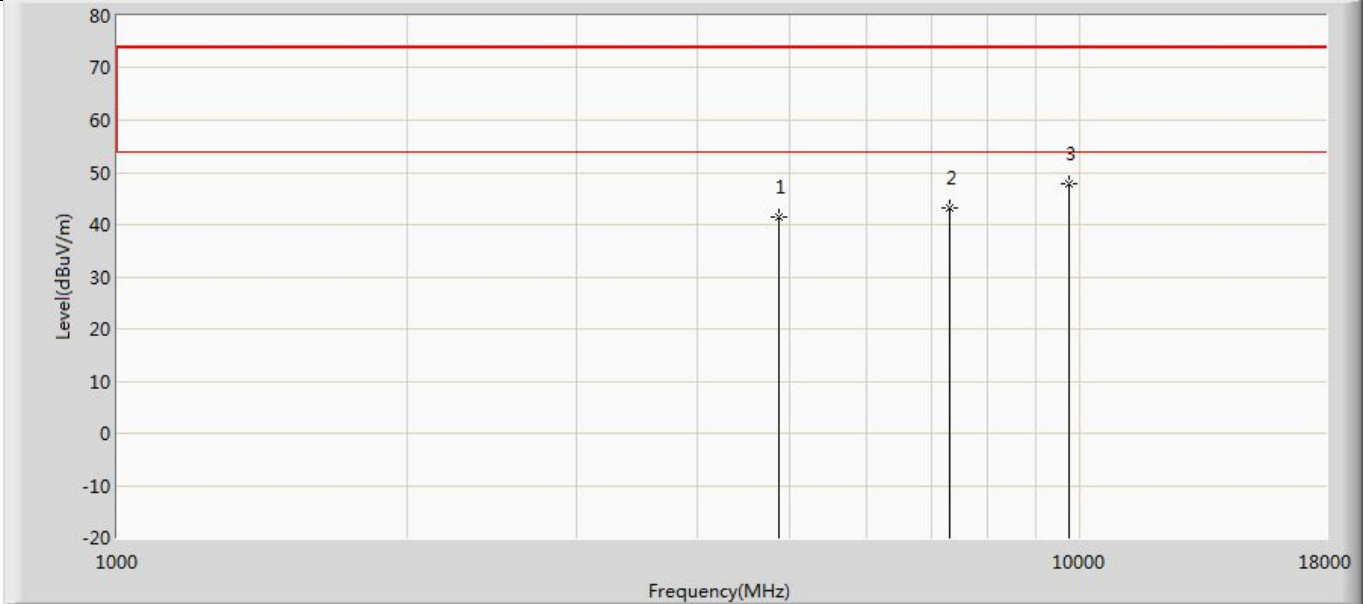


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 41.310                 | 51.957               | -32.690         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 43.316                 | 50.817               | -30.684         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.873                 | 50.757               | -26.127         | 74.000         | -2.883      | PK   |

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 34             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2437MHz by 802.11g with Aux |                          |

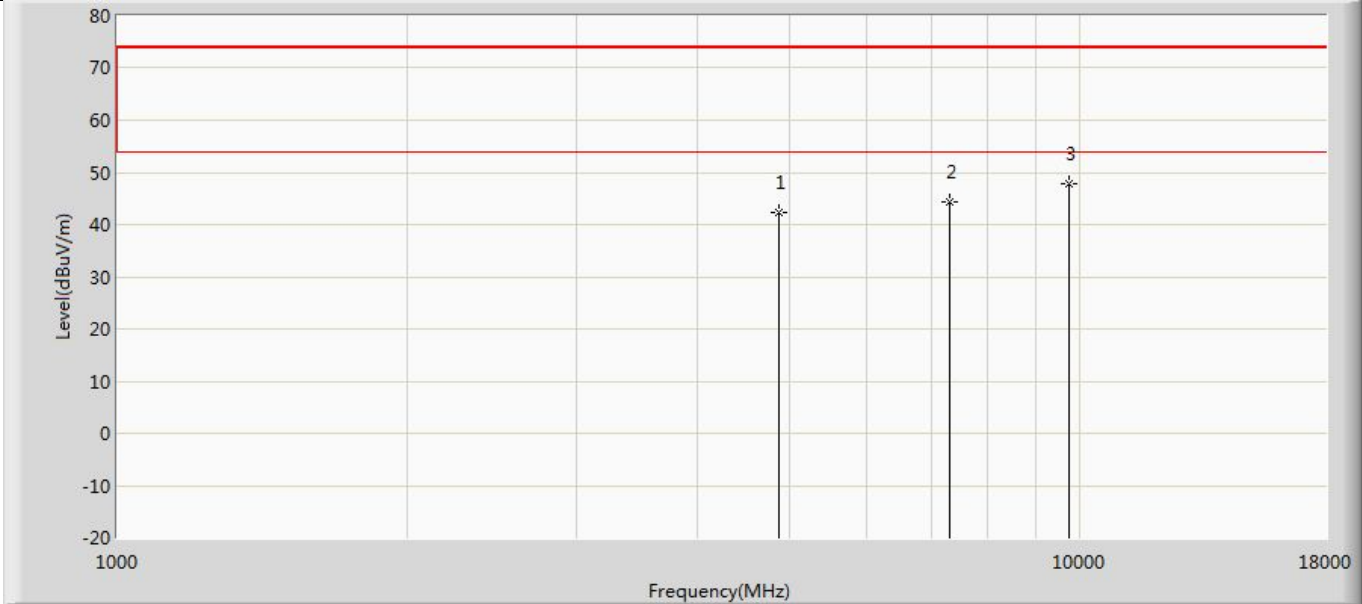

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.258                 | 52.905               | -31.742         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 44.395                 | 51.896               | -29.605         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.843                 | 50.727               | -26.157         | 74.000         | -2.883      | PK   |


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 35             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

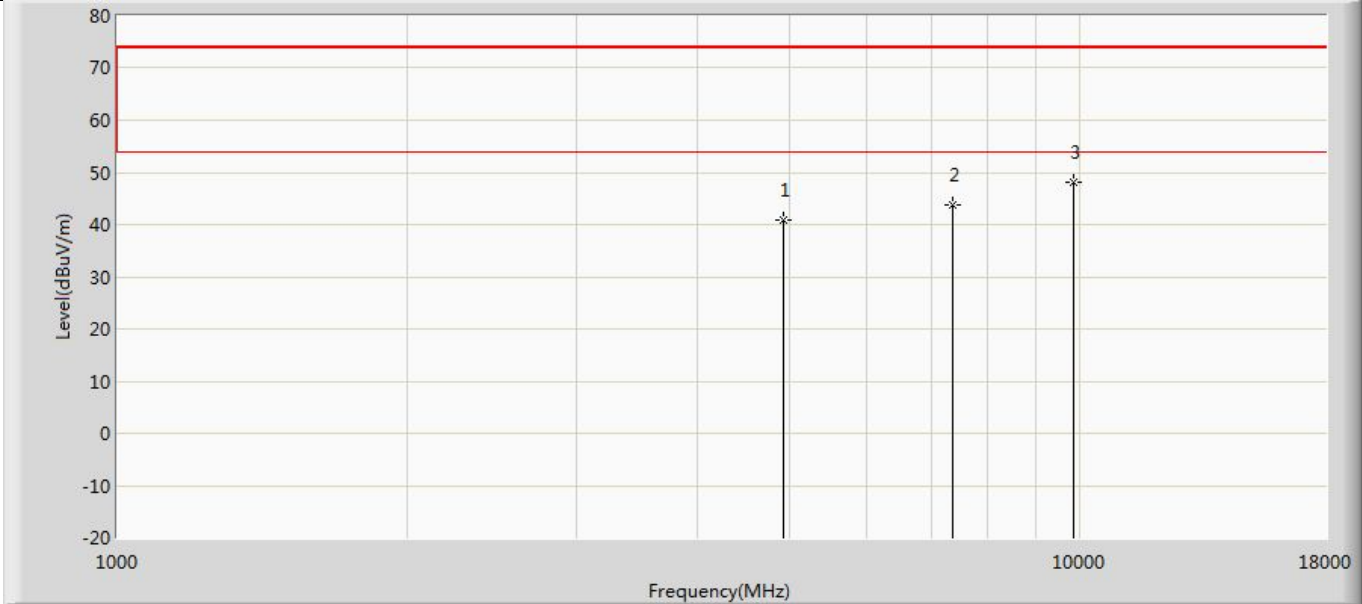

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 41.010                 | 52.799               | -32.990         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 43.882                 | 50.843               | -30.118         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 48.178                 | 50.666               | -25.822         | 74.000         | -2.487      | PK   |




|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                      | Page No.: 36             |
| Engineer: Yu Liu                                       |                          |
| Site: AC5                                              | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                    | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                      | Power: 3.3 Vdc           |
| Note: Mode 2 : Transmit at 2462MHz by 802.11g with Aux |                          |

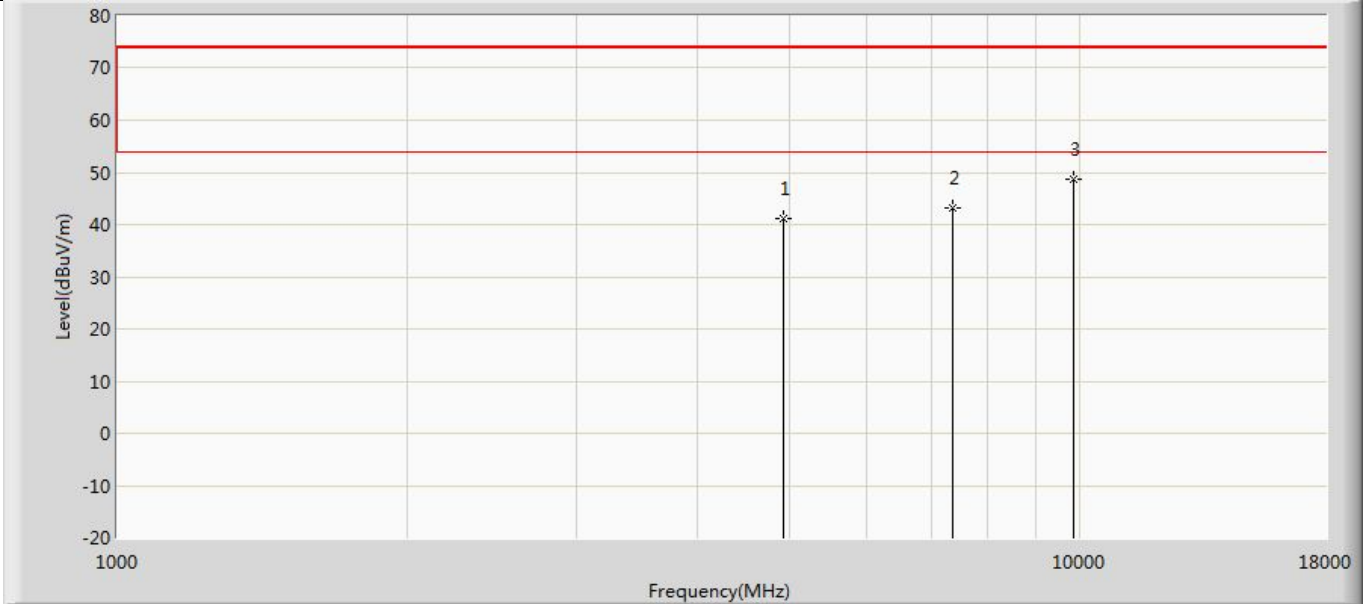

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 41.173                 | 52.962               | -32.827         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 43.231                 | 50.192               | -30.769         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 48.692                 | 51.180               | -25.308         | 74.000         | -2.487      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 37             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:21 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

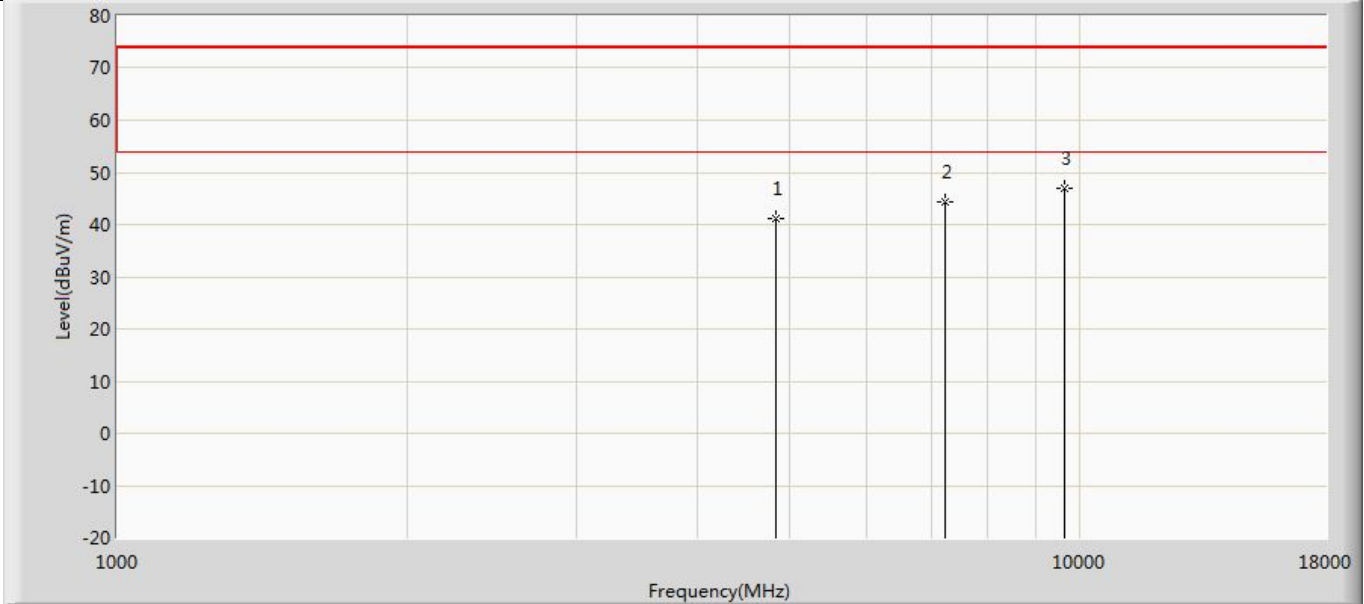

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 41.027                 | 53.115               | -32.973         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 44.280                 | 51.301               | -29.720         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 46.960                 | 50.692               | -27.040         | 74.000         | -3.732      | PK   |


|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 38             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) with Main+Aux |                          |

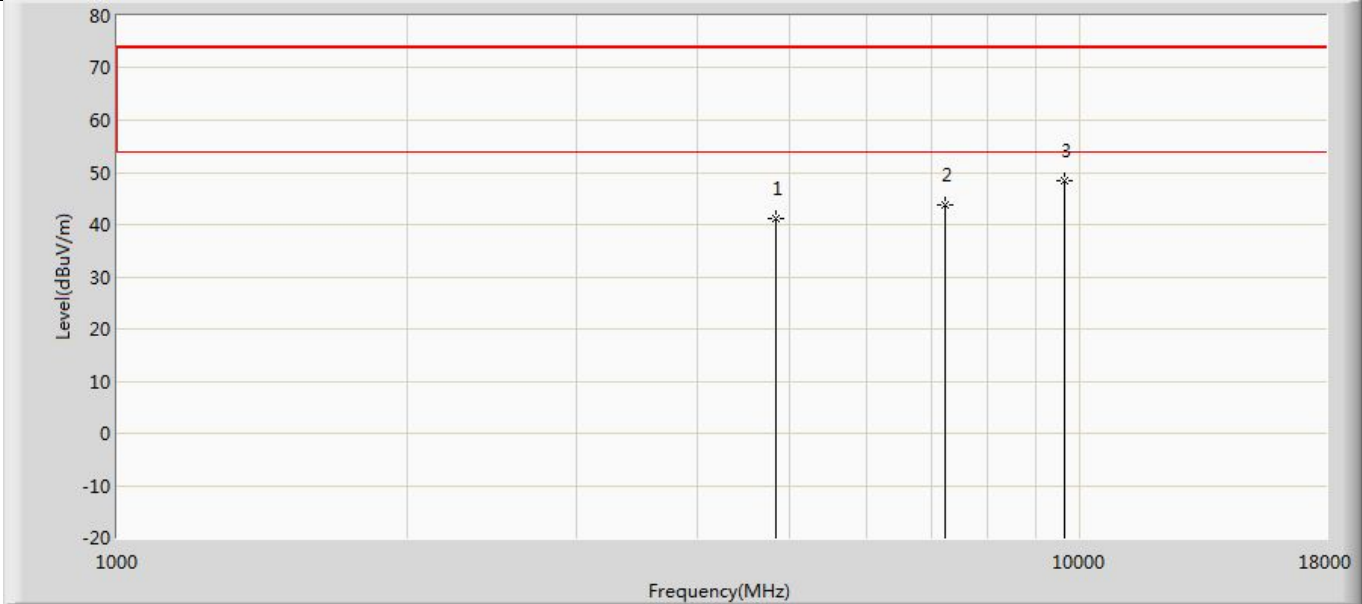

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4824.000        | 41.093                 | 53.181               | -32.907         | 74.000         | -12.088     | PK   |
| 2  |      | 7236.000        | 43.807                 | 50.828               | -30.193         | 74.000         | -7.021      | PK   |
| 3  | *    | 9648.000        | 48.291                 | 52.023               | -25.709         | 74.000         | -3.732      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 39             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2437MHz by 802.11n(20MHz) with Main+Aux |                          |

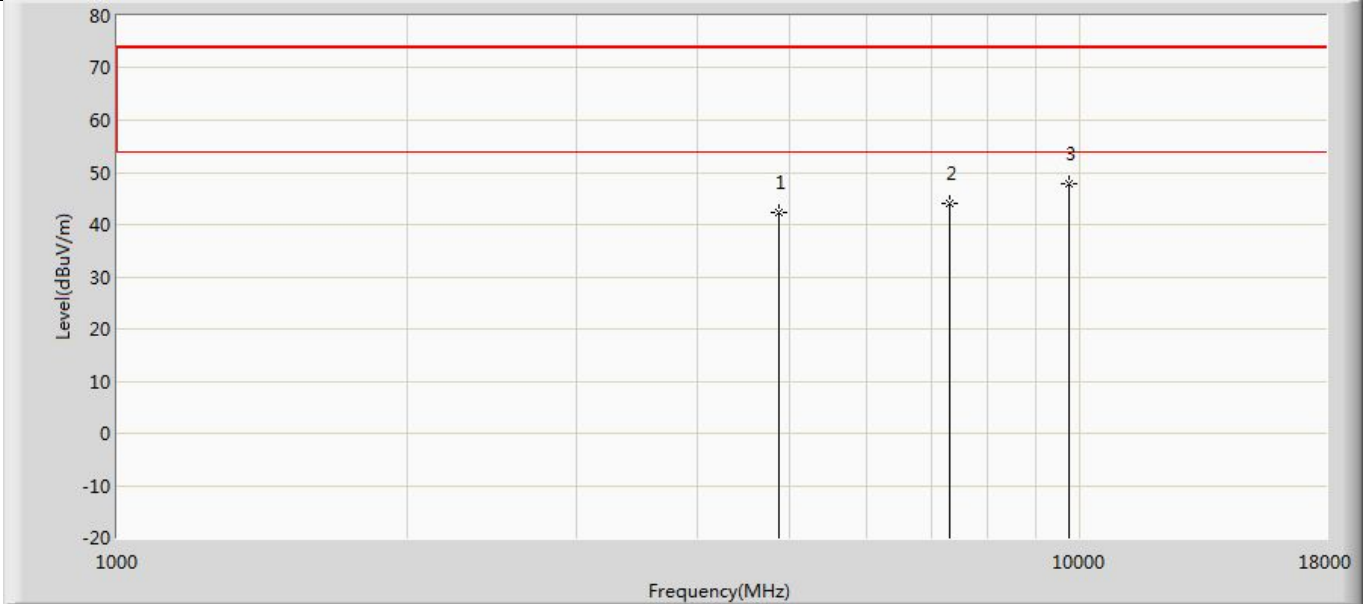


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.182                 | 52.829               | -31.818         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 44.079                 | 51.580               | -29.921         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.880                 | 50.764               | -26.120         | 74.000         | -2.883      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 40             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2437MHz by 802.11n(20MHz) with Main+Aux |                          |

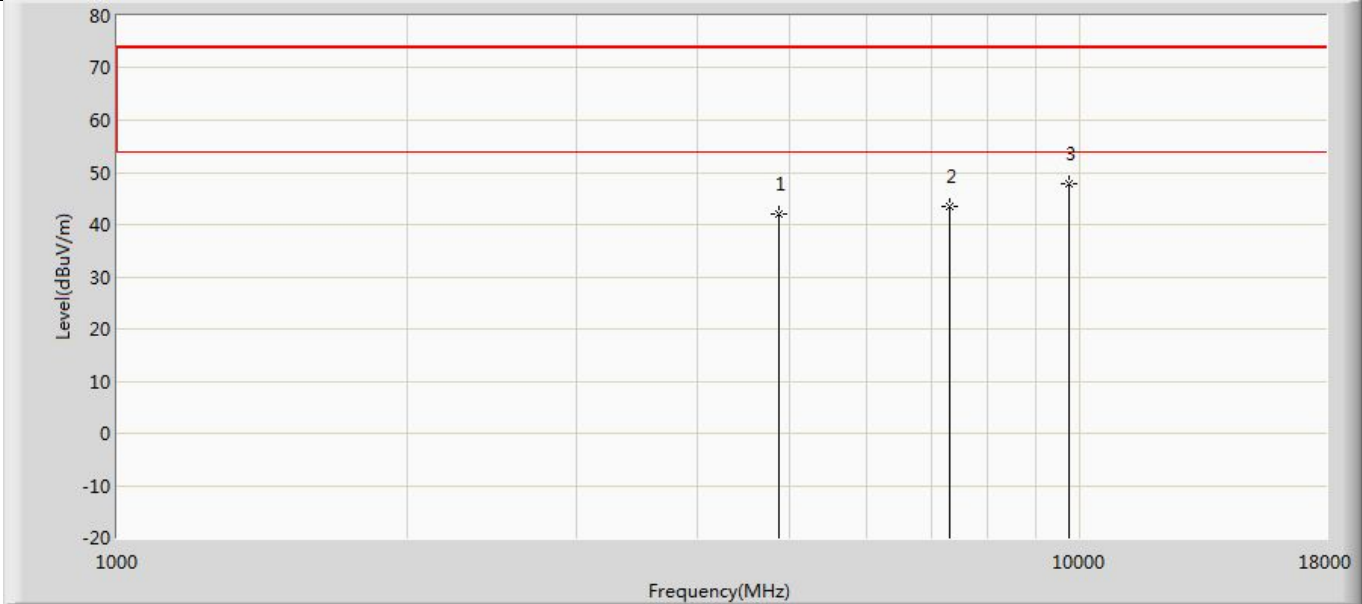


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 42.042                 | 52.689               | -31.958         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 43.376                 | 50.877               | -30.624         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.821                 | 50.705               | -26.179         | 74.000         | -2.883      | PK   |

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 41             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

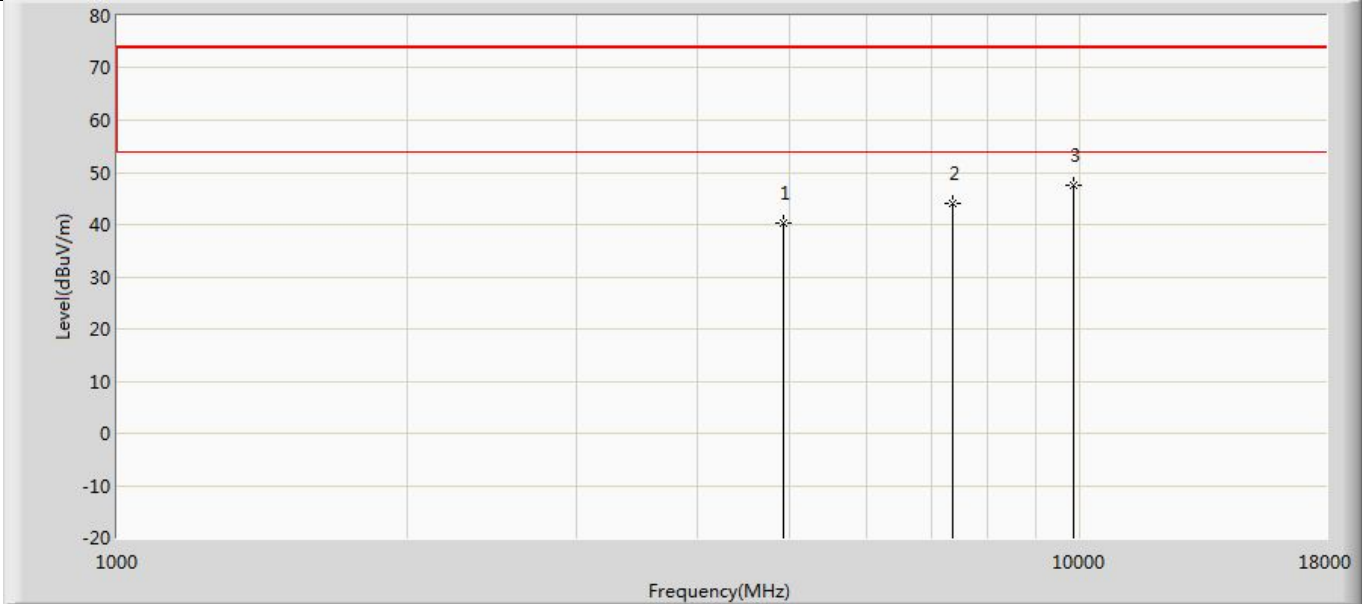

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 40.362                 | 52.151               | -33.638         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 44.090                 | 51.051               | -29.910         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 47.498                 | 49.986               | -26.502         | 74.000         | -2.487      | PK   |


|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 42             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) with Main+Aux |                          |

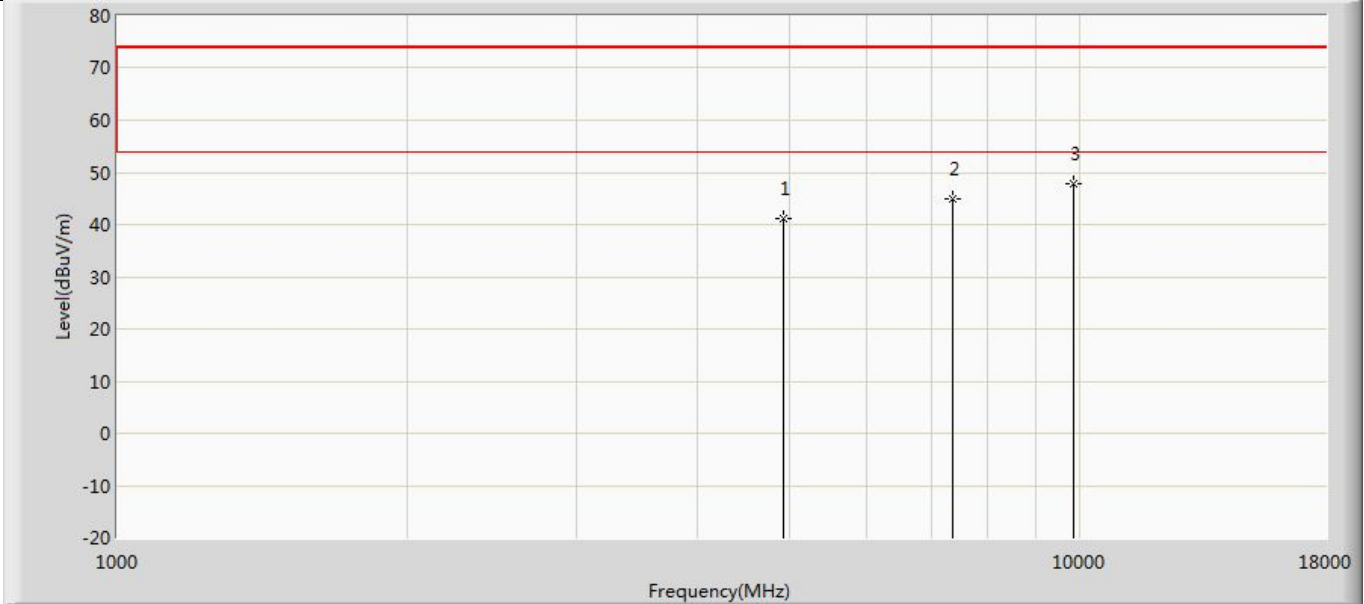

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4924.000        | 41.160                 | 52.949               | -32.840         | 74.000         | -11.788     | PK   |
| 2  |      | 7386.000        | 44.785                 | 51.746               | -29.215         | 74.000         | -6.961      | PK   |
| 3  | *    | 9848.000        | 47.863                 | 50.351               | -26.137         | 74.000         | -2.487      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 43             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

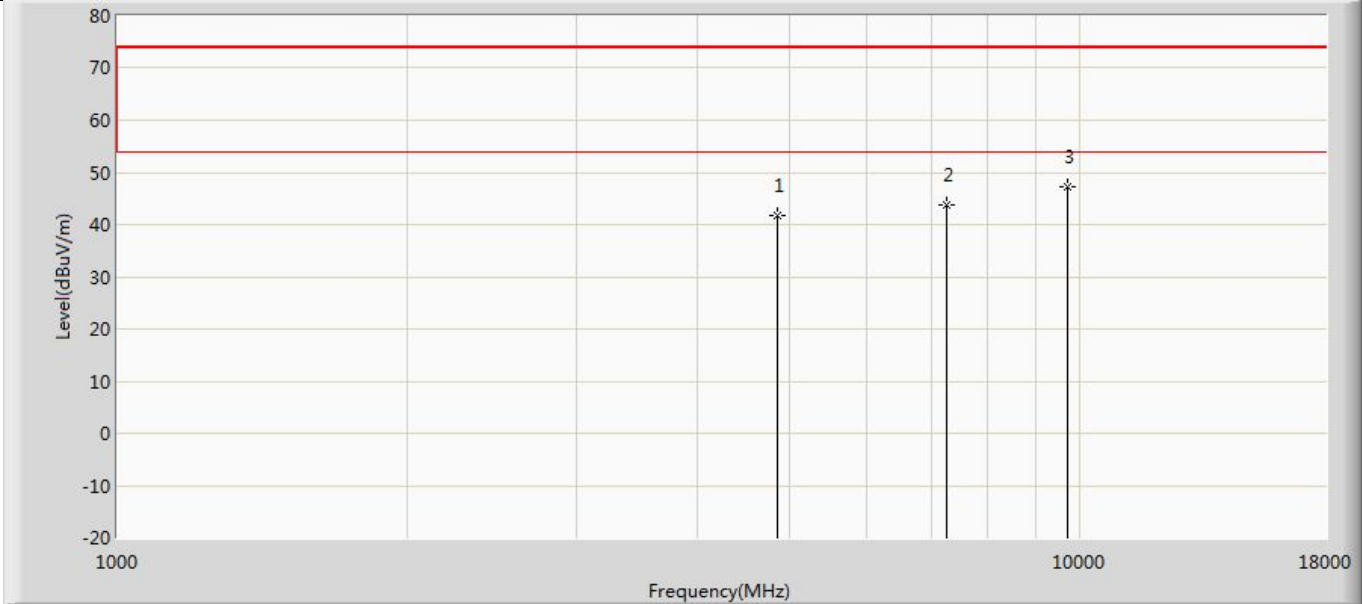

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4844.000        | 41.657                 | 53.095               | -32.343         | 74.000         | -11.438     | PK   |
| 2  |      | 7266.000        | 43.808                 | 50.890               | -30.192         | 74.000         | -7.083      | PK   |
| 3  | *    | 9688.000        | 47.218                 | 50.380               | -26.782         | 74.000         | -3.161      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 44             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) with Main+Aux |                          |

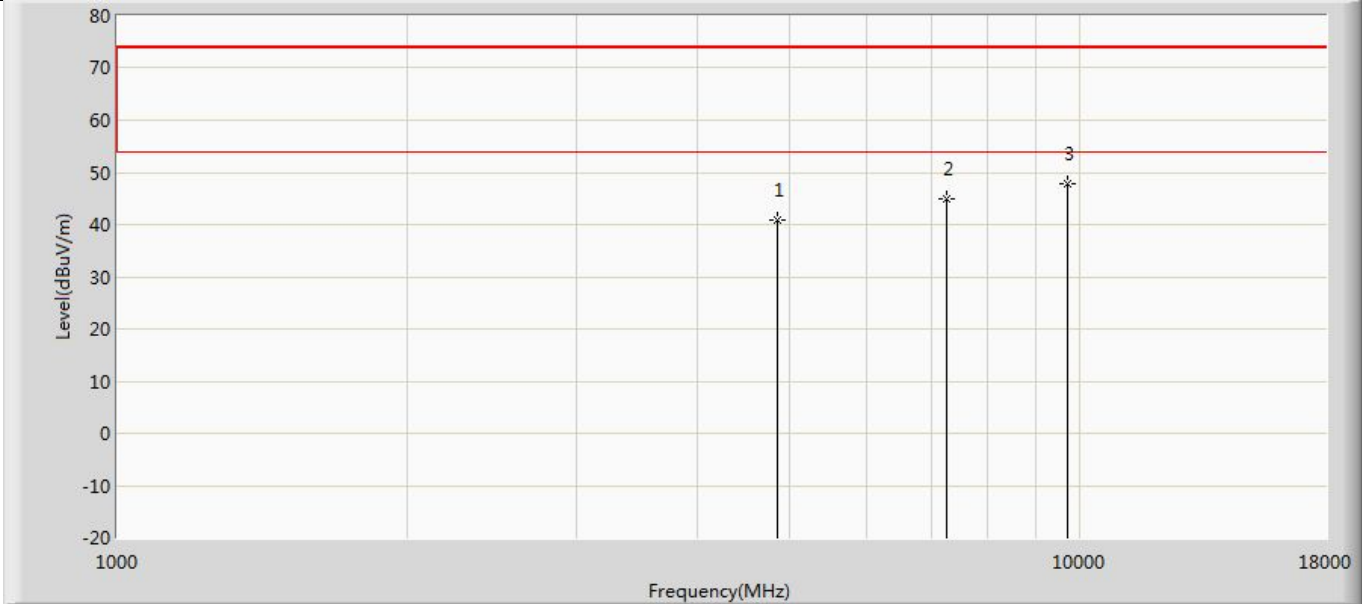

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4844.000        | 41.007                 | 52.445               | -32.993         | 74.000         | -11.438     | PK   |
| 2  |      | 7266.000        | 44.887                 | 51.969               | -29.113         | 74.000         | -7.083      | PK   |
| 3  | *    | 9688.000        | 47.826                 | 50.988               | -26.174         | 74.000         | -3.161      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 45             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2437MHz by 802.11n(40MHz) with Main+Aux |                          |

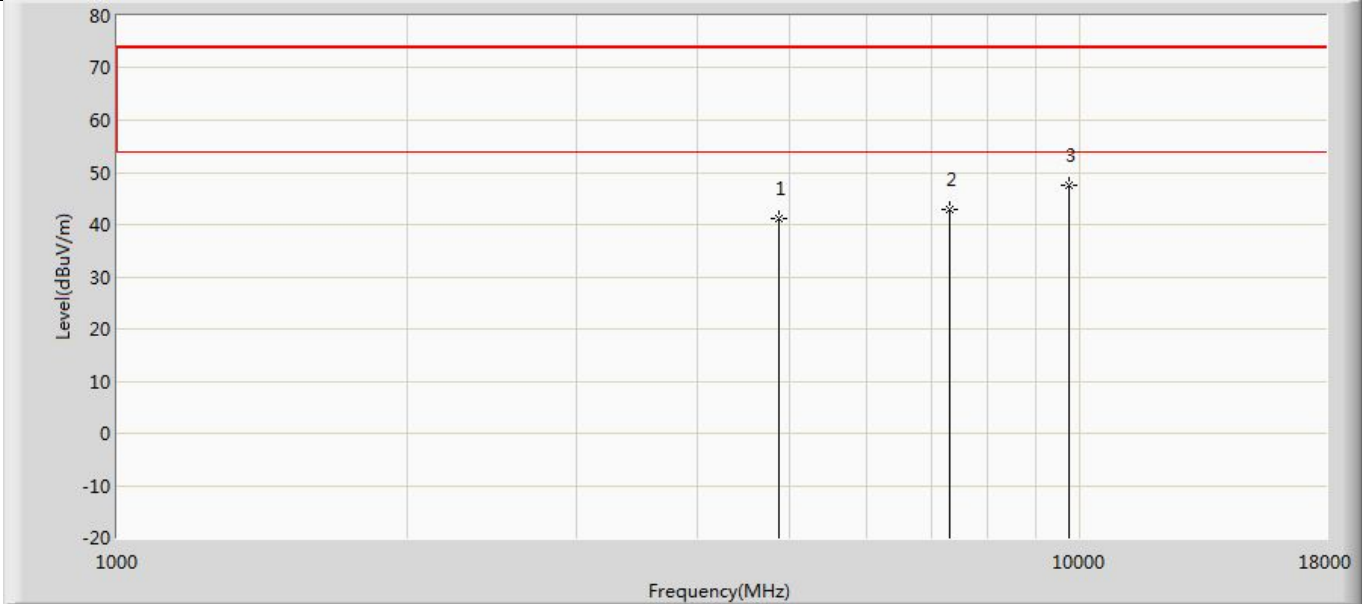

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 41.191                 | 51.838               | -32.809         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 42.905                 | 50.406               | -31.095         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.627                 | 50.511               | -26.373         | 74.000         | -2.883      | PK   |


|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 46             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2437MHz by 802.11n(40MHz) with Main+Aux |                          |

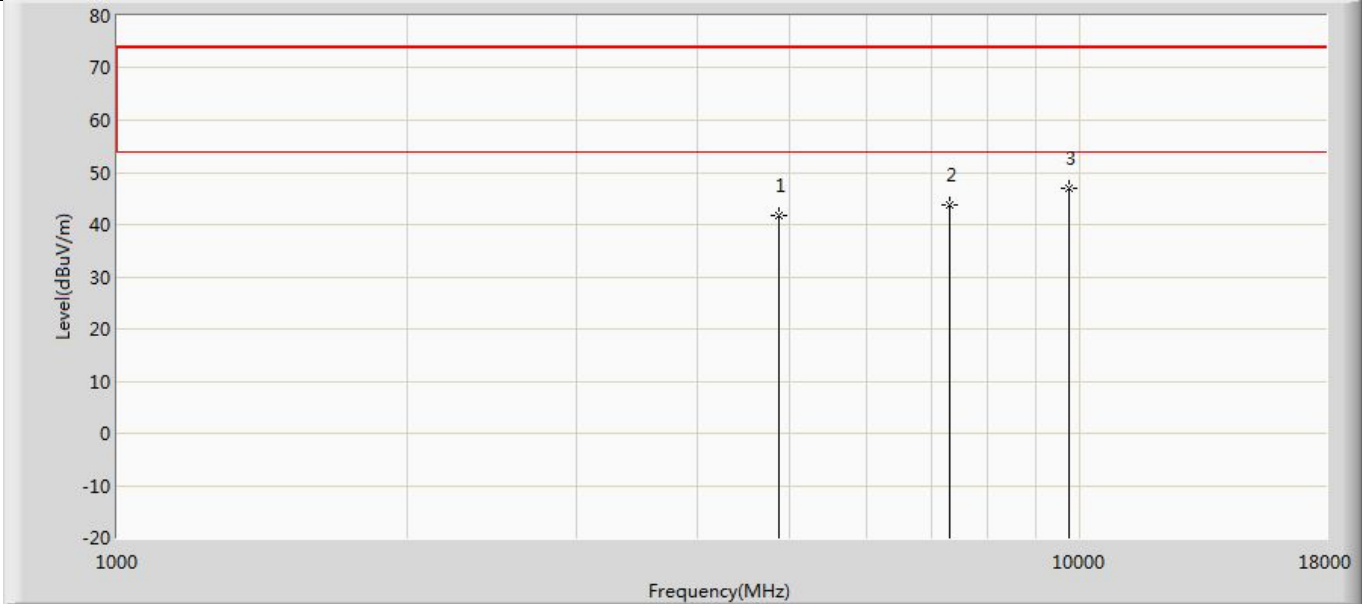

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4874.000        | 41.688                 | 52.335               | -32.312         | 74.000         | -10.647     | PK   |
| 2  |      | 7311.000        | 43.858                 | 51.359               | -30.142         | 74.000         | -7.501      | PK   |
| 3  | *    | 9748.000        | 47.098                 | 49.982               | -26.902         | 74.000         | -2.883      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 47             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

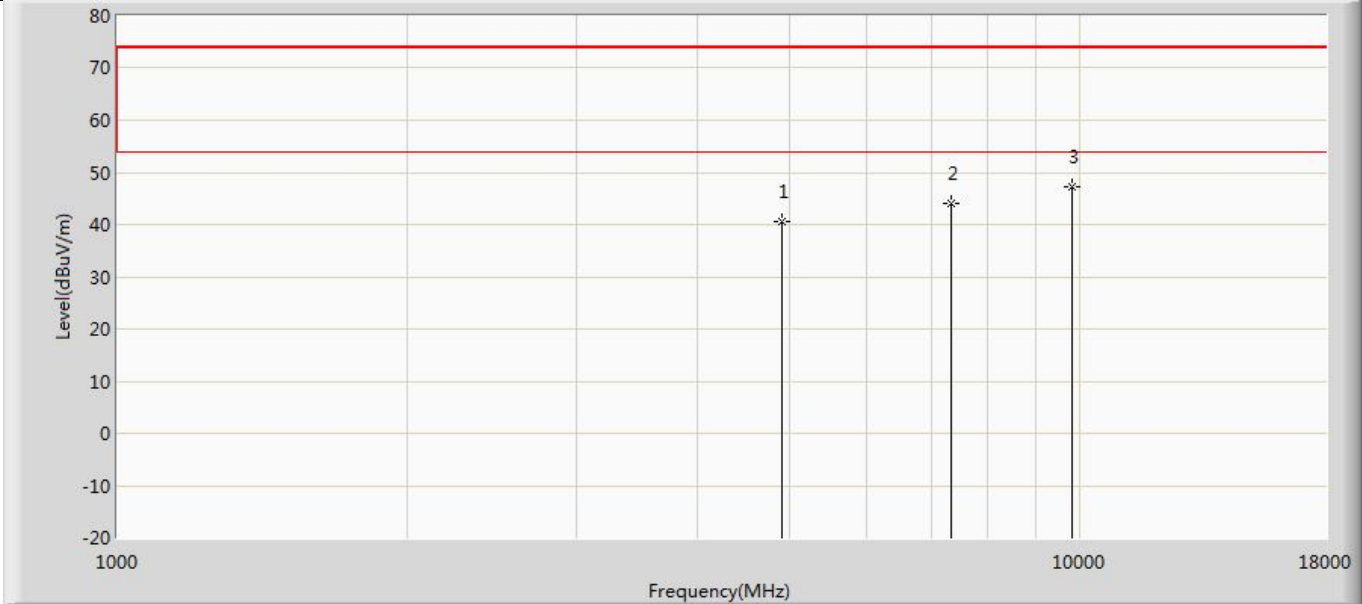

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4904.000        | 40.622                 | 52.371               | -33.378         | 74.000         | -11.749     | PK   |
| 2  |      | 7356.000        | 44.051                 | 50.944               | -29.949         | 74.000         | -6.893      | PK   |
| 3  | *    | 9808.000        | 47.362                 | 50.740               | -26.638         | 74.000         | -3.378      | PK   |




|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Profile: 24B0601R                                                  | Page No.: 48             |
| Engineer: Yu Liu                                                   |                          |
| Site: AC5                                                          | Time: 2024/11/30 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                       | Margin: 0                |
| Probe: Horn_3117_00167055_(1-18GHz)                                | Polarity: Vertical       |
| EUT: SKI.WB663U.2                                                  | Power: 3.3 Vdc           |
| Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) with Main+Aux |                          |

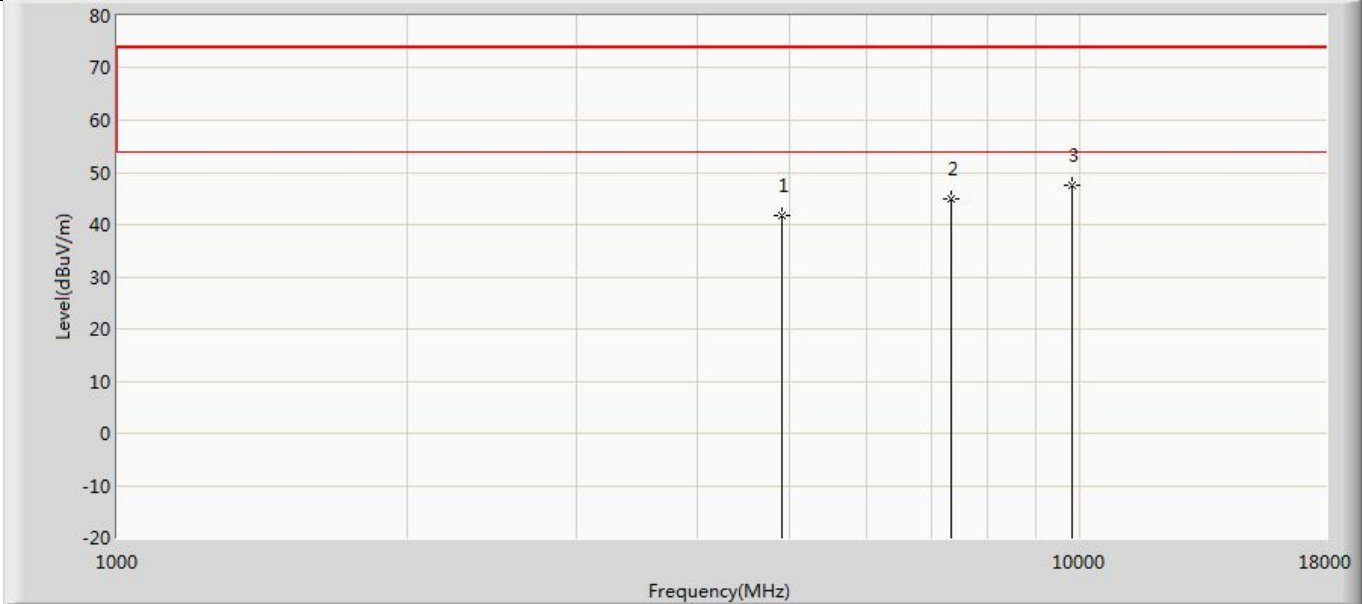

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 4904.000        | 41.664                 | 53.413               | -32.336         | 74.000         | -11.749     | PK   |
| 2  |      | 7356.000        | 44.884                 | 51.777               | -29.116         | 74.000         | -6.893      | PK   |
| 3  | *    | 9808.000        | 47.557                 | 50.935               | -26.443         | 74.000         | -3.378      | PK   |


The worst case of radiation emissions in restricted bands below 1GHz:

|                                              |                          |
|----------------------------------------------|--------------------------|
| Profile: 24B0601R                            | Page No.: 5              |
| Engineer: Yu Liu                             |                          |
| Site: AC2                                    | Time: 2024/11/25 - 21:19 |
| Limit: FCC_Part 15.109_RE (3m)_Class B       | Margin: 0                |
| Probe: CBL6112D_27613(30-1000MHz)            | Polarity: Vertical       |
| EUT: SKI.WB663U.2                            | Power: 3.3 Vdc           |
| Note: Mode 1: Transmit at 2412MHz by 802.11b |                          |

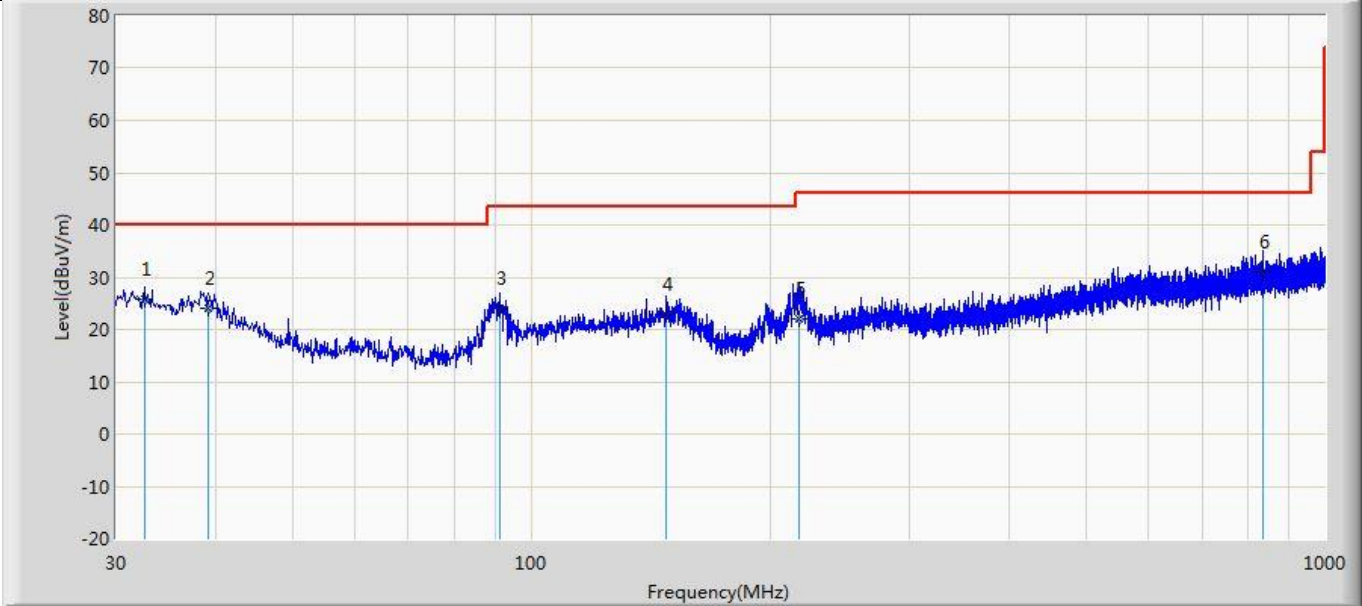

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 32.546          | 25.825                 | 2.112                | -14.175         | 40.000         | 23.713      | QP   |
| 2  |      | 39.215          | 24.032                 | 4.036                | -15.968         | 40.000         | 19.996      | QP   |
| 3  |      | 91.231          | 24.180                 | 8.011                | -19.320         | 43.500         | 16.169      | QP   |
| 4  |      | 148.219         | 23.017                 | 5.446                | -20.483         | 43.500         | 17.571      | QP   |
| 5  |      | 217.331         | 21.950                 | 5.463                | -24.050         | 46.000         | 16.486      | QP   |
| 6  |      | 834.857         | 31.035                 | 1.698                | -14.965         | 46.000         | 29.336      | QP   |

|                                              |                          |
|----------------------------------------------|--------------------------|
| Profile: 24B0601R                            | Page No.: 6              |
| Engineer: Yu Liu                             |                          |
| Site: AC2                                    | Time: 2024/11/25 - 21:20 |
| Limit: FCC_Part 15.109_RE (3m)_Class B       | Margin: 0                |
| Probe: CBL6112D_27613(30-1000MHz)            | Polarity: Horizontal     |
| EUT: SKI.WB663U.2                            | Power: 3.3 Vdc           |
| Note: Mode 1: Transmit at 2412MHz by 802.11b |                          |

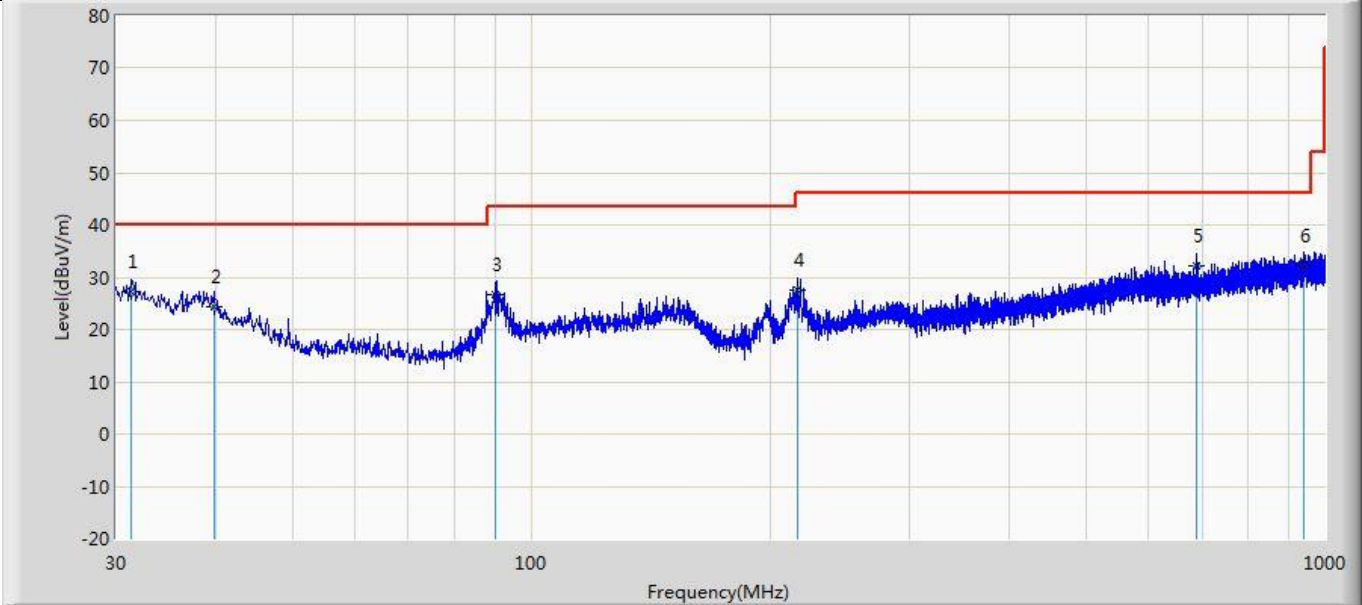

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 31.334          | 27.142                 | 2.891                | -12.858         | 40.000         | 24.251      | QP   |
| 2  |      | 39.821          | 24.354                 | 4.682                | -15.646         | 40.000         | 19.672      | QP   |
| 3  |      | 90.019          | 26.581                 | 10.687               | -16.919         | 43.500         | 15.893      | QP   |
| 4  |      | 216.482         | 27.541                 | 11.065               | -18.459         | 46.000         | 16.476      | QP   |
| 5  |      | 689.357         | 32.126                 | 4.441                | -13.874         | 46.000         | 27.685      | QP   |
| 6  |      | 939.375         | 32.145                 | 1.689                | -13.855         | 46.000         | 30.455      | QP   |

Note:

1. " \* ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)
3. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
4. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
5. If the test result on peak is lower than average limit, then average measurement needn't be performed.
6. We evaluated/tested both SISO and MIMO mode,shown in report is the worst data.

The End