



诺检标准
NTT STANDARD

TEST REPORT

FCC ID:2ASCB-DK032TL14

Product : 32-inch PCAP TCH KIOSK 14 OS
Model Name : DK032TL14, DK032TLB2, DK032TLW2
Brand : DISPLAYS2GO
Report No. : SZNTT26018481E1-3

Prepared for

D2G Group LLC

81 Commerce Drive, Fall River, Massachusetts 02720, United States

Prepared by

Shenzhen NTT Testing Technology Co., Ltd.

1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang
Industrial Park No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-
district, Bao'an District, Shenzhen City, China

TEL: 0755-27889935



1 TEST RESULT CERTIFICATION

Applicant : D2G Group LLC

Address : 81 Commerce Drive, Fall River, Massachusetts 02720, United States

Manufacturer : GUANGZHOU YOUGUANG OPTOELECTRONICS CO.,LTD.

Address : No.75, Pacific Ind.Zone, XintangTown, Zengcheng, Guangzhou, China,511340.

Product name : 32-inch PCAP TCH KIOSK 14 OS

Model name : DK032TL14

Additional model : DK032TLB2, DK032TLW2

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10-2020+Cor.1-2023
KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019

Date of test : Apri. 29, 2026 to May 15, 2026

Date of Issue : May 21, 2026

This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTT, this document may be altered or revised by NTT, personal only, and shall be noted in the revision of the document.

Prepared by(Test Engineer):

Zhao Di

Reviewer(Supervisor):

Ken Wu

Approved(Manager):

Abel Yu



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
3.4 TEST SETUP CONFIGURATION	9
3.5 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	15
5.7 CONDUCTED EMISSION TEST RESULT	15
6 RADIATED SPURIOUS EMISSIONS	18
6.1 EUT OPERATION	18
6.2 TEST SETUP	19
6.3 SPECTRUM ANALYZER SETUP	21
6.4 TEST PROCEDURE	22
6.5 SUMMARY OF TEST RESULTS	23
7 DUTY CYCLE	34
7.1 LIMIT	34
7.2 TEST SETUP	34



7.3 TEST PROCEDURE	34
7.4 TEST RESULT	34
8 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	35
8.1 TEST SETUP	35
8.2 TEST PROCEDURE	35
8.3 TEST RESULT	35
9 6DB&99% BANDWIDTH MEASUREMENT	36
9.1 TEST SETUP	36
9.2 TEST PROCEDURE	36
9.3 TEST RESULT	36
10 MAXIMUM AVG CONDUCTED OUTPUT POWER	37
10.1 TEST SETUP	37
10.2 TEST PROCEDURE	37
10.3 TEST RESULT	38
11 POWER SPECTRAL DENSITY	39
11.1 TEST SETUP	39
11.2 TEST PROCEDURE	39
11.3 TEST RESULT	39
12 ANTENNA APPLICATION	40
12.1 ANTENNA REQUIREMENT	40
12.2 RESULT	40
13 TEST SETUP AND EUT PHOTOS	41



2 Test Summary

Test Items	Test Requirement	Result
AC Power Line conducted emission	FCC part 15.207	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Duty cycle	ANSI C63.10 Section 11.6	PASS
Conducted Spurious Emission	FCC part 15.205/15.209	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Conducted Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (b)	PASS

Remark:

"N/A" denotes test is not applicable in this Test Report.



3 General Information

3.1 General Description of E.U.T.

Product Name	:	32-inch PCAP TCH KIOSK 14 OS
Model Name	:	DK032TL14
Sample ID	:	SZNTT26018481E1-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	DK032TLB2, DK032TLW2
Model Different.:	:	All the models are the same circuit and RF module, except the model name and color. DK032TL14: (The color is white and black) DK032TLB2: (The color is black) DK032TLW2: (The color is white)
Specification	:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40) 802.11ax (HE20)/802.11ax (HE40)
Operation Frequency	:	2412-2462MHz for 802.11b/g/n20/ax20; 2422-2452MHz for 802.11n40/ax40;
Number of Channel	:	11 channels for 802.11b/g/n20/ax20; 7 channels for 802.11n40/ax40;
Type of Modulation	:	802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ax:(1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA
Antenna installation	:	External antenna
Antenna Gain	:	2.38 dBi
Test Power supply	:	AC 100-240V 50/60Hz
Note	:	During 802.11ax mode testing, the device was configured to operate with full channel bandwidth Resource Unit (RU) allocation
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20); 802.11ax (HE20): MCS0; 802.11n (HT40); 802.11ax (HE40): MCS0; were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n/ax (HT20/HT40/HE20/HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n/ax (HT20/HT40/HE20/HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452



3.3 Test Site


Site Description

EMC Lab.	:	Designation Number: CN3446
		Test Firm Registration Number: 129414
		Accredited by ANAB, Dec. 19, 2025
		The Certificate Registration Number is AT-3446
Name of Firm	:	Shenzhen NTT Testing Technology Co., Ltd.
Site Location	:	1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao'an District, Shenzhen City, China



3.4 Test Setup Configuration

Conducted Emission




Radiated Emission (30MHz-1GHz)



Radiated Emission(above 1GHz)



RF Conducted Test



3.5 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	The EUT enters engineering mode
Power level setup	Default



4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/4/30	2028/4/29
EMI Test Receiver	ESCI	/	RS	2025/9/8	2026/9/7
LISN	NNLK 8129	00603	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00694	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00680	Schwarzbeck	2025/9/8	2026/9/7
Cable	RG223-1500MM	NA	RG	2025/9/8	2026/9/7

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/7/24	2028/7/23
EMI Test Receiver	ESCI	101018	RS	2025/9/8	2026/9/7
Amplifier (30MHz-1GHz)	BBV 9718D	00042	SCHWARZBECK	2025/9/8	2026/9/7
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2025/9/9	2026/9/8
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/9/9	2026/9/8
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/9/8	2026/9/7
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/9/8	2026/9/7
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/9/8	2026/9/7



Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/9/8	2026/9/7
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/9/8	2026/9/7
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHWARZBECK	2025/9/8	2026/9/7
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/9/8	2026/9/7
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/9/8	2026/9/7
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/9/8	2026/9/7
Power Sensor	TR1029-2	512364	Techoy	2025/9/8	2026/9/7
RF Swith	TR1029-1	512364	Techoy	2025/9/8	2026/9/7
Cable	DA800- 4000MM	NA	DA	2025/9/8	2026/9/7
Cable	DA800- 11000MM	NA	DA	2025/9/8	2026/9/7
Oven	GX-3020- M150	NA	GAOXIN	2026/03/10	2027/03/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark:When making a conformity declaration based on test results for regulations/standards or specifications,the default is to use Clause 4.2.1of ILAC-G8:09/2019 and the guidelines on decision rules and conformity declaration in IEC Guide 115:2023.	

4.3 Description of Support Units

The EUT has been tested as an independent unit



5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10-2020+Cor.1-2023
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature	: 26 °C
Humidity	: 54 % RH
Atmospheric Pressure	: 101.11kPa

5.2 EUT Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020+Cor.1-2023.

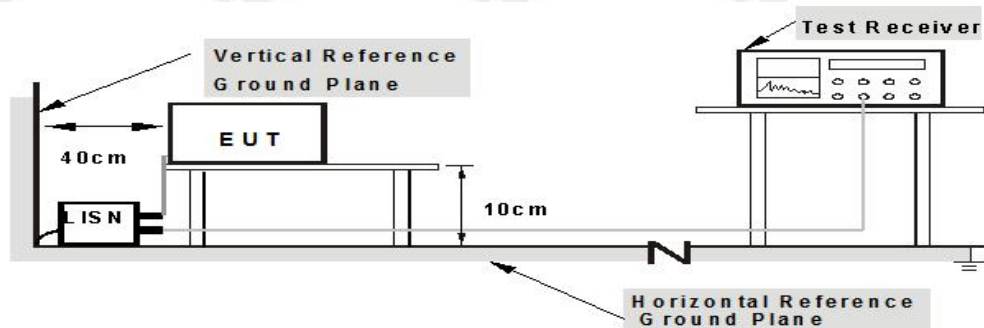

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 10 cm from EUT and at least 10 from other units and other metal planes



5.3 Test SET-UP (Block Diagram of Configuration)

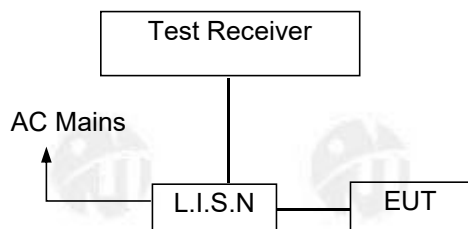

5.4 Measurement Procedure

1. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

0.15-0.5

0.5-5.0

5.0-30.0

Quasi-peak

66-56

56

60

Average

56-46

46

50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (802.11b, Lowest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

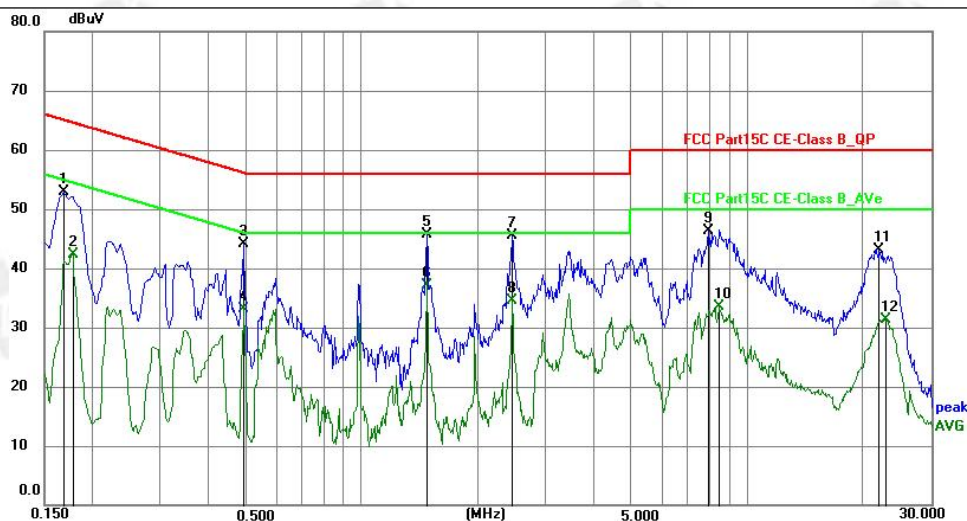

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1680	42.70	10.18	52.88	65.06	-12.18	QP
2	0.1770	32.17	10.17	42.34	54.63	-12.29	AVG
3	0.4920	33.91	10.13	44.04	56.13	-12.09	QP
4	0.4920	22.99	10.13	33.12	46.13	-13.01	AVG
5	1.4730	35.54	10.14	45.68	56.00	-10.32	QP
6 *	1.4730	27.00	10.14	37.14	46.00	-8.86	AVG
7	2.4584	35.41	10.16	45.57	56.00	-10.43	QP
8	2.4584	24.39	10.16	34.55	46.00	-11.45	AVG
9	7.9350	35.98	10.31	46.29	60.00	-13.71	QP
10	8.4525	23.12	10.31	33.43	50.00	-16.57	AVG
11	22.0470	32.48	10.69	43.17	60.00	-16.83	QP
12	22.9560	20.66	10.74	31.40	50.00	-18.60	AVG

Notes: 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4. Measurement Level = Reading level + Correct Factor. Margin= Measurement Level - Limit



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	44.02	10.17	54.19	64.63	-10.44	QP
2	0.1770	33.32	10.17	43.49	54.63	-11.14	AVG
3	0.4920	34.62	10.12	44.74	56.13	-11.39	QP
4 *	0.4920	26.45	10.12	36.57	46.13	-9.56	AVG
5	1.4730	31.20	10.13	41.33	56.00	-14.67	QP
6	1.4730	24.74	10.13	34.87	46.00	-11.13	AVG
7	2.4584	34.55	10.16	44.71	56.00	-11.29	QP
8	2.4584	24.42	10.16	34.58	46.00	-11.42	AVG
9	4.8254	22.04	10.24	32.28	46.00	-13.72	AVG
10	5.3700	36.35	10.25	46.60	60.00	-13.40	QP
11	7.4130	38.95	10.28	49.23	60.00	-10.77	QP
12	7.5120	26.72	10.28	37.00	50.00	-13.00	AVG

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
3. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4.Mesurement Level = Reading level + Correct Factor. Margin= Mesurement Level - Limit



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10-2020+Cor.1-2023
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation

Operating Environment :


Temperature: : 26°C
Humidity: : 54 % RH
Atmospheric Pressure: : 101.11kPa
Test Voltage : AC 120V/60Hz




6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz

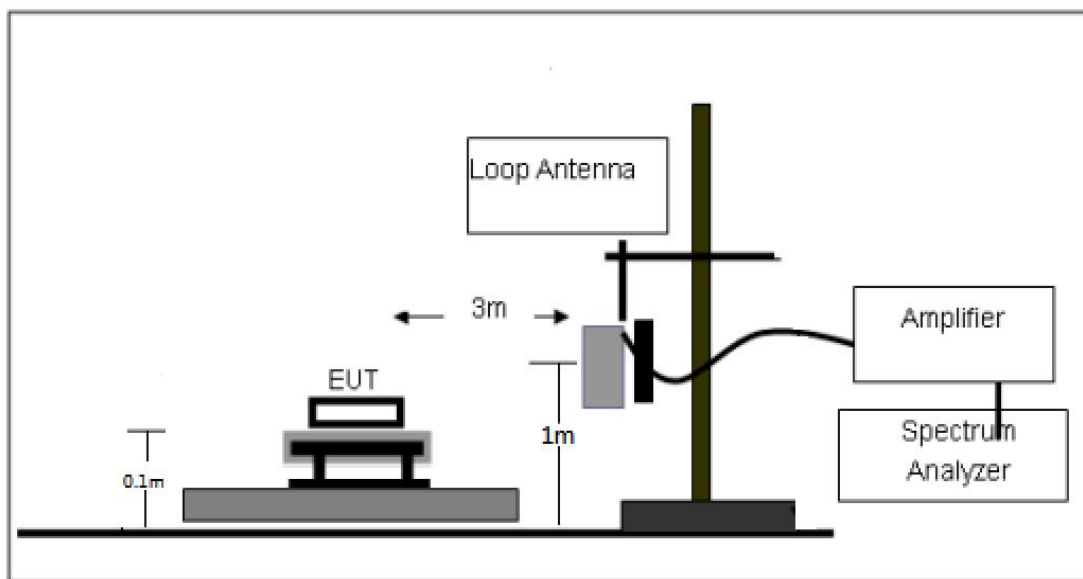


The test setup for emission measurement from 30 MHz to 1 GHz.

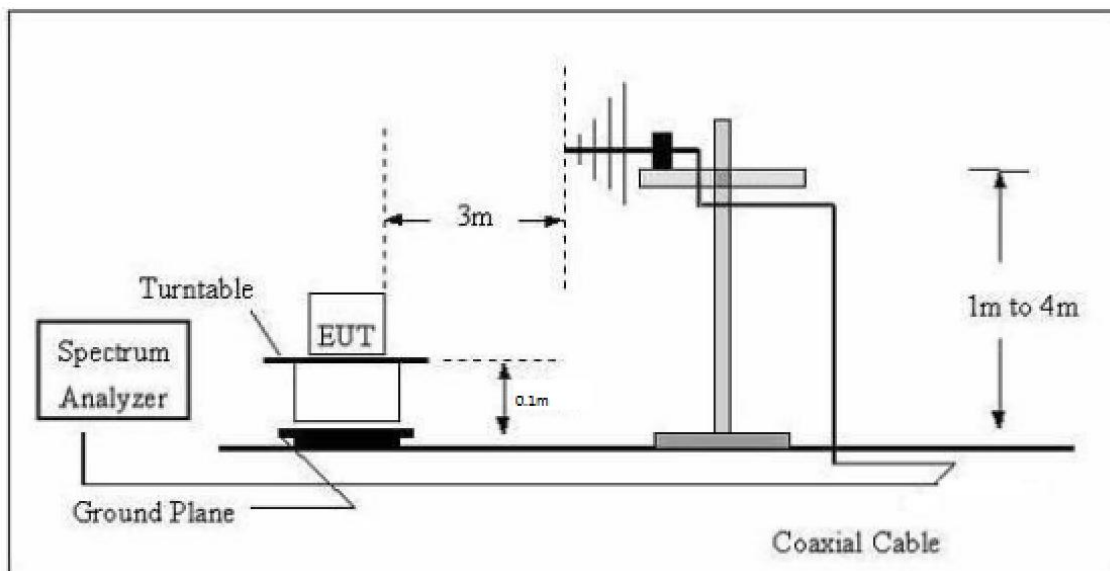



The test setup for emission measurement above 1 GHz

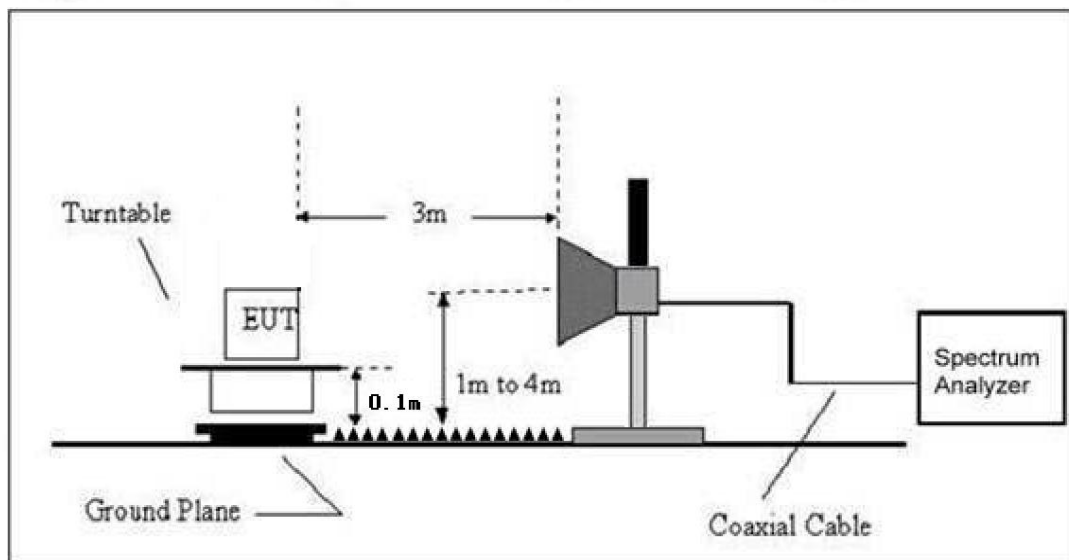



6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.1m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 0.1m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:




Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

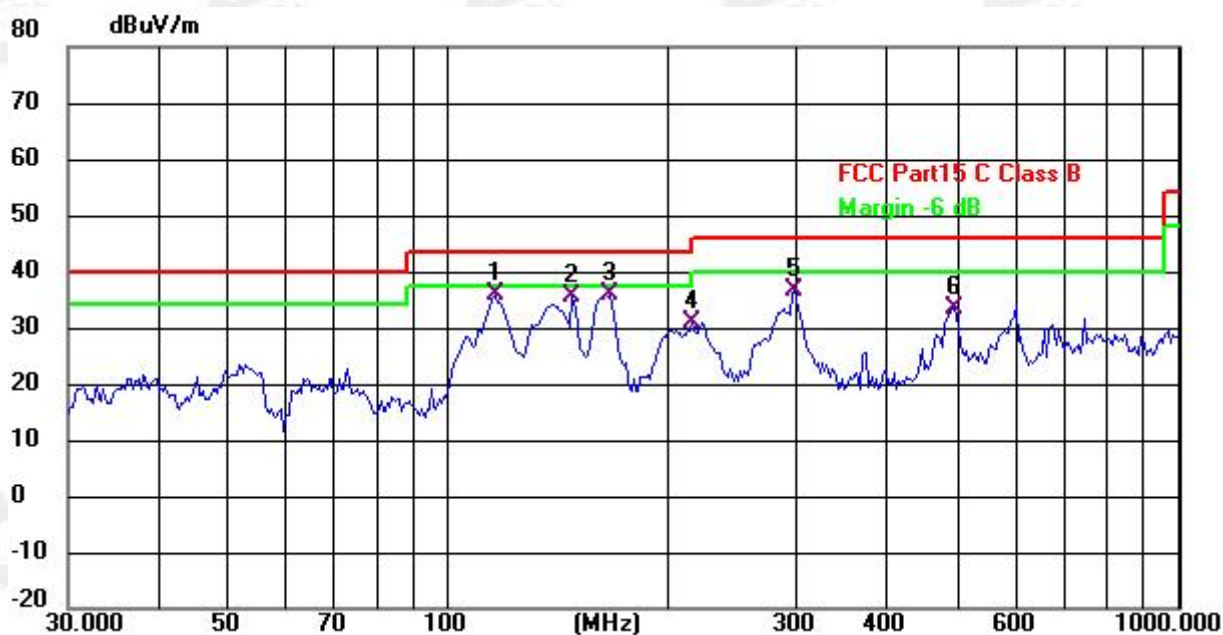

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	116.1320	50.10	-14.28	35.82	43.50	-7.68	QP
2	147.4036	48.08	-12.58	35.50	43.50	-8.00	QP
3 *	166.0680	48.63	-12.76	35.87	43.50	-7.63	QP
4	215.2676	46.05	-15.17	30.88	43.50	-12.62	QP
5	297.2240	48.90	-12.37	36.53	46.00	-9.47	QP
6	492.4685	41.05	-7.81	33.24	46.00	-12.76	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

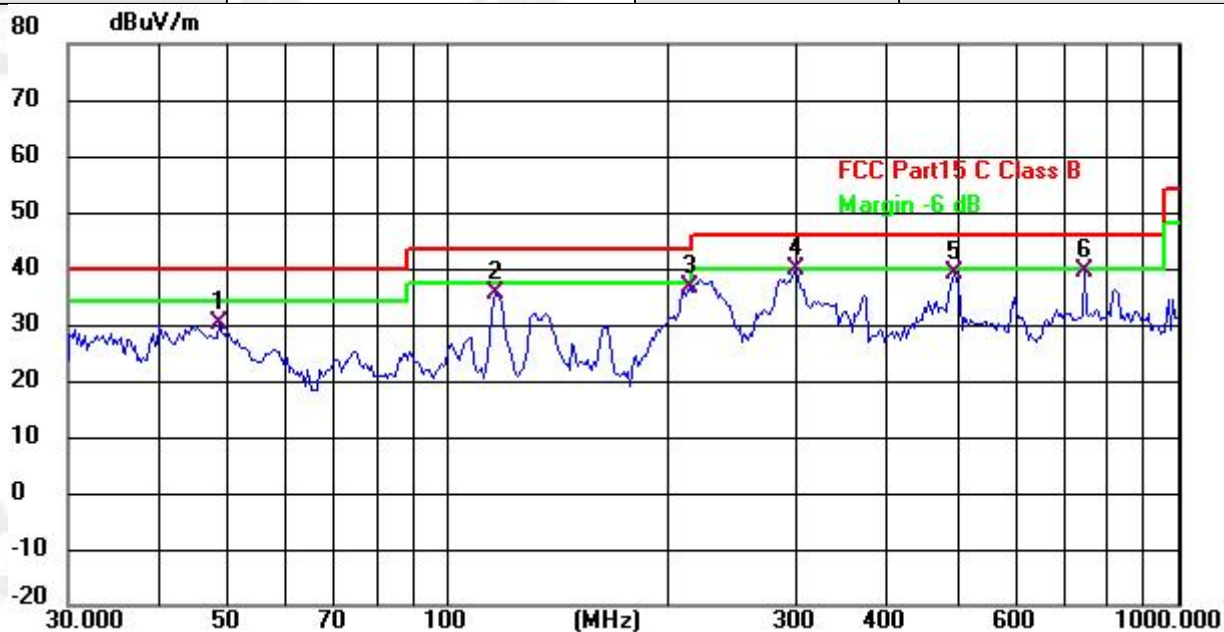

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.3316	43.67	-13.49	30.18	40.00	-9.82	QP
2	116.1320	49.69	-14.28	35.41	43.50	-8.09	QP
3	213.7632	51.81	-15.21	36.60	43.50	-6.90	QP
4 *	299.3158	52.08	-12.28	39.80	46.00	-6.20	QP
5	492.4685	46.85	-7.81	39.04	46.00	-6.96	QP
6	744.8660	41.69	-2.33	39.36	46.00	-6.64	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor- Pre-amplifier.

Margin= Emission Level - Limit



Test Frequency: From 1GHz to 25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824	43.13	34.11	5.04	32.44	46.50	74.00	-27.50	PK
V	4824	38.19	34.11	5.04	32.44	41.56	54.00	-12.44	AV
V	7236	45.28	32.57	6.30	35.89	54.90	74.00	-19.10	PK
V	7236	29.06	32.57	6.30	35.89	38.68	54.00	-15.32	AV
V	9648	37.69	32.96	7.56	38.40	50.69	74.00	-23.31	PK
V	9648	24.93	32.96	7.56	38.40	37.93	54.00	-16.07	AV
V	12060	34.02	32.06	8.92	39.01	49.89	74.00	-24.11	PK
V	12060	25.37	32.06	8.92	39.01	41.24	54.00	-12.76	AV
H	4824	46.6	34.11	5.04	32.44	49.97	74.00	-24.03	PK
H	4824	36.44	34.11	5.04	32.44	39.81	54.00	-14.19	AV
H	7236	39.12	32.57	6.30	35.89	48.74	74.00	-25.26	PK
H	7236	27.24	32.57	6.30	35.89	36.86	54.00	-17.14	AV
H	9648	37.78	32.96	7.56	38.40	50.78	74.00	-23.22	PK
H	9648	24.98	32.96	7.56	38.40	37.98	54.00	-16.02	AV
H	12060	35.37	32.06	8.92	39.01	51.24	74.00	-22.76	PK
H	12060	24.61	32.06	8.92	39.01	40.48	54.00	-13.52	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874	46.95	34.08	5.08	32.57	50.52	74.00	-23.48	PK
V	4874	39.24	34.08	5.08	32.57	42.81	54.00	-11.19	AV
V	7311	43.10	32.62	6.34	35.95	52.77	74.00	-21.23	PK
V	7311	31.77	32.62	6.34	35.95	41.44	54.00	-12.56	AV
V	9748	41.86	32.93	7.58	38.40	54.91	74.00	-19.09	PK
V	9748	33.97	32.93	7.58	38.40	47.02	54.00	-6.98	AV
V	12185	44.72	31.97	8.89	39.04	60.68	74.00	-13.32	PK
V	12185	28.25	31.97	8.89	39.04	44.21	54.00	-9.79	AV
H	4874	43.99	34.08	5.08	32.57	47.56	74.00	-26.44	PK
H	4874	34.12	34.08	5.08	32.57	37.69	54.00	-16.31	AV
H	7311	39.67	32.62	6.34	35.95	49.34	74.00	-24.66	PK
H	7311	30.37	32.62	6.34	35.95	40.04	54.00	-13.96	AV
H	9748	42.36	32.93	7.58	38.40	55.41	74.00	-18.59	PK
H	9748	29.33	32.93	7.58	38.40	42.38	54.00	-11.62	AV
H	12185	34.39	31.97	8.89	39.04	50.35	74.00	-23.65	PK
H	12185	27.68	31.97	8.89	39.04	43.64	54.00	-10.36	AV



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	48.70	34.05	5.14	32.79	52.58	74.00	-21.42	PK
V	4924	32.74	34.05	5.14	32.79	36.62	54.00	-17.38	AV
V	7386	38.62	32.67	6.36	35.99	48.30	74.00	-25.70	PK
V	7386	30.19	32.67	6.36	35.99	39.87	54.00	-14.13	AV
V	9848	39.17	32.89	7.59	38.37	52.24	74.00	-21.76	PK
V	9848	27.32	32.89	7.59	38.37	40.39	54.00	-13.61	AV
V	12310	34.20	31.88	8.82	39.06	50.20	74.00	-23.80	PK
V	12310	22.78	31.88	8.82	39.06	38.78	54.00	-15.22	AV
H	4924	44.09	34.05	5.14	32.79	47.97	74.00	-26.03	PK
H	4924	35.34	34.05	5.14	32.79	39.22	54.00	-14.78	AV
H	7386	44.16	32.67	6.36	35.99	53.84	74.00	-20.16	PK
H	7386	28.70	32.67	6.36	35.99	38.38	54.00	-15.62	AV
H	9848	37.65	32.89	7.59	38.37	50.72	74.00	-23.28	PK
H	9848	25.44	32.89	7.59	38.37	38.51	54.00	-15.49	AV
H	12310	36.29	31.88	8.82	39.06	52.29	74.00	-21.71	PK
H	12310	24.59	31.88	8.82	39.06	40.59	54.00	-13.41	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. We test all the mode and recorded the worst mode (802.11b) in the report.
The 1-25GHz range has been tested, and the report only records the worst performance of the 1-18G range.



Radiated Band Emission Measurement:

	Polar (H/V)	Frequenc y (MHz)	Meter Readin g (dBuV)	Pre- amplifie r (dB)	Cabl e Loss (dB)	Antenn a Factor (dB/m)	Emissio n level (dBuV/m)	Limit (dBuV/ m)	Margin(dB)	Detecto r Type	Result
802.11 b	Low Channel 2412MHz										
	H	2390.00	58.41	35.17	3.48	27.49	54.21	74.00	-19.79	PK	PASS
	H	2390.00	50.13	35.17	3.48	27.49	45.93	54.00	-8.07	AV	PASS
	H	2400.00	59.74	35.16	3.49	27.52	55.59	74.00	-18.41	PK	PASS
	H	2400.00	49.57	35.16	3.49	27.52	45.42	54.00	-8.58	AV	PASS
	V	2390.00	57.72	35.17	3.48	27.49	53.52	74.00	-20.48	PK	PASS
	V	2390.00	49.33	35.17	3.48	27.49	45.13	54.00	-8.87	AV	PASS
	V	2400.00	59.70	35.16	3.49	27.52	55.55	74.00	-18.45	PK	PASS
	V	2400.00	50.35	35.16	3.49	27.52	46.20	54.00	-7.8	AV	PASS
	High Channel 2462MHz										
	H	2483.50	57.76	35.11	3.56	27.75	53.96	74.00	-20.04	PK	PASS
	H	2483.50	48.32	35.11	3.56	27.75	44.52	54.00	-9.48	AV	PASS
	H	2500.00	58.72	35.10	3.57	27.80	54.99	74.00	-19.01	PK	PASS
	H	2500.00	49.30	35.10	3.57	27.80	45.57	54.00	-8.43	AV	PASS
	V	2483.50	58.92	35.11	3.56	27.75	55.12	74.00	-18.88	PK	PASS
	V	2483.50	50.27	35.11	3.56	27.75	46.47	54.00	-7.53	AV	PASS
	V	2500.00	58.60	35.10	3.57	27.80	54.87	74.00	-19.13	PK	PASS
	V	2500.00	49.57	35.10	3.57	27.80	45.84	54.00	-8.16	AV	PASS
802.11 g	Low Channel 2412MHz										
	H	2390.00	58.39	35.17	3.48	27.49	54.19	74.00	-19.81	PK	PASS
	H	2390.00	49.49	35.17	3.48	27.49	45.29	54.00	-8.71	AV	PASS
	H	2400.00	59.57	35.16	3.49	27.52	55.42	74.00	-18.58	PK	PASS



802.11 n20	H	2400.00	50.24	35.16	3.49	27.52	46.09	54.00	-7.91	AV	PASS
	V	2390.00	57.87	35.17	3.48	27.49	53.67	74.00	-20.33	PK	PASS
	V	2390.00	49.51	35.17	3.48	27.49	45.31	54.00	-8.69	AV	PASS
	V	2400.00	59.41	35.16	3.49	27.52	55.26	74.00	-18.74	PK	PASS
	V	2400.00	49.74	35.16	3.49	27.52	45.59	54.00	-8.41	AV	PASS
	High Channel 2462MHz										
	H	2483.50	57.73	35.11	3.56	27.75	53.93	74.00	-20.07	PK	PASS
	H	2483.50	48.73	35.11	3.56	27.75	44.93	54.00	-9.07	AV	PASS
	H	2500.00	59.11	35.10	3.57	27.80	55.38	74.00	-18.62	PK	PASS
	H	2500.00	49.50	35.10	3.57	27.80	45.77	54.00	-8.23	AV	PASS
	V	2483.50	58.91	35.11	3.56	27.75	55.11	74.00	-18.89	PK	PASS
	V	2483.50	49.78	35.11	3.56	27.75	45.98	54.00	-8.02	AV	PASS
	V	2500.00	58.39	35.10	3.57	27.80	54.66	74.00	-19.34	PK	PASS
	V	2500.00	49.37	35.10	3.57	27.80	45.64	54.00	-8.36	AV	PASS
	Low Channel 2412MHz										
	H	2390.00	57.67	35.17	3.48	27.49	53.47	74.00	-20.53	PK	PASS
	H	2390.00	50.32	35.17	3.48	27.49	46.12	54.00	-7.88	AV	PASS
	H	2400.00	60.24	35.16	3.49	27.52	56.09	74.00	-17.91	PK	PASS
	H	2400.00	49.55	35.16	3.49	27.52	45.40	54.00	-8.6	AV	PASS
	V	2390.00	58.25	35.17	3.48	27.49	54.05	74.00	-19.95	PK	PASS
	V	2390.00	49.68	35.17	3.48	27.49	45.48	54.00	-8.52	AV	PASS
	V	2400.00	59.89	35.16	3.49	27.52	55.74	74.00	-18.26	PK	PASS
	V	2400.00	50.15	35.16	3.49	27.52	46.00	54.00	-8	AV	PASS
	High Channel 2462MHz										
	H	2483.50	57.70	35.11	3.56	27.75	53.90	74.00	-20.1	PK	PASS
	H	2483.50	49.12	35.11	3.56	27.75	45.32	54.00	-8.68	AV	PASS



	H	2500.00	59.18	35.10	3.57	27.80	55.45	74.00	-18.55	PK	PASS
	H	2500.00	49.47	35.10	3.57	27.80	45.74	54.00	-8.26	AV	PASS
	V	2483.50	58.78	35.11	3.56	27.75	54.98	74.00	-19.02	PK	PASS
	V	2483.50	49.82	35.11	3.56	27.75	46.02	54.00	-7.98	AV	PASS
	V	2500.00	58.71	35.10	3.57	27.80	54.98	74.00	-19.02	PK	PASS
	V	2500.00	49.23	35.10	3.57	27.80	45.50	54.00	-8.5	AV	PASS
802.11 ax20	Low Channel 2412MHz										
	H	2390.00	58.22	35.17	3.48	27.49	54.02	74.00	-19.98	PK	PASS
	H	2390.00	49.64	35.17	3.48	27.49	45.44	54.00	-8.56	AV	PASS
	H	2400.00	59.79	35.16	3.49	27.52	55.64	74.00	-18.36	PK	PASS
	H	2400.00	49.80	35.16	3.49	27.52	45.65	54.00	-8.35	AV	PASS
	V	2390.00	57.53	35.17	3.48	27.49	53.33	74.00	-20.67	PK	PASS
	V	2390.00	49.62	35.17	3.48	27.49	45.42	54.00	-8.58	AV	PASS
	V	2400.00	59.99	35.16	3.49	27.52	55.84	74.00	-18.16	PK	PASS
	V	2400.00	49.39	35.16	3.49	27.52	45.24	54.00	-8.76	AV	PASS
	High Channel 2462MHz										
	H	2483.50	57.87	35.11	3.56	27.75	54.07	74.00	-19.93	PK	PASS
	H	2483.50	48.47	35.11	3.56	27.75	44.67	54.00	-9.33	AV	PASS
	H	2500.00	58.70	35.10	3.57	27.80	54.97	74.00	-19.03	PK	PASS
	H	2500.00	49.87	35.10	3.57	27.80	46.14	54.00	-7.86	AV	PASS
	V	2483.50	58.25	35.11	3.56	27.75	54.45	74.00	-19.55	PK	PASS
	V	2483.50	50.27	35.11	3.56	27.75	46.47	54.00	-7.53	AV	PASS
	V	2500.00	58.97	35.10	3.57	27.80	55.24	74.00	-18.76	PK	PASS
	V	2500.00	50.07	35.10	3.57	27.80	46.34	54.00	-7.66	AV	PASS
802.11 n40	Low Channel 2422MHz										
	H	2390.00	57.92	35.17	3.48	27.49	53.72	74.00	-20.28	PK	PASS



	H	2390.00	49.46	35.17	3.48	27.49	45.26	54.00	-8.74	AV	PASS
	H	2400.00	59.54	35.16	3.49	27.52	55.39	74.00	-18.61	PK	PASS
	H	2400.00	49.67	35.16	3.49	27.52	45.52	54.00	-8.48	AV	PASS
	V	2390.00	57.47	35.17	3.48	27.49	53.27	74.00	-20.73	PK	PASS
	V	2390.00	49.49	35.17	3.48	27.49	45.29	54.00	-8.71	AV	PASS
	V	2400.00	59.81	35.16	3.49	27.52	55.66	74.00	-18.34	PK	PASS
	V	2400.00	49.59	35.16	3.49	27.52	45.44	54.00	-8.56	AV	PASS
	High Channel 2452MHz										
	H	2483.50	57.52	35.11	3.56	27.75	53.72	74.00	-20.28	PK	PASS
	H	2483.50	49.07	35.11	3.56	27.75	45.27	54.00	-8.73	AV	PASS
	H	2500.00	59.19	35.10	3.57	27.80	55.46	74.00	-18.54	PK	PASS
	H	2500.00	49.65	35.10	3.57	27.80	45.92	54.00	-8.08	AV	PASS
	V	2483.50	58.20	35.11	3.56	27.75	54.40	74.00	-19.6	PK	PASS
	V	2483.50	49.89	35.11	3.56	27.75	46.09	54.00	-7.91	AV	PASS
	V	2500.00	58.67	35.10	3.57	27.80	54.94	74.00	-19.06	PK	PASS
	V	2500.00	49.13	35.10	3.57	27.80	45.40	54.00	-8.6	AV	PASS
802.11 ax40	Low Channel 2422MHz										
	H	2390.00	57.94	35.17	3.48	27.49	53.74	74.00	-20.26	PK	PASS
	H	2390.00	50.20	35.17	3.48	27.49	46.00	54.00	-8	AV	PASS
	H	2400.00	59.69	35.16	3.49	27.52	55.54	74.00	-18.46	PK	PASS
	H	2400.00	49.86	35.16	3.49	27.52	45.71	54.00	-8.29	AV	PASS
	V	2390.00	57.62	35.17	3.48	27.49	53.42	74.00	-20.58	PK	PASS
	V	2390.00	49.97	35.17	3.48	27.49	45.77	54.00	-8.23	AV	PASS
	V	2400.00	60.00	35.16	3.49	27.52	55.85	74.00	-18.15	PK	PASS
	V	2400.00	49.52	35.16	3.49	27.52	45.37	54.00	-8.63	AV	PASS
	High Channel 2452MHz										



H	2483.50	57.34	35.11	3.56	27.75	53.54	74.00	-20.46	PK	PASS
H	2483.50	48.27	35.11	3.56	27.75	44.47	54.00	-9.53	AV	PASS
H	2500.00	59.38	35.10	3.57	27.80	55.65	74.00	-18.35	PK	PASS
H	2500.00	49.55	35.10	3.57	27.80	45.82	54.00	-8.18	AV	PASS
V	2483.50	58.83	35.11	3.56	27.75	55.03	74.00	-18.97	PK	PASS
V	2483.50	50.25	35.11	3.56	27.75	46.45	54.00	-7.55	AV	PASS
V	2500.00	59.09	35.10	3.57	27.80	55.36	74.00	-18.64	PK	PASS
V	2500.00	49.24	35.10	3.57	27.80	45.51	54.00	-8.49	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




7 Duty cycle

7.1 Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor.1-2023
Test Result: PASS

7.2 Test Setup



7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set the center frequency of the instrument to the center frequency of the transmission.
 - b) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - c) Set $VBW \geq RBW$. Detector = peak or average.
 - d) Sweep time = auto couple.
 - e) Trace mode = max hold.
 - f) Allow trace to fully stabilize.

7.4 Test Result


Please see the attachment for the data.



8 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10-2020+Cor.1-2023
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Setup



8.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector fuNCTion = peak, Trace = max hold

8.3 Test Result

Please see the attachment for the data.




9 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10-2020+Cor.1-2023

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Setup



9.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz, VBW $\geq$ 3RBW

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = shall be in the range of 1% to 5% of the OBW, VBW $\geq$ 3RBW

9.3 Test Result


Please see the attachment for the data.



10 Maximum AVG Conducted Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020+Cor.1-2023
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Setup



10.2 Test Procedure

ANSI C63.10-2020+Cor.1-2023 section 11.9.2.2.5

Method AVGSA-2A uses rms detection with slow sweep with spectrum bin averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to >1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, but do not exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq [10 \times (\text{number of points in sweep}) \times (\text{total ON/OFF period of the transmitted signal})]$.
- Set detector = Power averaging (rms).
- Perform a single sweep.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's



band-power measurement function with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW.

j) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

10.3 Test Result


Please see the attachment for the data.



11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020+Cor.1-2023
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Setup



11.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set instrument center frequency to DTS channel center frequency
3. Set span to > 1.5 times the OBW.
4. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
5. Set VBW $\geq [3 \times \text{RBW}]$
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Employ trace averaging (rms) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum amplitude level.
11. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).
12. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

11.3 Test Result

Please see the attachment for the data.



12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna, is Internal Antenna. The antenna's gain is 2.38 dBi and meets the requirement.



13 Test Setup and EUT Photos

Reference to the attachment for details.

*******THE END REPORT*******