


Temperature:	24 °C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BLE 1M-2440MHz	Comment:	1GHz-18GHz

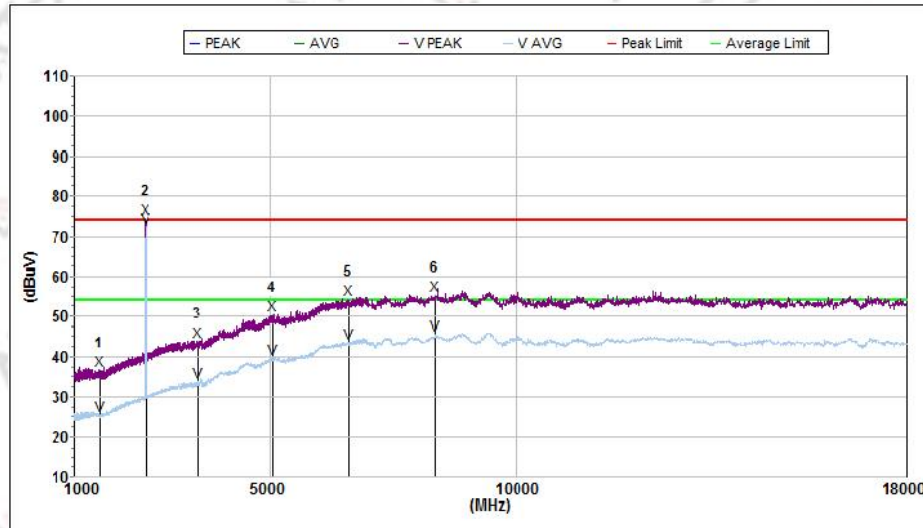


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1510.000	36.7	74.0	37.3	-23.6	53.4	4.4	V
2	2441.000	74.4	74.0	-0.4	-20.9	54.1	5.7	V
3	3526.000	44.0	74.0	30.0	-17.1	53.8	7.1	V
4	5060.000	50.4	74.0	23.6	-10.5	52.4	8.8	V
5	6606.000	54.5	74.0	19.5	-5.6	51.6	10.6	V
6	8369.500	55.5	74.0	18.5	-3.5	52.2	11.4	V
Avg:								
1	1510.000	25.6	54.0	28.4	-23.6	53.4	4.4	V
2	2441.000	72.5	54.0	-18.5	-20.9	54.1	5.7	V
3	3526.000	33.7	54.0	20.3	-17.1	53.8	7.1	V
4	5060.000	39.5	54.0	14.5	-10.5	52.4	8.8	V
5	6606.000	43.7	54.0	10.3	-5.6	51.6	10.6	V
6	8369.500	45.4	54.0	8.6	-3.5	52.2	11.4	V

Note:Point 2 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BLE 1M-2480MHz	Comment:	1GHz-18GHz

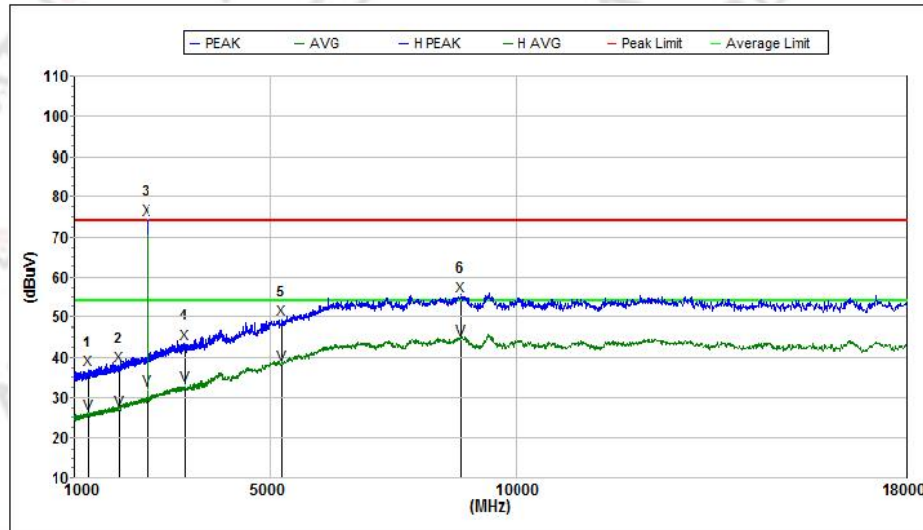


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1283.500	37.0	74.0	37.0	-23.8	53.5	4.1	H
2	1895.500	38.0	74.0	36.0	-23.0	53.8	5.0	H
3	2479.000	74.4	74.0	-0.4	-20.8	54.1	5.7	H
4	3254.500	43.6	74.0	30.4	-17.6	53.9	6.8	H
5	5232.000	49.6	74.0	24.4	-10.4	52.4	9.0	H
6	8886.000	55.3	74.0	18.7	-2.5	52.4	12.1	H
Avg:								
1	1283.500	26.0	54.0	28.0	-23.8	53.5	4.1	H
2	1895.500	27.1	54.0	26.9	-23.0	53.8	5.0	H
3	2479.000	32.0	54.0	22.0	-20.8	54.1	5.7	H
4	3254.500	32.9	54.0	21.1	-17.6	53.9	6.8	H
5	5232.000	38.4	54.0	15.6	-10.4	52.4	9.0	H
6	8886.000	44.6	54.0	9.4	-2.5	52.4	12.1	H

Note: Point 3 serves as the primary frequency signal.

Temperature:	24 °C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BLE 1M-2480MHz	Comment:	1GHz-18GHz

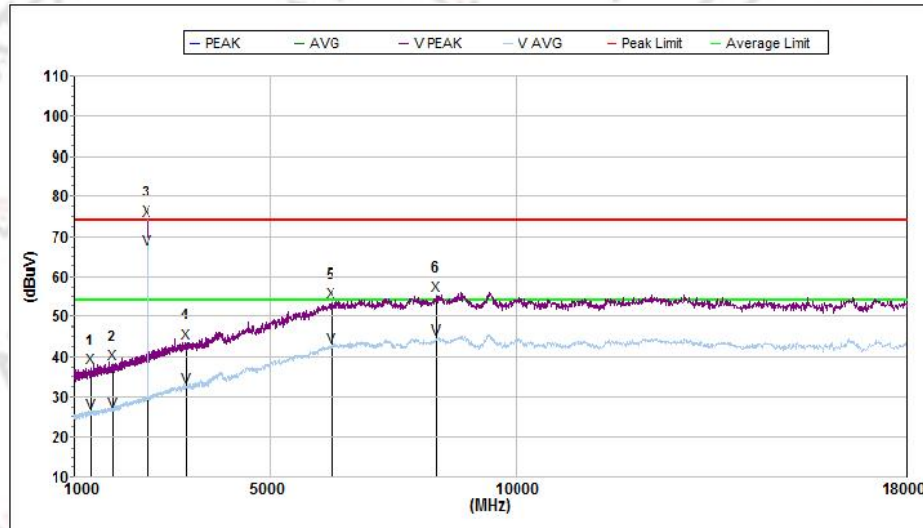

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1327.000	37.4	74.0	36.6	-23.7	53.5	4.2	V
2	1775.500	38.3	74.0	35.7	-23.8	53.7	4.8	V
3	2480.500	74.0	74.0	0.0	-20.8	54.1	5.7	V
4	3283.000	43.6	74.0	30.4	-17.6	53.9	6.8	V
5	6247.000	53.6	74.0	20.4	-6.7	51.5	10.1	V
6	8403.000	55.4	74.0	18.6	-3.5	52.2	11.4	V
Avg:								
1	1327.000	26.2	54.0	27.8	-23.7	53.5	4.2	V
2	1775.500	26.6	54.0	27.4	-23.8	53.7	4.8	V
3	2480.500	66.8	54.0	-12.8	-20.8	54.1	5.7	V
4	3283.000	32.3	54.0	21.7	-17.6	53.9	6.8	V
5	6247.000	42.5	54.0	11.5	-6.7	51.5	10.1	V
6	8403.000	44.4	54.0	9.6	-3.5	52.2	11.4	V


Note:Point 3 serves as the primary frequency signal.

Restricted Band

Note: During the test, pre-scan All mode, the report only reflects the test data of worst mode(BLE 1M).


Test Mode: BLE 1M

Test Channel: Lowest channel, Test Polarization: Horizontal

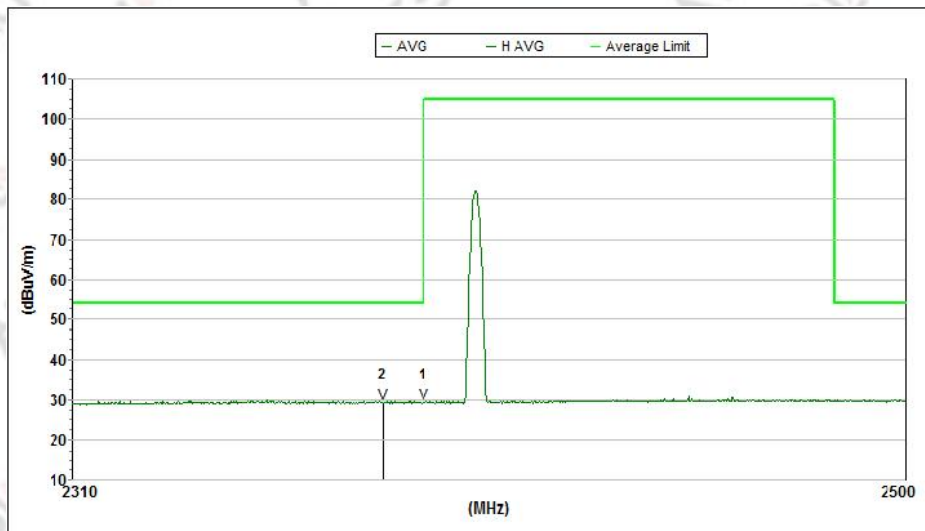

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
AVG								
1	2390.000	29.5	54.0	24.5	-21.1	54.1	5.6	H
2	2380.813	29.4	54.0	24.6	-21.2	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

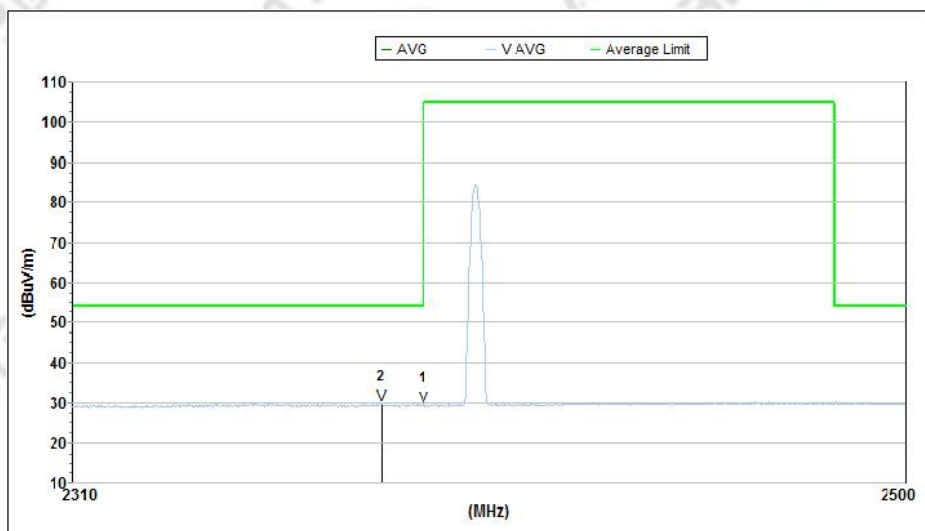

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
AVG								
1	2390.000	29.4	54.0	24.6	-21.1	54.1	5.6	V
2	2380.625	29.6	54.0	24.4	-21.2	54.1	5.6	V


Test Mode: BLE 1M

Test Channel: Lowest channel, Test Polarization: Horizontal

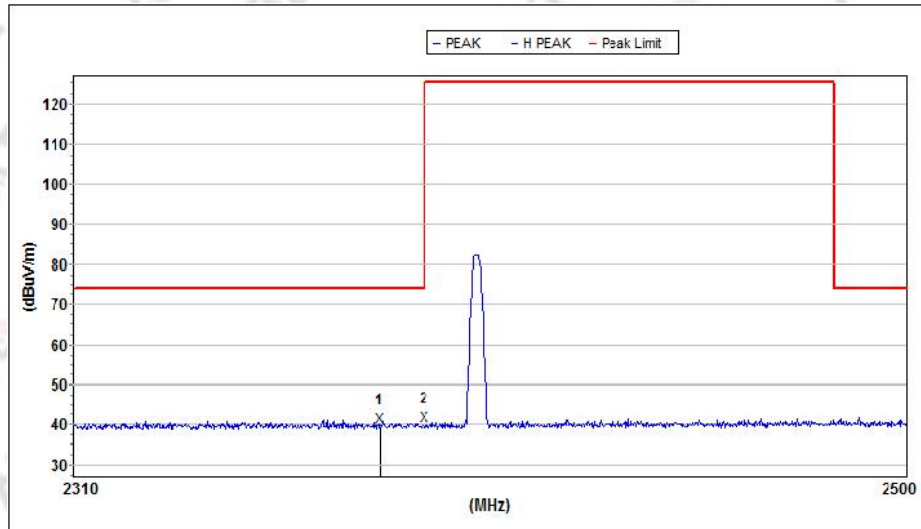

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
PEAK								
1	2380.000	39.4	74.0	34.6	-21.2	54.1	5.6	H
2	2390.000	39.8	74.0	34.2	-21.1	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

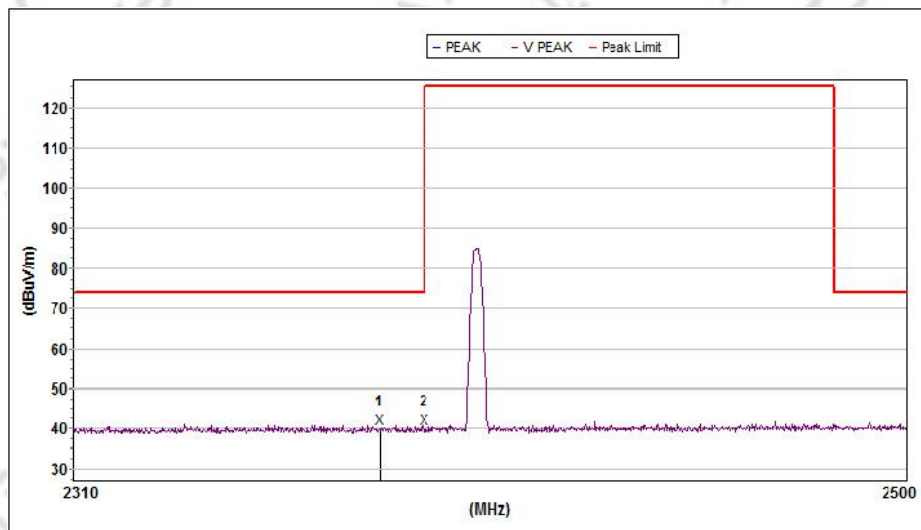

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
PEAK								
1	2380.000	40.0	74.0	34.0	-21.2	54.1	5.6	V
2	2390.000	40.0	74.0	34.0	-21.1	54.1	5.6	V


Test Mode: BLE 1M

Test Channel: Highest channel, Test Polarization: Horizontal

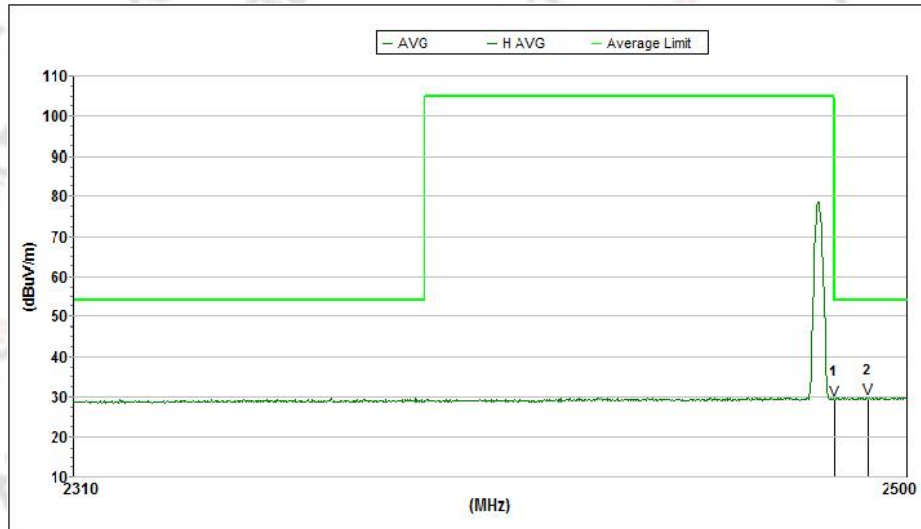

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	29.4	54.0	24.6	-20.8	54.1	5.7	H
2	2490.927	29.9	54.0	24.1	-20.7	54.1	5.8	H


Test Channel: Highest channel, Test Polarization: Vertical

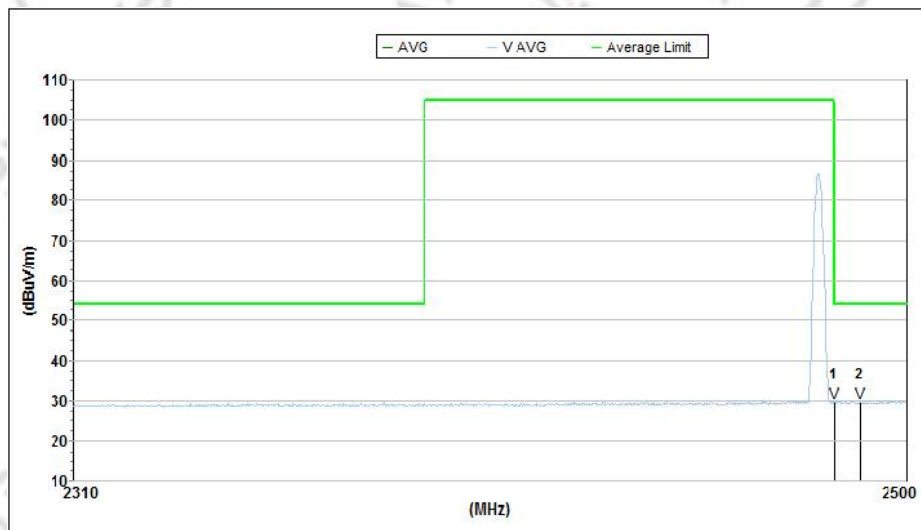

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	29.6	54.0	24.4	-20.8	54.1	5.7	V
2	2489.155	29.7	54.0	24.3	-20.7	54.1	5.8	V


Test Mode: BLE 1M

Test Channel: Highest channel, Test Polarization: Horizontal

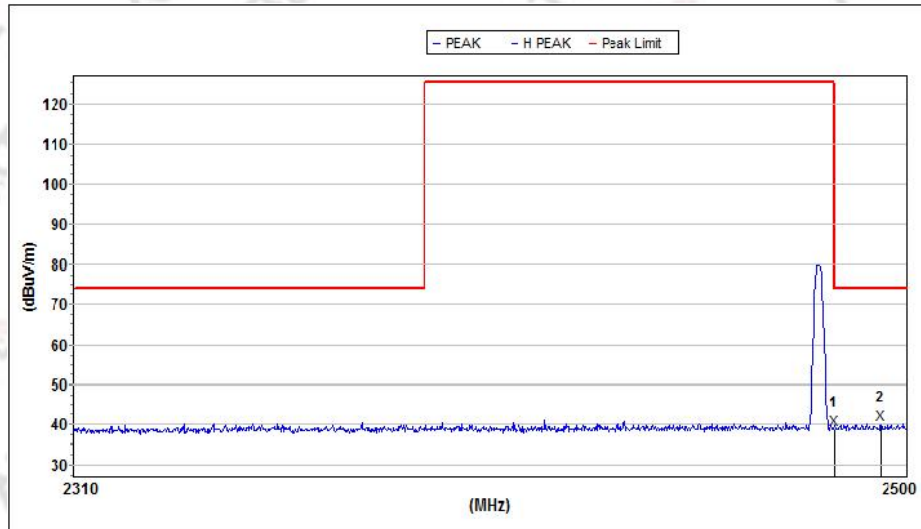

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	39.0	74.0	35.0	-20.8	54.1	5.7	H
2	2493.882	40.1	74.0	33.9	-20.7	54.1	5.8	H

Test Channel: Highest channel, Test Polarization: Vertical

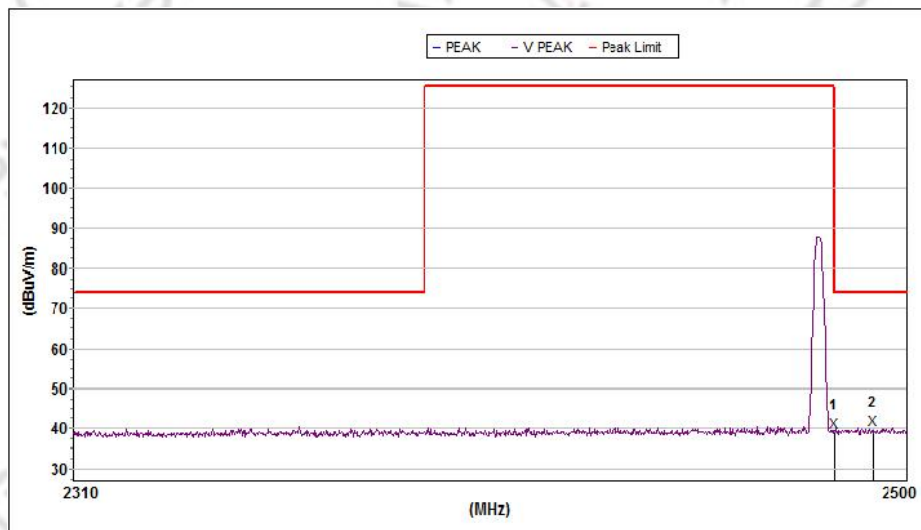

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	39.2	74.0	34.8	-20.8	54.1	5.7	V
2	2492.108	39.9	74.0	34.1	-20.7	54.1	5.8	V

.※※※※※END OF THE Appendix ※※※※※