

Case No. : <u>GTS20250905010-1-01</u>
Ambient Condition: <u>22</u> °C, <u>48</u> %RH
According Standard: ■Part15C
Test Date: <u>2025.9.16-2025.10.11</u> Test Engineer: <u>Evan ouyang</u>

AppendixA.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.644	2401.752	2402.396	0.5	PASS
		2440	0.660	2439.740	2440.400	0.5	PASS
		2480	0.648	2479.752	2480.400	0.5	PASS




AppendixA.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0510	2401.5400	2402.5910	---	---
		2440	1.0590	2439.5413	2440.6003	---	---
		2480	1.0587	2479.5411	2480.5998	---	---

Test Graphs

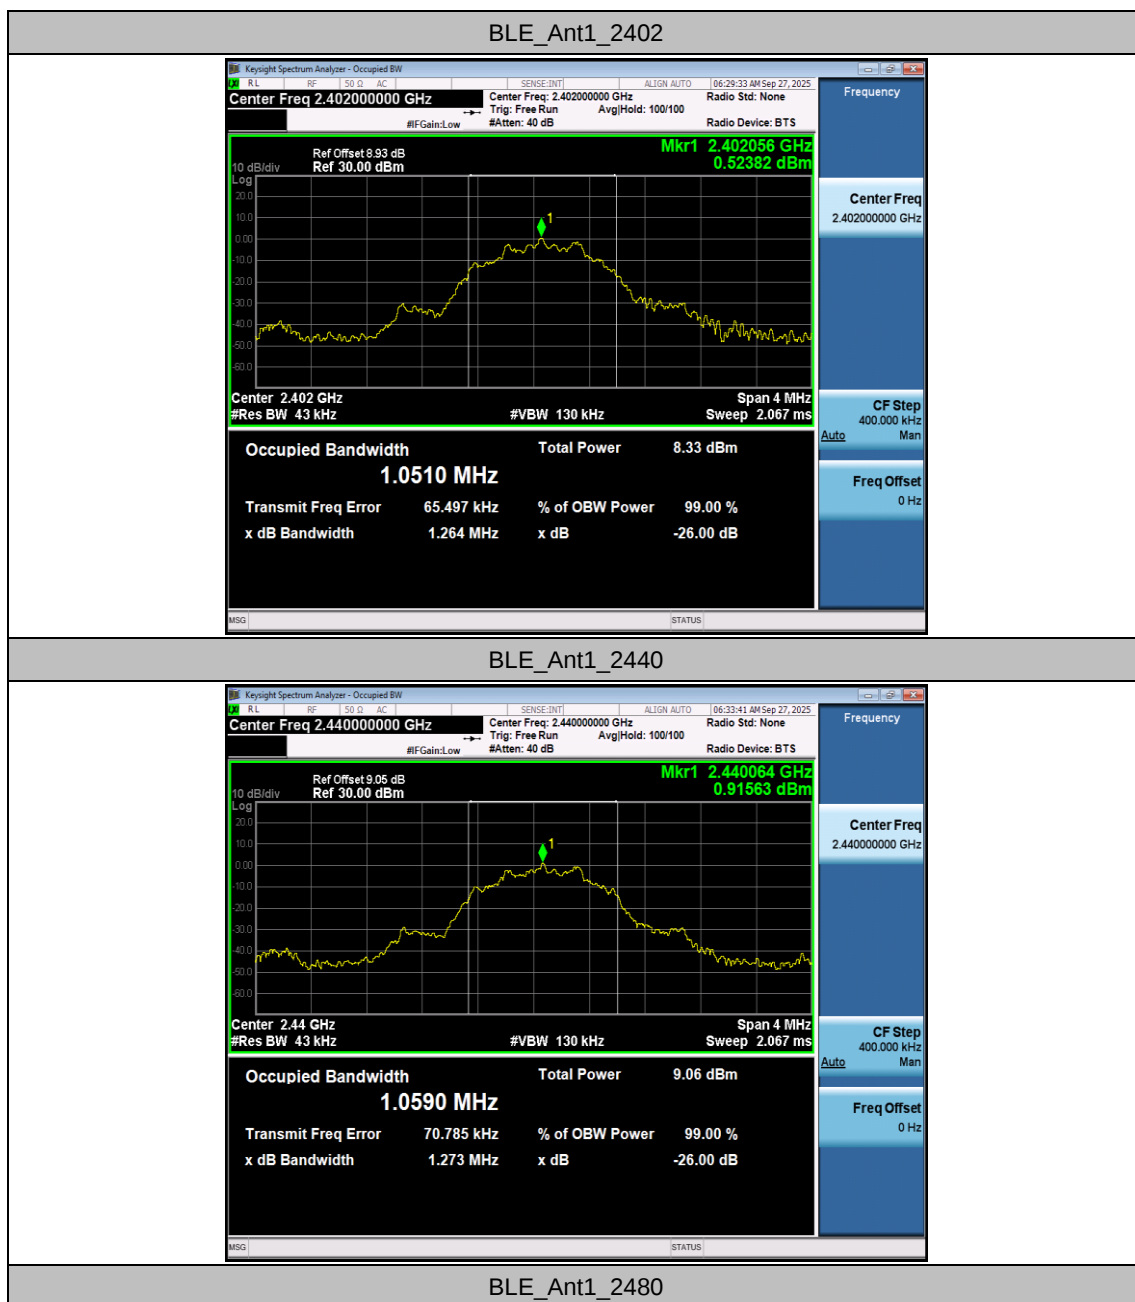




AppendixA.3: Maximum conducted output power**Test Result Peak**


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]
BLE	Ant1	2402	1.29	≤30
		2440	2.16	≤30
		2480	1.59	≤30

AppendixA.4: Maximum power spectral density**Test Result**

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-15.04	≤8.00	PASS
		2440	-14.12	≤8.00	PASS
		2480	-14.57	≤8.00	PASS

Test Graphs

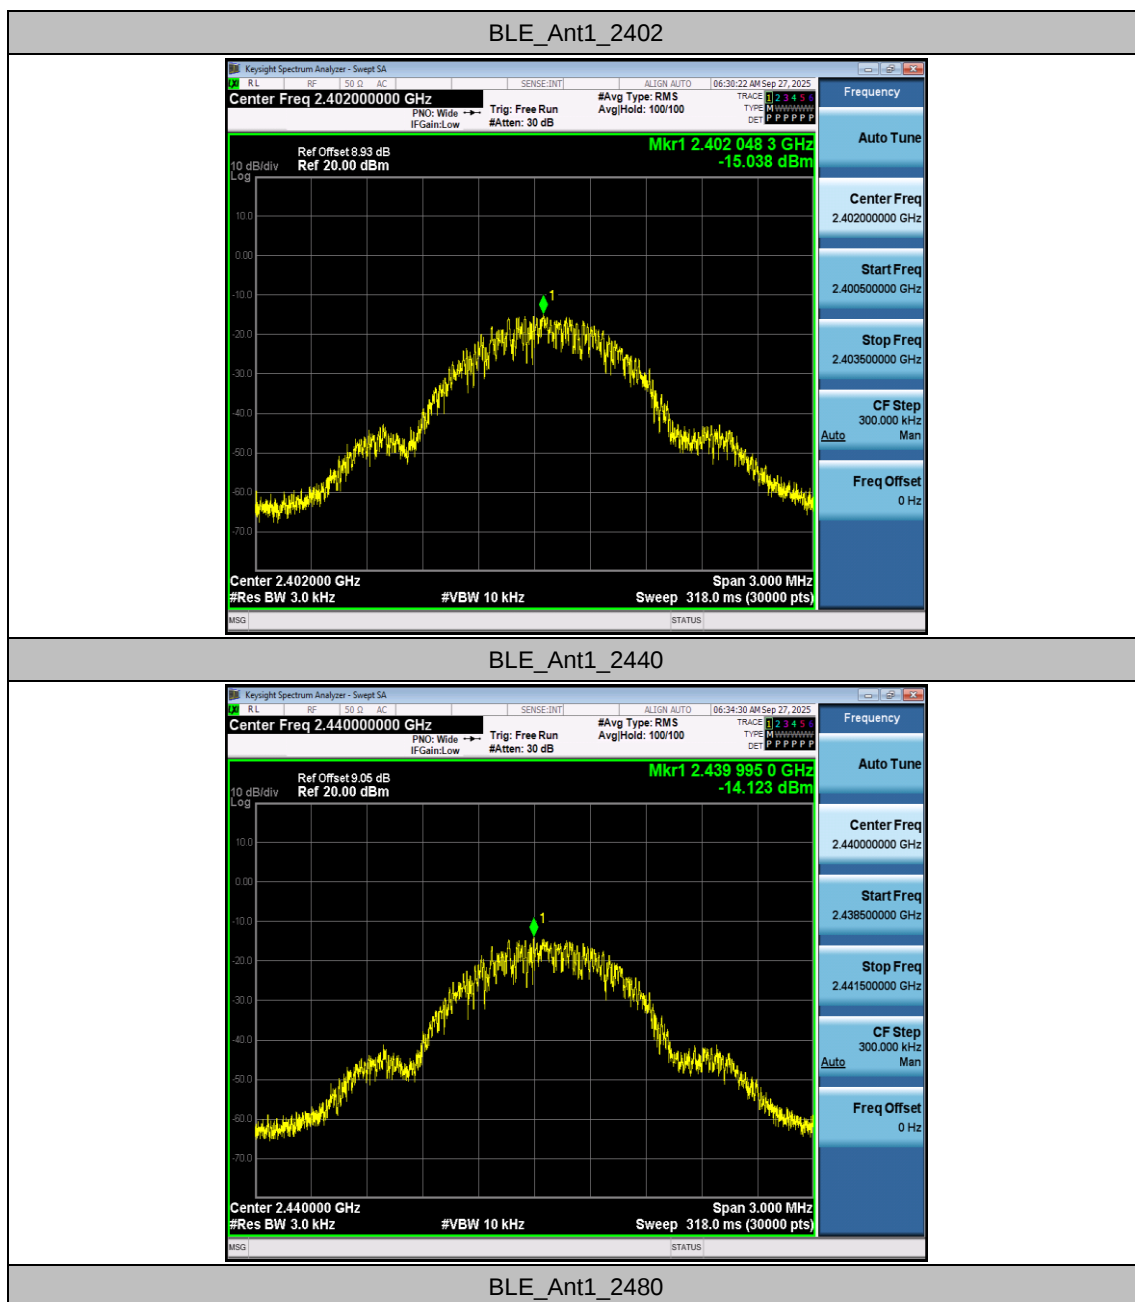

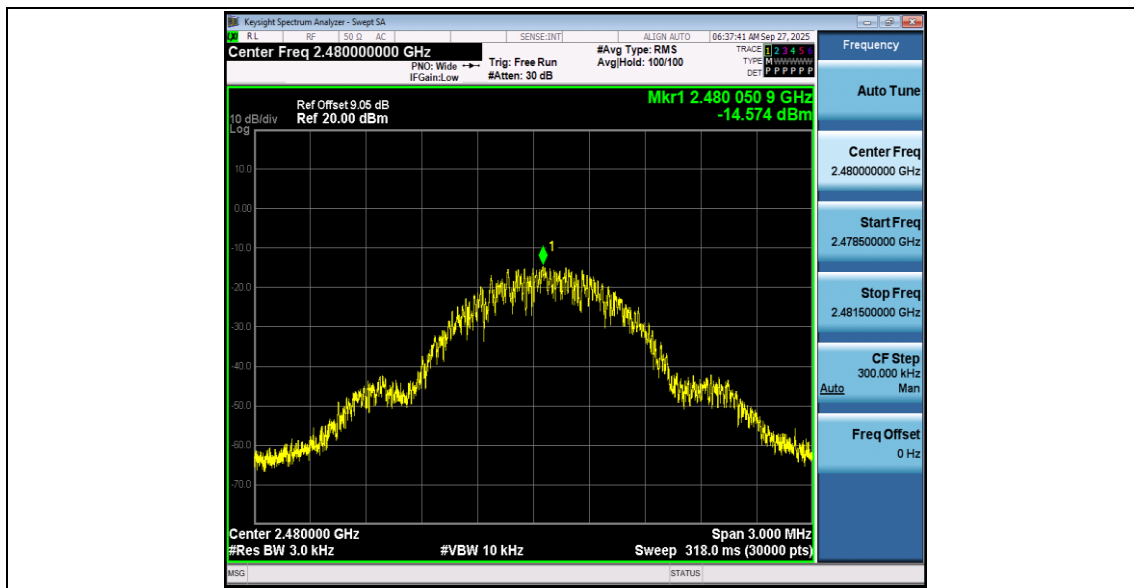


Appendix A.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	0.92	-38.17	≤-19.08	PASS
		High	2480	1.40	-41.59	≤-18.61	PASS

Test Graphs

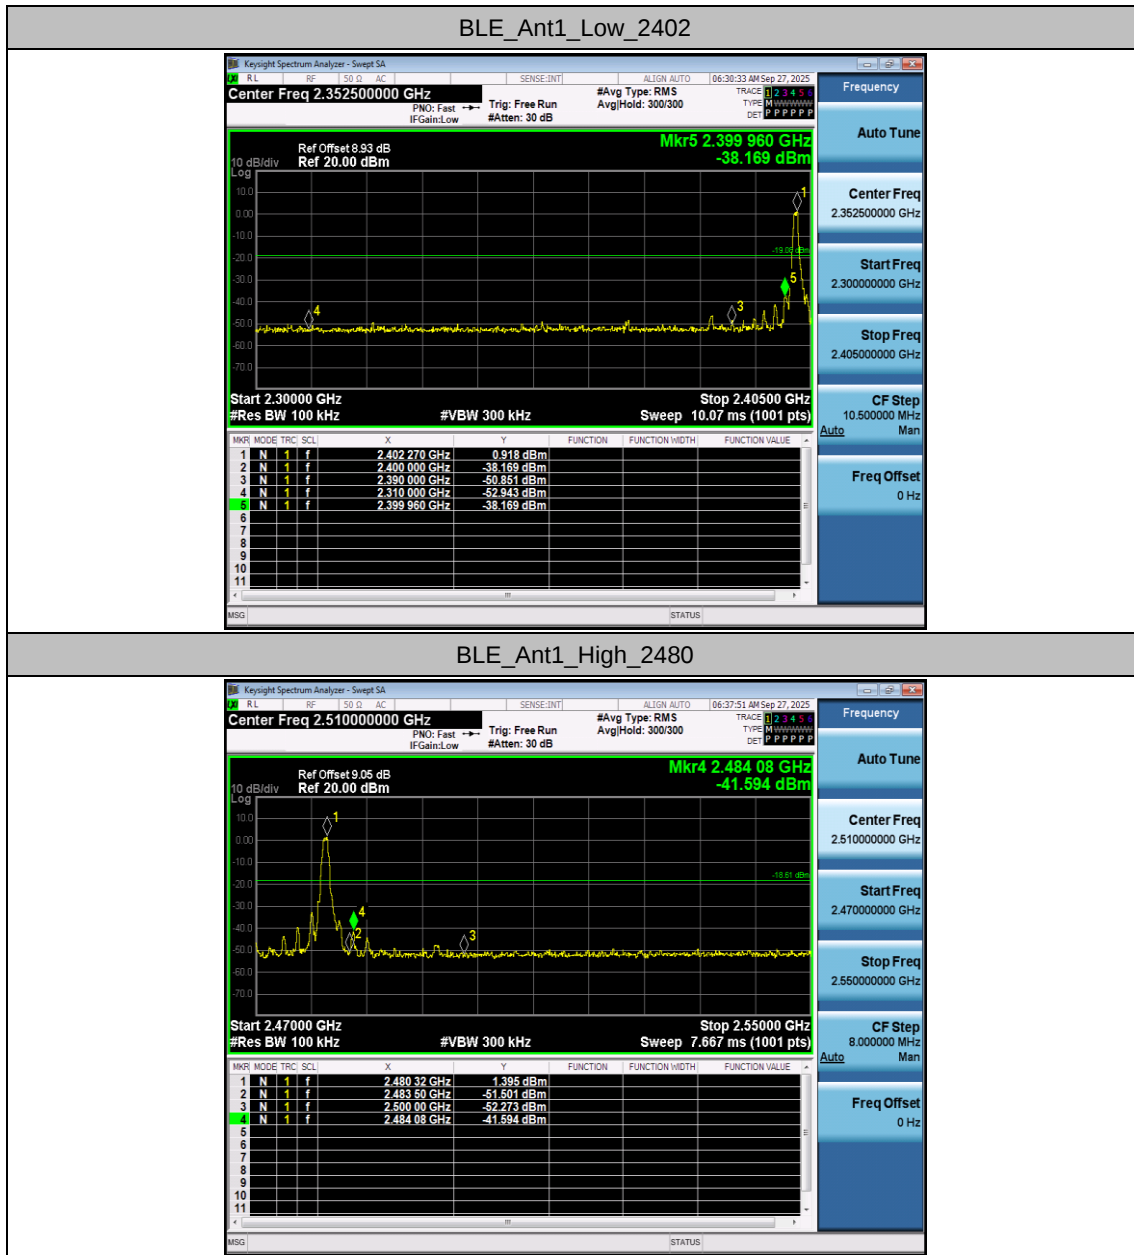



Appendix A.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	0.10	0.10	---	PASS
			30~1000	0.10	-60.24	≤ -19.9	PASS
			1000~26500	0.10	-47.57	≤ -19.9	PASS
		2440	Reference	1.23	1.23	---	PASS
			30~1000	1.23	-60.29	≤ -18.77	PASS
			1000~26500	1.23	-47.13	≤ -18.77	PASS
		2480	Reference	1.32	1.32	---	PASS
			30~1000	1.32	-60.94	≤ -18.68	PASS
			1000~26500	1.32	-47.98	≤ -18.68	PASS

Test Graphs

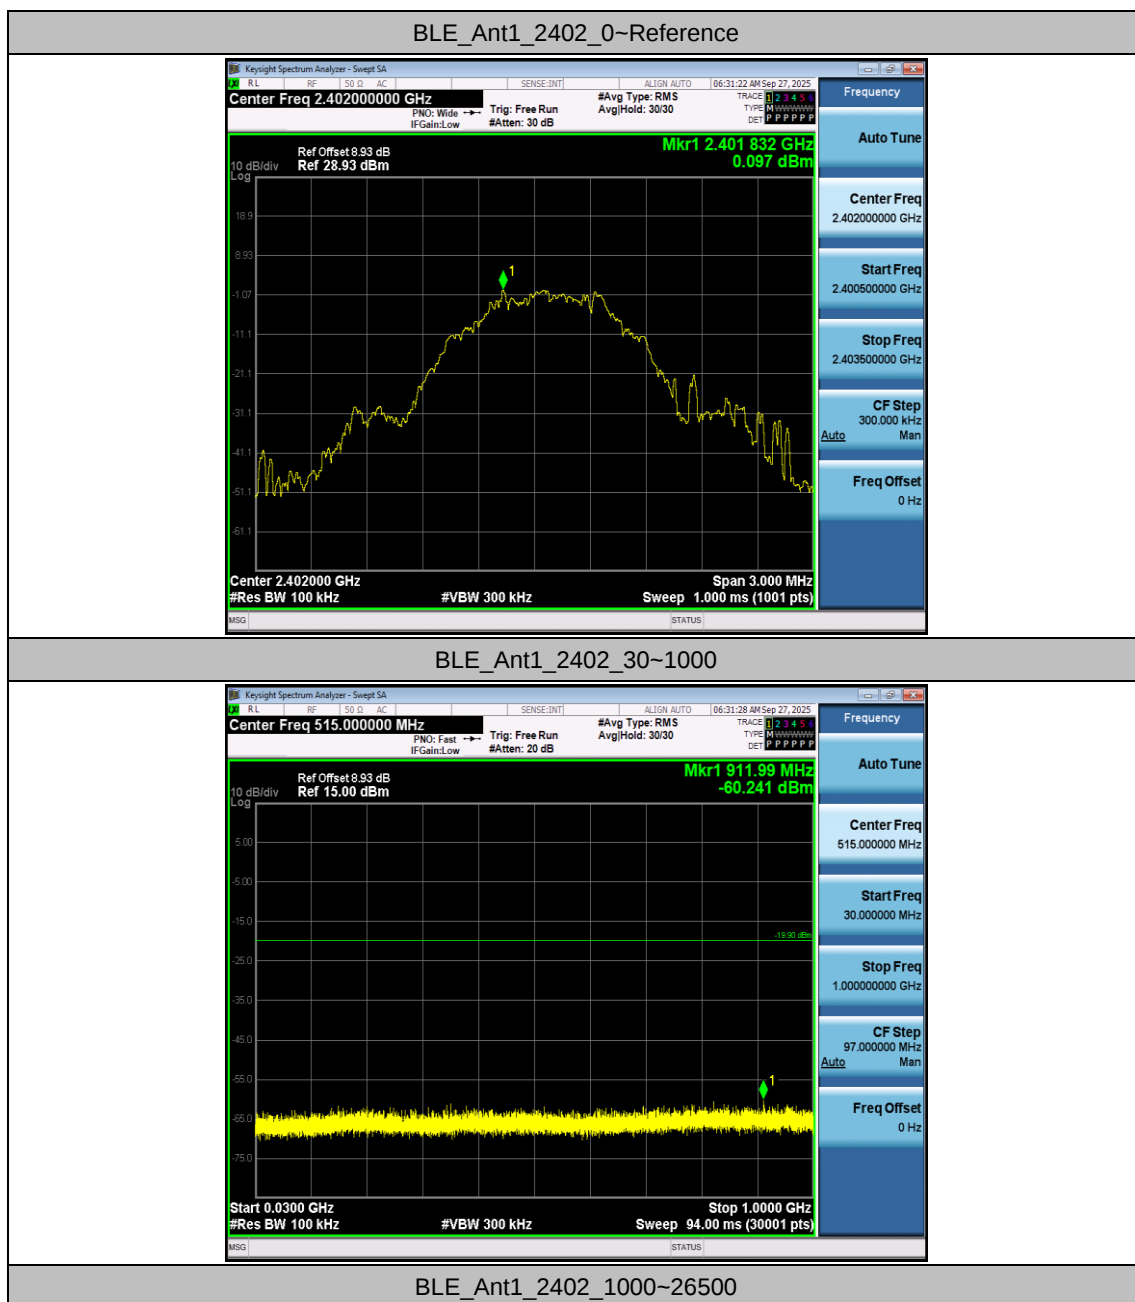


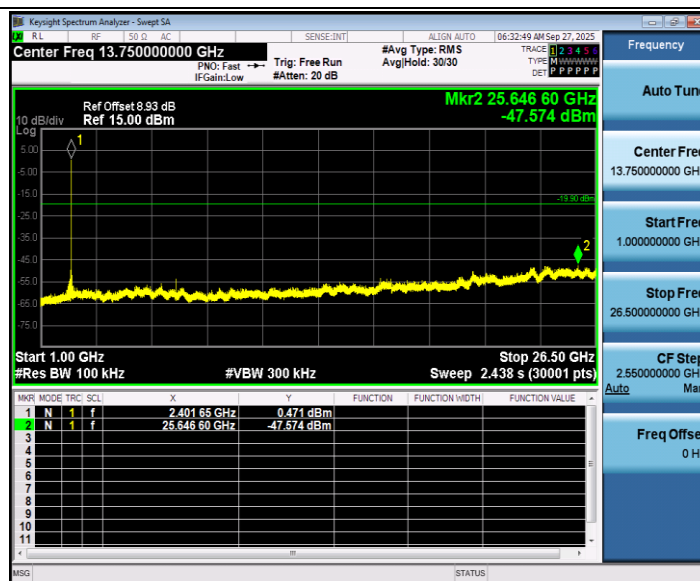


BLE_Ant1_2440_0~Reference



BLE_Ant1_2440_30~1000

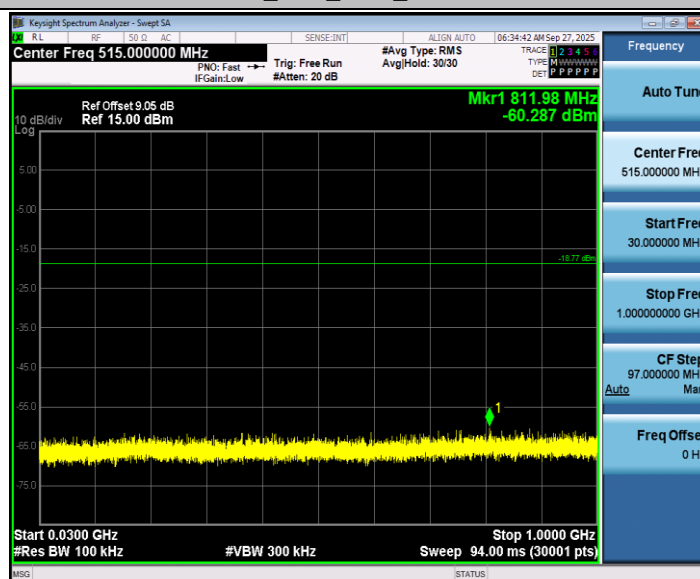


BLE_Ant1_2440_1000~26500

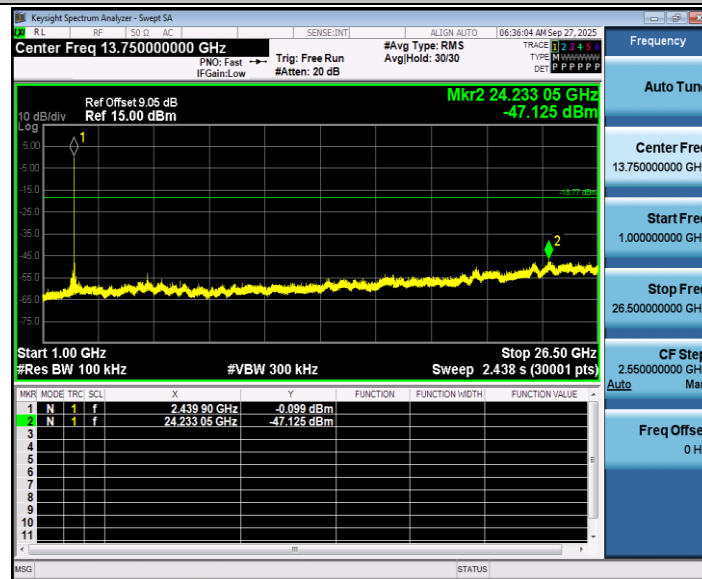

BLE_Ant1_2480_0~Reference



BLE_Ant1_2480_30~1000

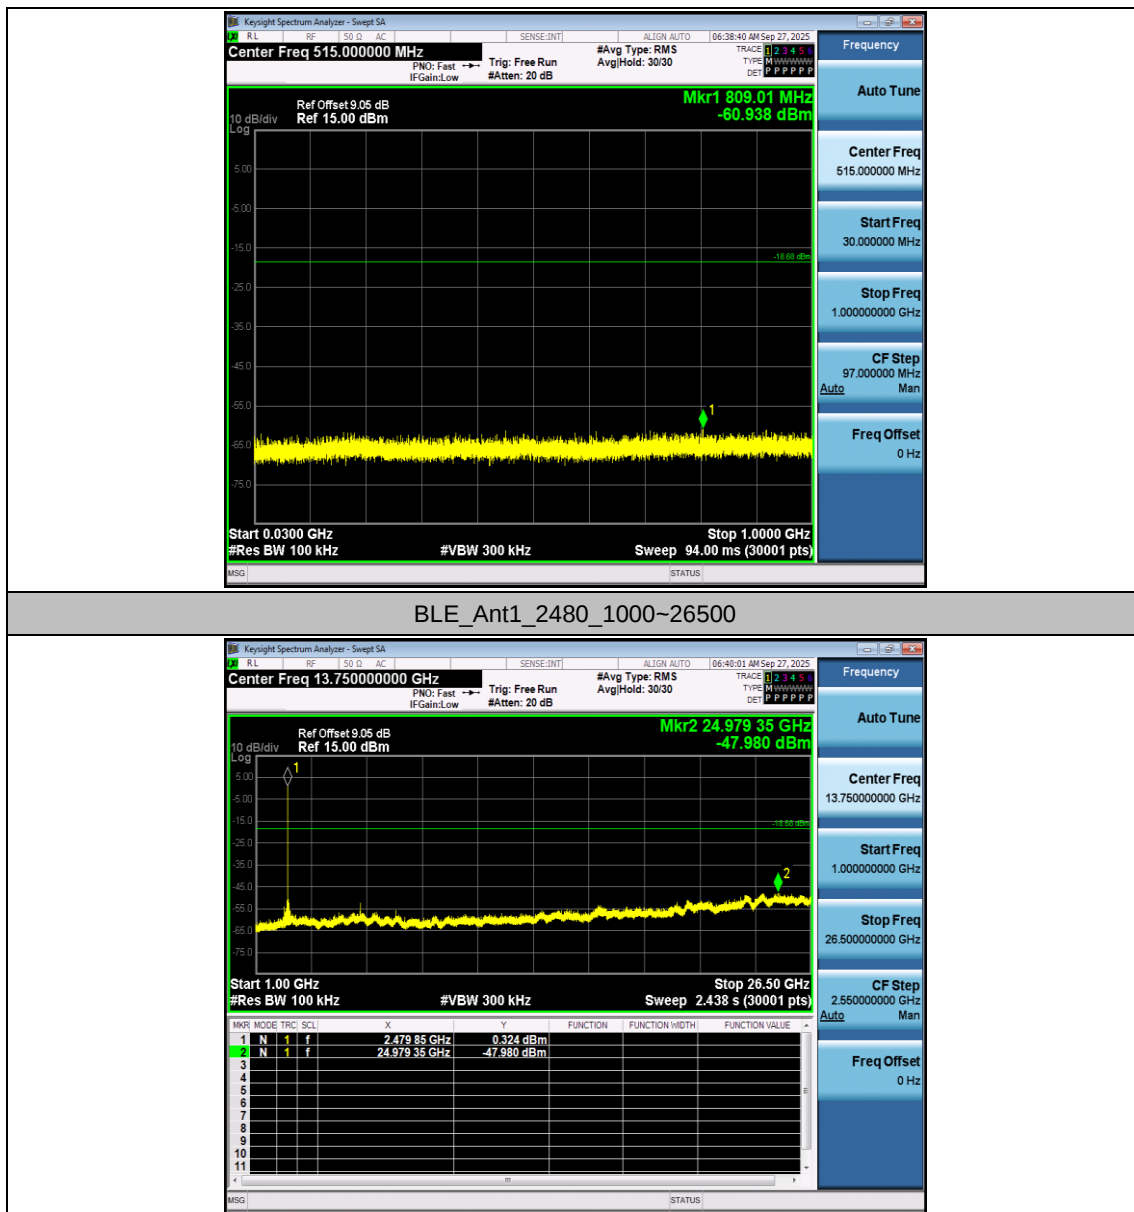



AppendixA.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	0.42	0.63	0.6667	66.67	1.76	2.38
		2440	0.42	0.63	0.6667	66.67	1.76	2.38
		2480	0.42	0.63	0.6667	66.67	1.76	2.38

Test Graphs

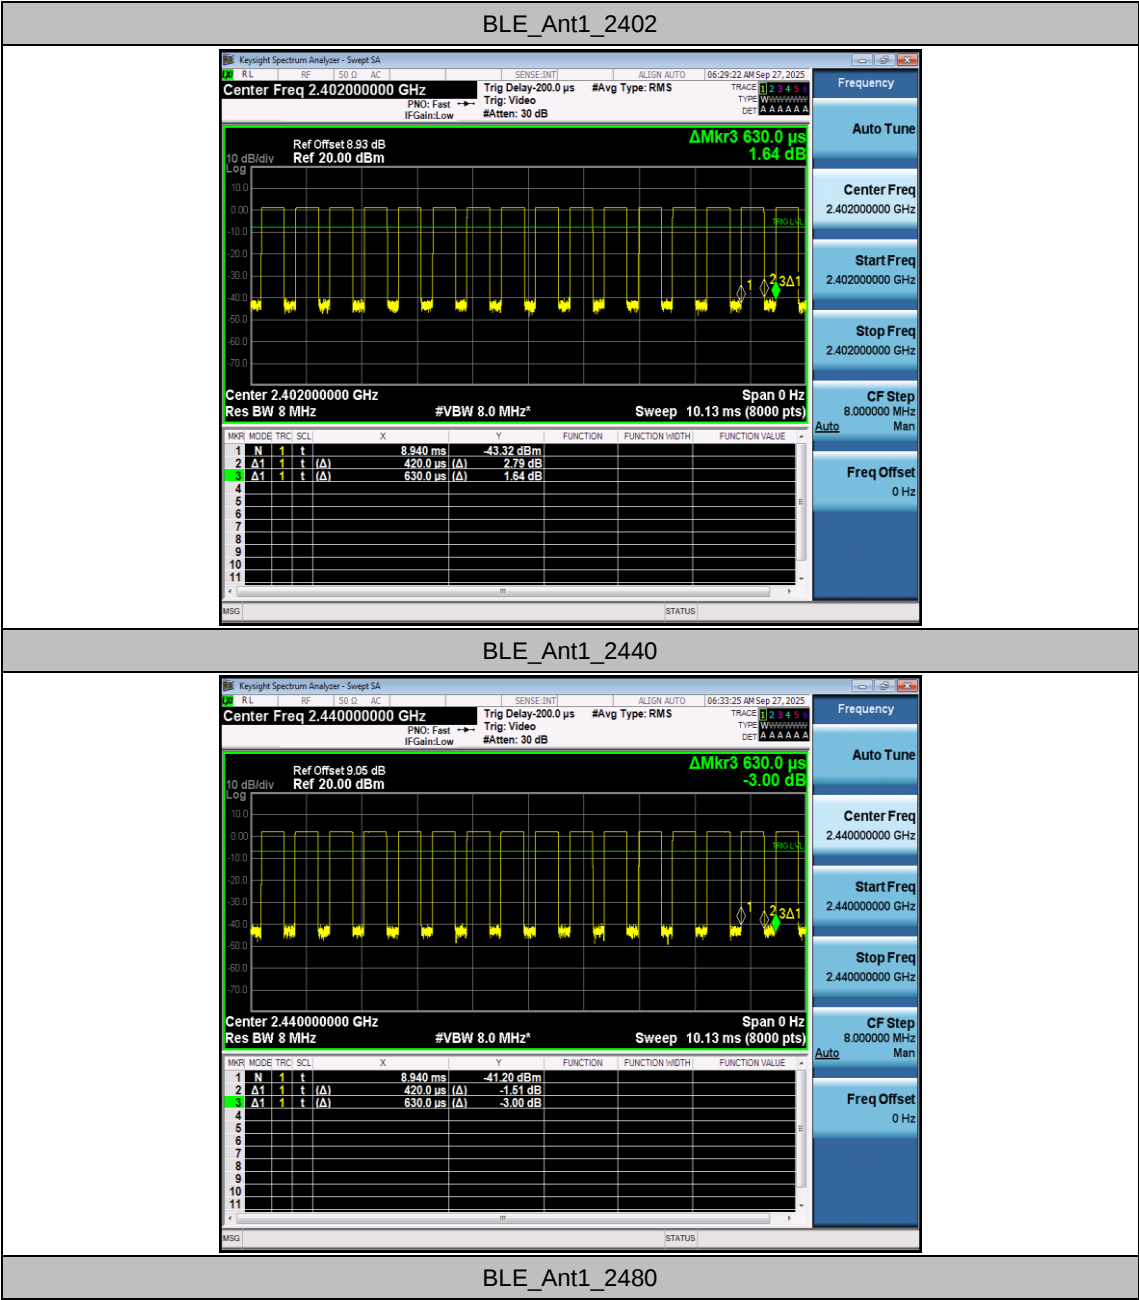

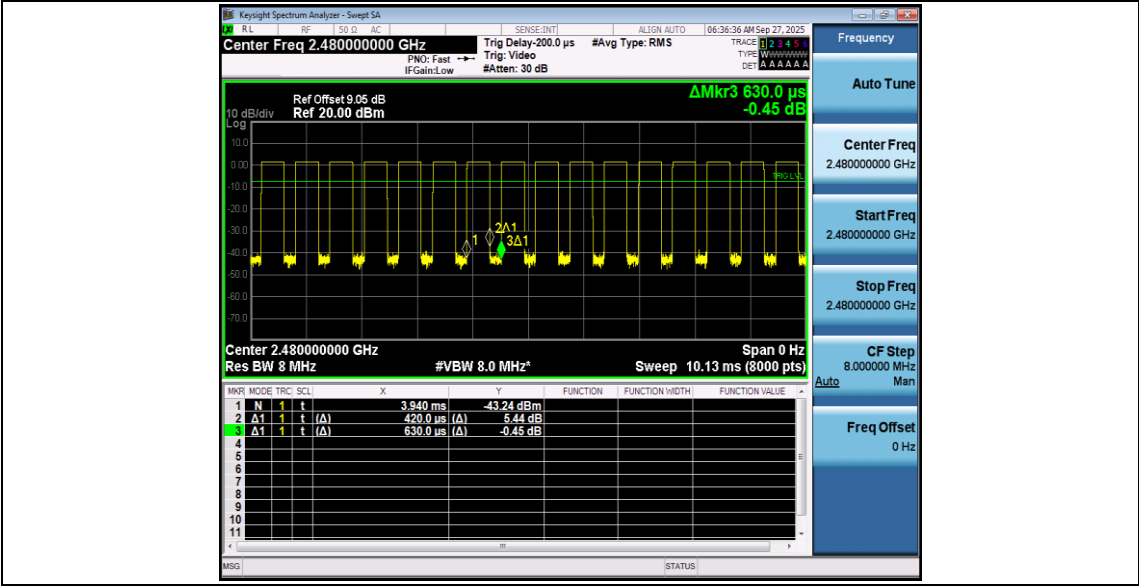

Appendix A.8: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.26	≤-41.20	45.94	≤54	PASS
				AV	2386.100	-45.64	≤-41.20	49.56	≤54	PASS
				AV	2390.000	-48.81	≤-41.20	46.39	≤54	PASS
				Peak	2310.000	-42.62	≤-21.20	52.58	≤74	PASS
				Peak	2322.155	-36.93	≤-21.20	58.27	≤74	PASS
				Peak	2390.000	-42.99	≤-21.20	52.21	≤74	PASS
		High	2480	AV	2483.500	-46.28	≤-41.20	48.92	≤54	PASS
				AV	2496.080	-45.6	≤-41.20	49.60	≤54	PASS
				AV	2500.000	-48.57	≤-41.20	46.63	≤54	PASS
				Peak	2483.500	-40.5	≤-21.20	54.70	≤74	PASS
				Peak	2484.000	-29.26	≤-21.20	65.94	≤74	PASS
				Peak	2500.000	-42.11	≤-21.20	53.09	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

