

# FCC RF Test Report

APPLICANT : Texas Instruments Incorporated  
EQUIPMENT : WiFi and Bluetooth Module  
BRAND NAME : Texas Instruments  
MODEL NAME : WL18MODGB  
FCC ID : Z64-WL18SBMOD  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 27, 2013 and testing was completed on Dec. 20, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Supervisor



---

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                    | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                              | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                               | <b>5</b>  |
| 1.1 Applicant .....                                              | 5         |
| 1.2 Manufacturer .....                                           | 5         |
| 1.3 Feature of Equipment Under Test .....                        | 5         |
| 1.4 Product Specification of Equipment Under Test .....          | 6         |
| 1.5 Modification of EUT .....                                    | 6         |
| 1.6 Testing Site .....                                           | 7         |
| 1.7 Applied Standards .....                                      | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>        | <b>8</b>  |
| 2.1 Carrier Frequency and Channel .....                          | 8         |
| 2.2 Pre-Scanned RF Power .....                                   | 9         |
| 2.3 Test Mode .....                                              | 10        |
| 2.4 Connection Diagram of Test System .....                      | 11        |
| 2.5 Support Unit used in test configuration and system .....     | 12        |
| 2.6 EUT Operation Test Setup .....                               | 12        |
| 2.7 Measurement Results Explanation Example .....                | 12        |
| <b>3 TEST RESULT .....</b>                                       | <b>13</b> |
| 3.1 6dB and 99% Bandwidth Measurement .....                      | 13        |
| 3.2 Peak Output Power Measurement .....                          | 16        |
| 3.3 Power Spectral Density Measurement .....                     | 19        |
| 3.4 Conducted Band Edges and Spurious Emission Measurement ..... | 22        |
| 3.5 Radiated Band Edges and Spurious Emission Measurement .....  | 41        |
| 3.6 AC Conducted Emission Measurement .....                      | 64        |
| 3.7 Antenna Requirements .....                                   | 68        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                       | <b>70</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                         | <b>71</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                             |           |



## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE   |
|--------------|---------|-------------------------|---------------|
| FR3N2752-01C | Rev. 01 | Initial issue of report | Jan. 27, 2014 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | IC Rule            | Description                                           | Limit                          | Result | Remark                                    |
|----------------|-----------------------|--------------------|-------------------------------------------------------|--------------------------------|--------|-------------------------------------------|
| 3.1            | 15.247(a)(2)          | RSS-210<br>A8.2(a) | 6dB Bandwidth                                         | $\geq 0.5\text{MHz}$           | Pass   | -                                         |
| 3.1            | -                     | RSS-Gen<br>4.6.1   | 99% Bandwidth                                         | -                              | Pass   | -                                         |
| 3.2            | 15.247(b)             | RSS-210<br>A8.4    | Power Output Measurement                              | $\leq 30\text{dBm}$            | Pass   | -                                         |
| 3.3            | 15.247(e)             | RSS-210<br>A8.2(b) | Power Spectral Density                                | $\leq 8\text{dBm}/3\text{kHz}$ | Pass   | -                                         |
| 3.4            | 15.247(d)             | RSS-210<br>A8.5    | Conducted Band Edges                                  | $\leq 20\text{dBc}$            | Pass   | -                                         |
|                |                       |                    | Conducted Spurious Emission                           |                                | Pass   | -                                         |
| 3.5            | 15.247(d)             | RSS-210<br>A8.5    | Radiated Band Edges and<br>Radiated Spurious Emission | 15.209(a) &<br>15.247(d)       | Pass   | Under limit<br>2.30 dB at<br>2483.950 MHz |
| 3.6            | 15.207                | RSS-Gen<br>7.2.4   | AC Conducted Emission                                 | 15.207(a)                      | Pass   | Under limit<br>8.50 dB at<br>0.350 MHz    |
| 3.7            | 15.203 &<br>15.247(b) | RSS-210<br>A8.4    | Antenna Requirement                                   | N/A                            | Pass   | -                                         |

# 1 General Description

## 1.1 Applicant

**Texas Instruments Incorporated**

12500 TI Boulevard, M/S 8751, Dallas, TX 75243, USA

## 1.2 Manufacturer

**Jorjin Technologies Inc.**

17F, No.239, Sec. 1, Datong Rd, Xizhi Dist. New Taipei City 221, Taiwan. R.O.C.

## 1.3 Feature of Equipment Under Test

| Product Feature                 |                                                                       |
|---------------------------------|-----------------------------------------------------------------------|
| Equipment                       | WiFi and Bluetooth Module                                             |
| Brand Name                      | Texas Instruments                                                     |
| Model Name                      | WL18MODGB                                                             |
| FCC ID                          | Z64-WL18SBMOD                                                         |
| EUT supports Radios application | WLAN 11b/g/n HT20/HT40<br>Bluetooth v3.0 + EDR<br>Bluetooth v4.0 + LE |
| EUT Stage                       | Production Unit                                                       |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard |                                                                                                                                                                                                                                                |              |              |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| <b>Tx/Rx Channel Frequency Range</b>              | 802.11b/g/n : 2412 MHz ~ 2462 MHz                                                                                                                                                                                                              |              |              |
| <b>Maximum Output Power to antenna</b>            | <b>&lt;Ant. 1&gt;</b><br>802.11b : 17.96 dBm (0.0625 W)<br>802.11g : 20.59 dBm (0.1146 W)<br>802.11n HT20 : 20.56 dBm (0.1138 W)<br>802.11n HT40 : 20.22 dBm (0.1052 W)<br><b>&lt;MIMO Ant. 1+2&gt;</b><br>802.11n HT20 : 23.87 dBm (0.2438 W) |              |              |
| <b>99% Occupied Bandwidth</b>                     | <b>&lt;Ant. 1&gt;</b><br>802.11b : 14.90MHz<br>802.11g : 19.55MHz<br>802.11n HT20 : 19.55MHz<br>802.11n HT40 : 36.80MHz<br><b>&lt;MIMO Ant. 1+2&gt;</b><br>802.11n HT20 : 19.65MHz                                                             |              |              |
| <b>Antenna Type</b>                               | <b>&lt;Ant 1&gt;</b><br>Chip Antenna type with gain -0.36 dBi<br><b>&lt;Ant 2&gt;</b><br>Chip Antenna type with gain 1.22 dBi                                                                                                                  |              |              |
| <b>Type of Modulation</b>                         | 802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                         |              |              |
| <b>Antenna Function for Transmitter</b>           |                                                                                                                                                                                                                                                | Chain Ant. 1 | Chain Ant. 2 |
|                                                   | 802.11 b                                                                                                                                                                                                                                       | V            | -            |
|                                                   | 802.11 g                                                                                                                                                                                                                                       | V            | -            |
|                                                   | 802.11 n HT20 SISO                                                                                                                                                                                                                             | V            | -            |
|                                                   | 802.11 n HT20 MIMO                                                                                                                                                                                                                             | V            | V            |
|                                                   | 802.11 n HT40 SISO                                                                                                                                                                                                                             | V            | -            |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Site

|                    |                                                                                                                                                              |         |           |                         |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|-------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                   |         |           |                         |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-3273456 / FAX: +886-3-3284978 |         |           |                         |
| Test Site No.      | Sporton Site No.                                                                                                                                             |         |           | FCC/IC Registration No. |
|                    | TH02-HY                                                                                                                                                      | CO05-HY | 03CH07-HY | 722060/4086B-1          |

**Note:** The test site complies with ANSI C63.4 2003 requirement.

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.4-2003

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

| Frequency Band  | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1       | 2412        | 7       | 2442        |
|                 | 2       | 2417        | 8       | 2447        |
|                 | 3       | 2422        | 9       | 2452        |
|                 | 4       | 2427        | 10      | 2457        |
|                 | 5       | 2432        | 11      | 2462        |
|                 | 6       | 2437        |         |             |

## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

<Ant. 1>

| 802.11b          |        |        |          |         |
|------------------|--------|--------|----------|---------|
| Data Rate (MHz)  | 1M bps | 2M bps | 5.5M bps | 11M bps |
| Peak Power (dBm) | 17.96  | 17.95  | 17.93    | 17.95   |

| 802.11g          |        |        |         |         |         |         |         |         |
|------------------|--------|--------|---------|---------|---------|---------|---------|---------|
| Data Rate (MHz)  | 6M bps | 9M bps | 12M bps | 18M bps | 24M bps | 36M bps | 48M bps | 54M bps |
| Peak Power (dBm) | 20.59  | 20.57  | 20.55   | 20.58   | 20.56   | 20.53   | 20.44   | 20.44   |

| 2.4GHz 802.11n HT20 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| Peak Power (dBm)    | 20.56 | 20.42 | 20.43 | 20.46 | 20.32 | 20.38 | 20.33 | 20.17 |

| 2.4GHz 802.11n HT40 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| Peak Power (dBm)    | 20.22 | 20.10 | 20.10 | 20.18 | 20.18 | 20.19 | 19.97 | 20.15 |

MIMO <Ant. 1+2>

| 2.4GHz 802.11n HT20 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS8  | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 | MCS15 |
| Peak Power (dBm)    | 23.87 | 23.83 | 23.84 | 23.85 | 23.78 | 23.87 | 23.52 | 23.48 |

**Note:** MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.


## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


| Test Cases               |                                               |                   |           |              |
|--------------------------|-----------------------------------------------|-------------------|-----------|--------------|
| Conducted<br>TCs         | Test Items                                    | Mode              | Data Rate | Test Channel |
|                          | 6dB and 99% BW<br>Power Spectral<br>Density   | 802.11b           | 1 Mbps    | 1/6/11       |
|                          |                                               | 802.11g           | 6 Mbps    | 1/6/11       |
|                          |                                               | 802.11n HT20      | 6.5 Mbps  | 1/6/11       |
|                          |                                               | 802.11n HT40      | 13.5 Mbps | 3/6/9        |
|                          | Output Power                                  | 802.11b           | 1 Mbps    | 1/6/11       |
|                          |                                               | 802.11g           | 6 Mbps    | 1/6/11       |
|                          |                                               | 802.11n HT20      | 6.5 Mbps  | 1/6/11       |
|                          |                                               | 802.11n HT40      | 13.5 Mbps | 3/6/9        |
|                          | Conducted Band<br>Edge                        | 802.11b           | 1 Mbps    | 1/11         |
|                          |                                               | 802.11g           | 6 Mbps    | 1/11         |
|                          |                                               | 802.11n HT20      | 6.5 Mbps  | 1/11         |
|                          |                                               | 802.11n HT40      | 13.5 Mbps | 3/9          |
|                          | Conducted Spurious<br>Emission                | 802.11b           | 1 Mbps    | 1/6/11       |
|                          |                                               | 802.11g           | 6 Mbps    | 1/6/11       |
|                          |                                               | 802.11n HT20      | 6.5 Mbps  | 1/6/11       |
|                          |                                               | 802.11n HT40      | 13.5 Mbps | 3/6/9        |
| Radiated<br>TCs          | Radiated Band Edge                            | 802.11b           | 1 Mbps    | 1/11         |
|                          |                                               | 802.11g           | 6 Mbps    | 1/11         |
|                          |                                               | 802.11n HT20 SISO | 6.5 Mbps  | 11           |
|                          |                                               | 802.11n HT20 MIMO | 6.5 Mbps  | 1/11         |
|                          |                                               | 802.11n HT40 SISO | 13.5 Mbps | 3/9          |
|                          | Radiated Spurious<br>Emission                 | 802.11b           | 1 Mbps    | 1/6/11       |
|                          |                                               | 802.11g           | 6 Mbps    | 1/6/11       |
|                          |                                               | 802.11n HT20 SISO | 6.5 Mbps  | 11           |
|                          |                                               | 802.11n HT20 MIMO | 6.5 Mbps  | 1/6/11       |
|                          |                                               | 802.11n HT40 SISO | 13.5 Mbps | 3/6/9        |
| AC Conducted<br>Emission | Mode 1 : WLAN Link + Bluetooth Link + Adapter |                   |           |              |

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

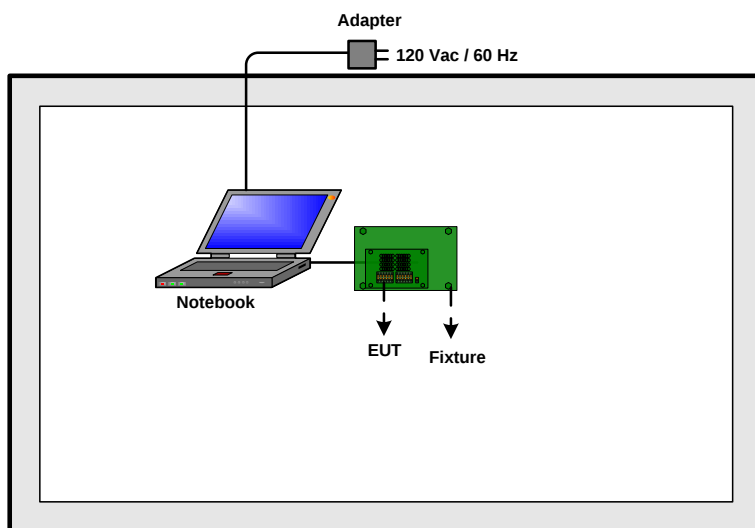

### <AC Conducted Emission Mode>

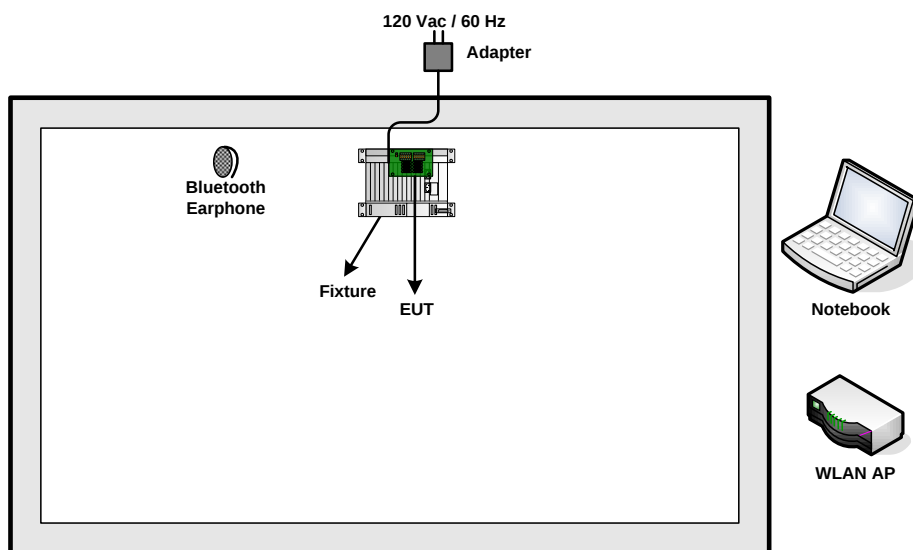

## 2.5 Support Unit used in test configuration and system

| Item | Equipment          | Trade Name    | Model Name        | FCC ID      | Data Cable | Power Cord                                                 |
|------|--------------------|---------------|-------------------|-------------|------------|------------------------------------------------------------|
| 1.   | WLAN AP            | D-Link        | DIR-628           | KA2DIR628A2 | N/A        | Unshielded, 1.8 m                                          |
| 2.   | Notebook           | Lenovo        | G480              | N/A         | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 3.   | Notebook           | DELL          | Latitude<br>E6320 | FCC DoC     | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 4.   | Bluetooth Earphone | Sony Ericsson | MW600             | PY7DDA-2029 | N/A        | N/A                                                        |
| 5.   | Fixture            | N/A           | WG7XXXT01         | N/A         | N/A        | N/A                                                        |
| 6.   | Adapter            | Aviv Energy   | HK-IP15-A05       | N/A         | N/A        | Unshielded, 1.8 m                                          |

## 2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, "HCT Tester" installed in the notebook make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

*= 4.2 + 10 = 14.2 (dB)*

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

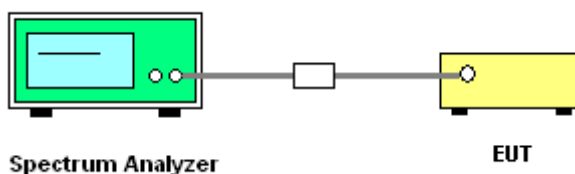




### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

|                        |          |                            |         |
|------------------------|----------|----------------------------|---------|
| <b>Test Band :</b>     | 2.4GHz   | <b>Temperature :</b>       | 21~25°C |
| <b>Test Engineer :</b> | Alex Lee | <b>Relative Humidity :</b> | 51~54%  |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 99% Bandwidth (MHz) |        | 6dB Bandwidth (MHz) |        | 6dB Bandwidth Min. Limit (MHz) | Pass/Fail |
|------|-----------|-----------------|---------|-------------|---------------------|--------|---------------------|--------|--------------------------------|-----------|
|      |           |                 |         |             | Ant. 1              | Ant. 2 | Ant. 1              | Ant. 2 |                                |           |
| 11b  | 1Mbps     | 1               | 1       | 2412        | 14.90               | -      | 10.04               | -      | 0.5                            | Pass      |
| 11b  | 1Mbps     | 1               | 6       | 2437        | 14.90               | -      | 10.08               | -      | 0.5                            | Pass      |
| 11b  | 1Mbps     | 1               | 11      | 2462        | 14.90               | -      | 10.04               | -      | 0.5                            | Pass      |
| 11g  | 6Mbps     | 1               | 1       | 2412        | 17.25               | -      | 15.08               | -      | 0.5                            | Pass      |
| 11g  | 6Mbps     | 1               | 6       | 2437        | 19.55               | -      | 15.08               | -      | 0.5                            | Pass      |
| 11g  | 6Mbps     | 1               | 11      | 2462        | 17.30               | -      | 15.08               | -      | 0.5                            | Pass      |
| HT20 | MCS0      | 1               | 1       | 2412        | 18.35               | -      | 15.12               | -      | 0.5                            | Pass      |
| HT20 | MCS0      | 1               | 6       | 2437        | 19.55               | -      | 15.08               | -      | 0.5                            | Pass      |
| HT20 | MCS0      | 1               | 11      | 2462        | 18.20               | -      | 15.08               | -      | 0.5                            | Pass      |
| HT40 | MCS0      | 1               | 3       | 2422        | 36.10               | -      | 35.04               | -      | 0.5                            | Pass      |
| HT40 | MCS0      | 1               | 6       | 2437        | 36.70               | -      | 35.04               | -      | 0.5                            | Pass      |
| HT40 | MCS0      | 1               | 9       | 2452        | 36.80               | -      | 35.12               | -      | 0.5                            | Pass      |
| HT20 | MCS8      | 2               | 1       | 2412        | 18.30               | 18.15  | 15.08               | 15.08  | 0.5                            | Pass      |
| HT20 | MCS8      | 2               | 6       | 2437        | 19.65               | 19.05  | 15.08               | 15.08  | 0.5                            | Pass      |
| HT20 | MCS8      | 2               | 11      | 2462        | 18.20               | 18.10  | 15.08               | 15.08  | 0.5                            | Pass      |




Minimum 6dB Bandwidth

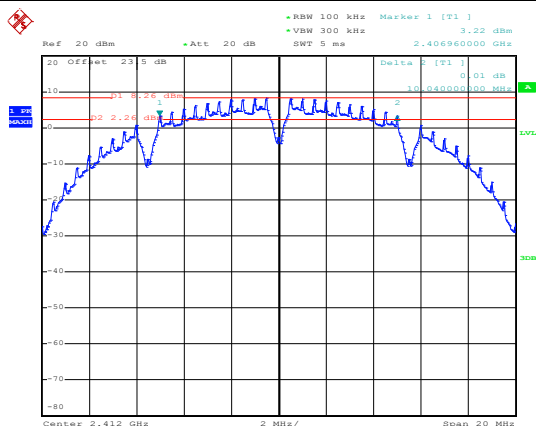

Date: 9.DEC.2013 20:48:13

Maximum 99% Occupied Bandwidth

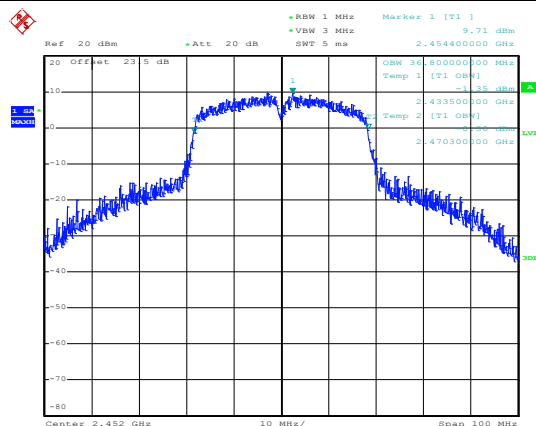

Date: 9.DEC.2013 21:49:04

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

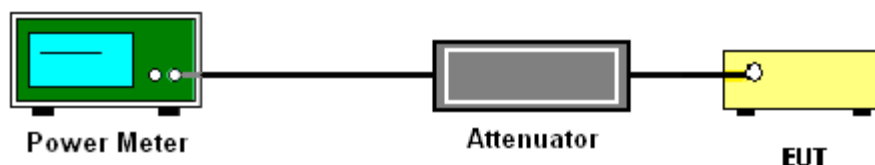

**3.2.5 Test Result of Peak Output Power**

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Band :</b>     | 2.4GHz   | <b>Temperature :</b>       | 21~25℃ |
| <b>Test Engineer :</b> | Alex Lee | <b>Relative Humidity :</b> | 51~54% |

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq.<br>(MHz) | Peak Conducted Power<br>(dBm) |        |       | Max. Limit<br>(dBm) |        | DG<br>(dBi) |        | Pass/Fail |
|------|-----------|-----------------|-----|----------------|-------------------------------|--------|-------|---------------------|--------|-------------|--------|-----------|
|      |           |                 |     |                | Ant. 1                        | Ant. 2 | SUM   | Ant. 1              | Ant. 2 | Ant. 1      | Ant. 2 |           |
| 11b  | 1Mbps     | 1               | 1   | 2412           | 17.58                         | -      | -     | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| 11b  | 1Mbps     | 1               | 6   | 2437           | 17.96                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| 11b  | 1Mbps     | 1               | 11  | 2462           | 17.62                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 1   | 2412           | 20.23                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 6   | 2437           | 20.59                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 11  | 2462           | 19.92                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 1   | 2412           | 19.95                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 6   | 2437           | 20.56                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 11  | 2462           | 20.32                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 3   | 2422           | 19.98                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 6   | 2437           | 20.22                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 9   | 2452           | 19.98                         | -      |       | 30.00               | 30.00  | -0.36       | 1.22   | Pass      |
| HT20 | MCS8      | 2               | 1   | 2412           | 19.82                         | 21.06  | 23.49 | 30.00               |        | 3.48        |        | Pass      |
| HT20 | MCS8      | 2               | 6   | 2437           | 19.95                         | 21.61  | 23.87 | 30.00               |        | 3.48        |        | Pass      |
| HT20 | MCS8      | 2               | 11  | 2462           | 19.55                         | 21.46  | 23.62 | 30.00               |        | 3.48        |        | Pass      |

**Note:** Measured power (dBm) has offset with cable loss.



## 3.2.6 Test Result of Average output Power (Reporting Only)

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Band :     | 2.4GHz   | Temperature :       | 21~25°C |
| Test Engineer : | Alex Lee | Relative Humidity : | 51~54%  |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | Duty Factor (dB) |        | Average Conducted Power (dBm) |        |           |
|------|-----------|-----------------|---------|----------------|------------------|--------|-------------------------------|--------|-----------|
|      |           |                 |         |                | Ant. 1           | Ant. 2 | Ant. 1                        | Ant. 2 | Sum Power |
| 11b  | 1Mbps     | 1               | 1       | 2412           | 0.10             | -      | 15.84                         | -      | -         |
| 11b  | 1Mbps     | 1               | 6       | 2437           | 0.10             | -      | 16.15                         | -      |           |
| 11b  | 1Mbps     | 1               | 11      | 2462           | 0.10             | -      | 15.92                         | -      |           |
| 11g  | 6Mbps     | 1               | 1       | 2412           | 0.59             | -      | 13.22                         | -      |           |
| 11g  | 6Mbps     | 1               | 6       | 2437           | 0.59             | -      | 16.22                         | -      |           |
| 11g  | 6Mbps     | 1               | 11      | 2462           | 0.59             | -      | 12.92                         | -      |           |
| HT20 | MCS0      | 1               | 1       | 2412           | 0.64             | -      | 13.02                         | -      |           |
| HT20 | MCS0      | 1               | 6       | 2437           | 0.64             | -      | 15.40                         | -      |           |
| HT20 | MCS0      | 1               | 11      | 2462           | 0.64             | -      | 13.59                         | -      |           |
| HT40 | MCS0      | 1               | 3       | 2422           | 1.21             | -      | 11.37                         | -      |           |
| HT40 | MCS0      | 1               | 6       | 2437           | 1.21             | -      | 13.99                         | -      |           |
| HT40 | MCS0      | 1               | 9       | 2452           | 1.21             | -      | 13.66                         | -      |           |
| HT20 | MCS8      | 2               | 1       | 2412           | 1.15             | 1.17   | 12.52                         | 13.76  | 16.19     |
| HT20 | MCS8      | 2               | 6       | 2437           | 1.15             | 1.17   | 14.76                         | 16.49  | 18.72     |
| HT20 | MCS8      | 2               | 11      | 2462           | 1.15             | 1.17   | 12.45                         | 13.90  | 16.24     |

**Note:** Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus 10 log (N) exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add 10 log (N) dB, where N is the number of outputs. (N=2)

### 3.3.4 Test Setup

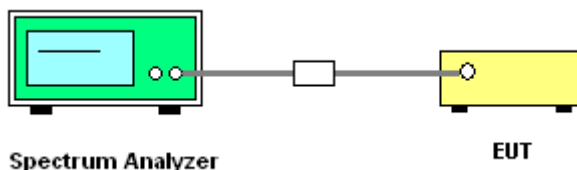


### 3.3.5 Test Result of Power Spectral Density

|                 |          |                     |        |
|-----------------|----------|---------------------|--------|
| Test Band :     | 2.4GHz   | Temperature :       | 21~25℃ |
| Test Engineer : | Alex Lee | Relative Humidity : | 51~54% |

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq.<br>(MHz) | Peak Power Density<br>(dBm/3kHz) |        |                    | Max. Limit<br>(dBm/3kHz) |        | DG<br>(dBi) |        | Pass/Fail |
|------|-----------|-----------------|-----|----------------|----------------------------------|--------|--------------------|--------------------------|--------|-------------|--------|-----------|
|      |           |                 |     |                | Ant. 1                           | Ant. 2 | Worst<br>+10log(2) | Ant. 1                   | Ant. 2 | Ant. 1      | Ant. 2 |           |
| 11b  | 1Mbps     | 1               | 1   | 2412           | -5.97                            | -      | -                  | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| 11b  | 1Mbps     | 1               | 6   | 2437           | -5.90                            | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| 11b  | 1Mbps     | 1               | 11  | 2462           | -6.29                            | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 1   | 2412           | -11.06                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 6   | 2437           | -7.54                            | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| 11g  | 6Mbps     | 1               | 11  | 2462           | -10.64                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 1   | 2412           | -10.43                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 6   | 2437           | -8.07                            | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT20 | MCS0      | 1               | 11  | 2462           | -9.16                            | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 3   | 2422           | -15.33                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 6   | 2437           | -12.61                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT40 | MCS0      | 1               | 9   | 2452           | -12.62                           | -      |                    | 8.00                     | 8.00   | -0.36       | 1.22   | Pass      |
| HT20 | MCS8      | 2               | 1   | 2412           | -12.82                           | -11.74 | -8.73              | 8.00                     |        | 3.48        |        | Pass      |
| HT20 | MCS8      | 2               | 6   | 2437           | -10.69                           | -9.07  | -6.06              | 8.00                     |        | 3.48        |        | Pass      |
| HT20 | MCS8      | 2               | 11  | 2462           | -12.75                           | -10.26 | -7.25              | 8.00                     |        | 3.48        |        | Pass      |

**Note:** Measured power density (dBm) has offset with cable loss.

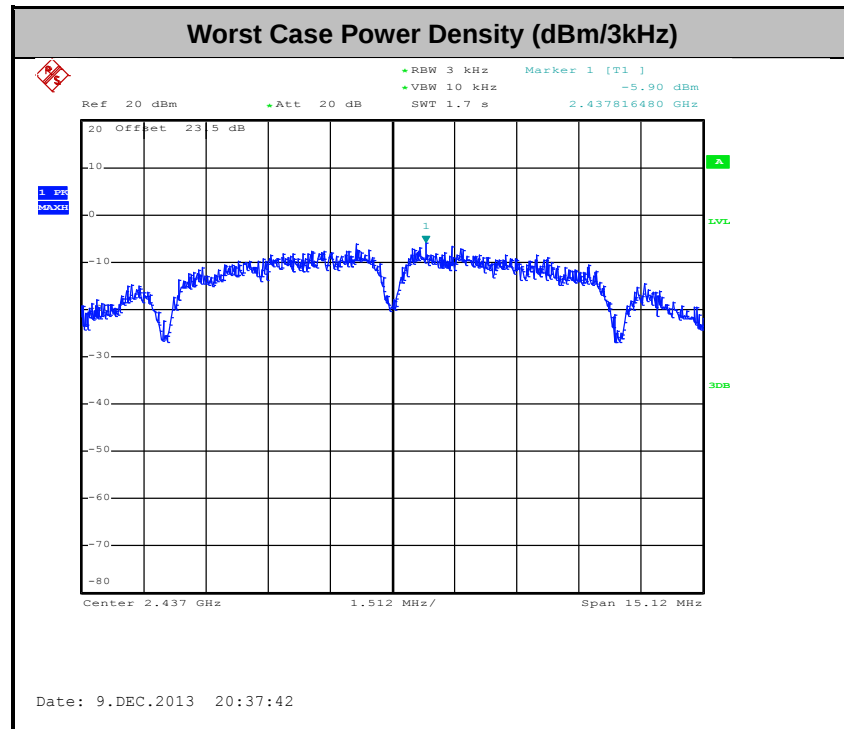

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

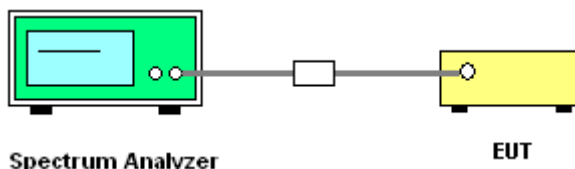

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)

|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Number of TX   | 1          | Ant. :              | 1        |
| Test Mode :    | 802.11b    | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 51~54%   |
| Test Channel : | 01         | Test Engineer :     | Alex Lee |

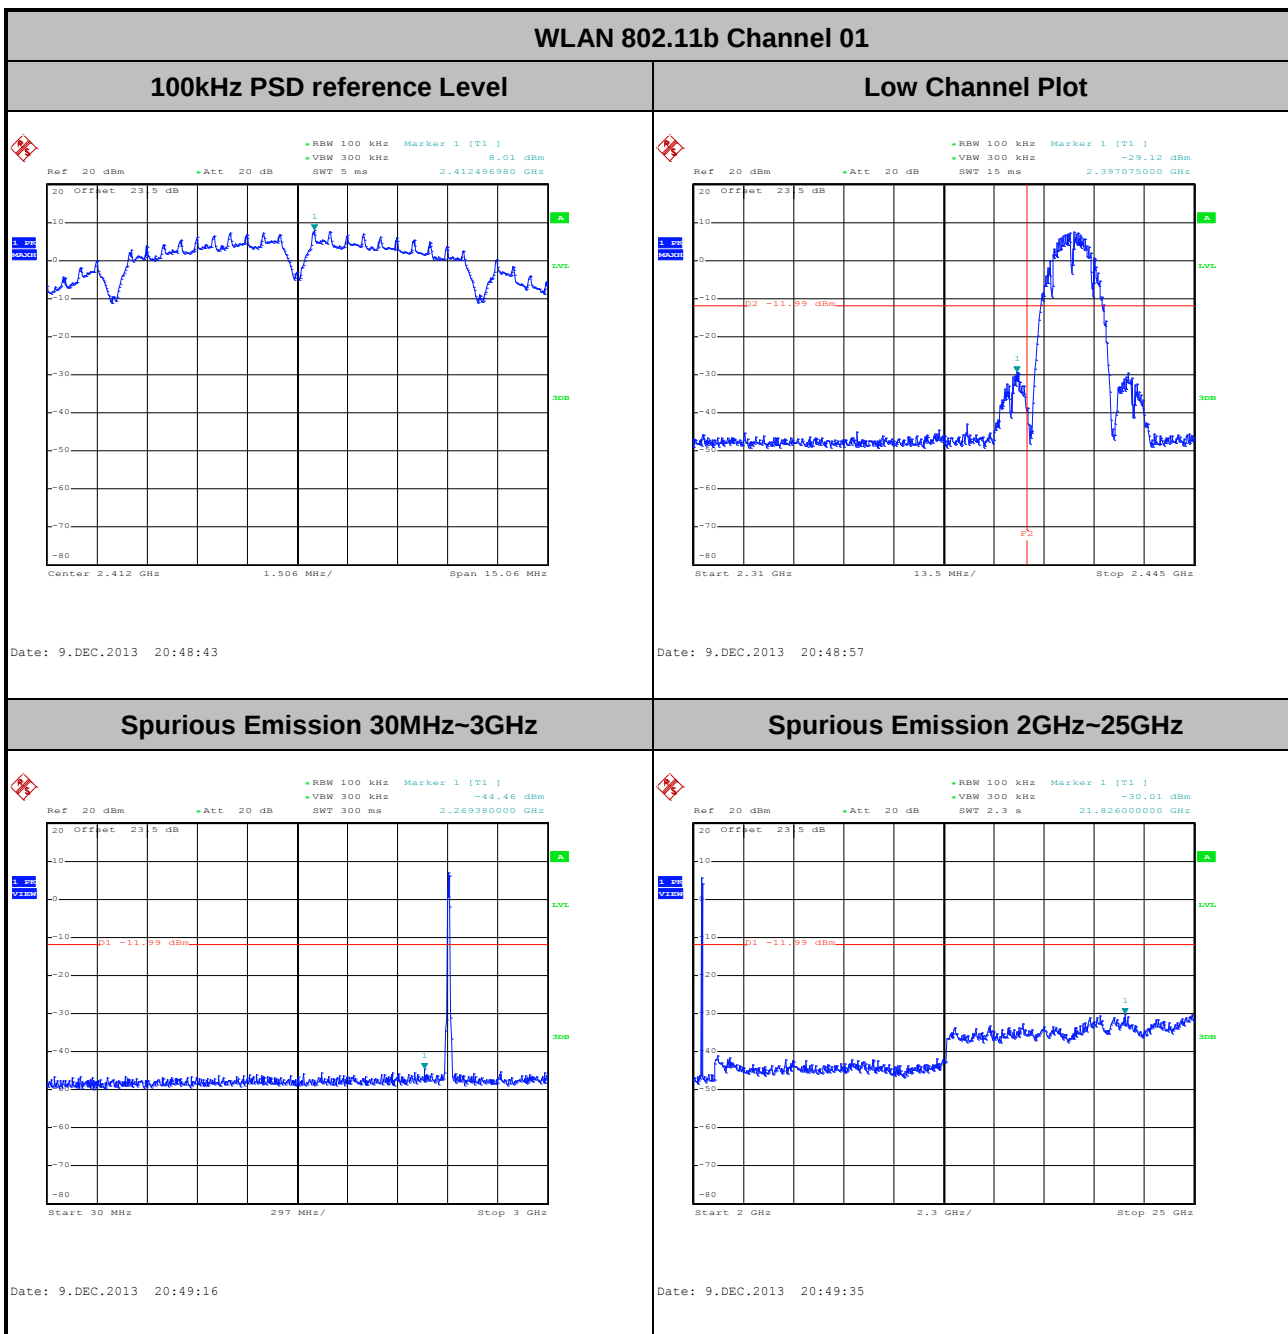




|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Number of TX : | 1          | Ant. :              | 1        |
| Test Mode :    | 802.11b    | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid | Relative Humidity : | 51~54%   |
| Test Channel : | 06         | Test Engineer :     | Alex Lee |


## WLAN 802.11b Channel 06

## 100kHz PSD reference Level

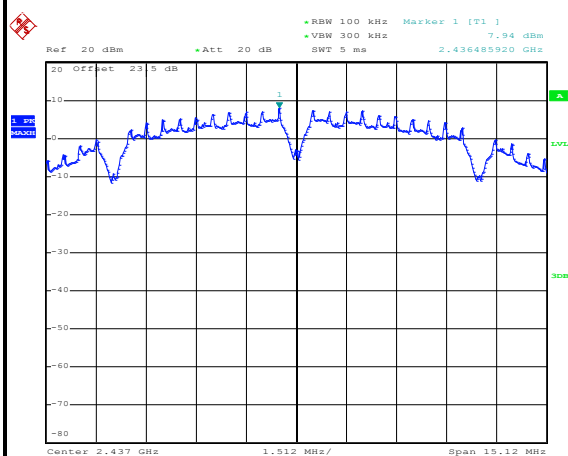


Date: 9.DEC.2013 20:37:51

## Spurious Emission 30MHz~3GHz

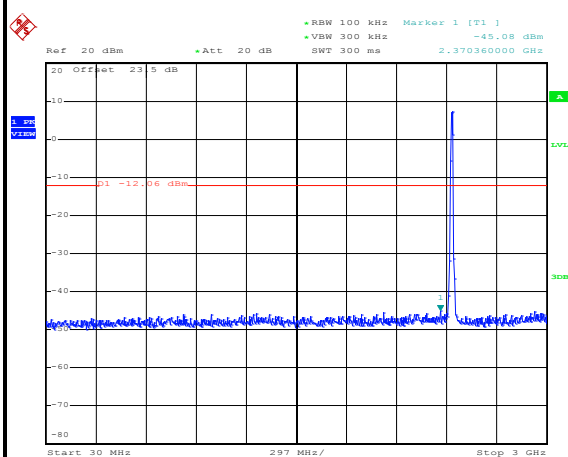

Date: 9.DEC.2013 21:16:04

## Spurious Emission 2GHz~25GHz

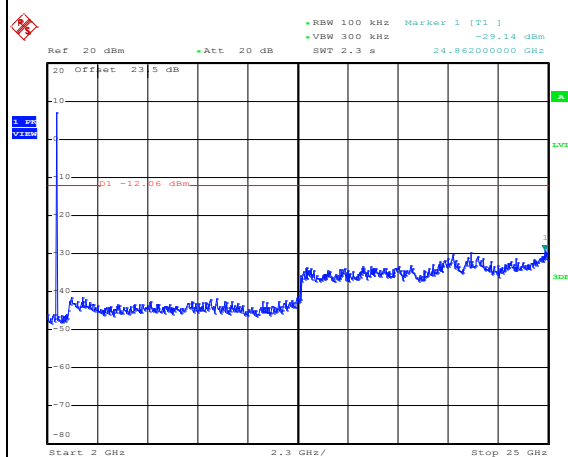


Date: 9.DEC.2013 21:16:23



|                |             |                     |          |
|----------------|-------------|---------------------|----------|
| Number of TX : | 1           | Ant. :              | 1        |
| Test Mode :    | 802.11b     | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High | Relative Humidity : | 51~54%   |
| Test Channel : | 11          | Test Engineer :     | Alex Lee |


## WLAN 802.11b Channel 11

## 100kHz PSD reference Level

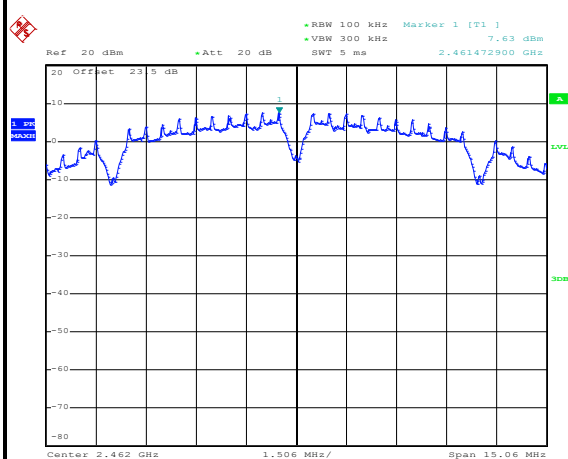


Date: 9.DEC.2013 20:55:01

## High Channel Plot

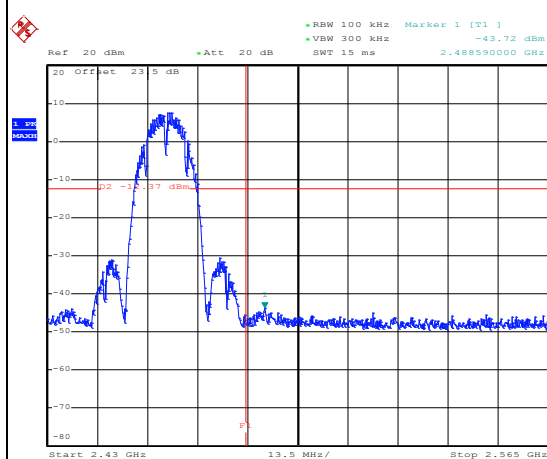


Date: 9.DEC.2013 20:55:15

## Spurious Emission 30MHz~3GHz

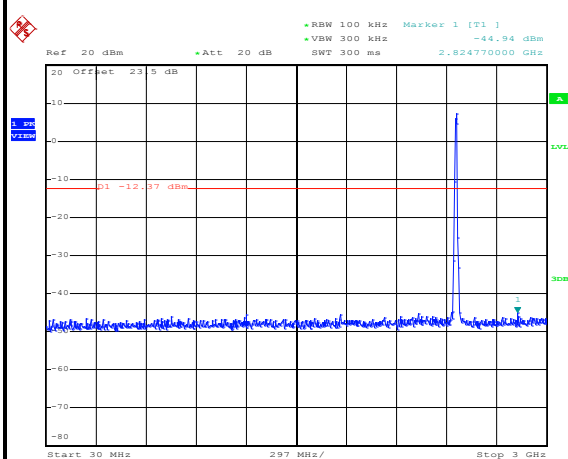

Date: 9.DEC.2013 20:55:34

## Spurious Emission 2GHz~25GHz

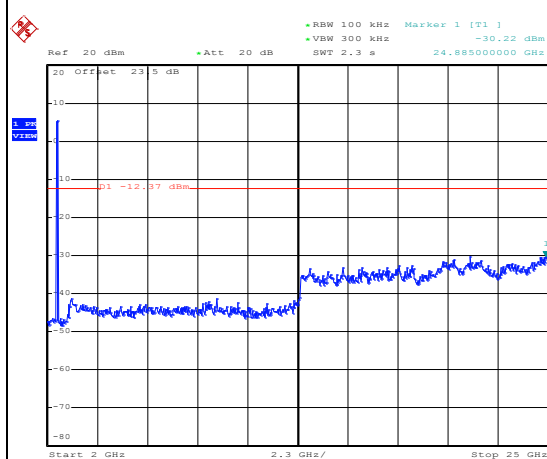


Date: 9.DEC.2013 20:55:53



|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Number of TX : | 1          | Ant. :              | 1        |
| Test Mode :    | 802.11g    | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 51~54%   |
| Test Channel : | 01         | Test Engineer :     | Alex Lee |


## WLAN 802.11g Channel 01

## 100kHz PSD reference Level

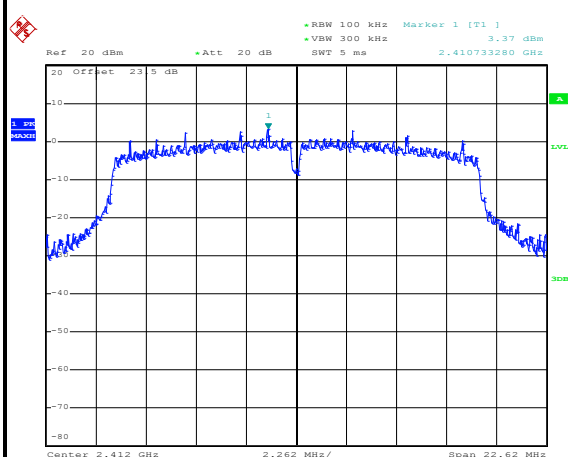


Date: 9.DEC.2013 21:10:50

## Low Channel Plot

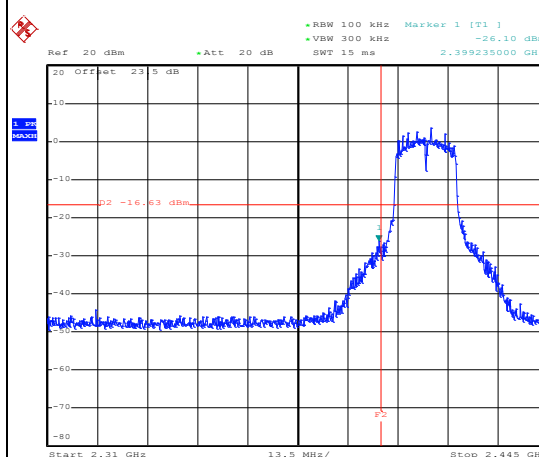


Date: 9.DEC.2013 21:11:04

## Spurious Emission 30MHz~3GHz

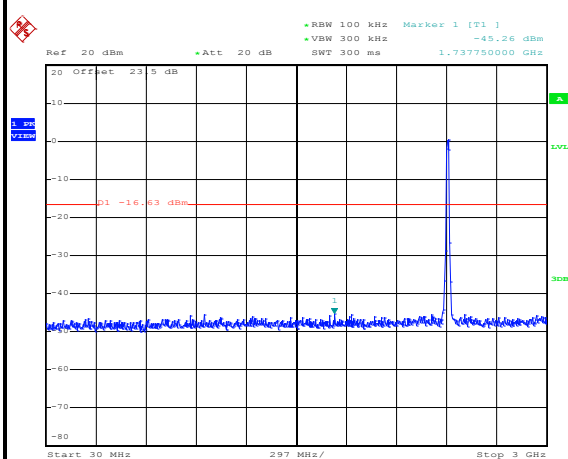

Date: 9.DEC.2013 21:11:23

## Spurious Emission 2GHz~25GHz

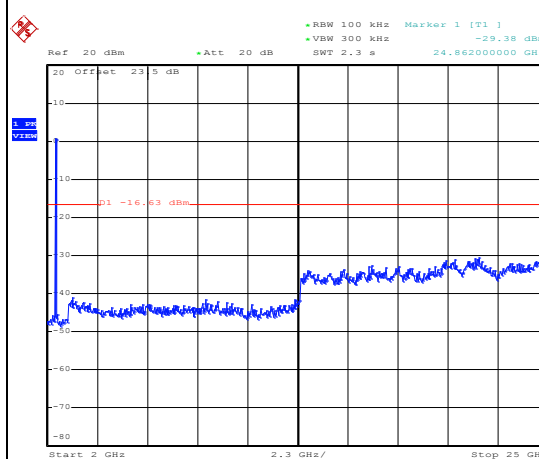


Date: 9.DEC.2013 21:11:42



|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Number of TX : | 1          | Ant. :              | 1        |
| Test Mode :    | 802.11g    | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid | Relative Humidity : | 51~54%   |
| Test Channel : | 06         | Test Engineer :     | Alex Lee |


## WLAN 802.11g Channel 06

## 100kHz PSD reference Level

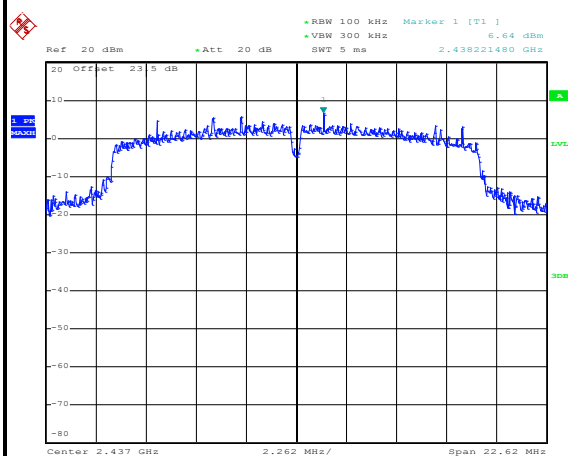


Date: 9.DEC.2013 21:06:51

## Spurious Emission 30MHz~3GHz

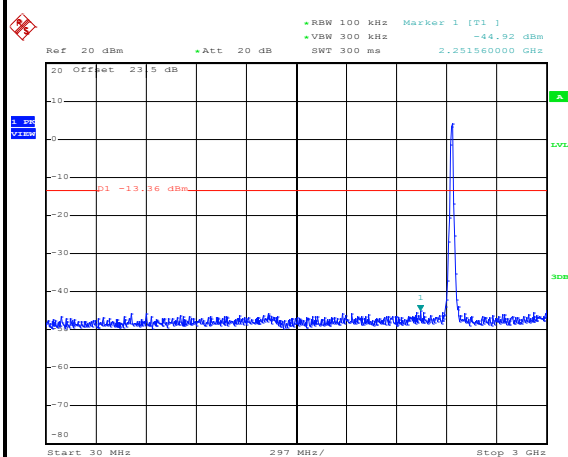

Date: 9.DEC.2013 21:07:10


## Spurious Emission 2GHz~25GHz

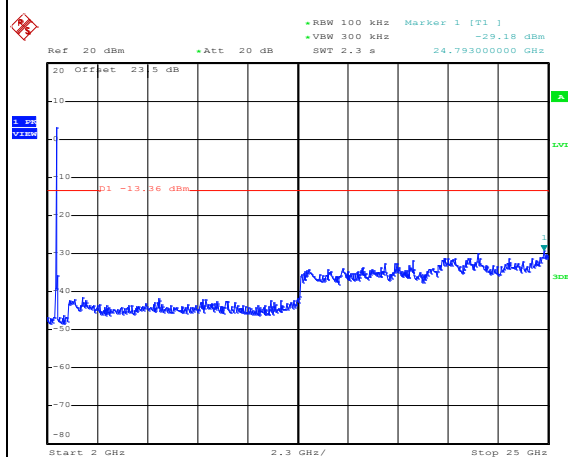


Date: 9.DEC.2013 21:07:29




|                |             |                     |          |
|----------------|-------------|---------------------|----------|
| Number of TX : | 1           | Ant. :              | 1        |
| Test Mode :    | 802.11g     | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High | Relative Humidity : | 51~54%   |
| Test Channel : | 11          | Test Engineer :     | Alex Lee |

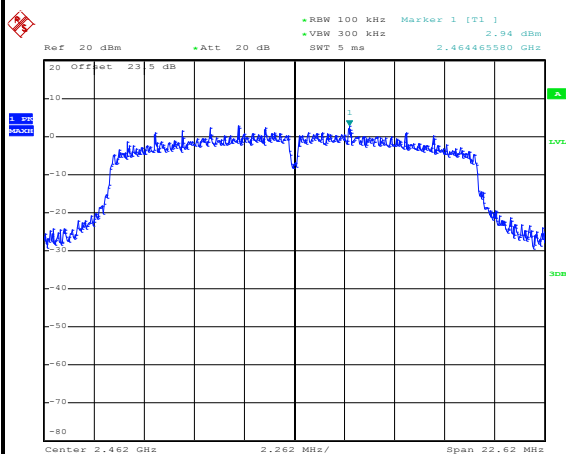**WLAN 802.11g Channel 11****100kHz PSD reference Level**


Date: 9.DEC.2013 21:00:53

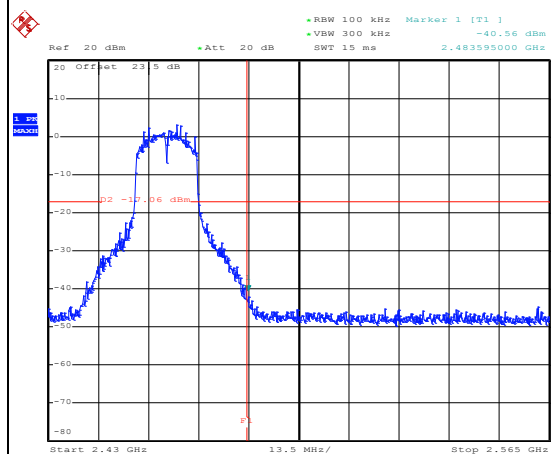**High Channel Plot**

Date: 9.DEC.2013 21:01:07

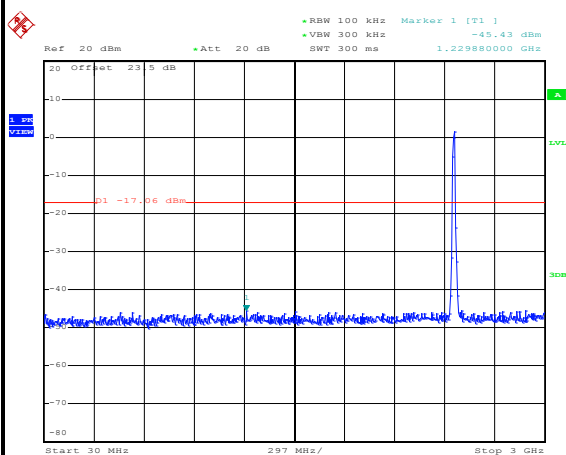**Spurious Emission 30MHz~3GHz**

Date: 9.DEC.2013 21:01:26

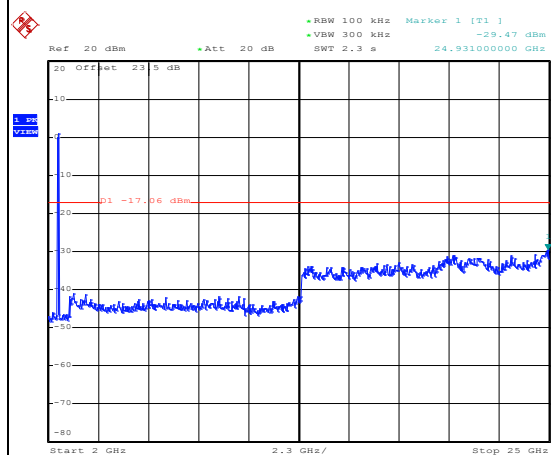**Spurious Emission 2GHz~25GHz**


Date: 9.DEC.2013 21:01:45



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%   |
| Test Channel : | 01           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT20 Channel 01

## 100kHz PSD reference Level

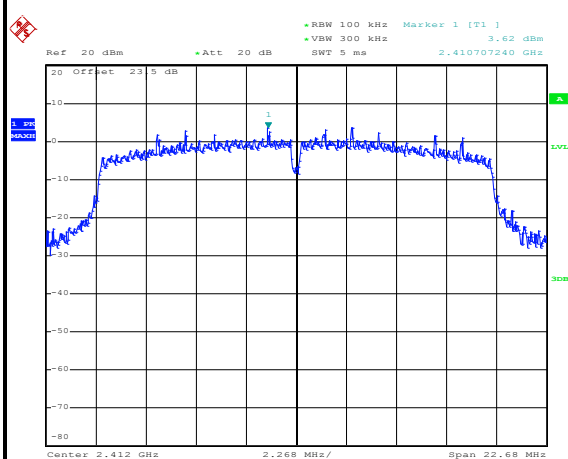


Date: 9.DEC.2013 21:23:15

## Low Channel Plot

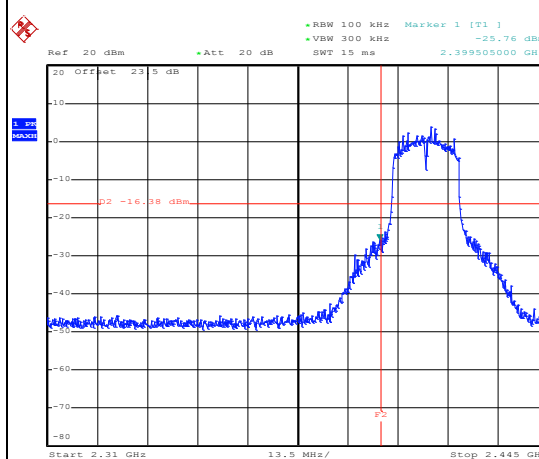


Date: 9.DEC.2013 21:23:29

## Spurious Emission 30MHz~3GHz

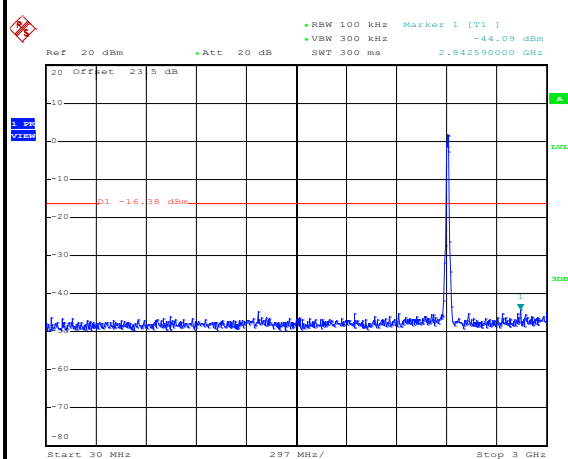

Date: 9.DEC.2013 21:23:48


## Spurious Emission 2GHz~25GHz

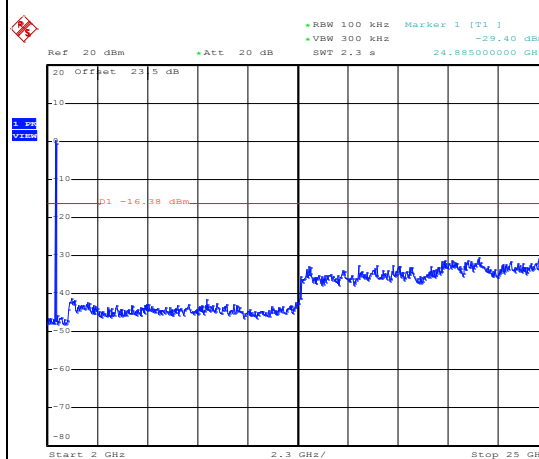


Date: 9.DEC.2013 21:24:06




|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%   |
| Test Channel : | 06           | Test Engineer :     | Alex Lee |

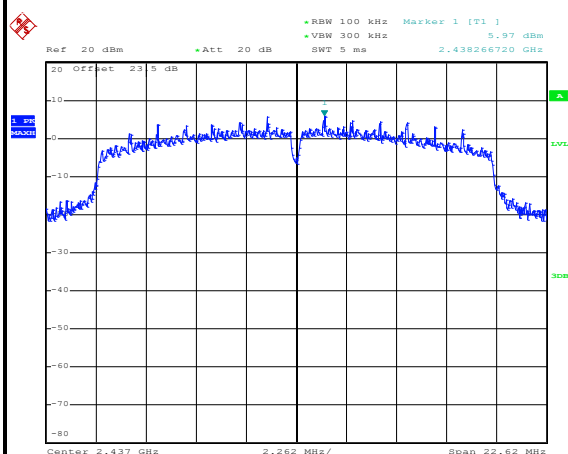**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level**

Date: 9.DEC.2013 21:27:41

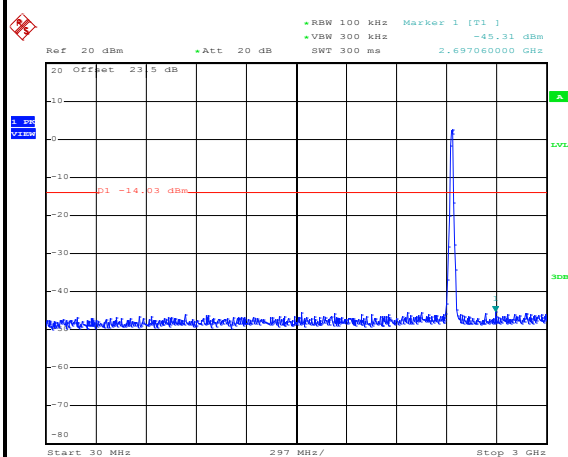**Spurious Emission 30MHz~3GHz**

Date: 9.DEC.2013 21:28:01

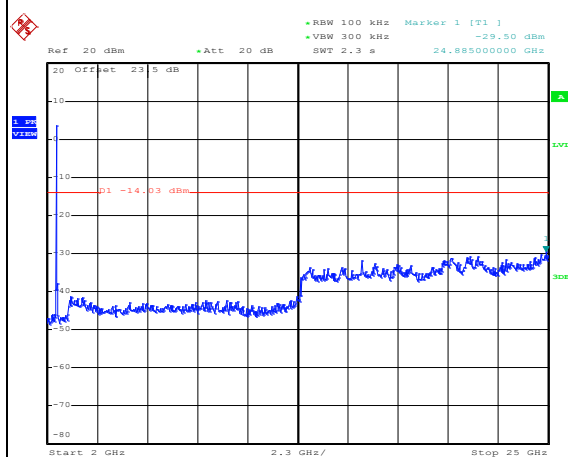**Spurious Emission 2GHz~25GHz**


Date: 9.DEC.2013 21:28:20



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%   |
| Test Channel : | 11           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT20 Channel 11

## 100kHz PSD reference Level

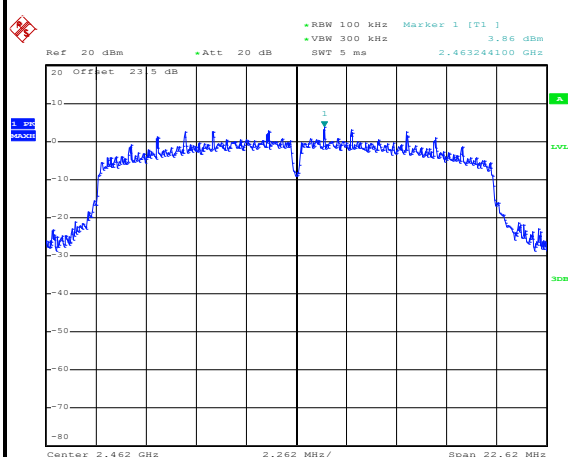


Date: 9.DEC.2013 21:31:45

## High Channel Plot

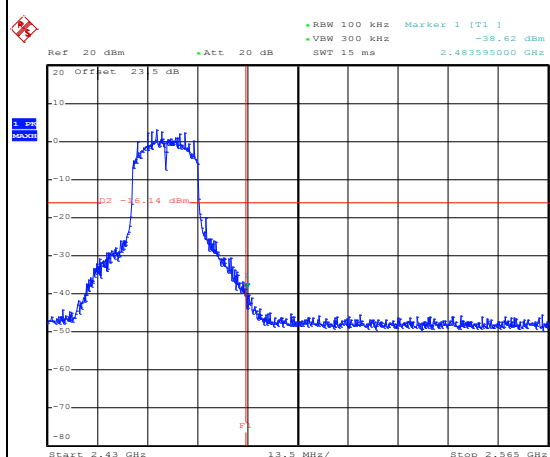


Date: 9.DEC.2013 21:31:59

## Spurious Emission 30MHz~3GHz

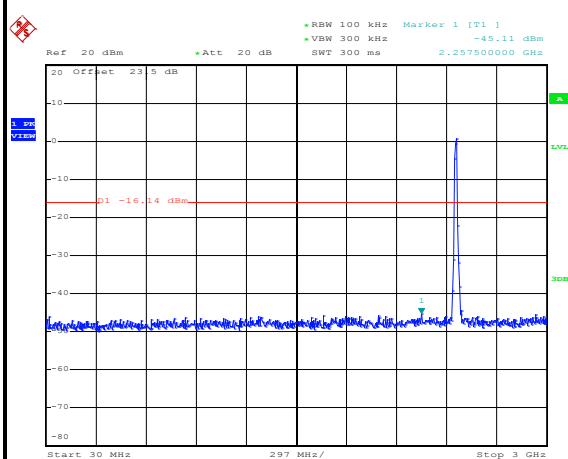

Date: 9.DEC.2013 21:32:19

## Spurious Emission 2GHz~25GHz

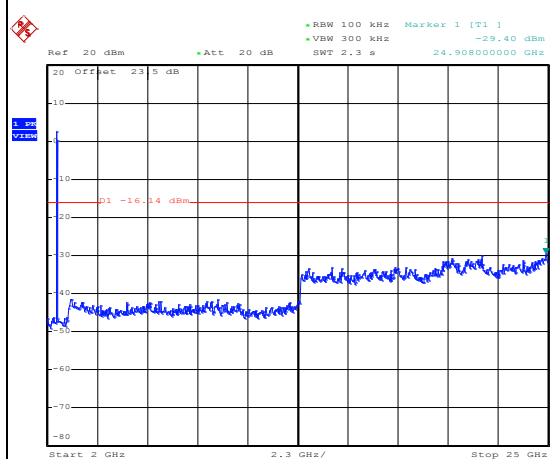


Date: 9.DEC.2013 21:32:37



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT40 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%   |
| Test Channel : | 03           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT40 Channel 03

## 100kHz PSD reference Level

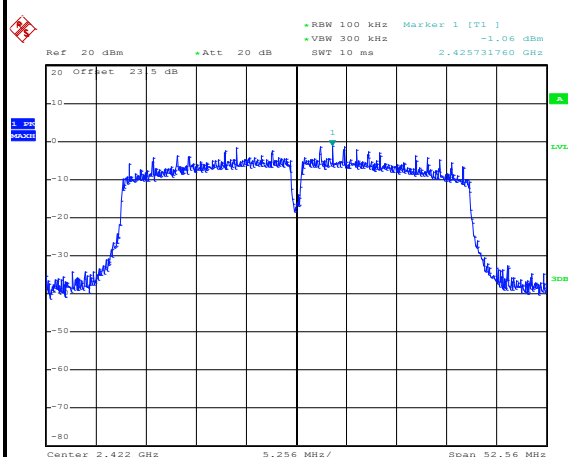


Date: 9.DEC.2013 21:38:58

## Low Channel Plot

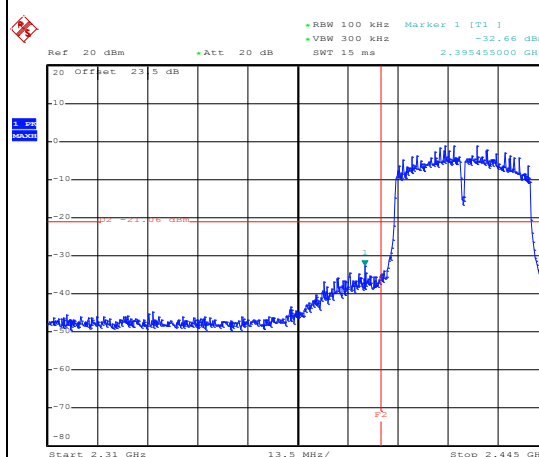


Date: 9.DEC.2013 21:39:12

## Spurious Emission 30MHz~3GHz

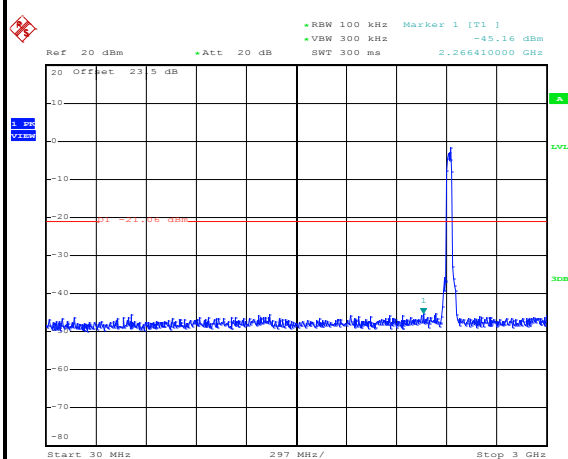

Date: 9.DEC.2013 21:39:31

## Spurious Emission 2GHz~25GHz

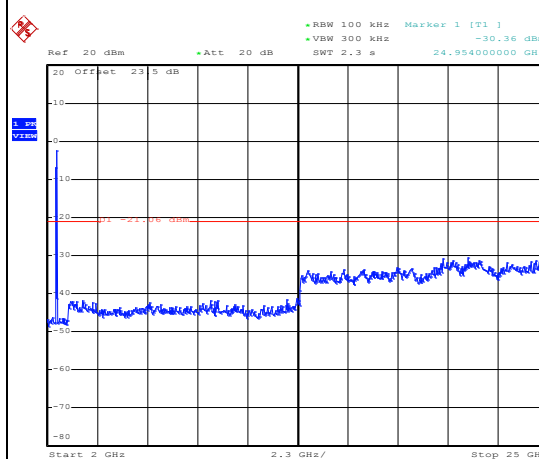


Date: 9.DEC.2013 21:39:50



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT40 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%   |
| Test Channel : | 06           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT40 Channel 06

## 100kHz PSD reference Level

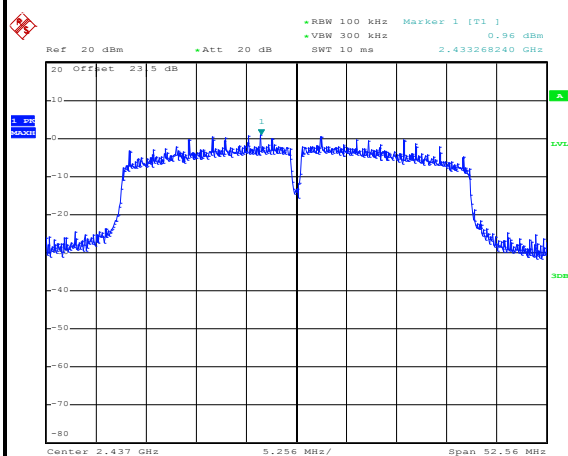


Date: 9.DEC.2013 21:44:15

## Spurious Emission 30MHz~3GHz

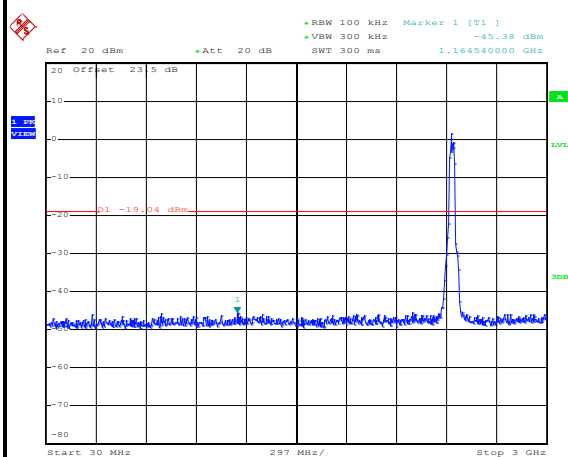

Date: 9.DEC.2013 21:45:31

## Spurious Emission 2GHz~25GHz

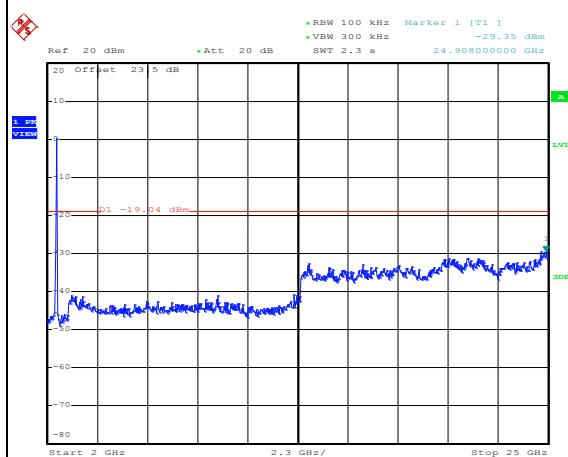


Date: 9.DEC.2013 21:45:50



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 1            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT40 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%   |
| Test Channel : | 09           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT40 Channel 09

## 100kHz PSD reference Level

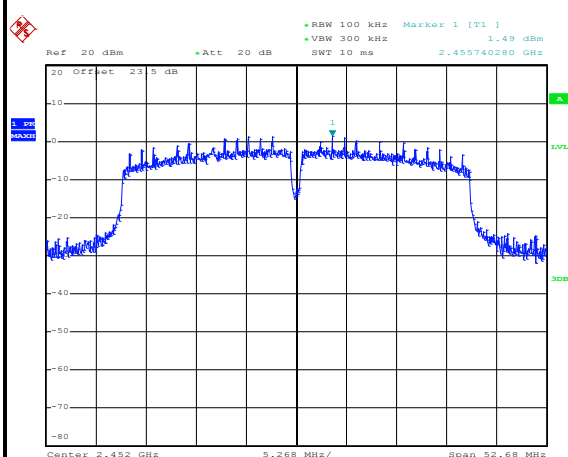


Date: 9.DEC.2013 21:48:02

## High Channel Plot

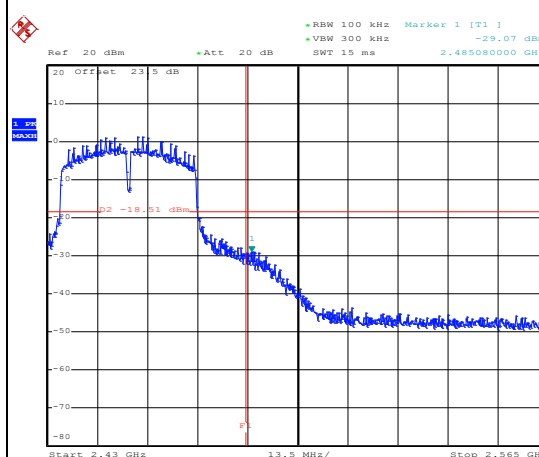


Date: 9.DEC.2013 21:48:16

## Spurious Emission 30MHz~3GHz

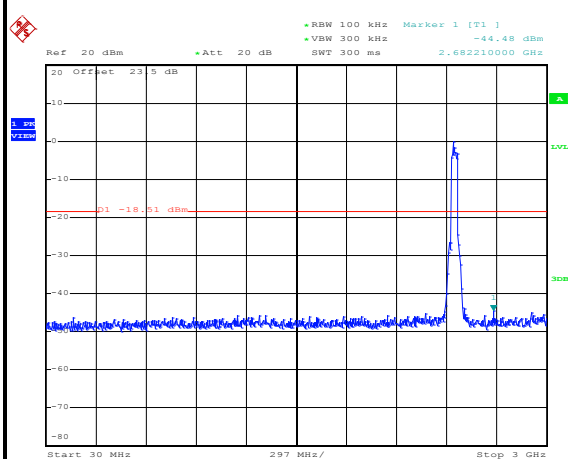

Date: 9.DEC.2013 21:49:33

## Spurious Emission 2GHz~25GHz

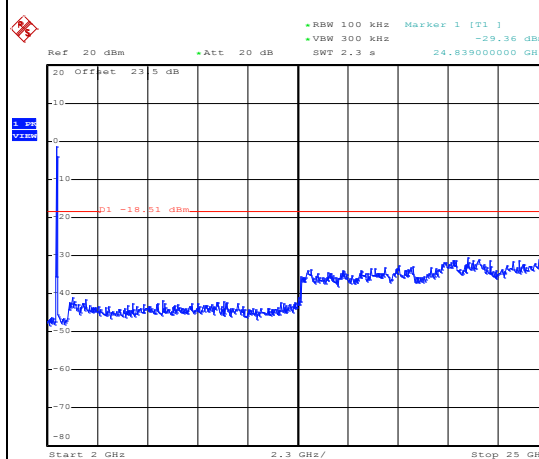

Date: 9.DEC.2013 21:49:52




Number of TX = 2, Ant. 1 (Measured)

|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%   |
| Test Channel : | 01           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT20 Channel 01

## 100kHz PSD reference Level

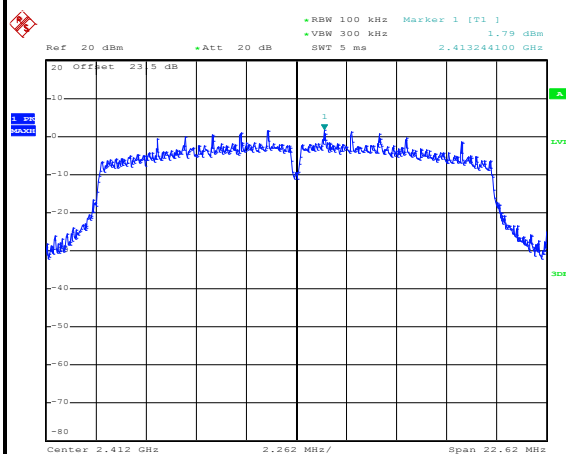


Date: 9.DEC.2013 21:56:25

## Low Channel Plot

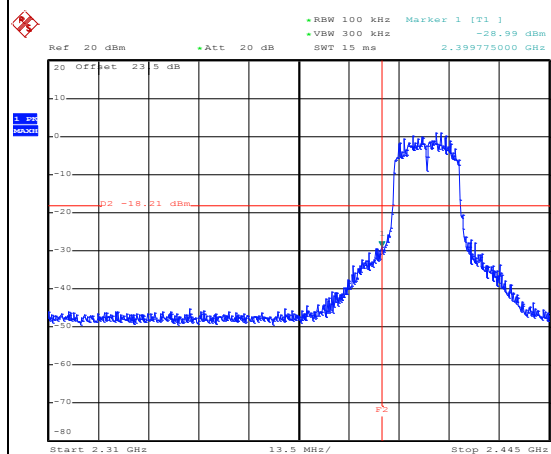


Date: 9.DEC.2013 21:56:39

## Spurious Emission 30MHz~3GHz

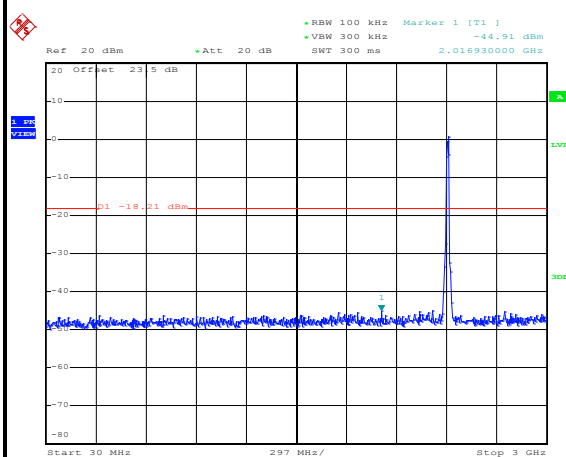

Date: 9.DEC.2013 21:56:58


## Spurious Emission 2GHz~25GHz

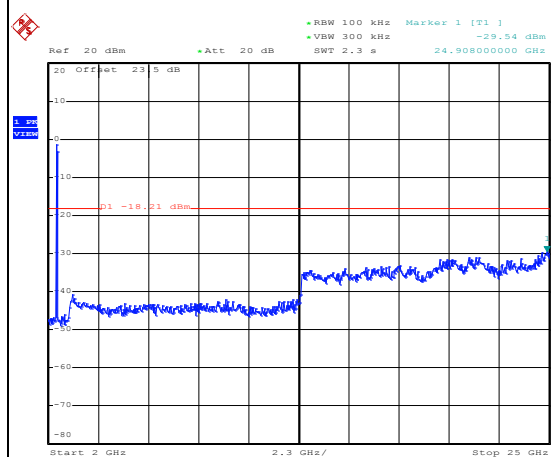


Date: 9.DEC.2013 21:57:17




|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%   |
| Test Channel : | 06           | Test Engineer :     | Alex Lee |

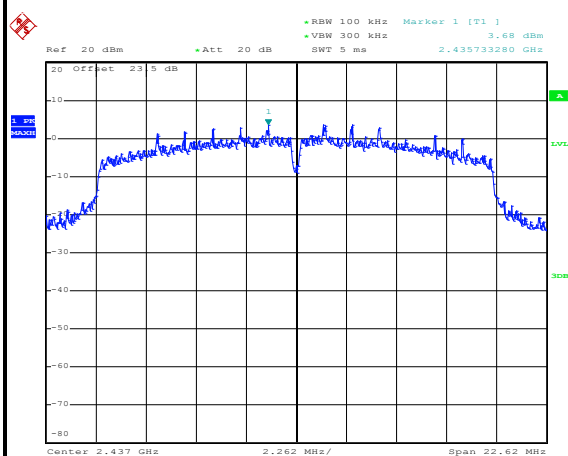**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level**

Date: 9.DEC.2013 21:59:44

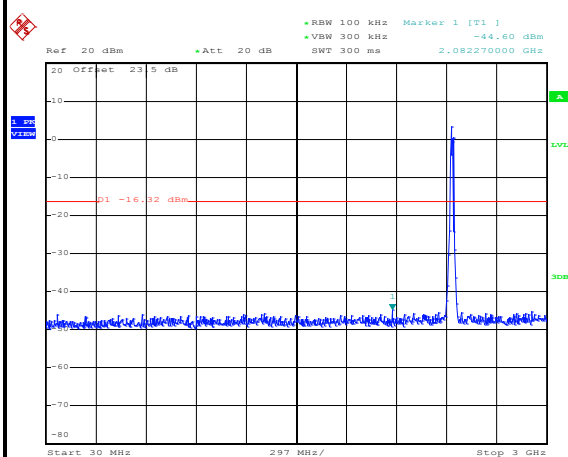**Spurious Emission 30MHz~3GHz**


Date: 9.DEC.2013 22:00:04

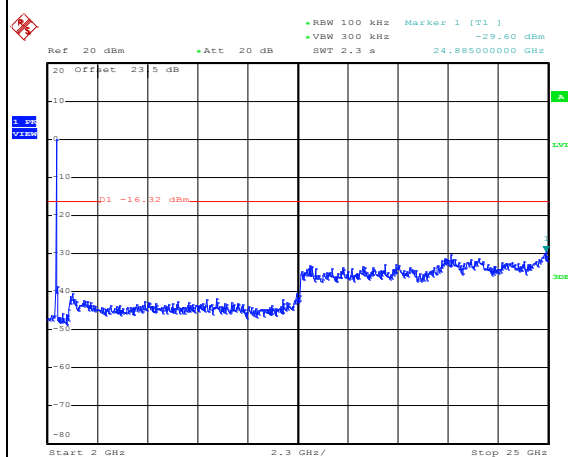**Spurious Emission 2GHz~25GHz**


Date: 9.DEC.2013 22:00:23




|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 1        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%   |
| Test Channel : | 11           | Test Engineer :     | Alex Lee |

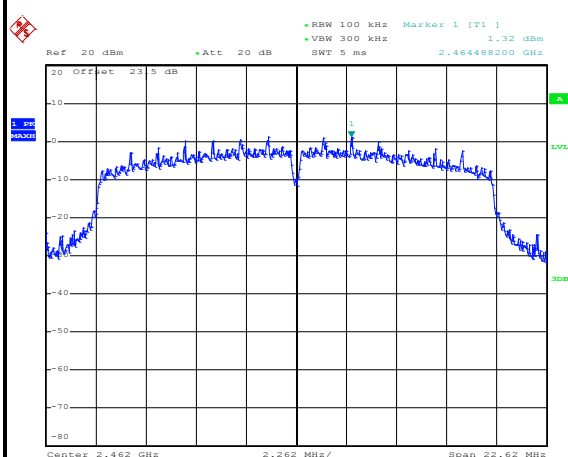**WLAN 802.11n HT20 Channel 11****100kHz PSD reference Level**


Date: 9.DEC.2013 22:03:19

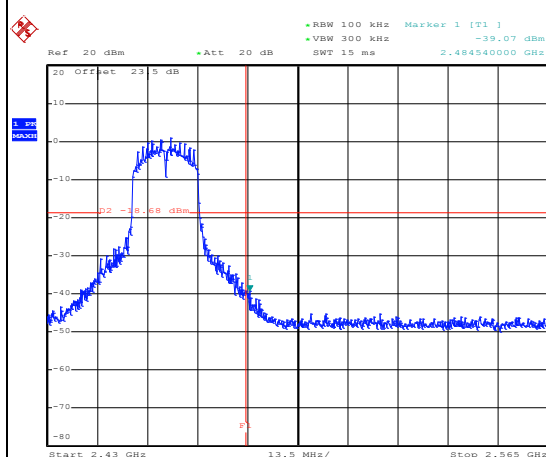**High Channel Plot**

Date: 9.DEC.2013 22:03:32

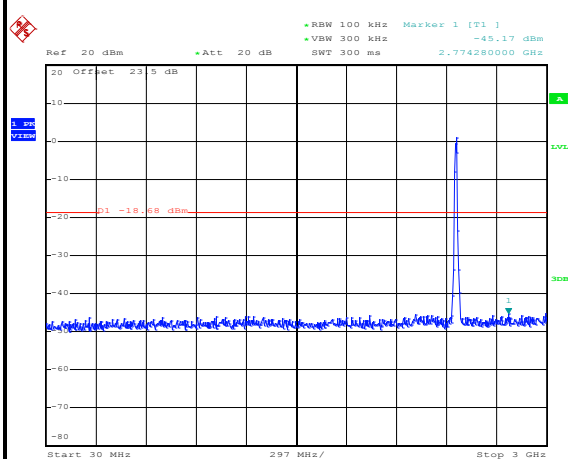**Spurious Emission 30MHz~3GHz**

Date: 9.DEC.2013 22:03:52

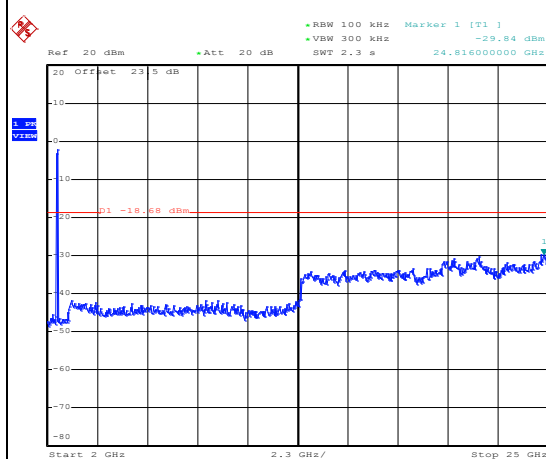**Spurious Emission 2GHz~25GHz**

Date: 9.DEC.2013 22:04:10




Number of TX = 2, Ant. 2 (Measured)

|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 2        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%   |
| Test Channel : | 01           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT20 Channel 01

## 100kHz PSD reference Level

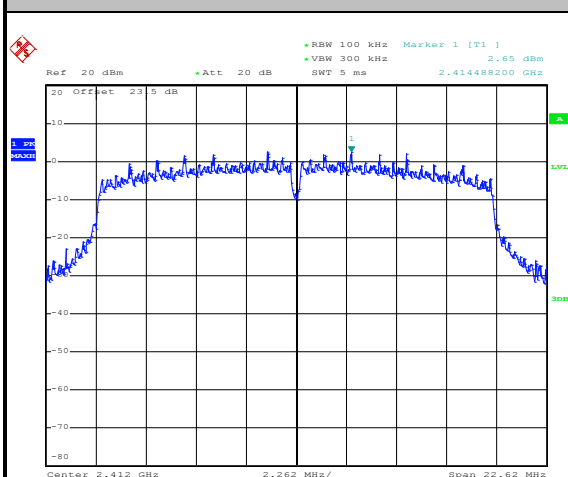


Date: 9.DEC.2013 22:18:47

## Low Channel Plot

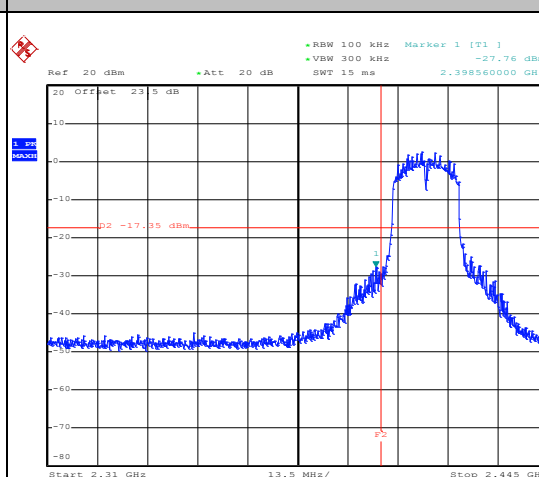


Date: 9.DEC.2013 22:19:01

## Spurious Emission 30MHz~3GHz

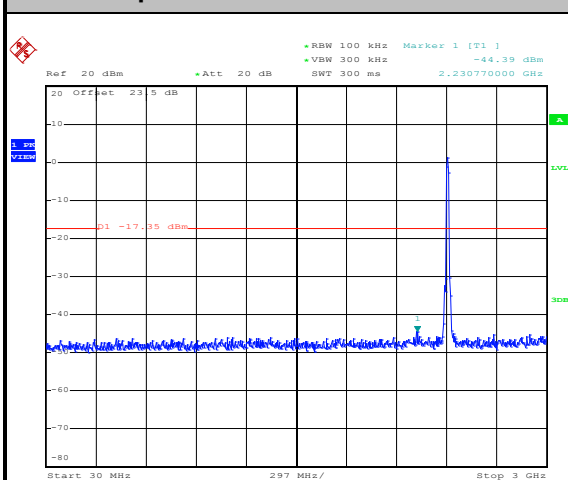

Date: 9.DEC.2013 22:19:21


## Spurious Emission 2GHz~25GHz

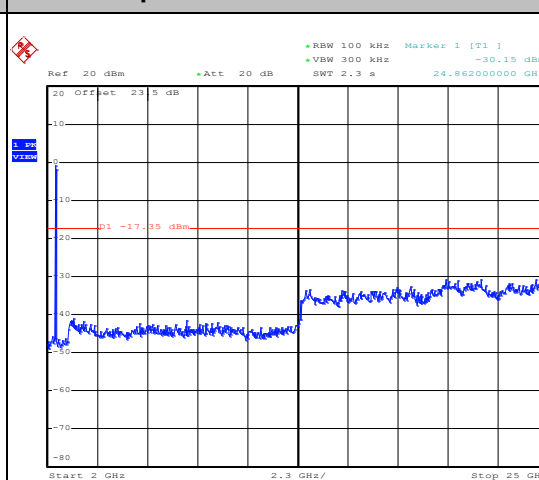


Date: 9.DEC.2013 22:19:39




|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 2        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%   |
| Test Channel : | 06           | Test Engineer :     | Alex Lee |

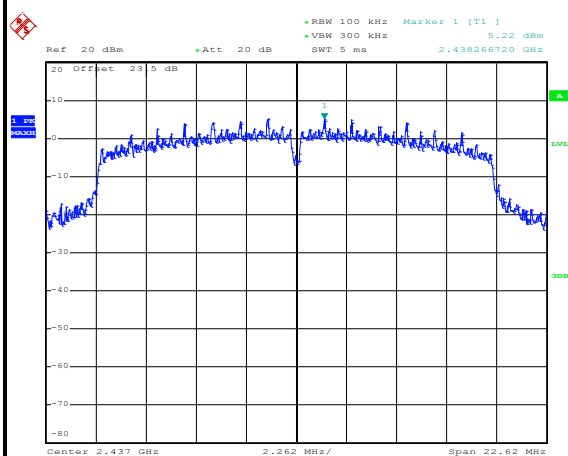**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level**

Date: 9.DEC.2013 22:10:30

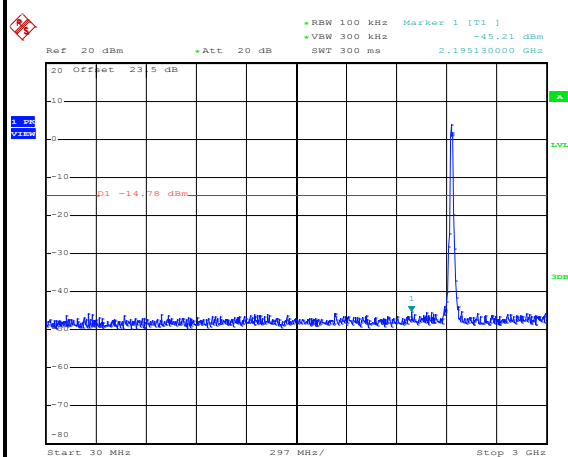**Spurious Emission 30MHz~3GHz**

Date: 9.DEC.2013 22:10:50

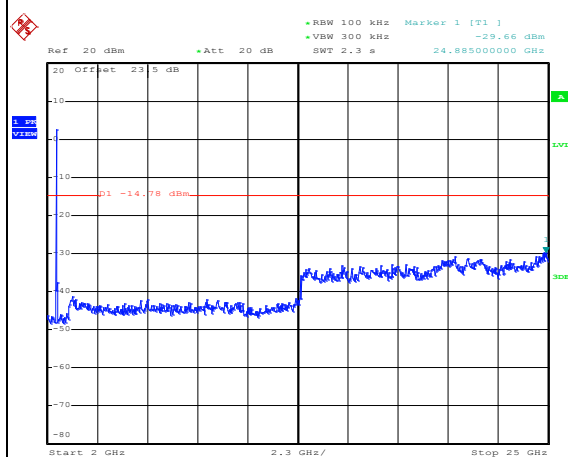**Spurious Emission 2GHz~25GHz**


Date: 9.DEC.2013 22:11:09



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Number of TX : | 2            | Ant. :              | 2        |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C  |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%   |
| Test Channel : | 11           | Test Engineer :     | Alex Lee |


## WLAN 802.11n HT20 Channel 11

## 100kHz PSD reference Level

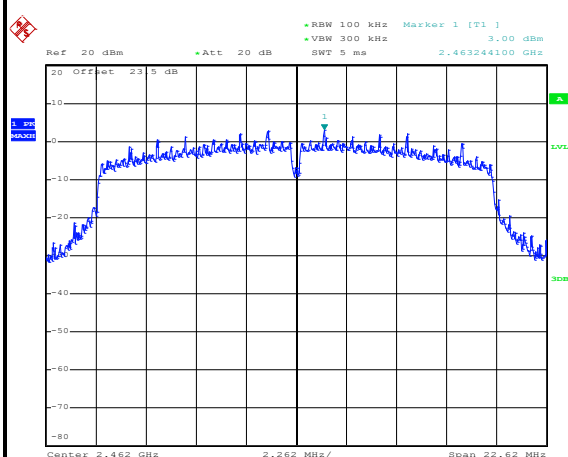


Date: 9.DEC.2013 22:07:36

## High Channel Plot

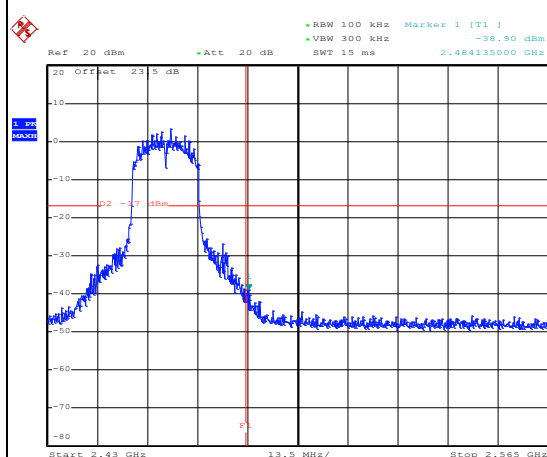


Date: 9.DEC.2013 22:07:50

## Spurious Emission 30MHz~3GHz

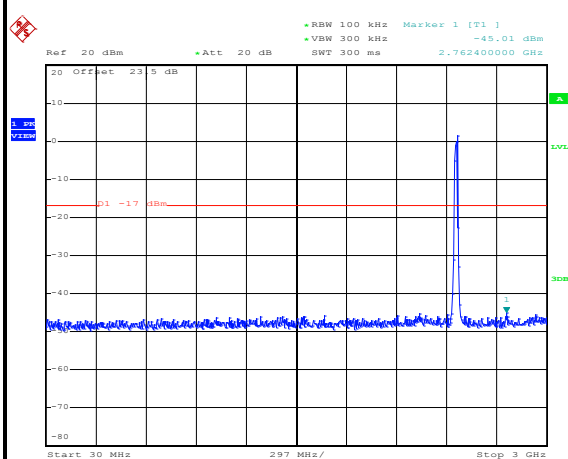

Date: 9.DEC.2013 22:08:09

## Spurious Emission 2GHz~25GHz

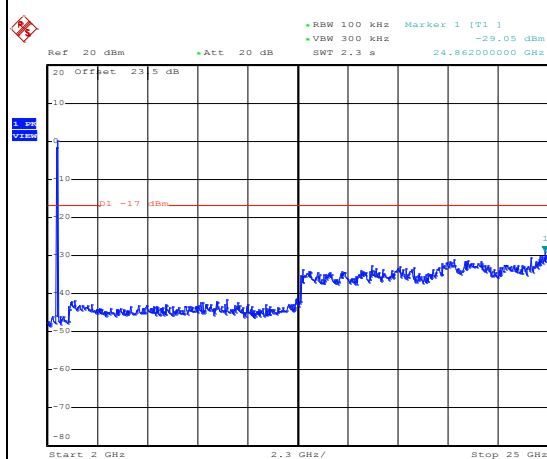

Date: 9.DEC.2013 22:08:28

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Antenna | Band                | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|---------|---------------------|---------------|-------|----------|-------------|
| 1       | 802.11b             | 97.62         | 16480 | 0.06     | 100Hz       |
| 1       | 802.11g             | 87.24         | 2736  | 0.37     | 1kHz        |
| 1       | 2.4GHz 802.11n HT20 | 86.26         | 2548  | 0.39     | 1kHz        |
| 1       | 2.4GHz 802.11n HT40 | 75.73         | 1248  | 0.80     | 1kHz        |
| 1+2     | 2.4GHz 802.11n HT20 | 76.78         | 1296  | 0.77     | 1kHz        |

### 3.5.4 Test Setup


For radiated emissions below 30MHz

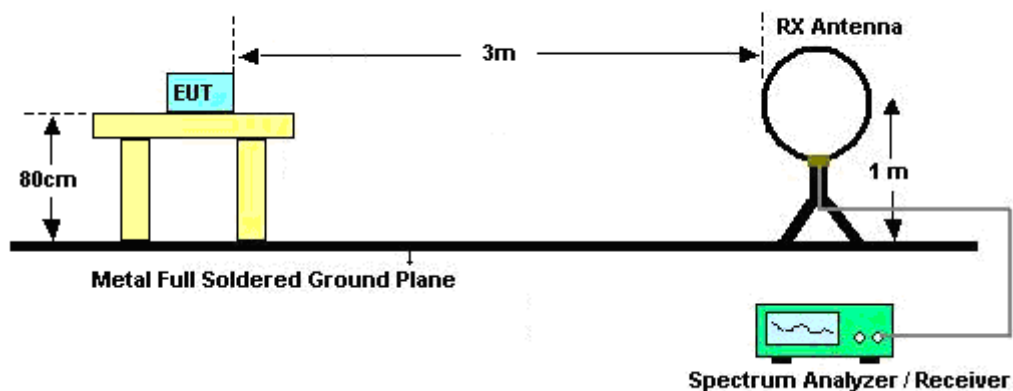

For radiated emissions from 30MHz to 1GHz

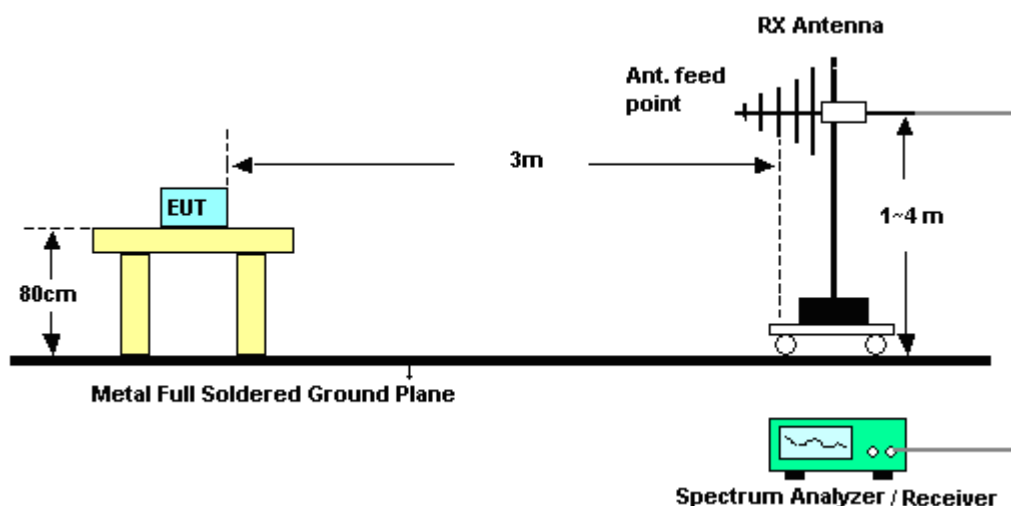

For radiated emissions above 1GHz

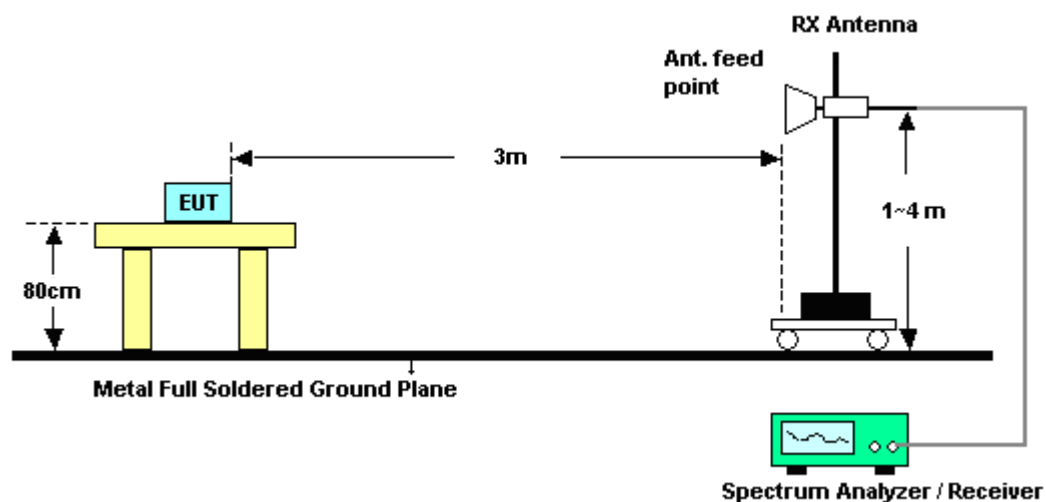

### 3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

<Ant. 1>

|                |         |                     |           |
|----------------|---------|---------------------|-----------|
| Test Mode :    | 802.11b | Temperature :       | 22~23°C   |
| Test Band :    | Low     | Relative Humidity : | 52~53%    |
| Test Channel : | 01      | Test Engineer :     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2385.78                       | 53.94               | -20.06                  | 74                          | 50.75                     | 32.86                       | 3.59                    | 33.26                      | 150                  | 181                     | Peak    |
| 2386.86                       | 46.57               | -7.43                   | 54                          | 43.38                     | 32.86                       | 3.59                    | 33.26                      | 150                  | 181                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2386.41                     | 52.69               | -21.31                  | 74                          | 49.5                      | 32.86                       | 3.59                    | 33.26                      | 100                  | 167                     | Peak    |
| 2386.86                     | 43.64               | -10.36                  | 54                          | 40.45                     | 32.86                       | 3.59                    | 33.26                      | 100                  | 167                     | Average |

|                |         |                     |           |
|----------------|---------|---------------------|-----------|
| Test Mode :    | 802.11b | Temperature :       | 22~23°C   |
| Test Band :    | High    | Relative Humidity : | 52~53%    |
| Test Channel : | 11      | Test Engineer :     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2487.64                       | 55.28               | -18.72                  | 74                          | 51.87                     | 33.05                       | 3.66                    | 33.3                       | 138                  | 221                     | Peak    |
| 2490.31                       | 47.66               | -6.34                   | 54                          | 44.25                     | 33.05                       | 3.66                    | 33.3                       | 138                  | 221                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2487.64                     | 53.04               | -20.96                  | 74                          | 49.63                     | 33.05                       | 3.66                    | 33.3                       | 182                  | 169                     | Peak    |
| 2488.69                     | 44.84               | -9.16                   | 54                          | 41.43                     | 33.05                       | 3.66                    | 33.3                       | 182                  | 169                     | Average |



|                       |         |                            |           |
|-----------------------|---------|----------------------------|-----------|
| <b>Test Mode :</b>    | 802.11g | <b>Temperature :</b>       | 22~23°C   |
| <b>Test Band :</b>    | Low     | <b>Relative Humidity :</b> | 52~53%    |
| <b>Test Channel :</b> | 01      | <b>Test Engineer :</b>     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.74                       | 63.45               | -10.55                  | 74                          | 60.26                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 189                     | Peak    |
| 2389.92                       | 42.21               | -11.79                  | 54                          | 39.02                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 189                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.92                     | 61.2                | -12.8                   | 74                          | 58.01                     | 32.86                       | 3.59                    | 33.26                      | 100                  | 329                     | Peak    |
| 2389.92                     | 40.26               | -13.74                  | 54                          | 37.07                     | 32.86                       | 3.59                    | 33.26                      | 100                  | 329                     | Average |

|                       |         |                            |           |
|-----------------------|---------|----------------------------|-----------|
| <b>Test Mode :</b>    | 802.11g | <b>Temperature :</b>       | 22~23°C   |
| <b>Test Band :</b>    | High    | <b>Relative Humidity :</b> | 52~53%    |
| <b>Test Channel :</b> | 11      | <b>Test Engineer :</b>     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.8                        | 62.95               | -11.05                  | 74                          | 59.58                     | 33.01                       | 3.65                    | 33.29                      | 144                  | 73                      | Peak    |
| 2483.5                        | 40.89               | -13.11                  | 54                          | 37.52                     | 33.01                       | 3.65                    | 33.29                      | 144                  | 73                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.56                     | 67.22               | -6.78                   | 74                          | 63.85                     | 33.01                       | 3.65                    | 33.29                      | 125                  | 328                     | Peak    |
| 2483.59                     | 42.65               | -11.35                  | 54                          | 39.28                     | 33.01                       | 3.65                    | 33.29                      | 125                  | 328                     | Average |



|                       |              |                            |           |
|-----------------------|--------------|----------------------------|-----------|
| <b>Test Mode :</b>    | 802.11n HT20 | <b>Temperature :</b>       | 22~23°C   |
| <b>Test Band :</b>    | High         | <b>Relative Humidity :</b> | 52~53%    |
| <b>Test Channel :</b> | 11           | <b>Test Engineer :</b>     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                         |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.74                       | 65.08               | -8.92                   | 74                          | 61.71                   | 33.01                       | 3.65                    | 33.29                      | 117                  | 348                     | Peak    |
| 2483.59                       | 42.2                | -11.8                   | 54                          | 38.83                   | 33.01                       | 3.65                    | 33.29                      | 117                  | 348                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                         |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.86                     | 62.24               | -11.76                  | 74                          | 58.87                   | 33.01                       | 3.65                    | 33.29                      | 100                  | 57                      | Peak    |
| 2483.5                      | 42.59               | -11.41                  | 54                          | 39.22                   | 33.01                       | 3.65                    | 33.29                      | 100                  | 57                      | Average |



|                       |              |                            |           |
|-----------------------|--------------|----------------------------|-----------|
| <b>Test Mode :</b>    | 802.11n HT40 | <b>Temperature :</b>       | 22~23°C   |
| <b>Test Band :</b>    | Low          | <b>Relative Humidity :</b> | 52~53%    |
| <b>Test Channel :</b> | 03           | <b>Test Engineer :</b>     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2387.31                       | 66.55               | -7.45                   | 74                          | 63.36                     | 32.86                       | 3.59                    | 33.26                      | 119                  | 296                     | Peak    |
| 2389.74                       | 46.62               | -7.38                   | 54                          | 43.43                     | 32.86                       | 3.59                    | 33.26                      | 119                  | 296                     | Average |
| 2485.57                       | 52.74               | -21.26                  | 74                          | 49.37                     | 33.01                       | 3.65                    | 33.29                      | 119                  | 296                     | Peak    |
| 2488.15                       | 35.09               | -18.91                  | 54                          | 31.68                     | 33.05                       | 3.66                    | 33.3                       | 119                  | 296                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.2                      | 65.51               | -8.49                   | 74                          | 62.32                     | 32.86                       | 3.59                    | 33.26                      | 186                  | 238                     | Peak    |
| 2389.92                     | 45.08               | -8.92                   | 54                          | 41.89                     | 32.86                       | 3.59                    | 33.26                      | 186                  | 238                     | Average |
| 2486.65                     | 52.11               | -21.89                  | 74                          | 48.74                     | 33.01                       | 3.65                    | 33.29                      | 186                  | 238                     | Peak    |
| 2489.47                     | 34.59               | -19.41                  | 54                          | 31.18                     | 33.05                       | 3.66                    | 33.3                       | 186                  | 238                     | Average |



|                       |              |                            |           |
|-----------------------|--------------|----------------------------|-----------|
| <b>Test Mode :</b>    | 802.11n HT40 | <b>Temperature :</b>       | 22~23°C   |
| <b>Test Band :</b>    | High         | <b>Relative Humidity :</b> | 52~53%    |
| <b>Test Channel :</b> | 09           | <b>Test Engineer :</b>     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2390                          | 48.01               | -25.99                  | 74                          | 44.82                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 297                     | Peak    |
| 2390                          | 36.34               | -17.66                  | 54                          | 33.15                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 297                     | Average |
| 2485.84                       | 64.28               | -9.72                   | 74                          | 60.91                     | 33.01                       | 3.65                    | 33.29                      | 145                  | 223                     | Peak    |
| 2483.71                       | 50.32               | -3.68                   | 54                          | 46.95                     | 33.01                       | 3.65                    | 33.29                      | 145                  | 223                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.65                     | 49.64               | -24.36                  | 74                          | 46.45                     | 32.86                       | 3.59                    | 33.26                      | 121                  | 258                     | Peak    |
| 2389.92                     | 36.72               | -17.28                  | 54                          | 33.53                     | 32.86                       | 3.59                    | 33.26                      | 121                  | 258                     | Average |
| 2483.95                     | 71.7                | -2.3                    | 74                          | 68.33                     | 33.01                       | 3.65                    | 33.29                      | 121                  | 258                     | Peak    |
| 2485.09                     | 50.87               | -3.13                   | 54                          | 47.5                      | 33.01                       | 3.65                    | 33.29                      | 121                  | 258                     | Average |



## &lt;MIMO Ant. 1+2&gt;

|                |              |                     |           |
|----------------|--------------|---------------------|-----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 22~23°C   |
| Test Band :    | Low          | Relative Humidity : | 52~53%    |
| Test Channel : | 01           | Test Engineer :     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.29                       | 63.48               | -10.52                  | 74                          | 60.29                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 186                     | Peak    |
| 2390                          | 44.64               | -9.36                   | 54                          | 41.45                     | 32.86                       | 3.59                    | 33.26                      | 180                  | 186                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.92                     | 66.18               | -7.82                   | 74                          | 62.99                     | 32.86                       | 3.59                    | 33.26                      | 100                  | 333                     | Peak    |
| 2389.92                     | 45.04               | -8.96                   | 54                          | 41.85                     | 32.86                       | 3.59                    | 33.26                      | 100                  | 333                     | Average |

|                |              |                     |           |
|----------------|--------------|---------------------|-----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 22~23°C   |
| Test Band :    | High         | Relative Humidity : | 52~53%    |
| Test Channel : | 11           | Test Engineer :     | Eric Shih |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.68                       | 69.28               | -4.72                   | 74                          | 65.91                     | 33.01                       | 3.65                    | 33.29                      | 114                  | 295                     | Peak    |
| 2483.56                       | 44.64               | -9.36                   | 54                          | 41.27                     | 33.01                       | 3.65                    | 33.29                      | 114                  | 295                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2484.13                     | 64.57               | -9.43                   | 74                          | 61.2                      | 33.01                       | 3.65                    | 33.29                      | 100                  | 286                     | Peak    |
| 2483.5                      | 41.31               | -12.69                  | 54                          | 37.94                     | 33.01                       | 3.65                    | 33.29                      | 100                  | 286                     | Average |

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<Ant. 1>

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2412 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 99.3                | -                       | -                           | 96.07                   | 32.89                       | 3.61                    | 33.27                      | 116                  | 318                     | Peak    |
| 2412                 | 94.14               | -                       | -                           | 90.91                   | 32.89                       | 3.61                    | 33.27                      | 116                  | 318                     | Average |
| 4824                 | 45.89               | -28.11                  | 74                          | 39.27                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 151                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2412 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 98.84               | -                       | -                           | 95.61                   | 32.89                       | 3.61                    | 33.27                      | 100                  | 333                     | Peak    |
| 2412                 | 93.83               | -                       | -                           | 90.6                    | 32.89                       | 3.61                    | 33.27                      | 100                  | 333                     | Average |
| 4824                 | 47.16               | -26.84                  | 74                          | 40.54                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 26                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2437 MHz is Fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 100.93              | -                       | -                           | 97.63                   | 32.95                       | 3.63                    | 33.28                      | 153                  | 76                      | Peak    |
| 2437                 | 96.31               | -                       | -                           | 93.01                   | 32.95                       | 3.63                    | 33.28                      | 153                  | 76                      | Average |
| 4874                 | 45.93               | -28.07                  | 74                          | 39.27                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 26                      | Peak    |
| 7312                 | 48.05               | -25.95                  | 74                          | 39.37                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 145                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2437 MHz is Fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 100.53              | -                       | -                           | 97.23                   | 32.95                       | 3.63                    | 33.28                      | 134                  | 332                     | Peak    |
| 2437                 | 95.42               | -                       | -                           | 92.12                   | 32.95                       | 3.63                    | 33.28                      | 134                  | 332                     | Average |
| 4874                 | 47.3                | -26.7                   | 74                          | 40.64                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 169                     | Peak    |
| 7312                 | 47.4                | -26.6                   | 74                          | 38.72                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 41                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 100.48              | -                       | -                           | 97.15                   | 32.98                       | 3.64                    | 33.29                      | 114                  | 88                      | Peak    |
| 2462                 | 95.5                | -                       | -                           | 92.17                   | 32.98                       | 3.64                    | 33.29                      | 114                  | 88                      | Average |
| 4924                 | 46.11               | -27.89                  | 74                          | 39.41                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 18                      | Peak    |
| 7386                 | 47.72               | -26.28                  | 74                          | 38.94                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 154                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 101.05              | -                       | -                           | 97.72                   | 32.98                       | 3.64                    | 33.29                      | 155                  | 330                     | Peak    |
| 2462                 | 96.21               | -                       | -                           | 92.88                   | 32.98                       | 3.64                    | 33.29                      | 155                  | 330                     | Average |
| 4924                 | 46.59               | -27.41                  | 74                          | 39.89                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 26                      | Peak    |
| 7386                 | 48.71               | -25.29                  | 74                          | 39.93                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 92                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2412 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 99.6                | -                       | -                           | 96.37                   | 32.89                       | 3.61                    | 33.27                      | 147                  | 78                      | Peak    |
| 2412                 | 88.45               | -                       | -                           | 85.22                   | 32.89                       | 3.61                    | 33.27                      | 147                  | 78                      | Average |
| 4824                 | 46.6                | -27.4                   | 74                          | 39.98                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 48                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2412 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 99.63               | -                       | -                           | 96.4                    | 32.89                       | 3.61                    | 33.27                      | 100                  | 334                     | Peak    |
| 2412                 | 88.21               | -                       | -                           | 84.98                   | 32.89                       | 3.61                    | 33.27                      | 100                  | 334                     | Average |
| 4824                 | 46.27               | -27.73                  | 74                          | 39.65                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 29                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 103.4               | -                       | -                           | 100.1                   | 32.95                       | 3.63                    | 33.28                      | 155                  | 79                      | Peak    |
| 2437                 | 92.35               | -                       | -                           | 89.05                   | 32.95                       | 3.63                    | 33.28                      | 155                  | 79                      | Average |
| 4874                 | 47.4                | -26.6                   | 74                          | 40.74                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 145                     | Peak    |
| 7312                 | 49.56               | -24.44                  | 74                          | 40.88                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 51                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 102.74              | -                       | -                           | 99.44                   | 32.95                       | 3.63                    | 33.28                      | 134                  | 333                     | Peak    |
| 2437                 | 92.26               | -                       | -                           | 88.96                   | 32.95                       | 3.63                    | 33.28                      | 134                  | 333                     | Average |
| 4874                 | 47.85               | -26.15                  | 74                          | 41.19                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 81                      | Peak    |
| 7312                 | 49.05               | -24.95                  | 74                          | 40.37                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 59                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 101.15              | -                       | -                           | 97.82                   | 32.98                       | 3.64                    | 33.29                      | 116                  | 86                      | Peak    |
| 2462                 | 90.19               | -                       | -                           | 86.86                   | 32.98                       | 3.64                    | 33.29                      | 116                  | 86                      | Average |
| 4924                 | 44.99               | -29.01                  | 74                          | 38.29                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 85                      | Peak    |
| 7386                 | 47                  | -27                     | 74                          | 38.22                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 8                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 101.46              | -                       | -                           | 98.13                   | 32.98                       | 3.64                    | 33.29                      | 154                  | 330                     | Peak    |
| 2462                 | 90.29               | -                       | -                           | 86.96                   | 32.98                       | 3.64                    | 33.29                      | 154                  | 330                     | Average |
| 4924                 | 45.72               | -28.28                  | 74                          | 39.02                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 41                      | Peak    |
| 7386                 | 48.07               | -25.93                  | 74                          | 39.29                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 263                     | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 96.2                | -                       | -                           | 92.87                   | 32.98                       | 3.64                    | 33.29                      | 117                  | 348                     | Peak    |
| 2462                 | 84.98               | -                       | -                           | 81.65                   | 32.98                       | 3.64                    | 33.29                      | 117                  | 348                     | Average |
| 4924                 | 49.71               | -24.29                  | 74                          | 43.01                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 252                     | Peak    |
| 7386                 | 48.74               | -25.26                  | 74                          | 39.96                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 152                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 96.49               | -                       | -                           | 93.16                   | 32.98                       | 3.64                    | 33.29                      | 100                  | 57                      | Peak    |
| 2462                 | 85.11               | -                       | -                           | 81.78                   | 32.98                       | 3.64                    | 33.29                      | 100                  | 57                      | Average |
| 4924                 | 60.21               | -13.79                  | 74                          | 53.51                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 329                     | Peak    |
| 4924                 | 44.98               | -9.02                   | 54                          | 38.28                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 329                     | Average |
| 7386                 | 49.89               | -24.11                  | 74                          | 41.11                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 26                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 03                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2422 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2422                 | 96.06               | -                       | -                           | 92.8                    | 32.92                       | 3.62                    | 33.28                      | 119                  | 296                     | Peak    |
| 2422                 | 84.88               | -                       | -                           | 81.62                   | 32.92                       | 3.62                    | 33.28                      | 119                  | 296                     | Average |
| 4844                 | 47.43               | -26.57                  | 74                          | 40.79                   | 35.18                       | 5.26                    | 33.8                       | 100                  | 195                     | Peak    |
| 7266                 | 48.67               | -25.33                  | 74                          | 40.03                   | 36.19                       | 6.56                    | 34.11                      | 100                  | 16                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 03                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2422 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2422                 | 94.94               | -                       | -                           | 91.68                   | 32.92                       | 3.62                    | 33.28                      | 186                  | 238                     | Peak    |
| 2422                 | 84.56               | -                       | -                           | 81.3                    | 32.92                       | 3.62                    | 33.28                      | 186                  | 238                     | Average |
| 4844                 | 46.55               | -27.45                  | 74                          | 39.91                   | 35.18                       | 5.26                    | 33.8                       | 100                  | 26                      | Peak    |
| 7266                 | 49.03               | -24.97                  | 74                          | 40.39                   | 36.19                       | 6.56                    | 34.11                      | 100                  | 82                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 100.03              | -                       | -                           | 96.73                   | 32.95                       | 3.63                    | 33.28                      | 115                  | 301                     | Peak    |
| 2437                 | 89.68               | -                       | -                           | 86.38                   | 32.95                       | 3.63                    | 33.28                      | 115                  | 301                     | Average |
| 4874                 | 47.68               | -26.32                  | 74                          | 41.02                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 26                      | Peak    |
| 7312                 | 48.43               | -25.57                  | 74                          | 39.75                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 256                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 99.23               | -                       | -                           | 95.93                   | 32.95                       | 3.63                    | 33.28                      | 154                  | 259                     | Peak    |
| 2437                 | 88.94               | -                       | -                           | 85.64                   | 32.95                       | 3.63                    | 33.28                      | 154                  | 259                     | Average |
| 4874                 | 45.92               | -28.08                  | 74                          | 39.26                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 21                      | Peak    |
| 7312                 | 49.05               | -24.95                  | 74                          | 40.37                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 41                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 09                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2452 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2452                 | 97.93               | -                       | -                           | 94.63                   | 32.95                       | 3.63                    | 33.28                      | 100                  | 297                     | Peak    |
| 2452                 | 86.48               | -                       | -                           | 83.18                   | 32.95                       | 3.63                    | 33.28                      | 100                  | 297                     | Average |
| 4924                 | 45.8                | -28.2                   | 74                          | 39.1                    | 35.19                       | 5.31                    | 33.8                       | 100                  | 296                     | Peak    |
| 7386                 | 49.03               | -24.97                  | 74                          | 40.25                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 25                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 09                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2452 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2452                 | 97.48               | -                       | -                           | 94.18                   | 32.95                       | 3.63                    | 33.28                      | 186                  | 257                     | Peak    |
| 2452                 | 86.64               | -                       | -                           | 83.34                   | 32.95                       | 3.63                    | 33.28                      | 186                  | 257                     | Average |
| 4924                 | 46.49               | -27.51                  | 74                          | 39.79                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 195                     | Peak    |
| 7386                 | 49.69               | -24.31                  | 74                          | 40.91                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 52                      | Peak    |

**<MIMO Ant. 1+2>**

|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 100                 | -                       | -                           | 96.77                   | 32.89                       | 3.61                    | 33.27                      | 148                  | 72                      | Peak    |
| 2412                 | 88.53               | -                       | -                           | 85.3                    | 32.89                       | 3.61                    | 33.27                      | 148                  | 72                      | Average |
| 4824                 | 54.87               | -19.13                  | 74                          | 48.25                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 55                      | Peak    |
| 4824                 | 40.4                | -13.6                   | 54                          | 33.78                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 55                      | Average |

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 101.47              | -                       | -                           | 98.24                   | 32.89                       | 3.61                    | 33.27                      | 100                  | 336                     | Peak    |
| 2412                 | 89.17               | -                       | -                           | 85.94                   | 32.89                       | 3.61                    | 33.27                      | 100                  | 336                     | Average |
| 4824                 | 58.01               | -15.99                  | 74                          | 51.39                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 261                     | Peak    |
| 4824                 | 41.36               | -12.64                  | 54                          | 34.74                   | 35.17                       | 5.25                    | 33.8                       | 100                  | 261                     | Average |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 103.66              | -                       | -                           | 100.36                  | 32.95                       | 3.63                    | 33.28                      | 119                  | 298                     | Peak    |
| 2437                 | 92.42               | -                       | -                           | 89.12                   | 32.95                       | 3.63                    | 33.28                      | 119                  | 298                     | Average |
| 4874                 | 56.28               | -17.72                  | 74                          | 49.62                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 313                     | Peak    |
| 4874                 | 39.01               | -14.99                  | 54                          | 32.35                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 313                     | Average |
| 7312                 | 48.79               | -25.21                  | 74                          | 40.11                   | 36.2                        | 6.61                    | 34.13                      | 100                  | 200                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2437 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2437                 | 103.91              | -                       | -                           | 100.61                  | 32.95                       | 3.63                    | 33.28                      | 180                  | 255                     | Peak    |
| 2437                 | 91.99               | -                       | -                           | 88.69                   | 32.95                       | 3.63                    | 33.28                      | 180                  | 255                     | Average |
| 4874                 | 60.21               | -13.79                  | 74                          | 53.55                   | 35.18                       | 5.28                    | 33.8                       | 100                  | 327                     | Peak    |
| 4874                 | 41.16               | -12.84                  | 54                          | 34.5                    | 35.18                       | 5.28                    | 33.8                       | 100                  | 327                     | Average |
| 7312                 | 49.25               | -24.75                  | 74                          | 40.57                   | 36.2                        | 6.61                    | 34.13                      | 121                  | 156                     | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%     |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 103.19              | -                       | -                           | 99.86                   | 32.98                       | 3.64                    | 33.29                      | 114                  | 295                     | Peak    |
| 2462                 | 91.08               | -                       | -                           | 87.75                   | 32.98                       | 3.64                    | 33.29                      | 114                  | 295                     | Average |
| 4924                 | 49.13               | -24.87                  | 74                          | 42.43                   | 35.19                       | 5.31                    | 33.8                       | 135                  | 263                     | Peak    |
| 7386                 | 49.46               | -24.54                  | 74                          | 40.68                   | 36.24                       | 6.7                     | 34.16                      | 100                  | 145                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 52~53%   |
| <b>Test Engineer :</b> | Eric Shih                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2462 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2462                 | 99.55               | -                       | -                           | 96.22                   | 32.98                       | 3.64                    | 33.29                      | 100                  | 286                     | Peak    |
| 2462                 | 87.3                | -                       | -                           | 83.97                   | 32.98                       | 3.64                    | 33.29                      | 100                  | 286                     | Average |
| 4924                 | 59.96               | -14.04                  | 74                          | 53.26                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 330                     | Peak    |
| 4924                 | 40.77               | -13.23                  | 54                          | 34.07                   | 35.19                       | 5.31                    | 33.8                       | 100                  | 330                     | Average |
| 7386                 | 48.73               | -25.27                  | 74                          | 39.95                   | 36.24                       | 6.7                     | 34.16                      | 151                  | 298                     | Peak    |

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission<br>(MHz) | Conducted Limit (dBμV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-Peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

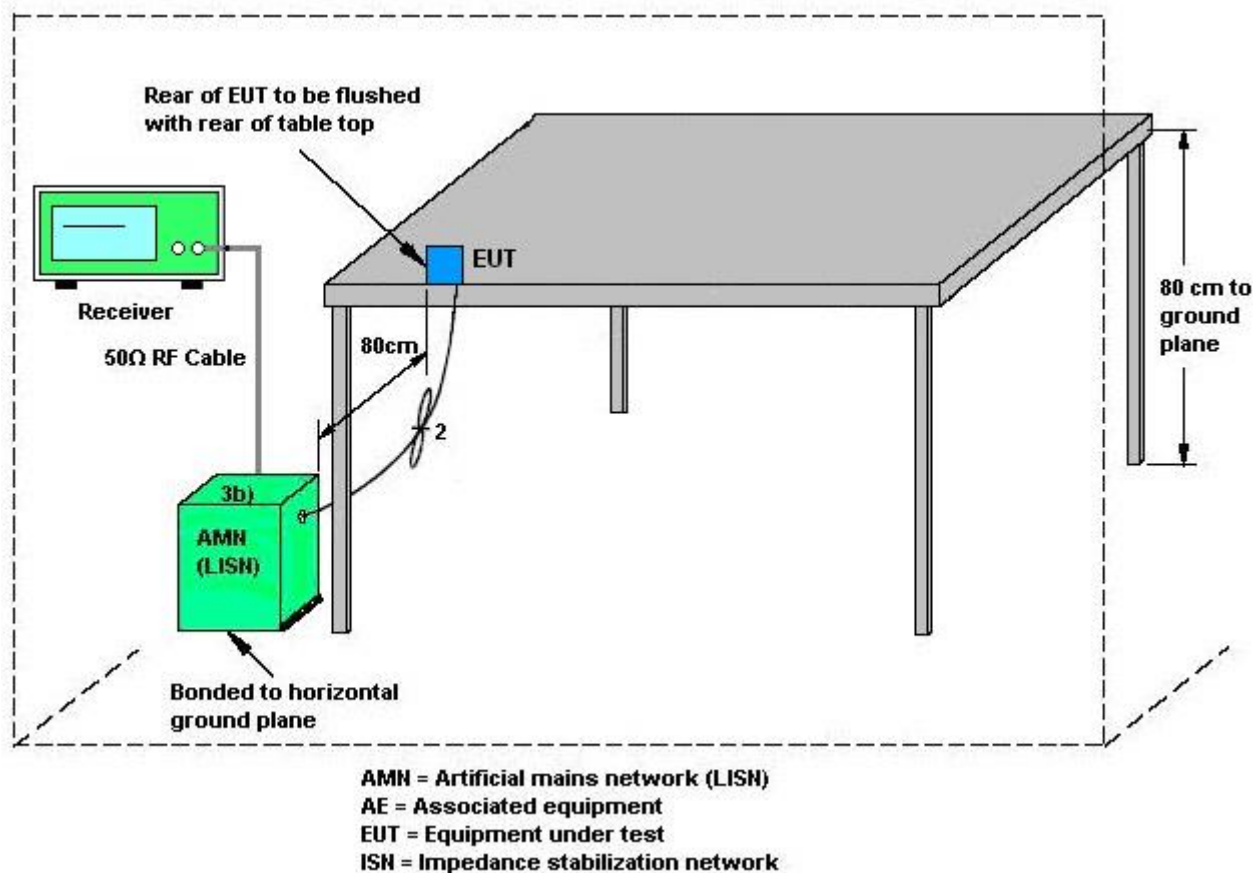

### 3.6.5 Test Result of AC Conducted Emission

|                        |                                      |                            |        |
|------------------------|--------------------------------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1                               | <b>Temperature :</b>       | 20~22℃ |
| <b>Test Engineer :</b> | Cosmo Xu                             | <b>Relative Humidity :</b> | 45~47% |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                        | <b>Phase :</b>             | Line   |
| <b>Function Type :</b> | WLAN Link + Bluetooth Link + Adapter |                            |        |

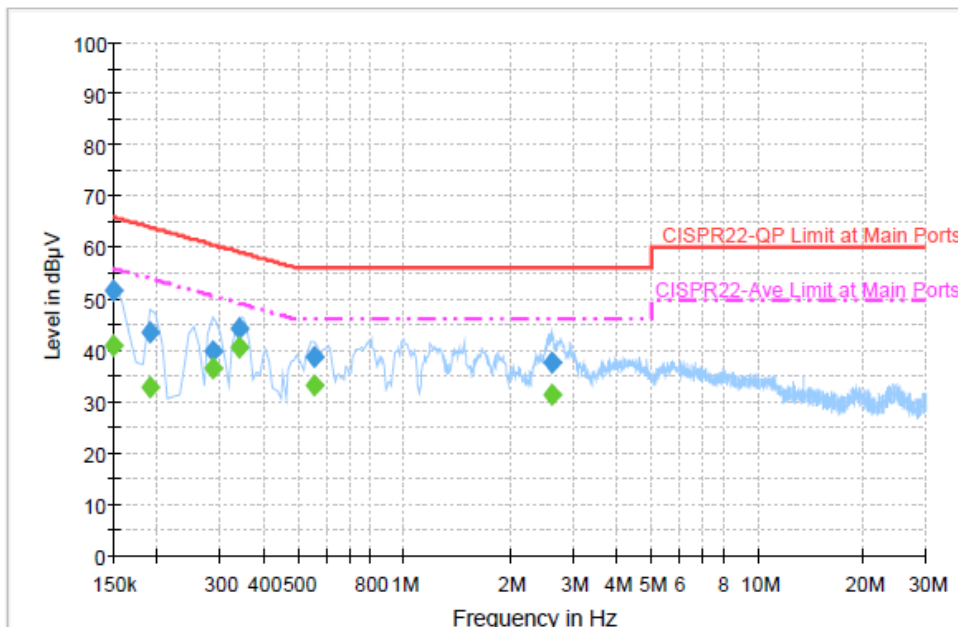


#### Final Result : QuasiPeak

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 51.8             | Off    | L1   | 19.4       | 14.2        | 66.0         |
| 0.190000        | 43.4             | Off    | L1   | 19.4       | 20.6        | 64.0         |
| 0.286000        | 40.0             | Off    | L1   | 19.4       | 20.6        | 60.6         |
| 0.342000        | 44.2             | Off    | L1   | 19.4       | 15.0        | 59.2         |
| 0.558000        | 38.7             | Off    | L1   | 19.4       | 17.3        | 56.0         |
| 2.630000        | 37.5             | Off    | L1   | 19.6       | 18.5        | 56.0         |

#### Final Result : Average

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 41.1           | Off    | L1   | 19.4       | 14.9        | 56.0         |
| 0.190000        | 32.8           | Off    | L1   | 19.4       | 21.2        | 54.0         |
| 0.286000        | 36.5           | Off    | L1   | 19.4       | 14.1        | 50.6         |
| 0.342000        | 40.5           | Off    | L1   | 19.4       | 8.7         | 49.2         |
| 0.558000        | 33.2           | Off    | L1   | 19.4       | 12.8        | 46.0         |
| 2.630000        | 31.4           | Off    | L1   | 19.6       | 14.6        | 46.0         |

|                        |                                      |                            |         |
|------------------------|--------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                               | <b>Temperature :</b>       | 20~22℃  |
| <b>Test Engineer :</b> | Cosmo Xu                             | <b>Relative Humidity :</b> | 45~47%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                        | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | WLAN Link + Bluetooth Link + Adapter |                            |         |

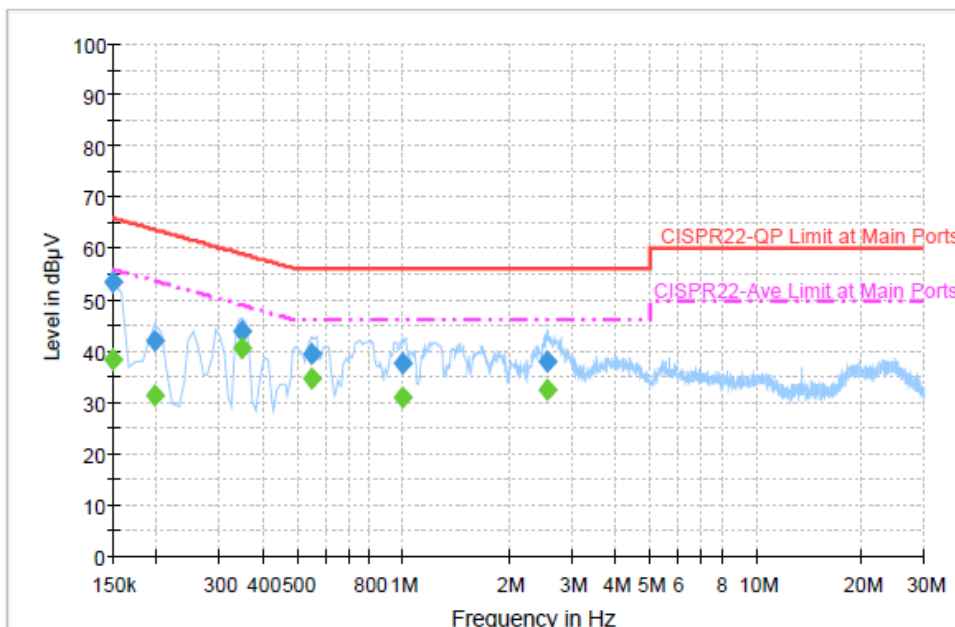
**Final Result : QuasiPeak**

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 53.5             | Off    | N    | 19.4       | 12.5        | 66.0         |
| 0.198000        | 42.2             | Off    | N    | 19.3       | 21.5        | 63.7         |
| 0.350000        | 43.8             | Off    | N    | 19.4       | 15.2        | 59.0         |
| 0.550000        | 39.7             | Off    | N    | 19.4       | 16.3        | 56.0         |
| 0.990000        | 37.8             | Off    | N    | 19.4       | 18.2        | 56.0         |
| 2.574000        | 38.2             | Off    | N    | 19.6       | 17.8        | 56.0         |

**Final Result : Average**

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 38.4           | Off    | N    | 19.4       | 17.6        | 56.0         |
| 0.198000        | 31.5           | Off    | N    | 19.3       | 22.2        | 53.7         |
| 0.350000        | 40.5           | Off    | N    | 19.4       | 8.5         | 49.0         |
| 0.550000        | 34.9           | Off    | N    | 19.4       | 11.1        | 46.0         |
| 0.990000        | 30.9           | Off    | N    | 19.4       | 15.1        | 46.0         |
| 2.574000        | 32.6           | Off    | N    | 19.6       | 13.4        | 46.0         |

### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

#### 3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.



The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

|         |        |        | DG    | DG    | Power     | PSD       |
|---------|--------|--------|-------|-------|-----------|-----------|
|         |        |        | for   | for   | Limit     | Limit     |
|         | Ant. 1 | Ant. 2 | Power | PSD   | Reduction | Reduction |
|         | (dBi)  | (dBi)  | (dBi) | (dBi) | (dB)      | (dB)      |
| 2.4 GHz | -0.36  | 1.22   | 3.48  | 3.48  | 0.00      | 0.00      |

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$

## 4 List of Measuring Equipment

| Instrument                         | Manufacturer    | Model No.              | Serial No.  | Characteristics   | Calibration Date | Test Date                     | Due Date      | Remark                |
|------------------------------------|-----------------|------------------------|-------------|-------------------|------------------|-------------------------------|---------------|-----------------------|
| Spectrum Analyzer                  | Rohde & Schwarz | FSP40                  | 100055      | 9kHz~40GHz        | Jun. 07, 2013    | Dec. 03, 2013 ~ Dec. 09, 2013 | Jun. 06, 2014 | Conducted (TH02-HY)   |
| Power Meter                        | Anritsu         | ML2495A                | 1036004     | 300MHz~40GHz      | Aug. 17, 2013    | Dec. 03, 2013 ~ Dec. 09, 2013 | Aug. 16, 2014 | Conducted (TH02-HY)   |
| Power Sensor                       | Anritsu         | MA2411B                | 1027253     | 300MHz~40GHz      | Aug. 17, 2013    | Dec. 03, 2013 ~ Dec. 09, 2013 | Aug. 16, 2014 | Conducted (TH02-HY)   |
| EMI Test Receiver                  | Rohde & Schwarz | ESCS 30                | 100356      | 9kHz ~ 2.75GHz    | Nov. 15, 2013    | Dec. 10, 2013                 | Nov. 14, 2014 | Conduction (CO05-HY)  |
| Two-LISN (for auxiliary equipment) | Rohde & Schwarz | ENV216                 | 100081      | 9kHz ~ 30MHz      | Dec. 12, 2012    | Dec. 10, 2013                 | Dec. 11, 2013 | Conduction (CO05-HY)  |
| Two-LISN                           | Rohde & Schwarz | ENV216                 | 100080      | 9kHz ~ 30MHz      | Dec. 04, 2013    | Dec. 10, 2013                 | Dec. 03, 2014 | Conduction (CO05-HY)  |
| AC Power Source                    | APC             | APC-1000 W             | N/A         | N/A               | N/A              | Dec. 10, 2013                 | N/A           | Conduction (CO05-HY)  |
| EMI Test Receiver                  | Rohde & Schwarz | ESCI 7                 | 100724      | 9 kHz~7 GHz       | Sep. 06, 2013    | Dec. 20, 2013                 | Sep. 05, 2014 | Radiation (03CH07-HY) |
| Spectrum Analyzer                  | Rohde & Schwarz | FSP30                  | 101067      | 9 kHz ~ 30 GHz    | Nov. 20, 2013    | Dec. 20, 2013                 | Nov. 19, 2014 | Radiation (03CH07-HY) |
| Loop Antenna                       | Rohde & Schwarz | HFH2-Z2                | 860004/0001 | 9 kHz~30 Mhz      | Jul. 03, 2012    | Dec. 20, 2013                 | Jul. 03, 2014 | Radiation (03CH07-HY) |
| Bilog Antenna                      | Schaffner       | CBL6111C               | 2726        | 30 MHz ~ 1 GHz    | Oct. 10, 2013    | Dec. 20, 2013                 | Oct. 09, 2014 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna          | ESCO            | 3117                   | 75962       | 1 GHz~18 GHz      | Aug. 22, 2013    | Dec. 20, 2013                 | Aug. 21, 2014 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna               | SCHWARZBECK     | BBHA 9170              | BBHA9170251 | 15 GHz- 40 GHz    | Oct. 03, 2013    | Dec. 20, 2013                 | Oct. 02, 2014 | Radiation (03CH07-HY) |
| Preamplifier                       | COM-POWER       | PA-103A                | 161241      | 30 MHz~1 GHz      | Feb. 26, 2013    | Dec. 20, 2013                 | Feb. 25, 2014 | Radiation (03CH07-HY) |
| Preamplifier                       | Agilent         | 8449B                  | 3008A01917  | 1 GHz~26.5 GHz    | Aug. 12, 2013    | Dec. 20, 2013                 | Aug. 11, 2014 | Radiation (03CH07-HY) |
| Preamplifier                       | MITEQ           | AMF-7D-00101800-30-10P | 159088      | DC~18 G High Gain | Feb. 27, 2013    | Dec. 20, 2013                 | Feb. 26, 2014 | Radiation (03CH07-HY) |
| Turn Table                         | ChainTek        | ChainTek 3000          | N/A         | 0 ~ 360 degree    | N/A              | Dec. 20, 2013                 | N/A           | Radiation (03CH07-HY) |
| Antenna Mast                       | ChainTek        | ChainTek 3000          | N/A         | N/A               | N/A              | Dec. 20, 2013                 | N/A           | Radiation (03CH07-HY) |



## **5 Uncertainty of Evaluation**

### **Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)**

|                                                                                         |             |
|-----------------------------------------------------------------------------------------|-------------|
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b> | <b>2.26</b> |
|-----------------------------------------------------------------------------------------|-------------|

### **Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

|                                                                                         |             |
|-----------------------------------------------------------------------------------------|-------------|
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b> | <b>4.50</b> |
|-----------------------------------------------------------------------------------------|-------------|

