


Appendix A. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2440	-0.02	30.00	Pass

Appendix B. Test Result of Radiated Emission**TX_BLE1M_2440MHz_H**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Ashton

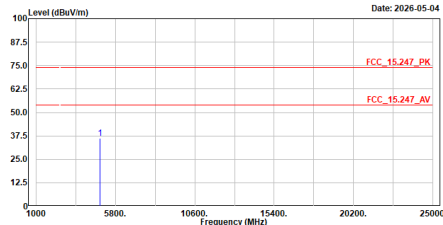


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	36.40	74.00	-37.60	50.88	-14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Ashton

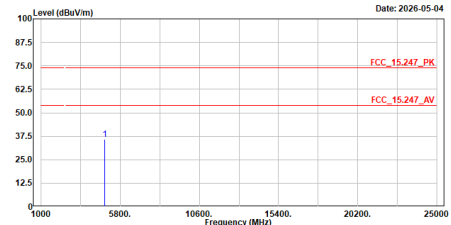


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	35.92	74.00	-38.08	50.40	-14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

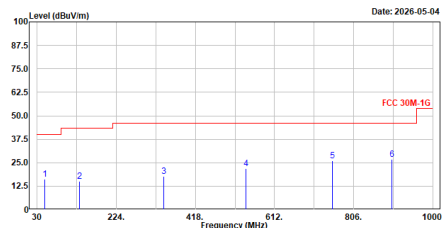


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.721	16.40	40.00	-23.60	39.89	-23.49	QP
2	134.081	15.16	43.50	-28.34	40.05	-24.89	QP
3	340.497	17.70	46.00	-28.30	39.70	-22.00	QP
4	542.548	22.01	46.00	-23.99	39.43	-17.42	QP
5	754.590	25.90	46.00	-20.02	38.93	-12.95	QP
6	899.799	26.81	46.00	-19.19	38.47	-11.66	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

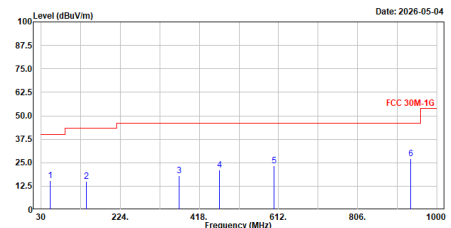

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	52.989	15.37	40.00	-24.63	38.84	-23.47	QP
2	140.483	15.13	43.50	-28.37	39.46	-24.33	QP
3	367.657	18.04	46.00	-27.96	39.45	-21.41	QP
4	468.052	21.24	46.00	-24.76	39.91	-18.67	QP
5	601.330	23.42	46.00	-22.58	39.17	-15.75	QP
6	936.077	27.25	46.00	-18.75	38.26	-11.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.