



TEST REPORT
FEDERAL COMMUNICATIONS COMMISSION
FOR WIRELESS POWER TRANSFER

Report Number.....	ITA26B06001066W 001
Test date	2026-06-27 to 2026-07-27
Issue date	2026-08-06
Total number of pages	26
Standard/According to	FCC CFR Title 47 Part 15 Subpart C ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Template version	V2.0
Testing Laboratory	Itestek Testing Co., Ltd. (Dongguan)
Address	Room 116, Building 8 and Room 606, Building 3, Innovation Port of Hanyuwan, Liyuan Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518000, People's Republic of China
Tested by	Tom Zhang <i>tom zhang</i>
Checked by	Oliver Qiao <i>Oliver Qiao</i>
Approved by	Rock Huang <i>Rock Huang</i>
Applicant's name	Shenzhen Mgctech Co., Ltd.
Address	401, Bldg.14, No. 48-12, Fuchengao Rd., Pinghu Street, Longgang District, Shenzhen, Guangdong, China
Manufacturer's name.....	Shenzhen Mgctech Co., Ltd.
Address	201, Bldg. C, No.12, Fusheng Road, Pinghu Fuchengao Street, Longgang District, Shenzhen, China. 518111.
Factory's name	Same as manufacturer
Address	Same as manufacturer
Trade Mark.....	N/A
Product description.....	Wireless Power Bank
Model/Type reference	T100D
Ratings.....	Input: USB-C Cable/ USB-C: 5Vdc, 3A; 9Vdc, 3A; 12Vdc, 2.5A; 15Vdc, 2A (30W); Output: USB-C Cable/ USB-C: 5Vdc, 3A; 9Vdc, 3A; 12Vdc, 2.92A; 15Vdc, 2.33A; 20Vdc, 1.75A (35W); Wireless Charging Output: 25W (Max); Combined Output: 5Vdc, 3A; Battery Capacity: 38.5Wh (7.7Vdc, 5000mAh) Capacity:10000mAh (5000mAh*2)
FCC ID	2AVSB-T100D
Test result.....	Pass

Declare:

1. This report shall not be partially reproduced without the consent of the laboratory.
2. If the report without tester's signature, auditor's signature, approver's signature and inspection seal, the report is invalid.
3. The test results are valid only for the tested samples.
4. After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.
5. If the report is not stamped with the accreditation recognized seal, it will only be used for scientific research, education, and internal quality control activities, and is not used for the purpose of issuing supporting data to the society.

Testing laboratory:

Itestek Testing Co., Ltd. (Dongguan)

Room 116, Building 8 and Room 606, Building 3, Innovation Port of Hanyuwan, Liyuan Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518000, People's Republic of China

FCC designation number CN1436

A2LA has accredited, certificate Number 7609.01

1. Summary of test results

Requirement	CFR47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209	PASS
Occupied Bandwidth	§15.215(c)	PASS


2. General test information

2.1. Description of EUT

Details of technical specification refer to the description in follows:

Test model number	T100D
Model different	/
Frequency range (Hz)	110.1K-205K, 360K
Modulation technique	ASK
Antenna type	Coil Antenna
Antenna gain	0 dBi
Temperature range (°C)	0 ~ 40
Hardware version	V1.0
Software version	V1.0

Block diagram EUT configuration for test



2.2. Test modes

Mode	Test Status
1	Mobile phone charging mode for output 5W (110.1k-205kHz)
2	Mobile phone charging mode for output 7.5W (110.1k-205kHz)
3	Mobile phone charging mode for output 10W (110.1k-205kHz)
4	Mobile phone charging mode for output 15W (360kHz)
5	Mobile phone charging mode for output 25W (360kHz)
6	Battery supply + USB-C output 20Vdc 1.75A
7	Battery supply + USB-C output 15Vdc 2.33A
8	Battery supply + USB-C output 12Vdc 2.92A
9	Battery supply + USB-C output 9Vdc 3A
10	Battery supply + USB-C output 5Vdc 3A
11	AC main + USB-C input 15Vdc 2A
12	AC main + USB-C input 12Vdc 2.5A
13	AC main + USB-C input 9Vdc 3A
14	AC main + USB-C input 5Vdc 3A

Worst case statement:

The aforementioned testing modes were all conducted under Battery Status: ≤1% (full load), Battery Status: ≈50% (half load), and Battery Status: ≥99% (no load) conditions.

After testing, it was found that the test data under full load condition is the worst-case.

The report reflecting only the worst-case test data.

Remark:

The equipment cannot support both wireless and wired load-bearing simultaneously.

2.3. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range (°C)	15-35
Humidity range (%)	30-75
Pressure range (kPa)	85-105

2.4. Test environment conditions

Item	Equipment	Mfr/Brand	Model / Type	Series No.	Note
1	Load	Apple	Iphone 17	--	Wireless charging of phone: 5W, 7.5W, 15W, 25W
2	Load	Apple	AirPods	--	Wireless charging of earbuds: 2.5W, 5W
3	Load	Apple	Apple Watch Series 10	--	Wireless charging of watch: Max. 5W
4	Load	YBT	P V3.1-Qi2.2/MPP	--	Wireless charging of phone: 5W, 7.5W, 10W, 15W, 25W
5	Load	YBT	E V1.0	--	Wireless charging of earbuds: 2.5W, 3W, 5W
6	Load	YBT	W V2.04	--	Wireless charging of watch: Max. 5W
7	HUAWEI Super Charge	Huawei	HW-2005C02	--	Input: 100-240Vac, 50/60Hz, 2.4A Output: USB-C 5Vdc, 3A; 9Vdc, 3A; 10Vdc, 4A; 11Vdc, 6A; 12Vdc, 3A; 15Vdc, 3A; 20Vdc, 5A; USB-A 5Vdc, 2A; 10Vdc, 4A; 11Vdc, 6A; 20Vdc, 5A

Remark:

The test utilized HUAWEI Super Charge, and the input voltage of HUAWEI Super Charge was 120Vac, 60Hz.

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.30 dB
Uncertainty for Radiation Emission test for 30MHz to 1GHz	4.12 dB (Polarize: V)
	4.54 dB (Polarize: H)
Uncertainty for Radiation Emission test for 9KHz to 30Mhz	4.11 dB (Polarize: V)
	4.15 dB (Polarize: H)
Radio Frequency	±20Hz


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Disturbance voltages (Mains terminals)

3.1 Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Test receiver	R&S	ESPI	100108	2027-03-17
2	LISN	Schwarzbeck	NSLK8127	005092	2027-01-04
3	Limitator	Schwarzbeck	VTSD9561 F-N	000918	2027-01-04
3	LISN	Schwarzbeck	NSLK8127	8127432	2026-11-18
4	RF cable	Huber	LEX30	/	2027-01-04
6	Measurement software	Tongscent	TS+ (V:1.0)	N/A	N/A

3.2 Block diagram of test setup

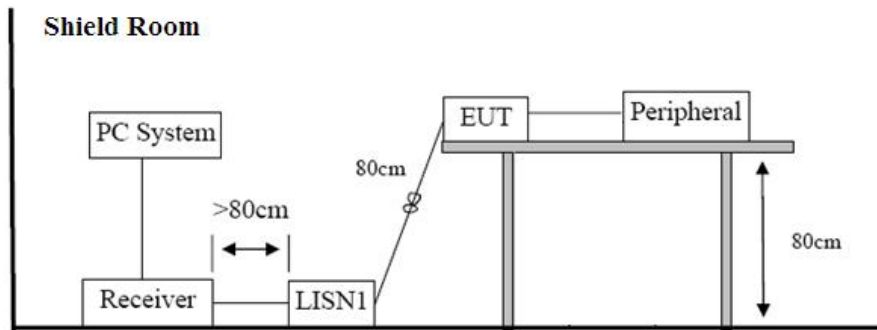

3.3 Limits for conducted disturbance at the mains ports

Frequency	At mains terminals (dB μ V)	
	Quasi-peak Level	Average Level
150k-0.5MHz	66 ~ 56*	56 ~ 46*
0.5M-5.0MHz	56	46
5.0M-30.0MHz	60	50

Note1: Decreasing linearly with logarithm of frequency.

Note2: The lower limit shall apply at the transition frequencies.

3.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50 μ H coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to FCC PART 15 regulation: The measurement procedure on conducted emission interference.


The resolution bandwidth of the field strength meter is set at 9 KHz.

3.5 Test Result (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: Margin = Limit - Level.

Test mode 11

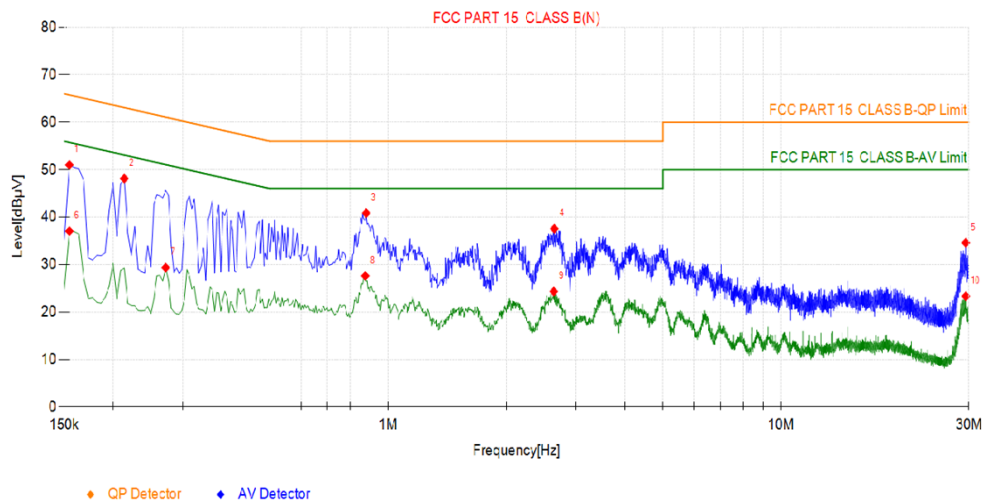


Suspected List					
NO.	Freq. [MHz]	Factor [dB]	Margin [dB]	Detector	Verdict
1	0.1545	10.70	14.80	PK	PASS
2	0.213	10.74	15.10	PK	PASS
3	0.879	10.91	15.14	PK	PASS
4	2.6475	10.97	18.44	PK	PASS
5	29.499	11.26	25.40	PK	PASS
6	0.1545	10.70	18.76	AV	PASS
7	0.2715	10.78	21.78	AV	PASS
8	0.8745	10.91	18.37	AV	PASS
9	2.6385	10.97	21.66	AV	PASS
10	29.499	11.26	26.67	AV	PASS

Test mode 11

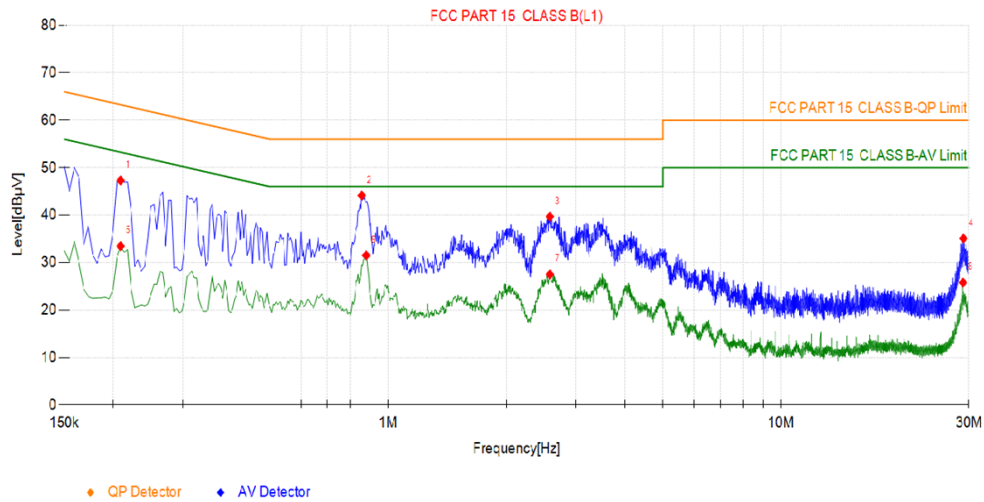


Suspected List					
NO.	Freq. [MHz]	Factor [dB]	Margin [dB]	Detector	Verdict
1	0.2085	10.78	16.07	PK	PASS
2	0.8565	10.91	11.87	PK	PASS
3	2.58	11.00	16.31	PK	PASS
4	29.085	11.32	24.91	PK	PASS
5	0.2085	10.78	19.90	AV	PASS
6	0.879	10.92	14.47	AV	PASS
7	2.58	11.00	18.49	AV	PASS
8	29.013	11.32	24.20	AV	PASS

Test mode 13

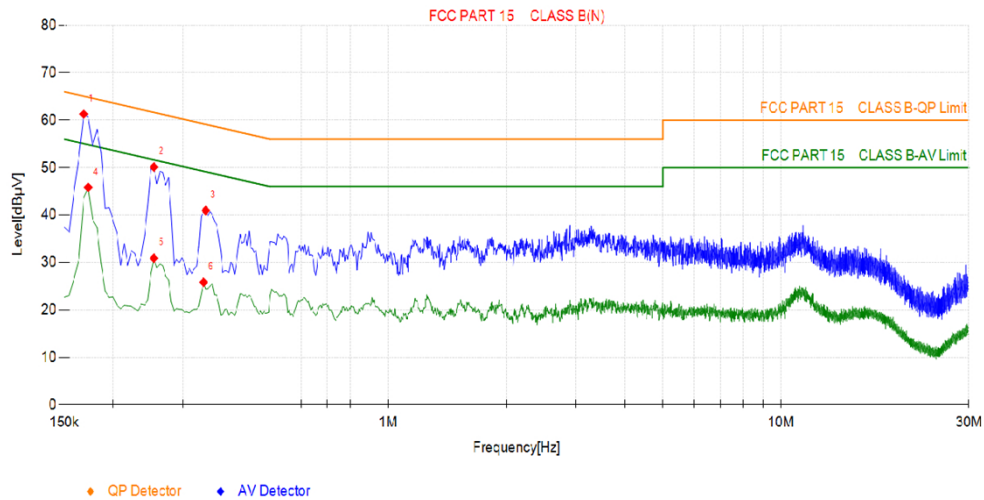

Suspected List							
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Verdict
1	0.168	61.29	10.70	65.06	3.77	PK	PASS
2	0.2535	50.12	10.77	61.64	11.52	PK	PASS
3	0.3435	40.96	10.81	59.12	18.16	PK	PASS
4	0.1725	45.83	10.71	54.84	9.01	AV	PASS
5	0.2535	30.90	10.77	51.64	20.74	AV	PASS
6	0.339	25.84	10.81	49.23	23.39	AV	PASS

Test mode 13

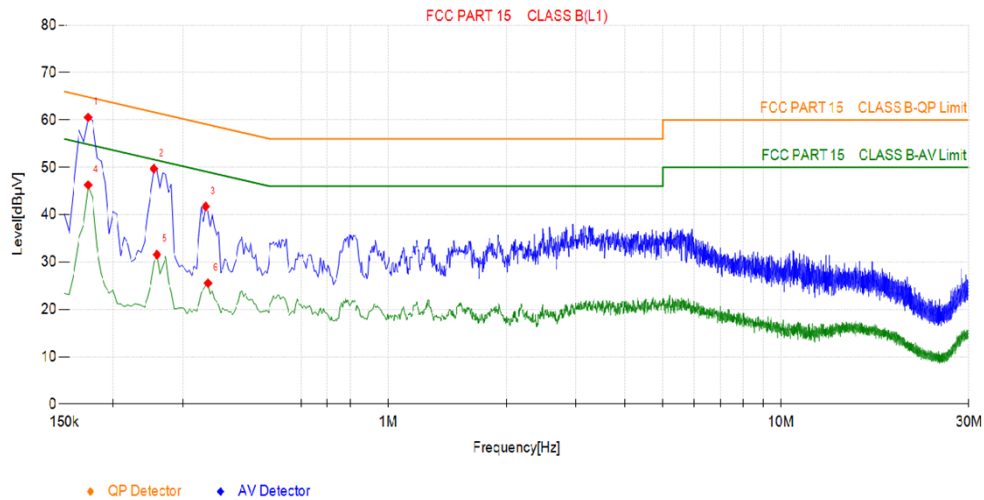

Suspected List							
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Verdict
1	0.1725	60.54	10.75	64.84	4.30	PK	PASS
2	0.2535	49.71	10.81	61.64	11.93	PK	PASS
3	0.3435	41.73	10.85	59.12	17.39	PK	PASS
4	0.1725	46.27	10.75	54.84	8.57	AV	PASS
5	0.258	31.57	10.81	51.50	19.93	AV	PASS
6	0.348	25.55	10.85	49.01	23.46	AV	PASS


4. Radiated disturbance test

4.1 Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI test receiver	R&S	ESCI 7	100969	2027-01-04
2	Trilog broadband antenna	Schwarzbeck	VULB9168	01326	2027-03-20
3	Pre-amplifier	R&S	TAP9K3G32	AP211806164	2027-01-04
4	RF Cable	Huber	LEX15	N/A	2027-01-04
5	RF Cable	Huber	LEX100	N/A	2027-01-04
6	Loop Antenna	Teseq	HLA6121	58357	2026-11-18
7	6dB attenuator	Teseqametek	LE263	60581	2027-01-04
8	Measurement software	Tongscent	TS+ (V:1.0)	N/A	N/A

4.2 Block diagram of test setup

For radiated emissions below 30MHz

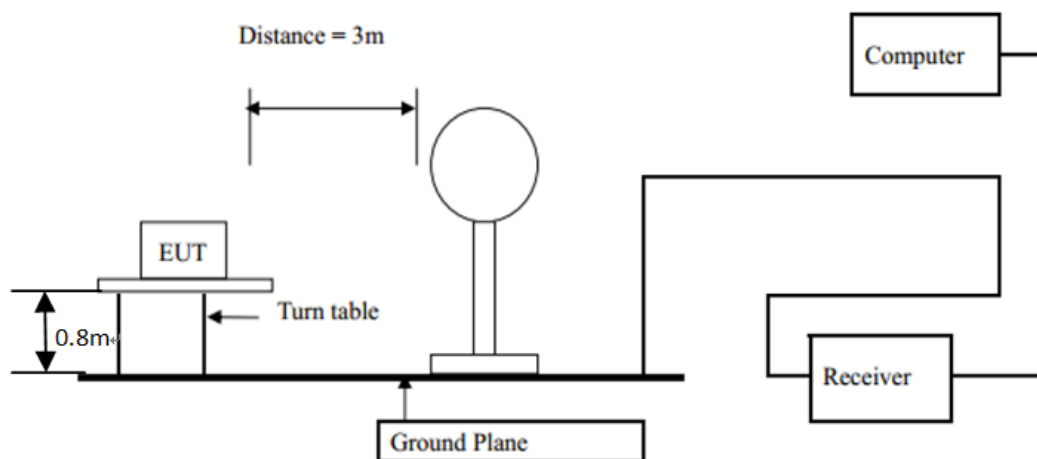

For radiated emissions 30MHz to 1GHz

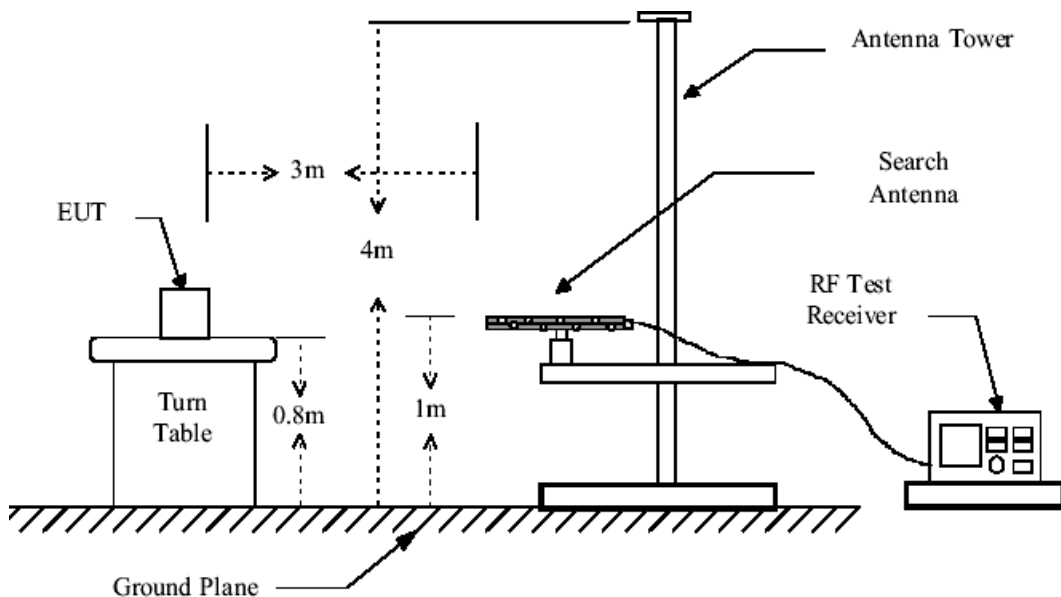

4.3 Radiated disturbance limit

Frequency	Measurement (micro volts/meter) Distance(meters)	Field Strength
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

4.4 Test Procedure

The EUT and its simulators are placed on turn table, non-conductive and wooden table, which is 0.8 meter above ground. The turn table rotates 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that distance from antenna to the EUT is 3 meters. For the frequency range is above 1 GHz, the EUT was positioned such that distance from antenna to the EUT is 3 meters.

The antenna is moved up and down between 1 meter to 4 meters to receive the maximum emission level. below 30MHz, The antenna is 1meter.

Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission, all of the interference cables must be manipulated according to FCC PART 15 regulation: the test procedure of the radiated emission measurement.

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 KHz, 110-490Khzandabove1000MHz.Radiatedemissionlimitsinthesethreebandsare based on measurements employing an average detector.


4.5 Test result (See below detailed test result)

See below detailed test result

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: Factor = Antenna Factor + Cable Loss – Amp Factor, Margin = Limit – Level

Test mode 3

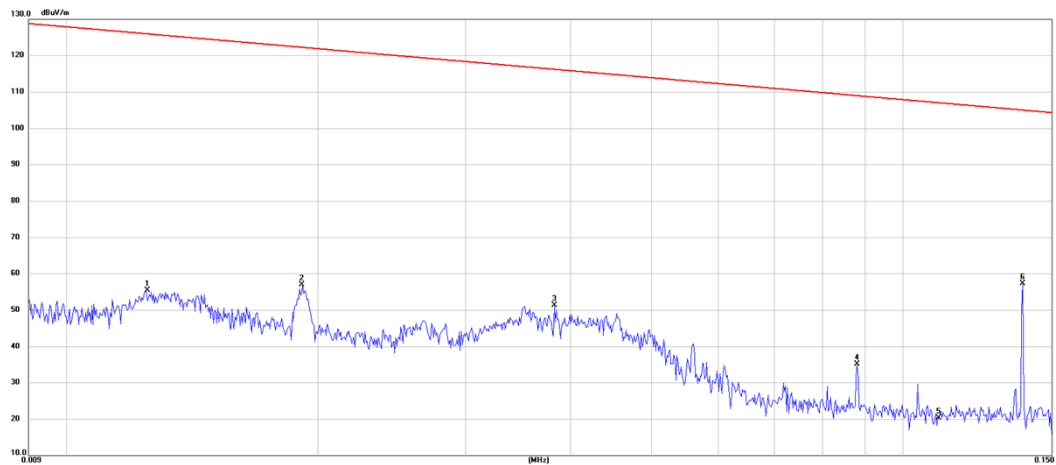


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0135	35.85	20.00	55.85	125.27	-69.42	peak	100	360	
2	0.0190	34.31	20.35	54.66	122.29	-67.63	peak	100	360	
3	0.0352	29.93	19.64	49.57	116.93	-67.36	peak	100	360	
4	0.1101	11.84	19.51	31.35	107.00	-75.65	peak	100	360	
5	0.1271	23.36	19.50	42.86	105.75	-62.89	peak	100	360	
6 *	0.1388	41.42	19.49	60.91	104.98	-44.07	peak	100	360	

Test mode 3

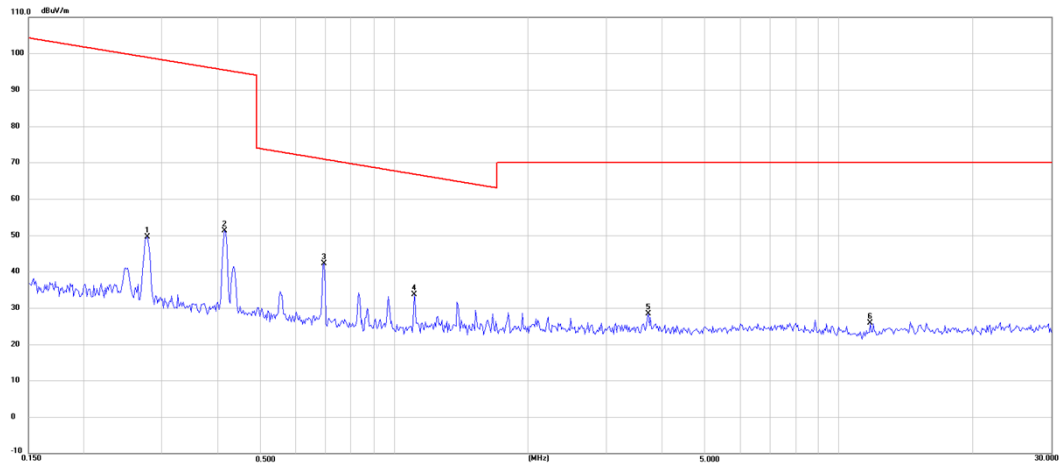


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.2509	22.20	19.40	41.60	99.83	-58.23	peak	100	0	
2	0.4354	20.46	19.46	39.92	95.03	-55.11	peak	100	0	
3	0.8710	15.68	19.66	35.34	68.93	-33.59	peak	100	0	
4 *	1.3090	16.34	19.61	35.95	65.33	-29.38	peak	100	0	
5	3.7296	6.13	19.74	25.87	70.00	-44.13	peak	100	0	
6	13.5868	6.03	20.08	26.11	70.00	-43.89	peak	100	0	

Test mode 5

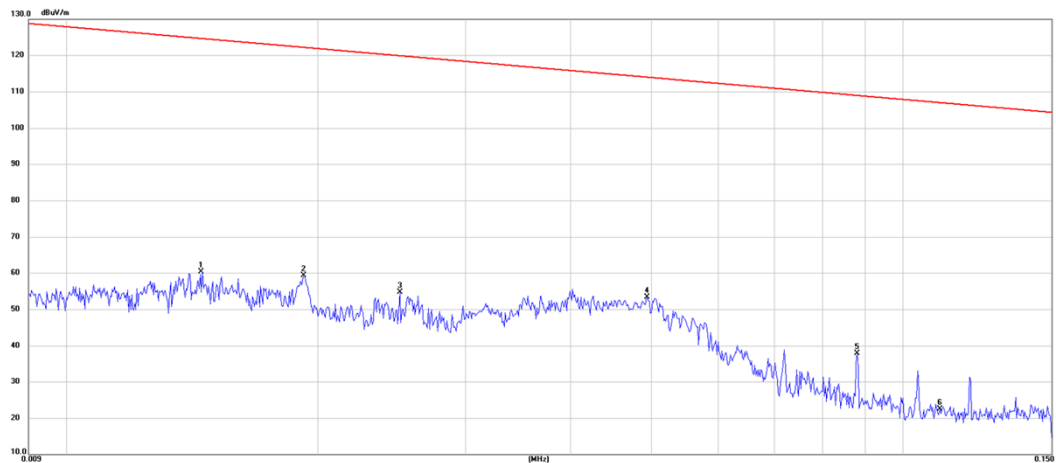


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0145	40.25	20.06	60.31	124.65	-64.34	peak	100	0	
2	0.0192	39.01	20.36	59.37	122.20	-62.83	peak	100	0	
3	0.0250	34.66	20.01	54.67	119.91	-65.24	peak	100	0	
4 *	0.0494	33.93	19.53	53.46	113.98	-60.52	peak	100	0	
5	0.0881	18.49	19.43	37.92	108.94	-71.02	peak	100	0	
6	0.1106	2.98	19.51	22.49	106.96	-84.47	peak	100	0	

Test mode 5

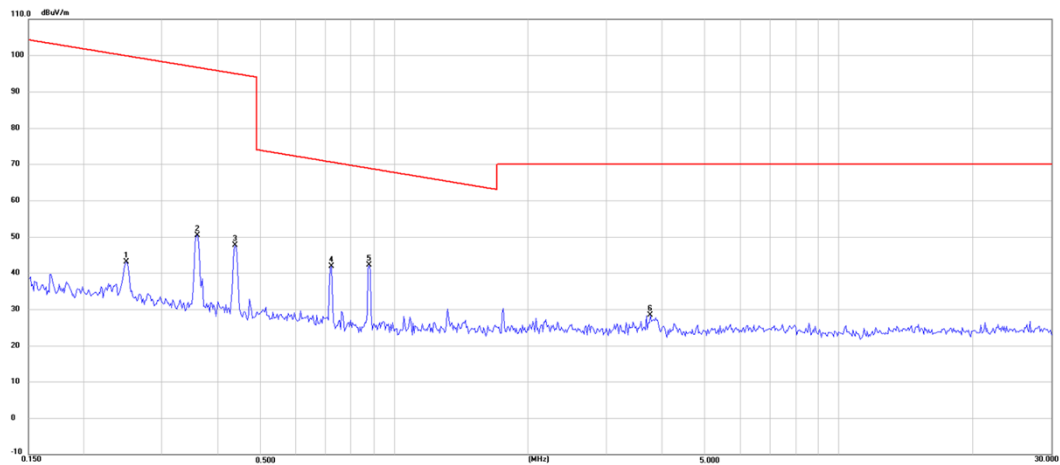


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.2503	23.66	19.40	43.06	99.85	-56.79	peak	100	0	
2	0.3600	31.04	19.42	50.46	96.68	-46.22	peak	100	0	
3	0.4383	28.25	19.46	47.71	94.97	-47.26	peak	100	0	
4	0.7203	22.35	19.50	41.85	70.60	-28.75	peak	100	0	
5 *	0.8780	22.54	19.67	42.21	68.85	-26.64	peak	100	0	
6	3.7619	8.65	19.75	28.40	70.00	-41.60	peak	100	0	

Test mode 6

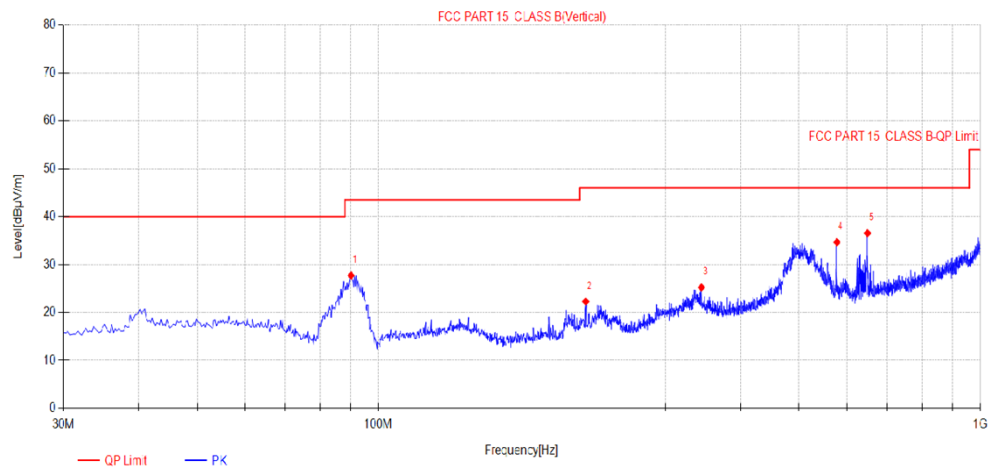


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	90.14	27.71	-17.49	43.50	15.79	100	75	Vertical
2	221.09	22.29	-14.24	46.00	23.71	100	264	Vertical
3	344.28	25.23	-8.77	46.00	20.77	100	140	Vertical
4	578.05	34.66	-5.50	46.00	11.34	100	119	Vertical
5	649.83	36.55	-4.45	46.00	9.45	100	10	Vertical

Test mode 6

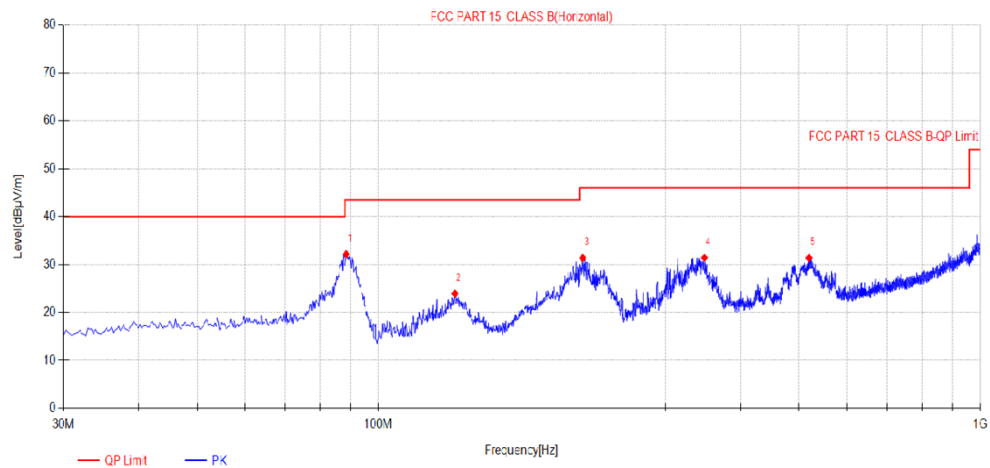


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	88.4425	32.17	-17.53	43.50	11.33	200	170	Horizontal
2	134.0325	23.92	-13.73	43.50	19.58	200	359	Horizontal
3	218.665	31.38	-14.36	46.00	14.62	200	309	Horizontal
4	348.16	31.43	-8.73	46.00	14.57	100	306	Horizontal
5	519.6075	31.40	-5.66	46.00	14.60	200	54	Horizontal

Test mode 8

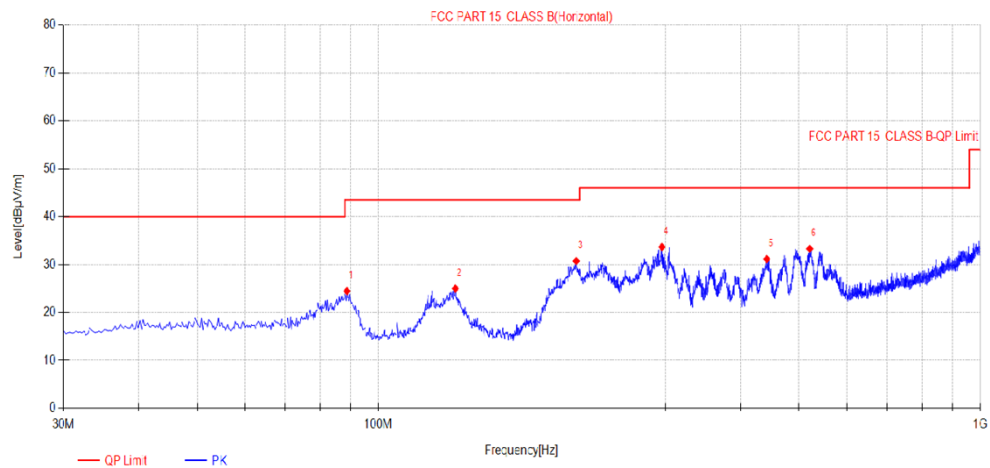


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	88.685	24.46	-17.53	43.50	19.04	200	359	Horizontal
2	134.275	24.99	-13.71	43.50	18.51	200	356	Horizontal
3	213.33	30.74	-14.62	43.50	12.76	100	300	Horizontal
4	296.0225	33.67	-9.82	46.00	12.33	100	190	Horizontal
5	442.0075	31.15	-7.13	46.00	14.85	100	277	Horizontal
6	520.82	33.29	-5.66	46.00	12.71	200	61	Horizontal

Test mode 8

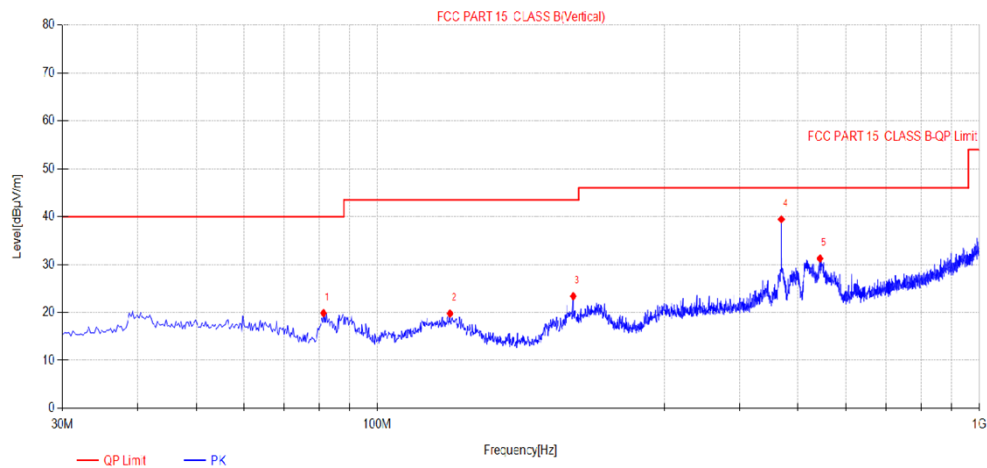


Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	81.41	19.86	-17.69	40.00	20.14	100	67	Vertical
2	132.0925	19.77	-13.86	43.50	23.73	100	38	Vertical
3	211.6325	23.40	-14.70	43.50	20.10	100	306	Vertical
4	469.41	39.44	-6.46	46.00	6.56	100	132	Vertical
5	544.1	31.26	-5.60	46.00	14.74	100	17	Vertical

Test mode 11

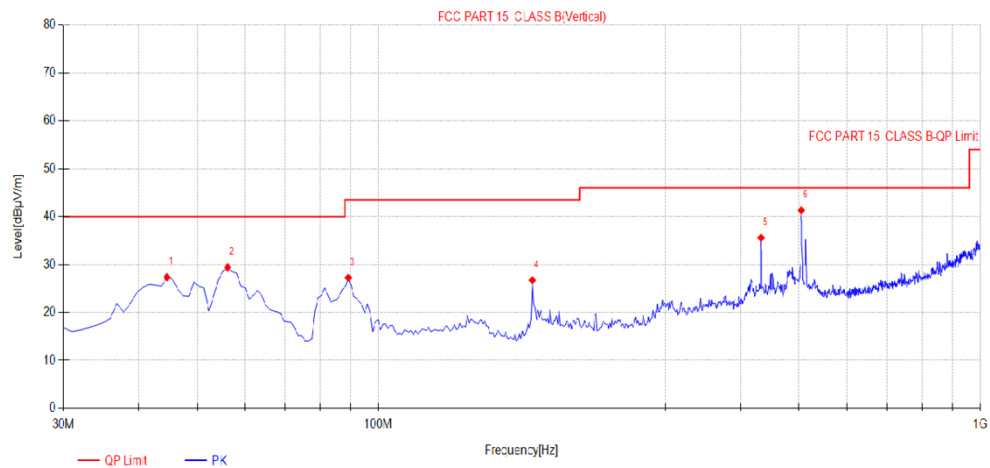


Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.55	27.37	-12.99	40.00	12.63	100	277	Vertical
2	56.19	29.41	-13.44	40.00	10.59	100	223	Vertical
3	89.17	27.25	-17.52	43.50	16.25	100	83	Vertical
4	180.35	26.74	-16.04	43.50	16.76	100	12	Vertical
5	432.55	35.59	-7.36	46.00	10.41	100	284	Vertical
6	504.33	41.33	-5.71	46.00	4.67	100	136	Vertical

Test mode 11

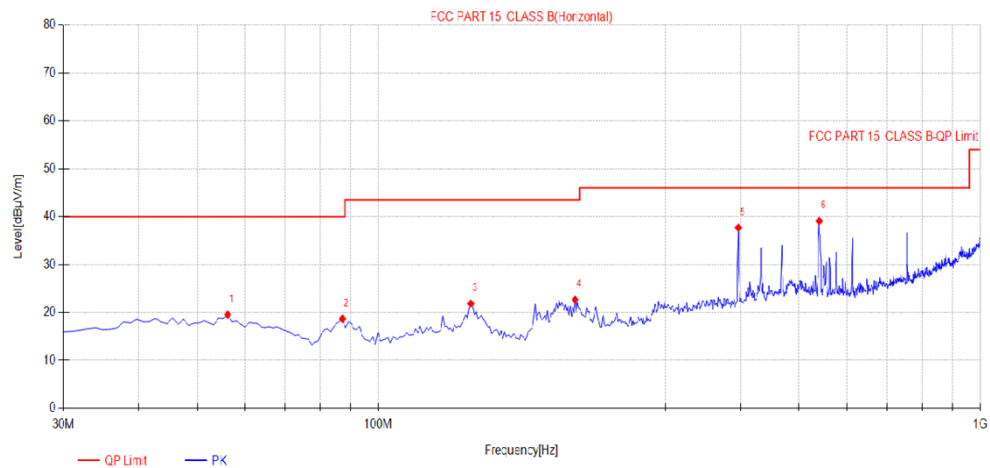


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.19	19.54	-13.44	40.00	20.46	200	1	Horizontal
2	87.23	18.68	-17.56	40.00	21.32	200	351	Horizontal
3	142.52	21.84	-13.58	43.50	21.66	200	0	Horizontal
4	212.36	22.66	-14.67	43.50	20.84	100	359	Horizontal
5	396.66	37.69	-8.18	46.00	8.31	100	331	Horizontal
6	540.22	39.08	-5.61	46.00	6.92	200	0	Horizontal

Test mode 13

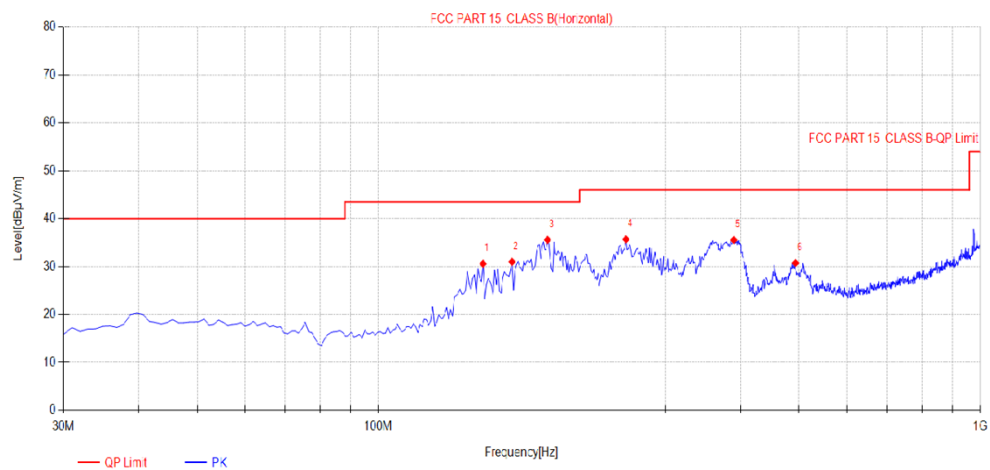

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	149.31	30.57	-14.30	43.50	12.93	200	290	Horizontal
2	166.77	31.00	-15.65	43.50	12.50	100	304	Horizontal
3	191.02	35.57	-15.63	43.50	7.93	100	290	Horizontal
4	257.95	35.68	-12.87	46.00	10.32	100	237	Horizontal
5	389.87	35.54	-8.26	46.00	10.46	100	277	Horizontal
6	493.66	30.74	-5.87	46.00	15.26	200	342	Horizontal

Test mode 13

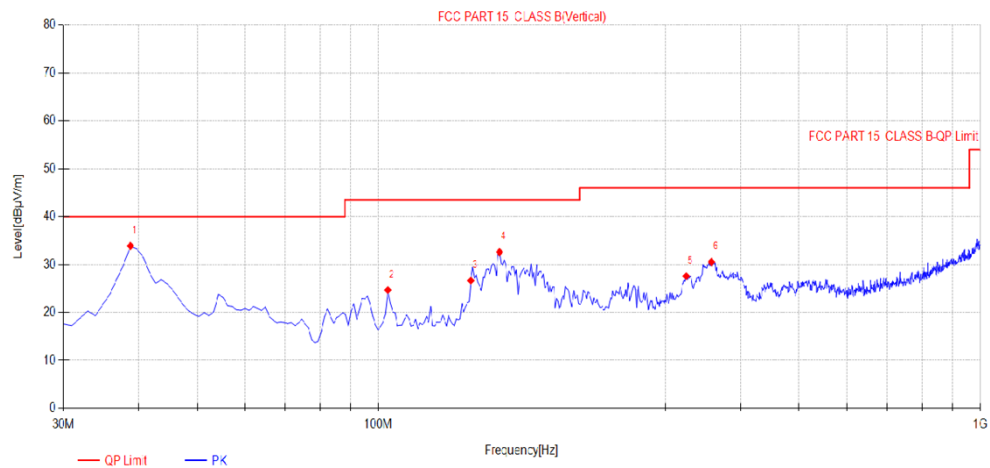

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.73	33.89	-13.26	40.00	6.11	100	1	Vertical
2	103.72	24.68	-16.39	43.50	18.82	100	350	Vertical
3	142.52	26.65	-13.58	43.50	16.85	100	0	Vertical
4	159.01	32.61	-15.33	43.50	10.89	100	22	Vertical
5	324.88	27.59	-8.99	46.00	18.41	100	324	Vertical
6	357.86	30.53	-8.62	46.00	15.47	100	310	Vertical


5. Occupied Bandwidth

5.1 Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI test receiver	R&S	ESCI 7	100969	2027-01-04
2	Loop antenna	TESEQ	HLA6121	58357	2027-01-04
3	Trilog broadband antenna	Schwarzbeck	VULLB9168	01326	2027-03-20
4	Pre-amplifier	R&S	TAP9K3G32	AP211806164	2027-01-04
5	RF cable	HUBER	LEX15	N/A	2027-01-04
6	RF cable	HUBER	LEX100	N/A	2027-01-04

5.2 Block diagram of test setup

For radiated emissions below 30MHz

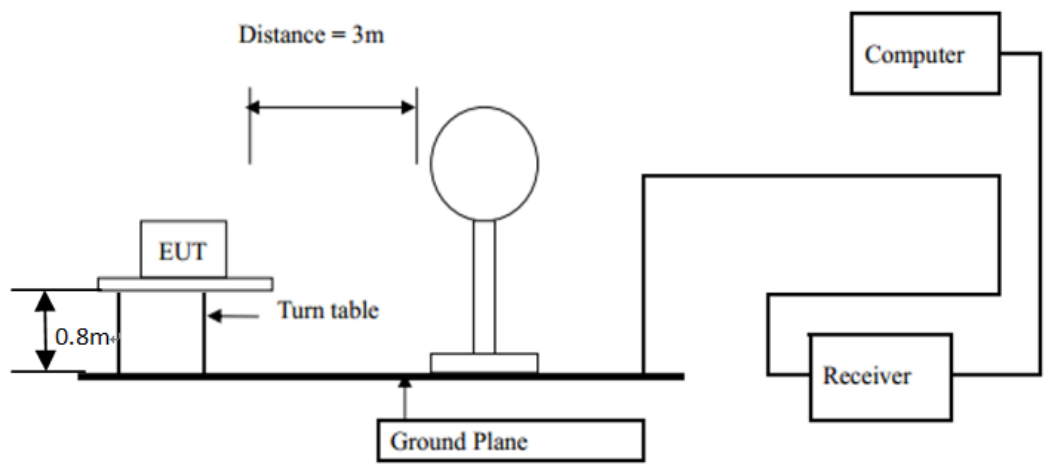

5.3 Test Procedure

According to the above Test-setup, keep the relative position between the artificial antenna and the EUT.



Set to the maximum power setting and enable the EUT transmit continuously.

Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep=auto; Detector function= peak; Trace = max hold.

Measurements record the results in the test report.

5.4 Test result

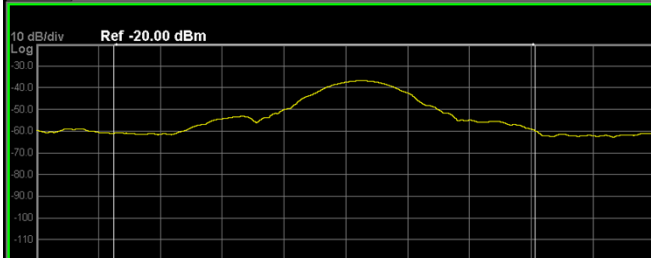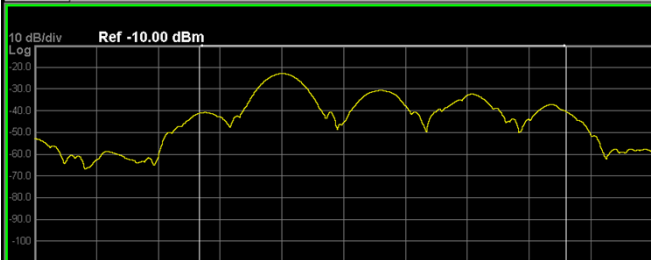Frequency (KHz)	20dB bandwidth (KHz)	Test detail	Result
138.5	4.886	Center Freq 138.500 kHz Center Freq: 138.500 kHz Trig: Free Run Avg Hold:>10/10 Radio Std: None #IFGain:Low #Atten: 10 dB Radio Device: BTS 10 dB/div Log Ref -20.00 dBm  Center 138.5 kHz #Res BW 1 kHz #VBW 3 kHz Span 10 kHz Sweep 12.4 ms Occupied Bandwidth 6.803 kHz Total Power -36.2 dBm Transmit Freq Error -345 Hz % of OBW Power 99.00 % x dB Bandwidth 4.886 kHz x dB -20.00 dB <td>Pass</td>	Pass
360.2	12.36	Center Freq 360.200 kHz Center Freq: 360.200 kHz Trig: Free Run Avg Hold:>10/10 Radio Std: None #IFGain:Low #Atten: 16 dB Radio Device: BTS 10 dB/div Log Ref -10.00 dBm  Center 360.2 kHz #Res BW 1 kHz #VBW 3 kHz Span 20 kHz Sweep 24.73 ms Occupied Bandwidth 11.859 kHz Total Power -21.4 dBm Transmit Freq Error 1.260 kHz % of OBW Power 99.00 % x dB Bandwidth 12.36 kHz x dB -20.00 dB <td>Pass</td>	Pass