

TEST REPORT

FCC ID: 2AW9M-KB1001A

Product: Tablet

Model No.: KB1001

KB1001L, KB1001S, KB1002, KB1002L, KB1003, KB1003L, KB1004,
KB1004L, KB1005, KB1005L, KB1006, KB1006L, KB1007, KB1007L,
KB1008, KB1008L, KB1009, KB1016, KB1028, KB1012, KB10, KB10L,
KB11, KB11L

Trade Mark: NA

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued Date: 20 October 2025

Issued for:

SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD.

Room 901, Block E, Building 1, Section 1, Chuangzhi Yuncheng,
Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen

Issued By:

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 and 60, Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. General Information	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	16
6.4. 20dB OCCUPY BANDWIDTH	23
6.5. CARRIER FREQUENCIES SEPARATION	30
6.6. HOPPING CHANNEL NUMBER	37
6.7. DWELL TIME	40
6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	51
6.9. CONDUCTED BAND EDGE MEASUREMENT	52
6.10. CONDUCTED SPURIOUS EMISSION MEASUREMENT	55
6.11. RADIATED SPURIOUS EMISSION MEASUREMENT	65
7. Test Setup Photographs	77

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

1. Test Certification

Product:	Tablet
Model No.:	KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L
Trade Mark:	NA
Applicant:	SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD. ROOM 901, BLOCK E, BUILDING 1, SECTION 1, CHUANGZHI YUNCHE NG, LIUXIAN AVENUE,XILI COMMUNITY, XILI STREET, NANSHAN DISTRICT, SHENZHEN
Manufacturer:	SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD. ROOM 901, BLOCK E, BUILDING 1, SECTION 1, CHUANGZHI YUNCHE NG, LIUXIAN AVENUE,XILI COMMUNITY, XILI STREET, NANSHAN DISTRICT, SHENZHEN
Date of Test:	28 August 2025 to 20 October 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

(Wang Xiang)

Checked By:

(Chen Xu)

Approved By:

(Qin Shuiquan)

Date:

20 October 2025

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum conducted output power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1053, §2.1057	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Tablet
Model :	KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007L,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L
Trade Mark:	NA
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	1MHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Integral Antenna
Antenna Gain:	1.97dBi
Operating Voltage:	Adapter1: G50-US-0502000 Input: 100-240V~,0.35A Max 50/60HZ Output:5.0V---2.0A 10.0W Adapter2: PS10UA050K2000UU Input: 100-240V~, 50/60HZ 0.35A Max Output:5.0V---2.0A 10.0W Rechargeable Li-ion Polymer Battery:2894130 Nominal Voltage: 3.8V Rated Capacity: 5000mAh Limited Charge Voltage: 4.35V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

3. The laboratory shall be responsible for all information in the report, except for the information provided by the client. The data provided by the client should be clearly identified. In addition, when the information provided by the client may affect the validity of the results, a disclaimer should be included in the report. When the laboratory is not responsible for sampling (such as when the sample is provided by the customer), the results should be declared in the report as applicable to the received sample.

4. Among the series models

KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007L,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L, theKB1001 serves as the primary test model. All test data has been derived from the KB1001, as these models differ only in their model names.

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	-	-

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	E065-1R200325VU	/	/	NA

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyao Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

5.3. Measurement Uncertainty

No.	Item	MU
1	Duty Cycle and Tx-Sequence and Tx-Gap	$\pm 1\%$
2	Dwell Time and Minimum Frequency Occupation	$\pm 1.2\%$
3	Medium Utilisation Factor	$\pm 1.3\%$
4	Occupied Channel Bandwidth	$\pm 2.4\%$
5	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
6	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
7	Receiver Spurious Emissions	$\pm 2.5\%$
8	Conducted Emission Test	$\pm 3.2\text{dB}$
9	RF power, conducted	$\pm 0.16\text{dB}$
10	Spurious emissions, conducted	$\pm 0.21\text{dB}$
11	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
12	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
13	Temperature	$\pm 0.5^{\circ}\text{C}$
14	Humidity	$\pm 2.0\%$

NOTE:1.The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additionan uncertainty in the test system over and above that specified in harmonized standard should be used to tighter the test requirements-making the test harder to pass. This procedure will ensure that a test system not comliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system comliant with harmonized standard had been used.

5.4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2024	11/04/2025
Coaxial cable	Megalon	LMR400	N/A	11/05/2024	11/04/2025
GPIO cable	Megalon	GPIO	N/A	11/05/2024	11/04/2025
Spectrum Analyzer	R&S	FSU	100114	11/05/2024	11/04/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2025	7/28/2026
9*6*6 Anechoic	--	--	--	11/05/2024	11/04/2025
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2024	11/04/2025
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2024	11/04/2025
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2024	11/04/2025
Loop Antenna	EMCO	6502	00042960	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2024	11/04/2025
Power meter	Anritsu	ML2487A	6K00003613	11/05/2024	11/04/2025
Power sensor	Anritsu	MX248XD	--	11/05/2024	11/04/2025
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2024	11/04/2025


6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is 1.97dBi. Please refer to the attached "KB1001 Internal Photo" for the antenna location	

6.2. Conducted Emission

6.2.1. Test Specification

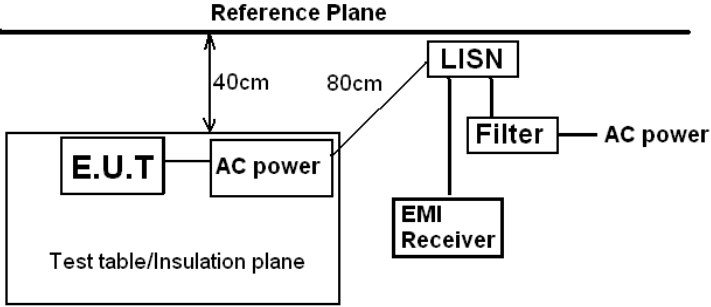Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2020		
Frequency Range:	150 kHz to 30 MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test Setup:	 <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Mode:	Refer to item 4.1		
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.		
Test Result:	PASS		

6.2.2. EUT OPERATING CONDITIONS


The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E250900072A-BT Issued: 20 October 2025

Test data


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

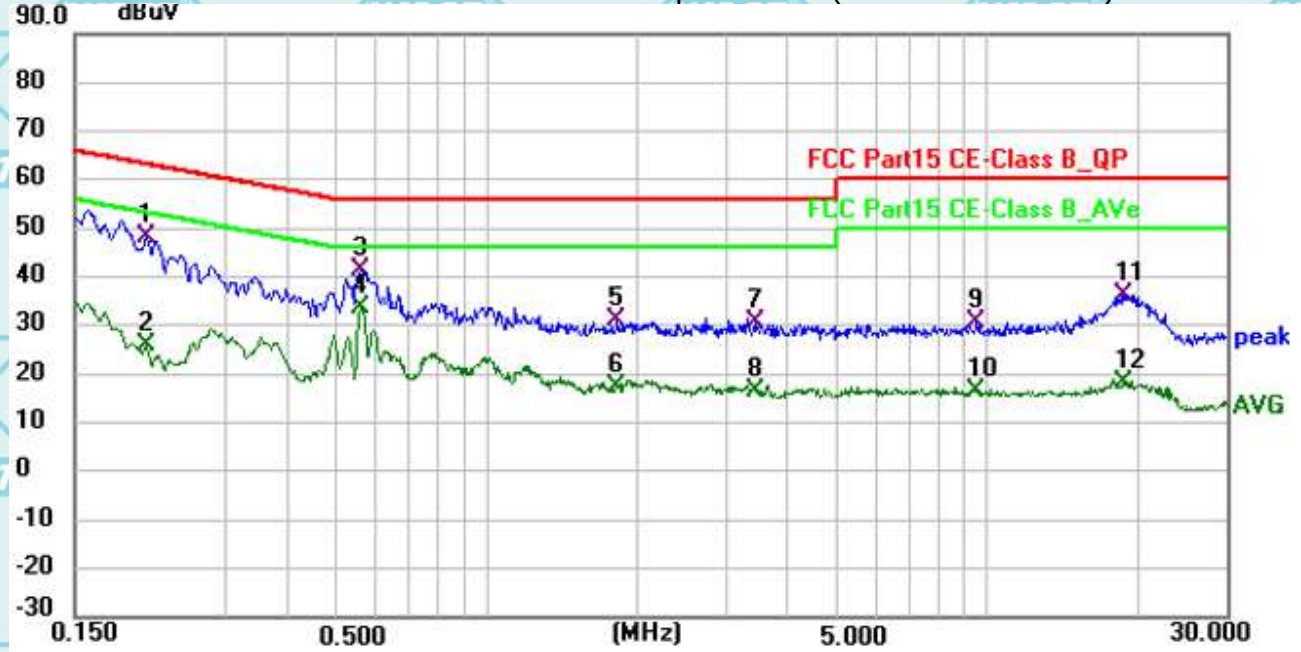

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2084	27.74	20.68	48.42	63.27	-14.85	QP
2	0.2084	5.36	20.68	26.04	53.27	-27.23	AVG
3	0.5594	20.65	20.52	41.17	56.00	-14.83	QP
4 *	0.5594	13.32	20.52	33.84	46.00	-12.16	AVG
5	1.8285	10.57	20.62	31.19	56.00	-24.81	QP
6	1.8285	-3.44	20.62	17.18	46.00	-28.82	AVG
7	3.4710	10.26	20.59	30.85	56.00	-25.15	QP
8	3.4710	-3.95	20.59	16.64	46.00	-29.36	AVG
9	9.5190	10.00	20.46	30.46	60.00	-29.54	QP
10	9.5190	-4.13	20.46	16.33	50.00	-33.67	AVG
11	18.6314	16.18	20.24	36.42	60.00	-23.58	QP
12	18.6314	-2.00	20.24	18.24	50.00	-31.76	AVG

Report No.: WSCT-ANAB-R&E250900072A-BT Issued: 20 October 2025

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

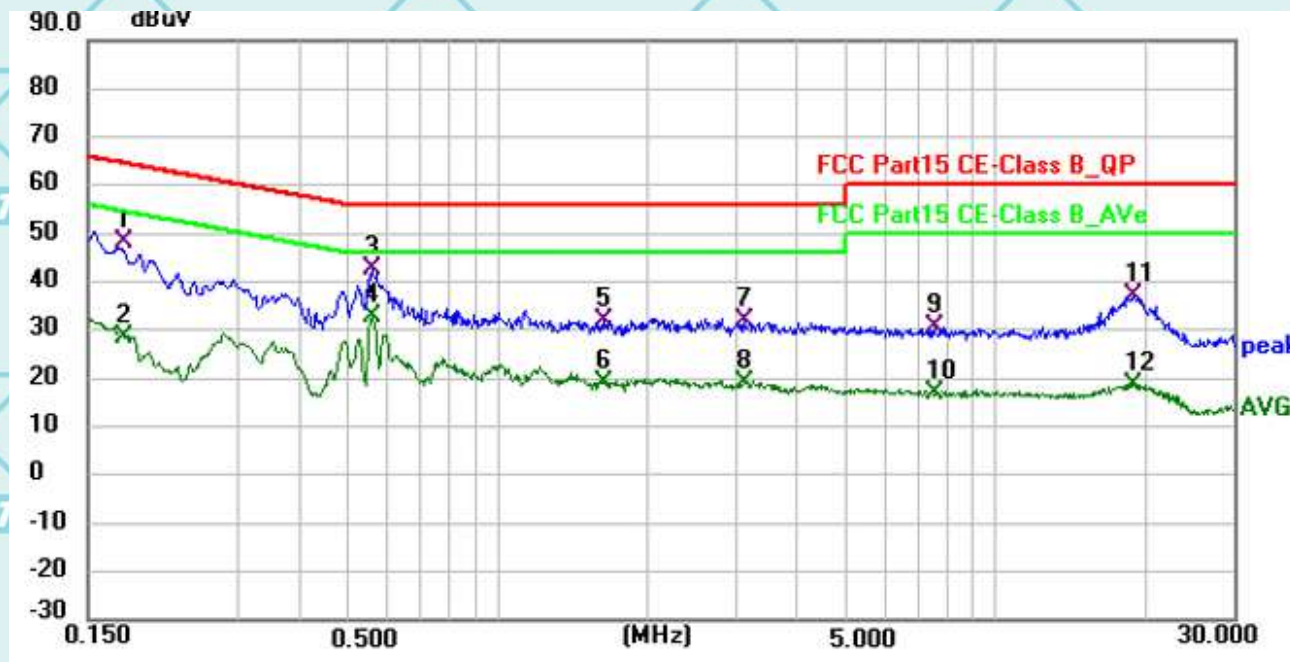

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	27.51	20.71	48.22	64.63	-16.41	QP
2	0.1770	7.90	20.71	28.61	54.63	-26.02	AVG
3	0.5595	22.06	20.52	42.58	56.00	-13.42	QP
4 *	0.5595	12.48	20.52	33.00	46.00	-13.00	AVG
5	1.6395	11.27	20.63	31.90	56.00	-24.10	QP
6	1.6395	-1.58	20.63	19.05	46.00	-26.95	AVG
7	3.1290	11.50	20.59	32.09	56.00	-23.91	QP
8	3.1290	-1.44	20.59	19.15	46.00	-26.85	AVG
9	7.5525	10.12	20.50	30.62	60.00	-29.38	QP
10	7.5525	-3.60	20.50	16.90	50.00	-33.10	AVG
11	18.9014	16.89	20.24	37.13	60.00	-22.87	QP
12	18.9014	-1.41	20.24	18.83	50.00	-31.17	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2020
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
Test Result:	PASS

6.3.2. Test Data

GFSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	-6.23	20.97	PASS
Middle	-6.16	20.97	PASS
Highest	-6.26	20.97	PASS

Pi/4DQPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	-7.49	20.97	PASS
Middle	-7.5	20.97	PASS
Highest	-7.44	20.97	PASS

8DPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	-6.62	20.97	PASS
Middle	-6.54	20.97	PASS
Highest	-6.71	20.97	PASS

Test plots as follows:

Test Graphs

Power 1-DH5 2402MHz



Power 1-DH5 2441MHz



Power 1-DH5 2480MHz



Power 2-DH5 2402MHz



Power 2-DH5 2441MHz



Power 2-DH5 2480MHz



Power 3-DH5 2402MHz



Power 3-DH5 2441MHz





6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	N/A
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test data

Test channel	20dB Occupy Bandwidth (MHz)			
	GFSK	$\pi/4$ -DQPSK	8DPSK	Conclusion
Lowest	0.868	1.301	1.219	PASS
Middle	0.826	1.299	1.269	PASS
Highest	0.914	1.304	1.27	PASS

Test plots as follows:

Test Graphs

-20dB Bandwidth 1-DH5 2402MHz



-20dB Bandwidth 1-DH5 2441MHz



-20dB Bandwidth 1-DH5 2480MHz



-20dB Bandwidth 2-DH5 2402MHz



-20dB Bandwidth 2-DH5 2441MHz



-20dB Bandwidth 2-DH5 2480MHz



-20dB Bandwidth 3-DH5 2402MHz




-20dB Bandwidth 3-DH5 2441MHz





6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

6.5.2. Test data

GFSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	1	0.579	PASS
Middle	1	0.551	PASS
Highest	0.998	0.609	PASS

Pi/4 DQPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	1.002	0.867	PASS
Middle	0.98	0.866	PASS
Highest	1	0.869	PASS

8DPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	0.992	0.813	PASS
Middle	1	0.846	PASS
Highest	1.154	0.847	PASS

Test plots as follows:

Test Graphs

CFS 1-DH5 2402MHz




CFS 1-DH5 2441MHz




CFS 1-DH5 2480MHz



CFS 2-DH5 2402MHz

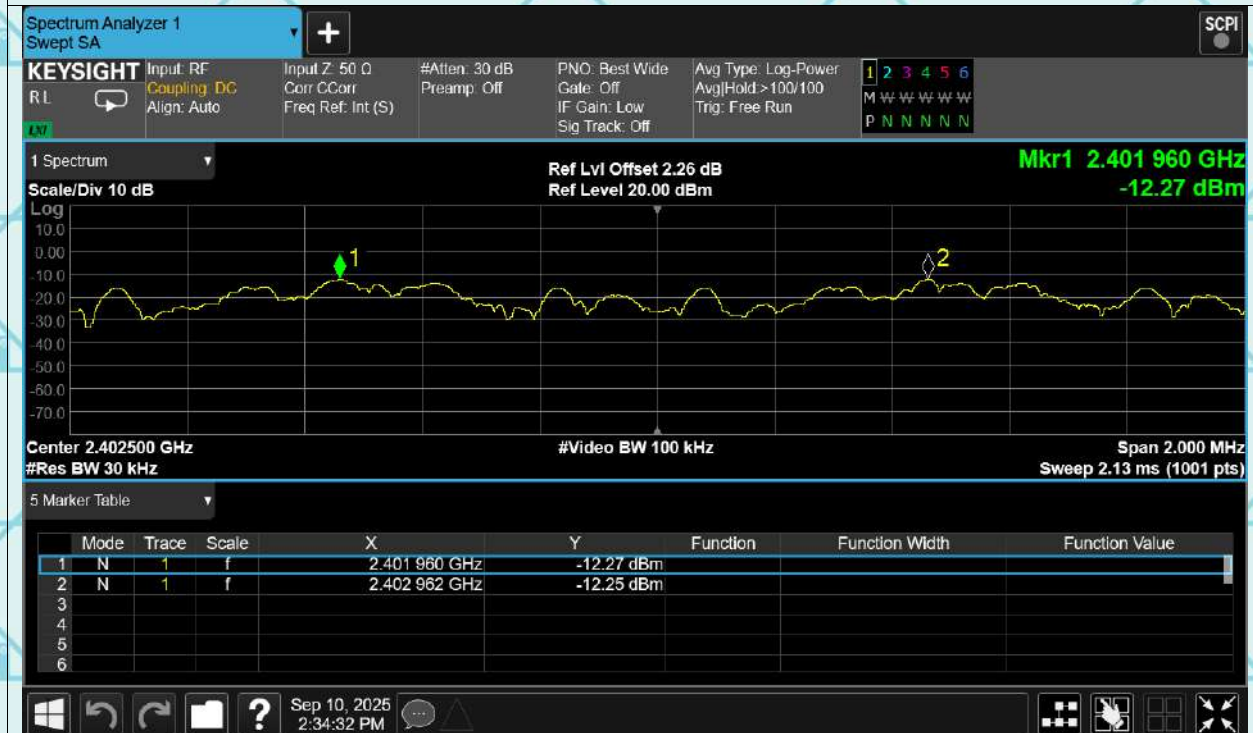


CFS 2-DH5 2441MHz

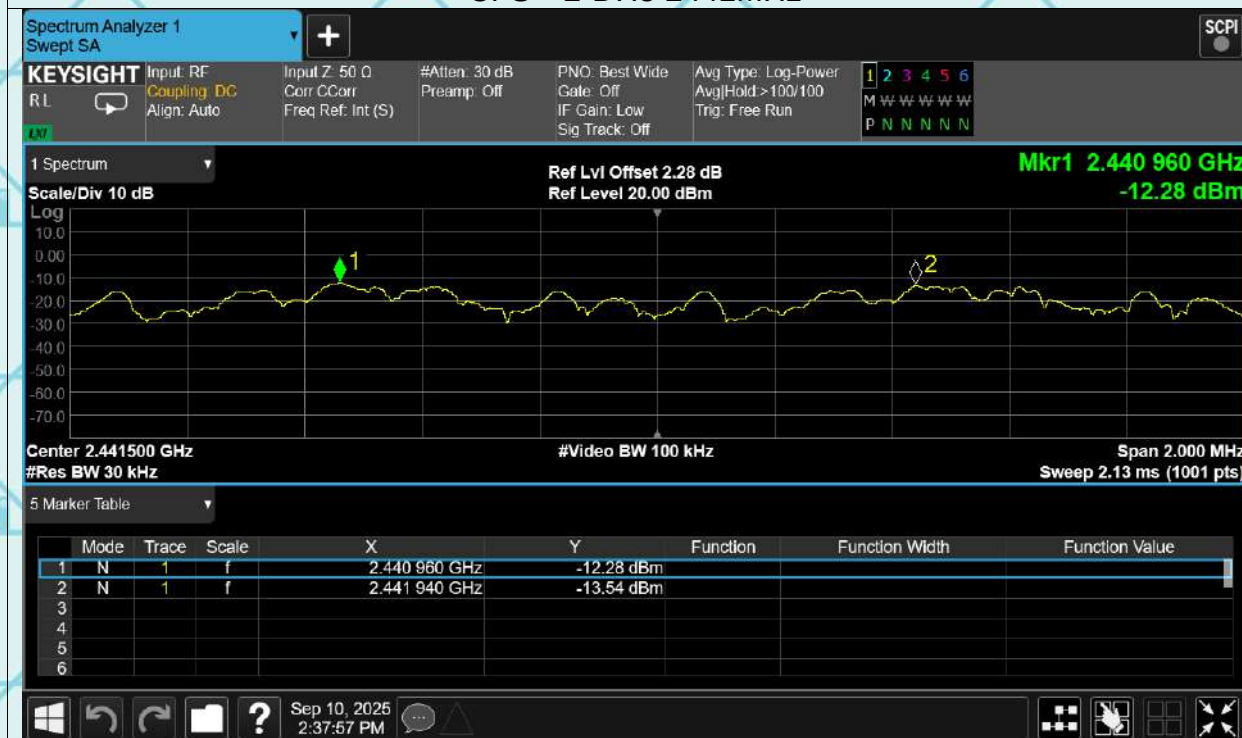

CFS 2-DH5 2480MHz




CFS 3-DH5 2402MHz

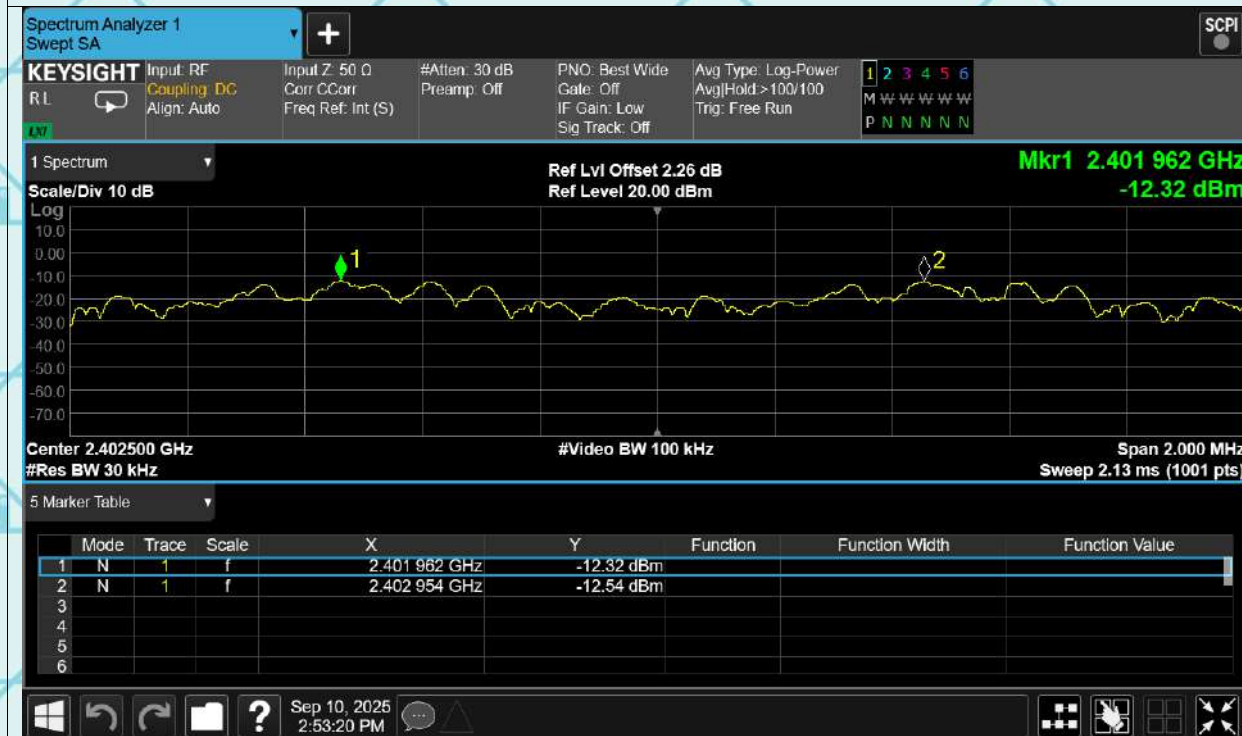


CFS 3-DH5 2441MHz



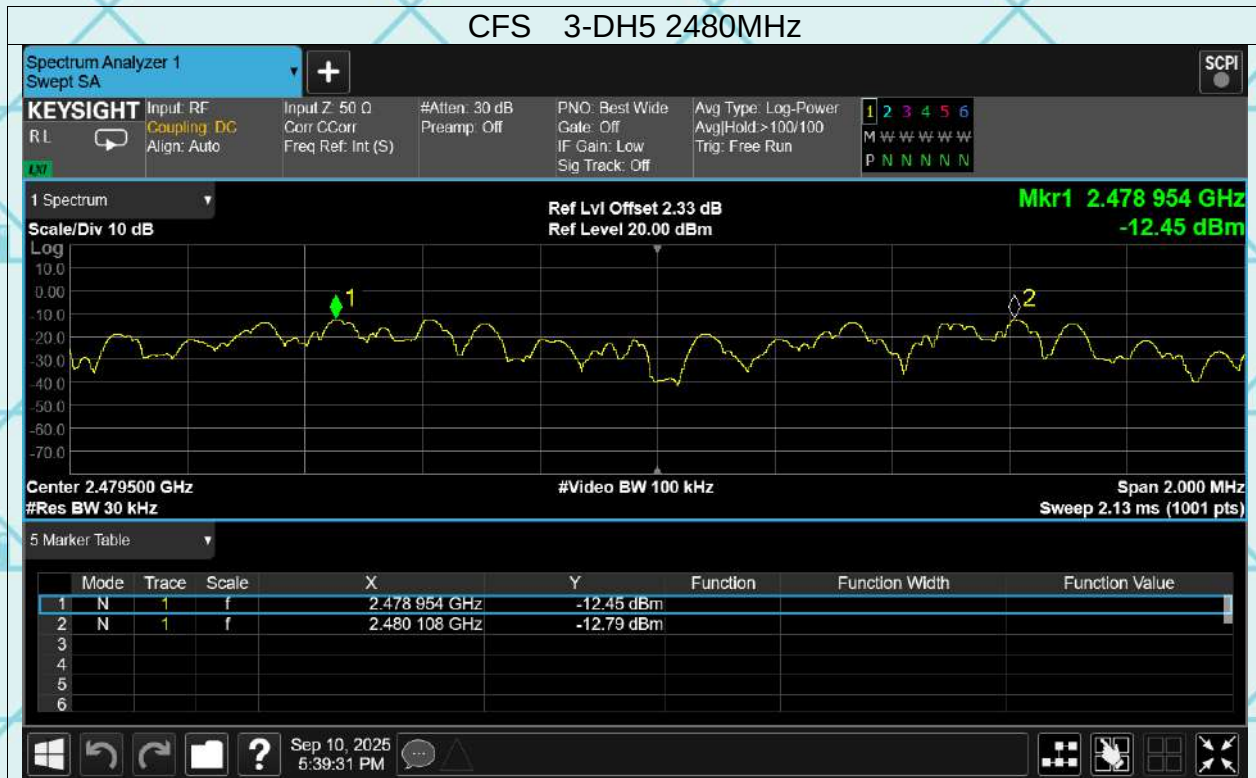

6.6. Hopping Channel Number


6.6.1. Test Specification

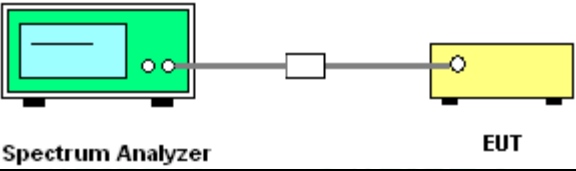Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS


6.6.2. Test data

Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK, 8DPSK	79	15	PASS


Test plots as follows:

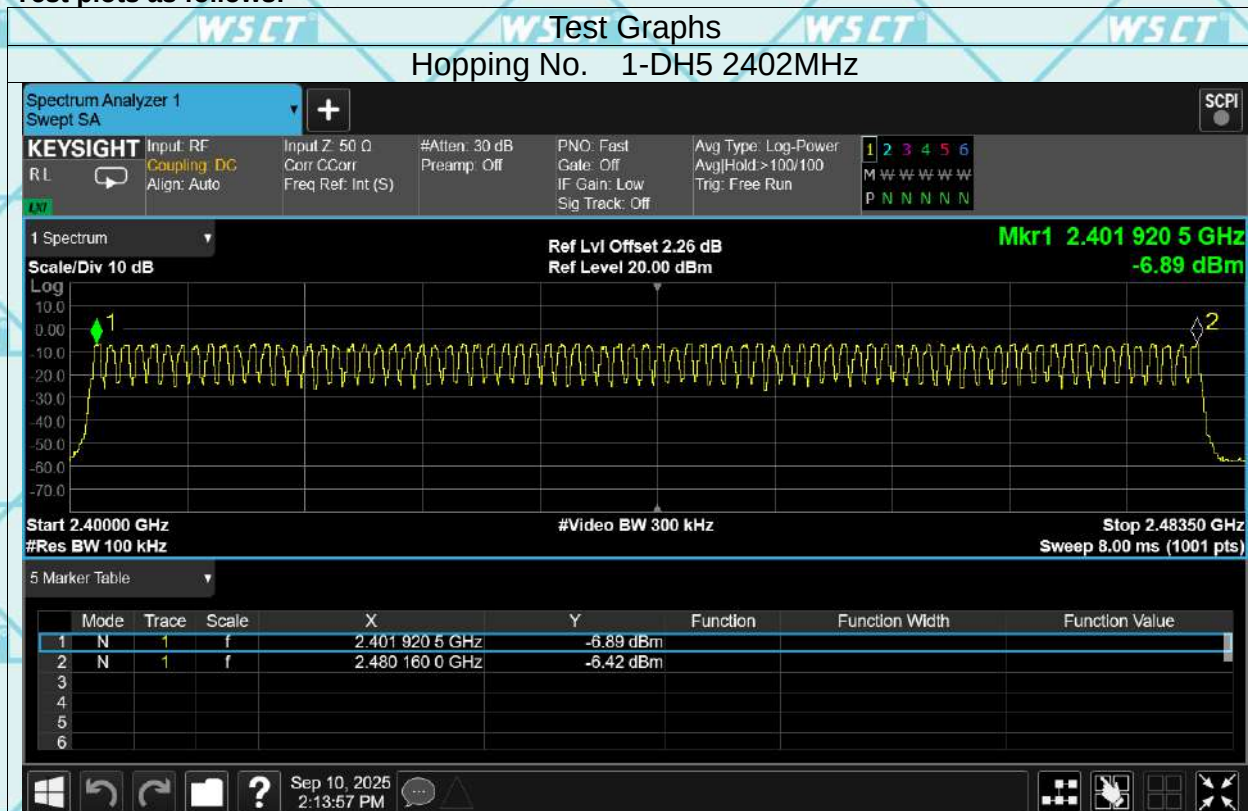

Hopping No. 2-DH5 2402MHz

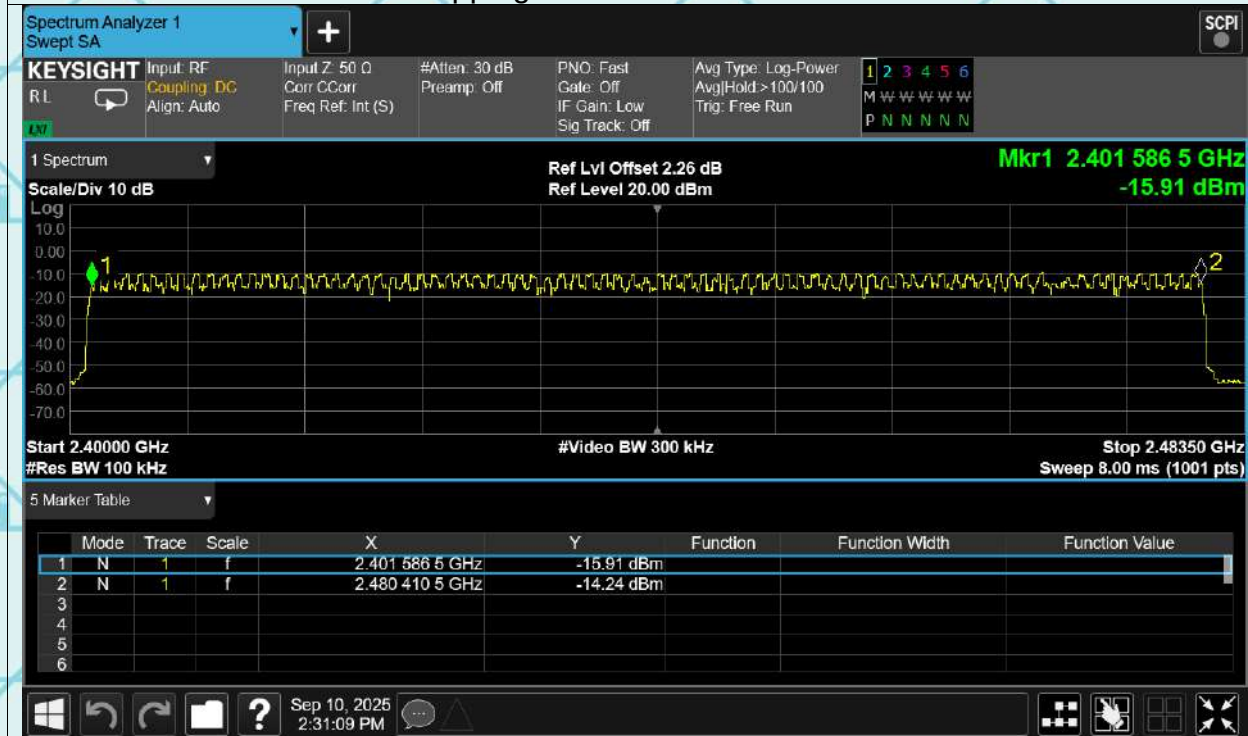


Hopping No. 3-DH5 2402MHz

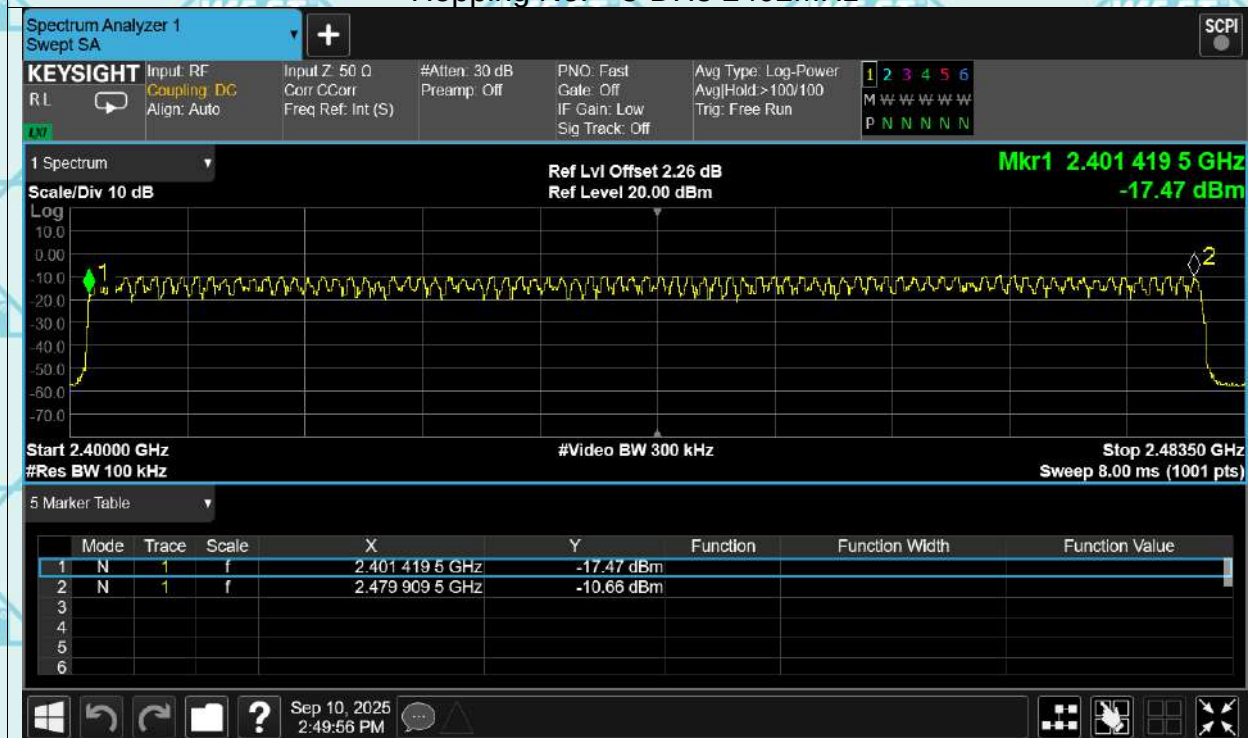

6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS

6.7.2. Test Data

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2402	0.367	117.073	319	31600	400	Pass
1-DH1	2441	0.367	117.073	319	31600	400	Pass
1-DH1	2480	0.367	117.073	319	31600	400	Pass
1-DH3	2402	1.623	264.549	163	31600	400	Pass
1-DH3	2441	1.624	251.72	155	31600	400	Pass
1-DH3	2480	1.624	254.968	157	31600	400	Pass
1-DH5	2402	2.872	324.536	113	31600	400	Pass
1-DH5	2441	2.872	307.304	107	31600	400	Pass
1-DH5	2480	2.872	298.688	104	31600	400	Pass

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops

For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:

Test Graphs

Dwell 1-DH1 2402MHz One Burst



Dwell 1-DH1 2402MHz Accumulated



Dwell 1-DH1 2441MHz One Burst



Dwell 1-DH1 2441MHz Accumulated



Dwell 1-DH1 2480MHz One Burst




Dwell 1-DH1 2480MHz Accumulated



Dwell 1-DH3 2402MHz One Burst




Dwell 1-DH3 2402MHz Accumulated

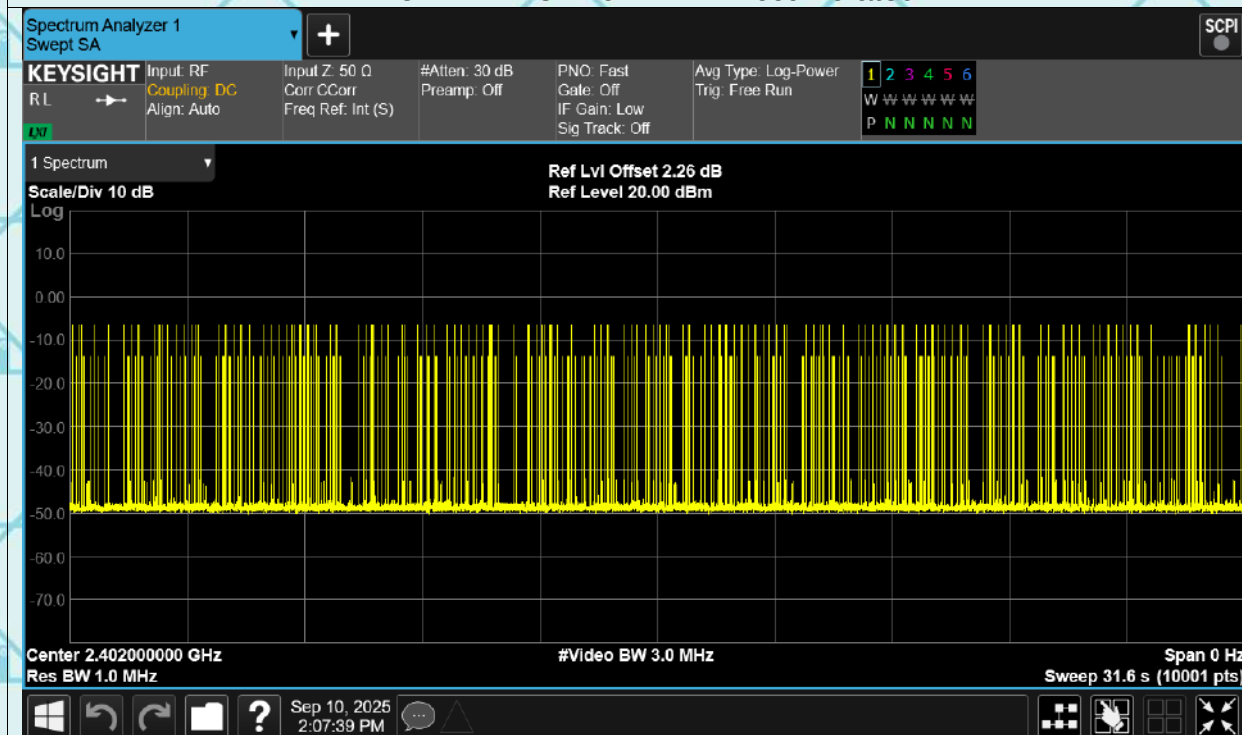

Dwell 1-DH3 2441MHz One Burst




Dwell 1-DH3 2441MHz Accumulated


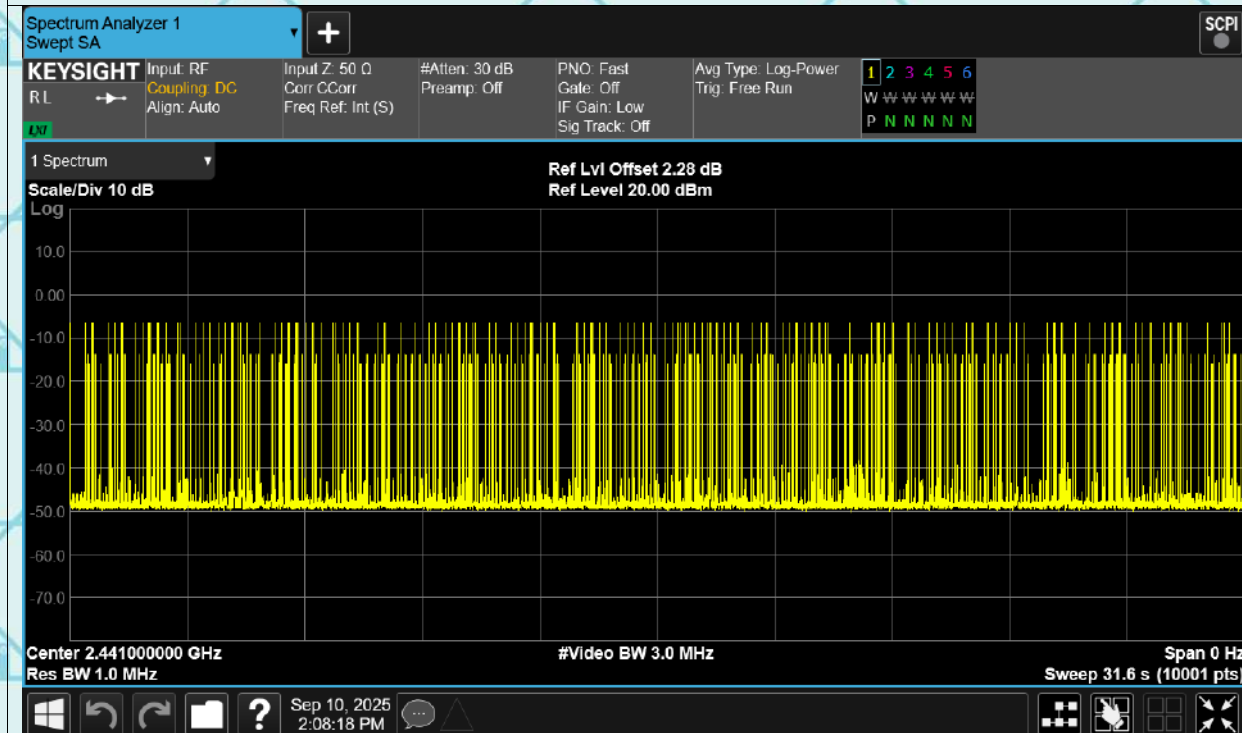


Dwell 1-DH3 2480MHz One Burst



Dwell 1-DH3 2480MHz Accumulated

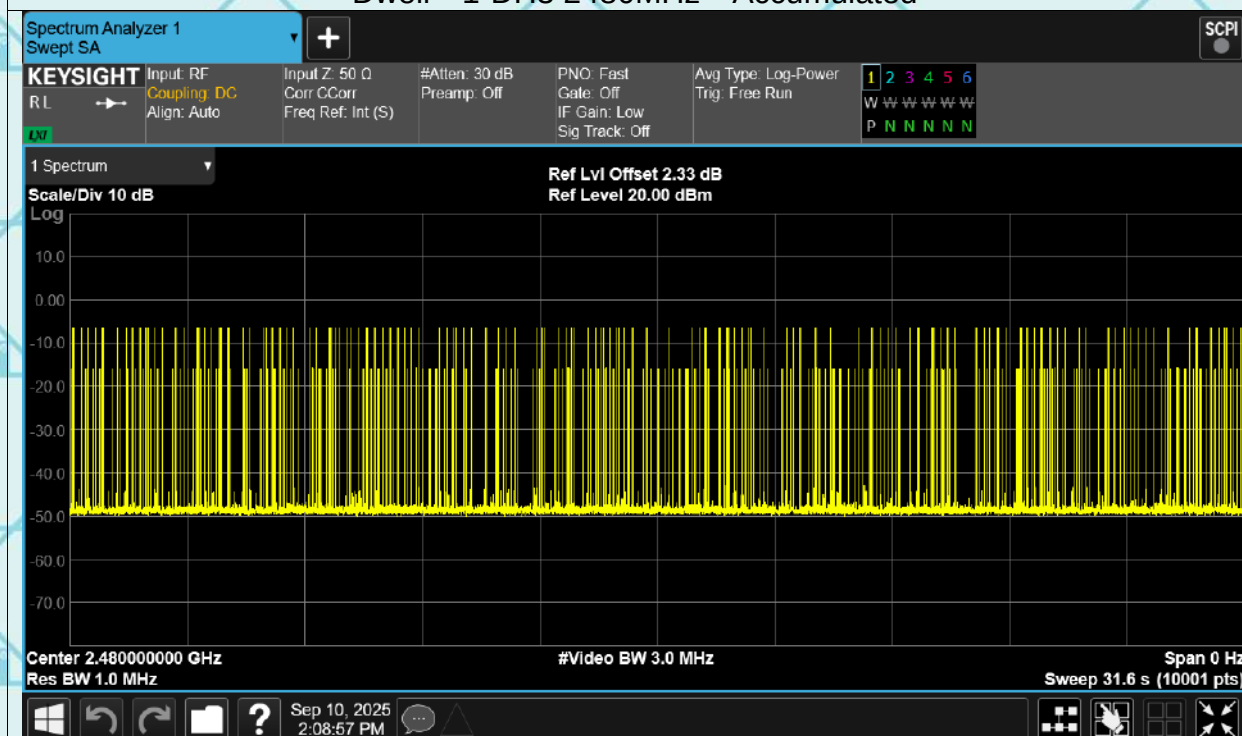

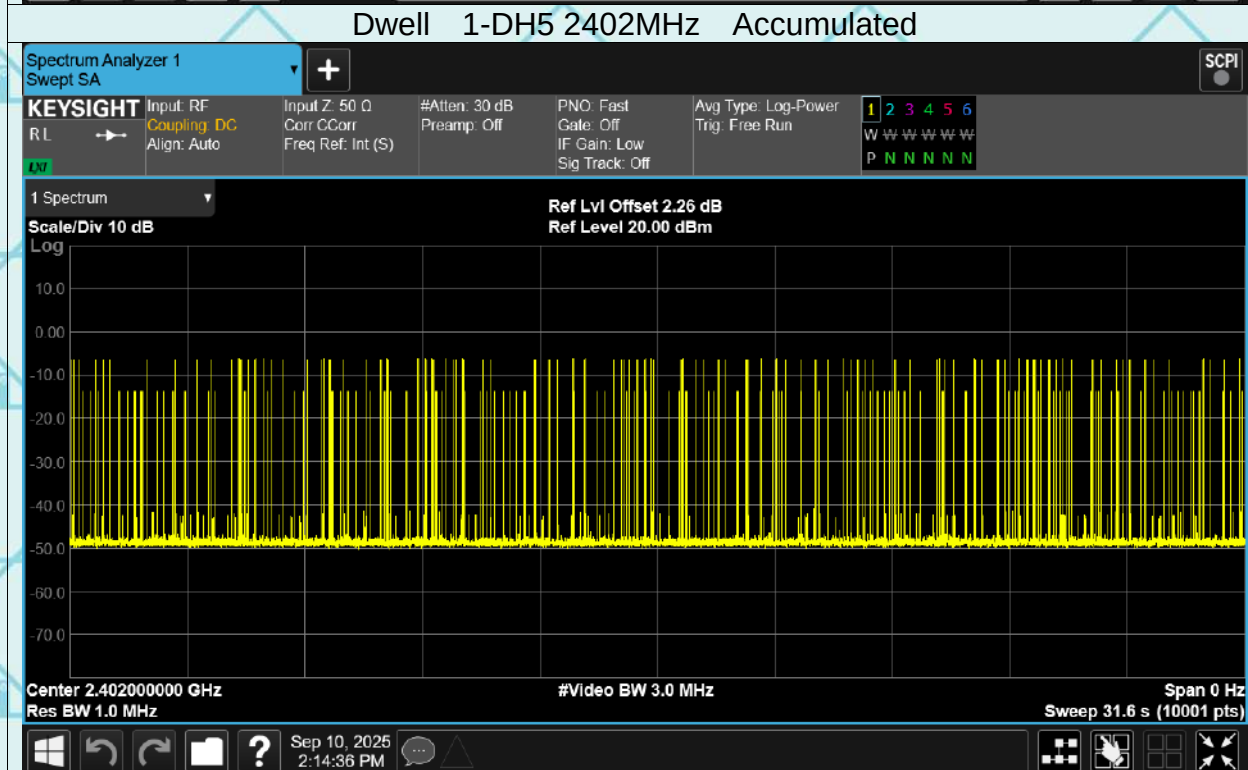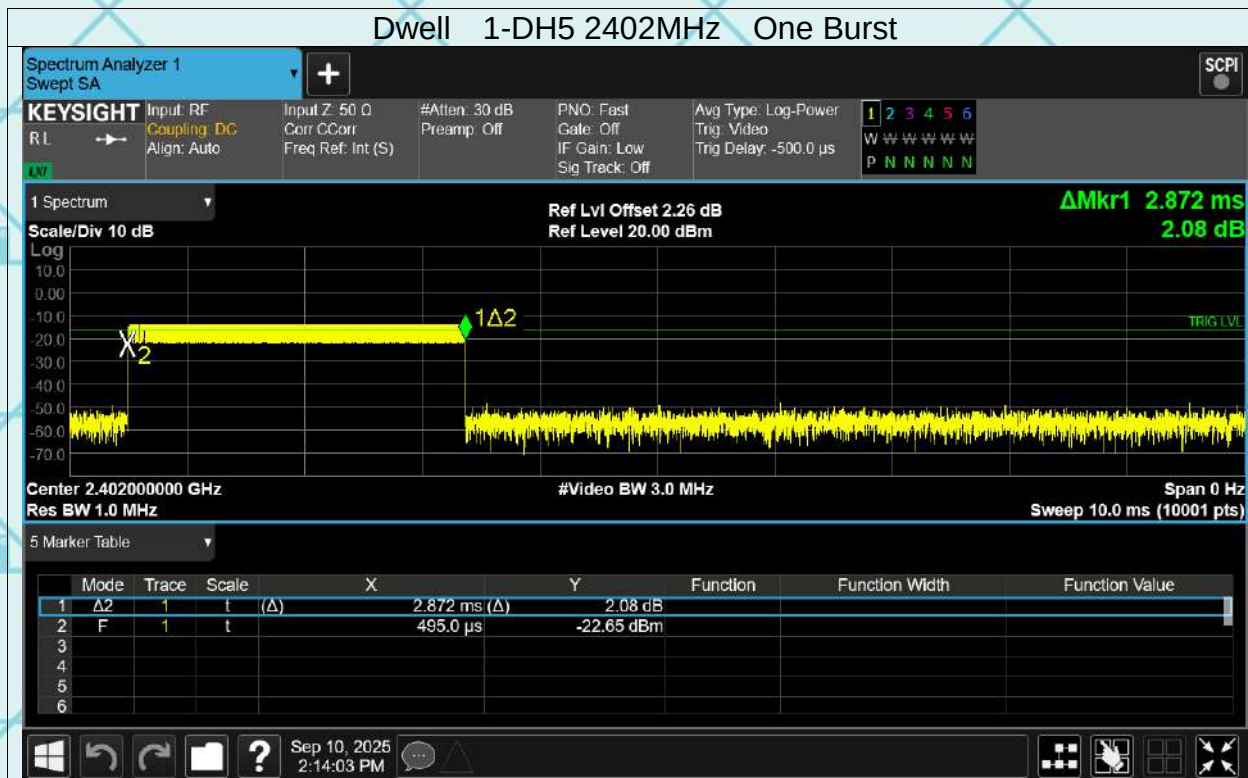

Dwell 1-DH5 2441MHz One Burst




Dwell 1-DH5 2441MHz Accumulated



Dwell 1-DH5 2480MHz One Burst



Dwell 1-DH5 2480MHz Accumulated

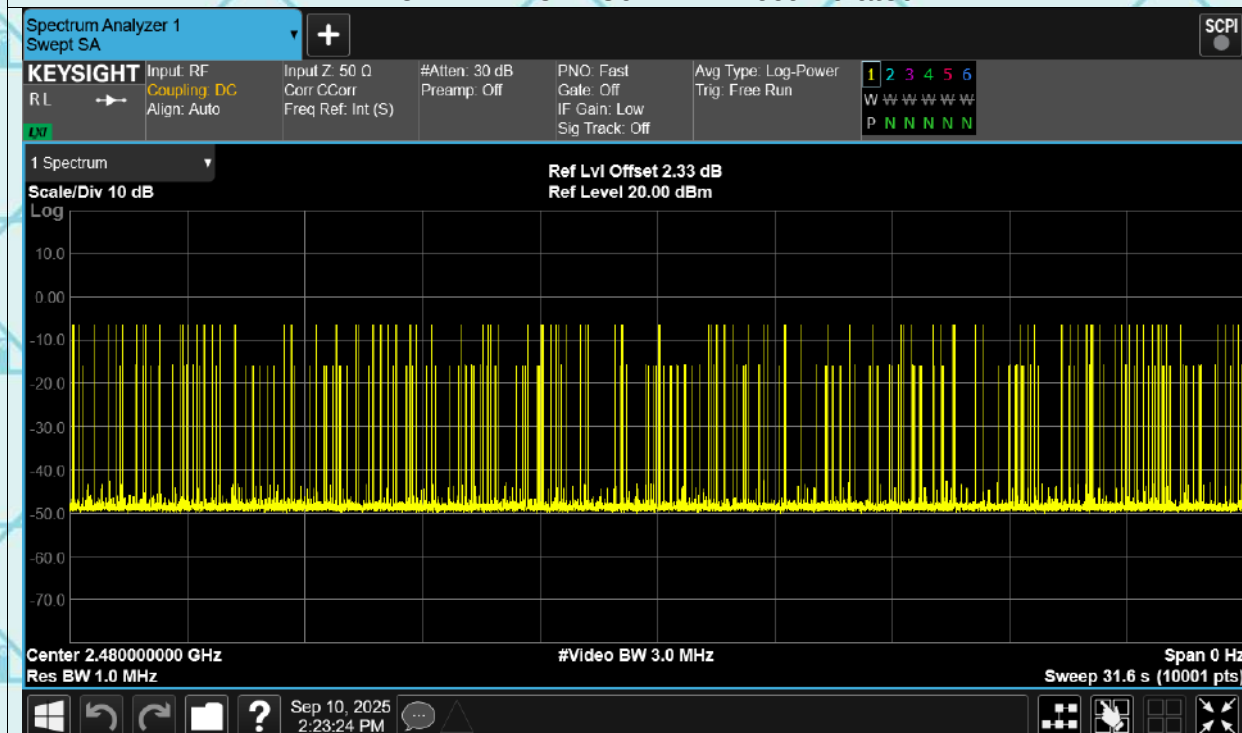

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

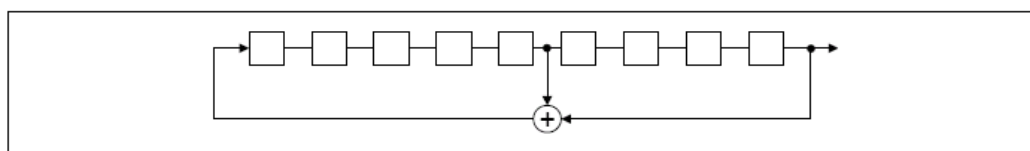

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

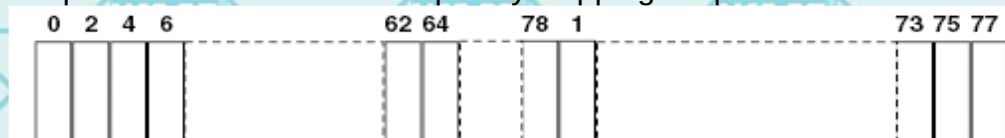

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram shows a Spectrum Analyzer (represented by a green box with a screen) connected via a cable to an EUT (represented by a yellow box). The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

Test Data


GFSK Modulation (the worst case)

Test Graphs

Band Edge(Hopping) 1-DH5 2402MHz Hopping Ref




Band Edge(Hopping) 1-DH5 2402MHz Hopping Emission

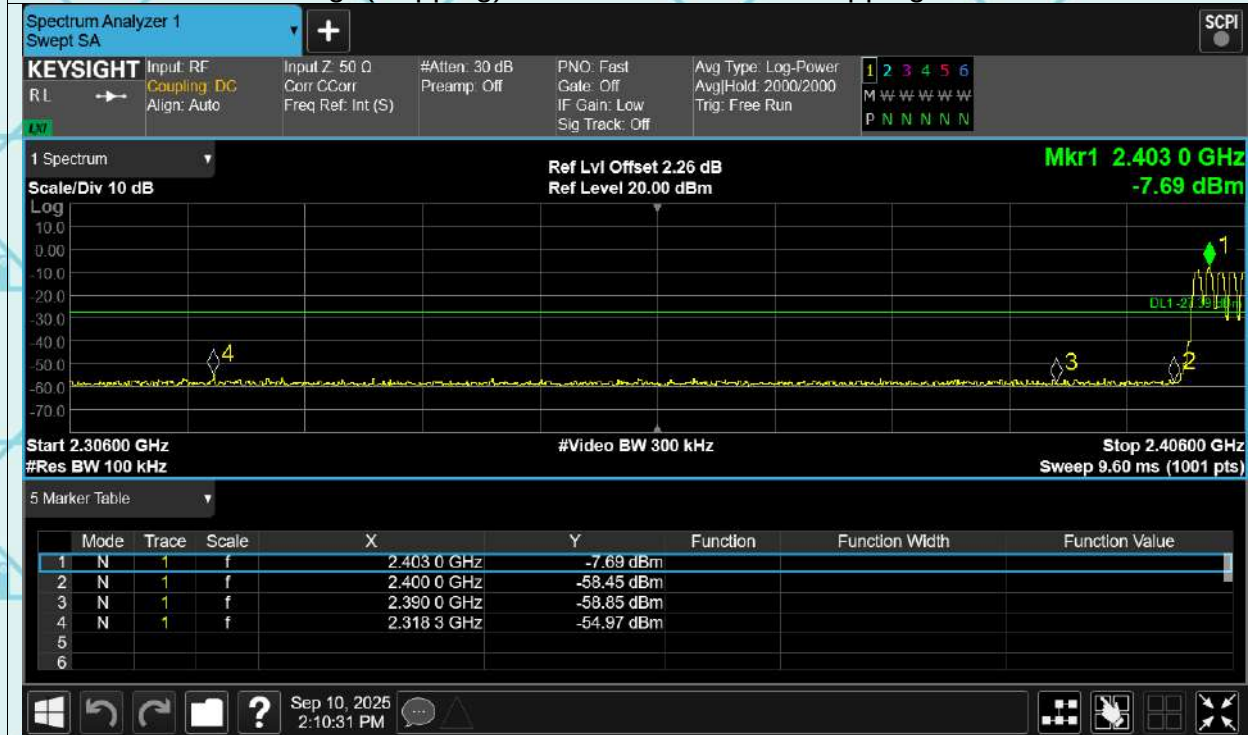

Band Edge(Hopping) 1-DH5 2480MHz Hopping Ref




Band Edge(Hopping) 1-DH5 2480MHz Hopping Emission

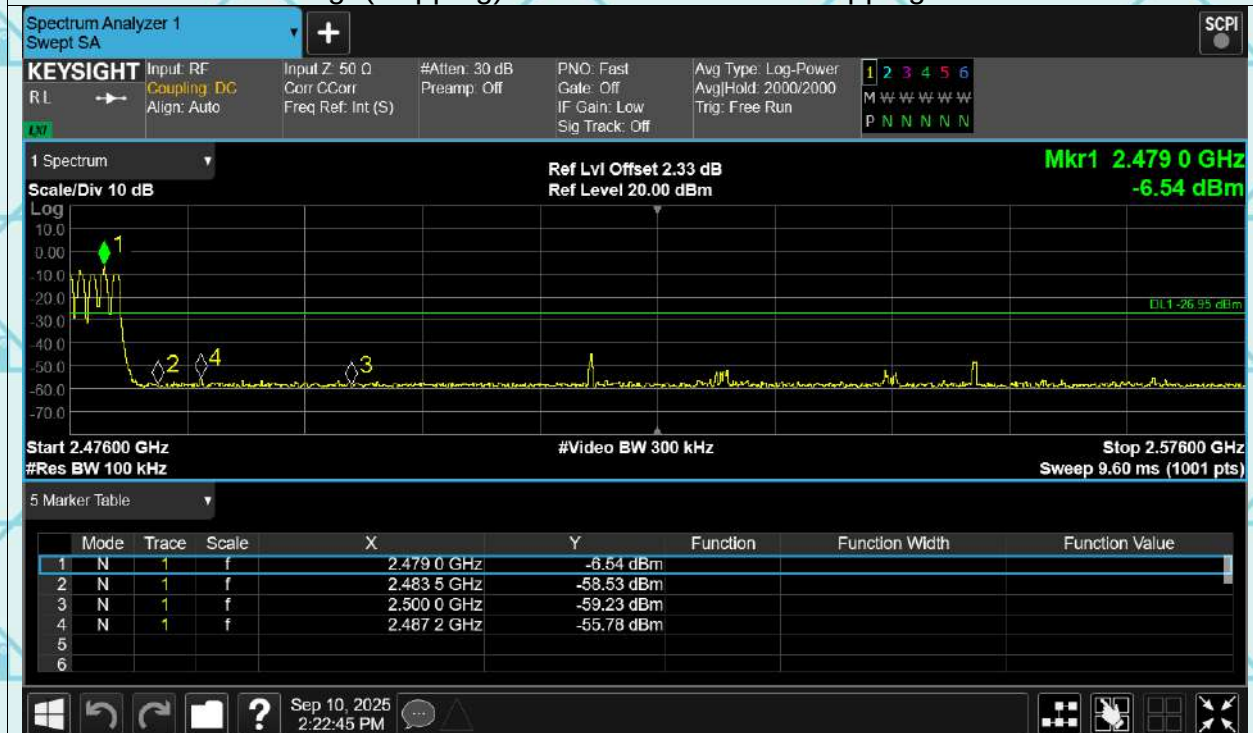

6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Test Data

Test Graphs

Tx. Spurious 1-DH5 2402MHz Ref



Tx. Spurious 1-DH5 2402MHz Emission



Tx. Spurious 1-DH5 2441MHz Ref




Tx. Spurious 1-DH5 2441MHz Emission



Tx. Spurious 1-DH5 2480MHz Ref



Tx. Spurious 1-DH5 2480MHz Emission

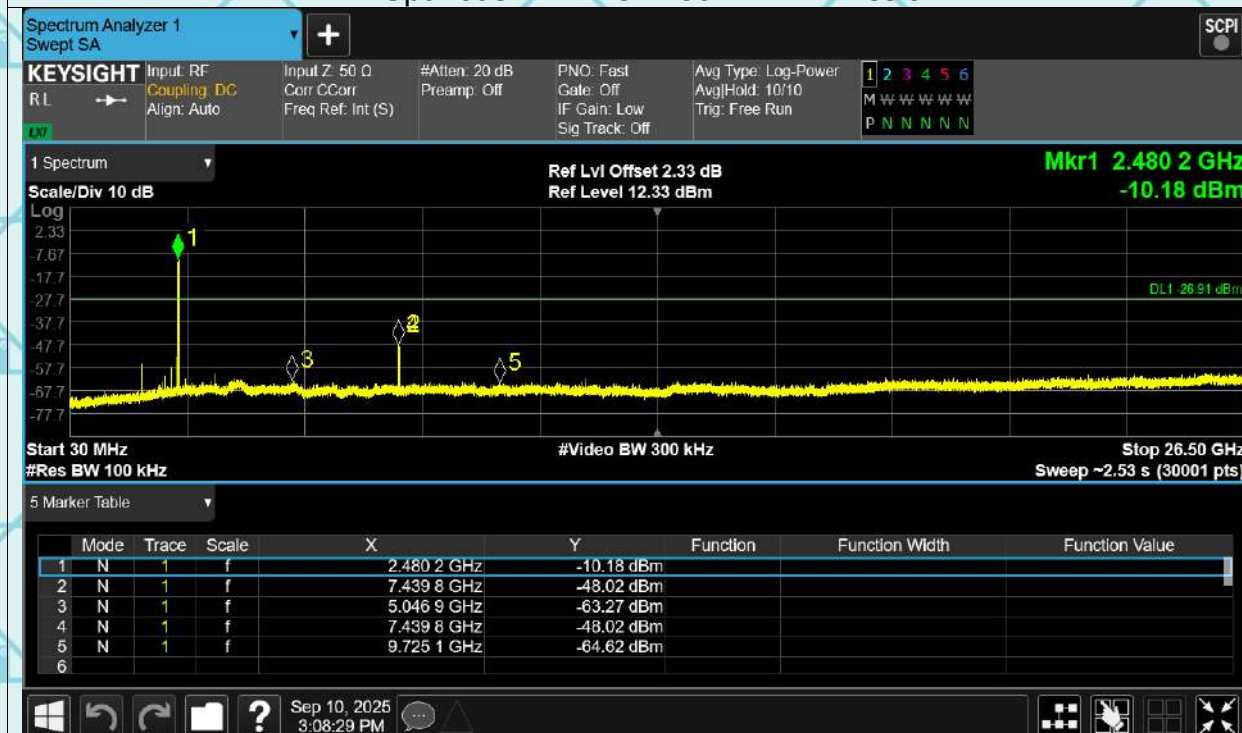

Tx. Spurious 2-DH5 2402MHz Ref



Tx. Spurious 2-DH5 2402MHz Emission



Tx. Spurious 2-DH5 2441MHz Ref




Tx. Spurious 2-DH5 2441MHz Emission



Tx. Spurious 2-DH5 2480MHz Ref




Tx. Spurious 2-DH5 2480MHz Emission

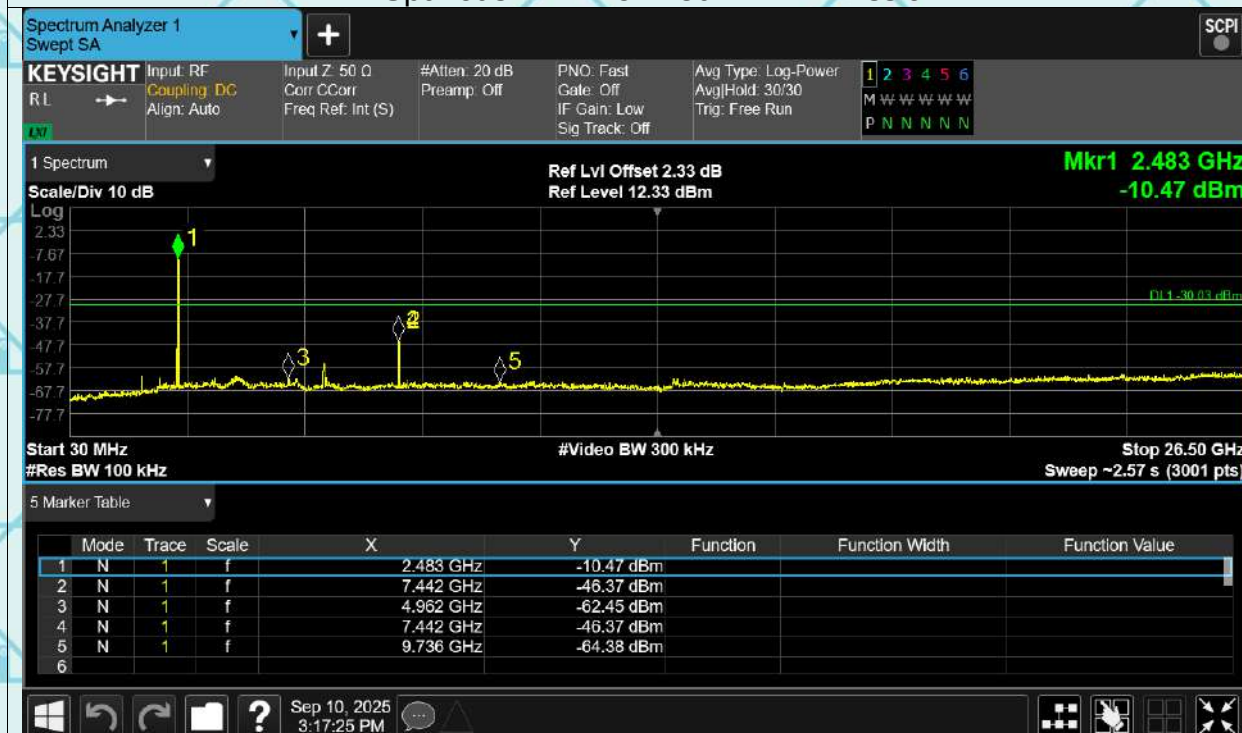

Tx. Spurious 3-DH5 2402MHz Ref



Tx. Spurious 3-DH5 2402MHz Emission

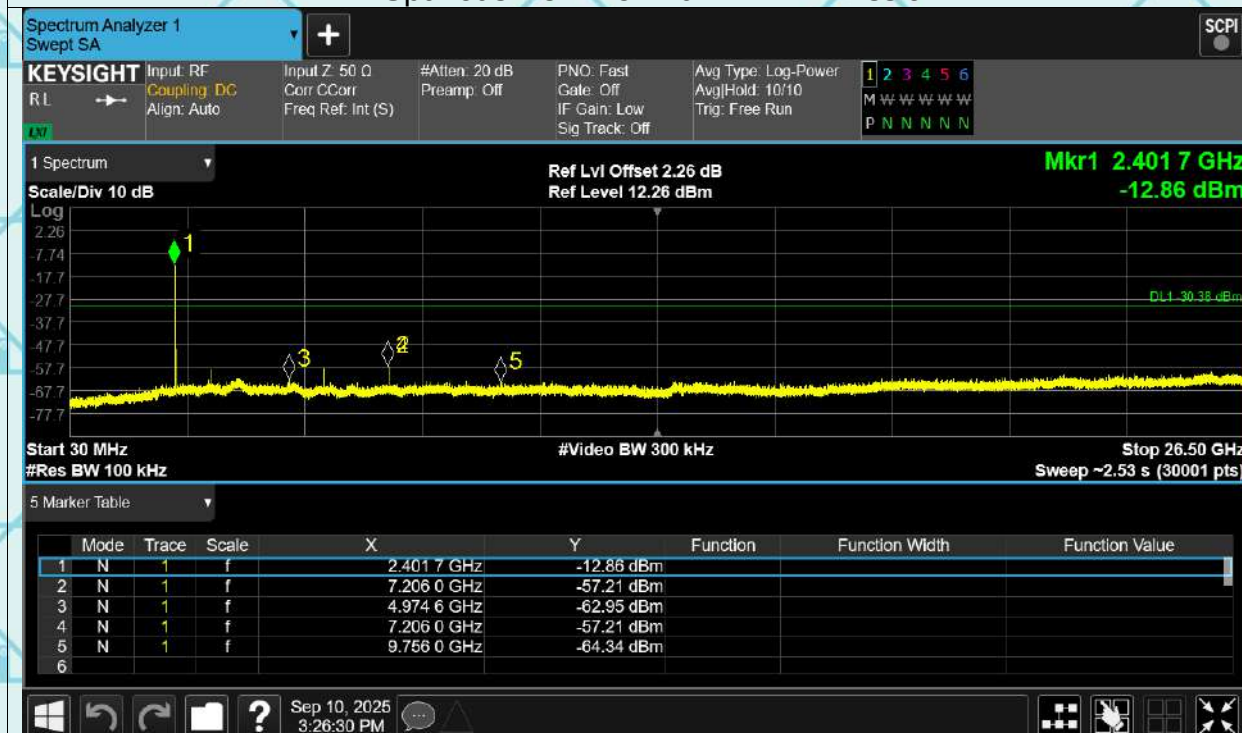

Tx. Spurious 3-DH5 2441MHz Ref



Tx. Spurious 3-DH5 2441MHz Emission



Tx. Spurious 3-DH5 2480MHz Ref



Tx. Spurious 3-DH5 2480MHz Emission




6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification



Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2020			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz

Test setup:

For radiated emissions below 30MHz

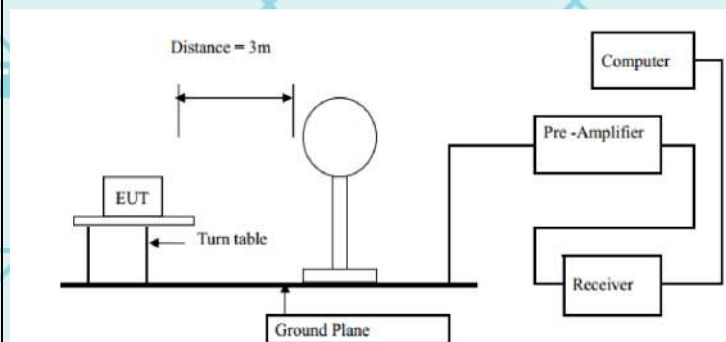

30MHz to 1GHz

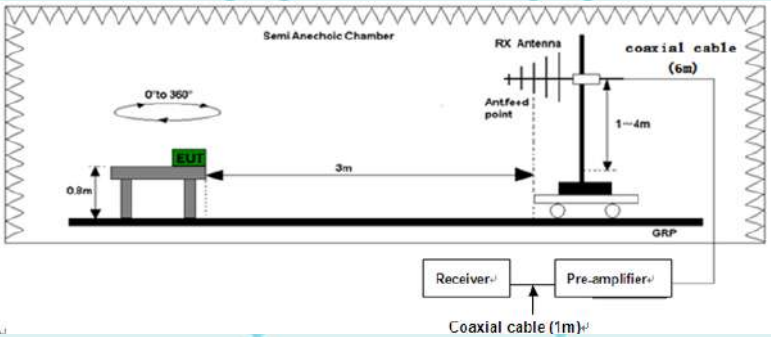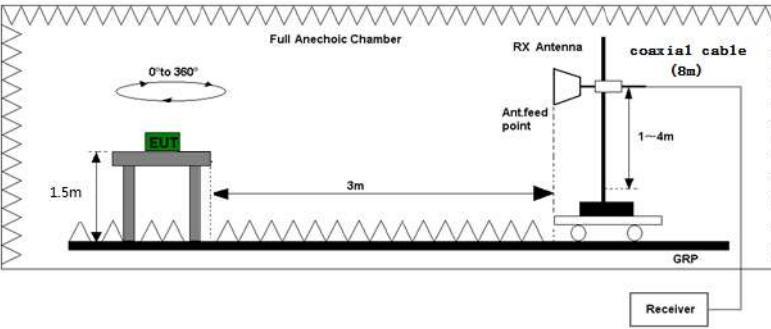	 Above 1GHz 
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

	maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N1 \cdot L1 + N2 \cdot L2 + \dots + Nn-1 \cdot Lnn-1 + Nn \cdot Ln$ Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	50.3699	34.89	-7.51	27.38	40.00	-12.62	QP
2		145.4299	35.92	-6.92	29.00	43.50	-14.50	QP
3		204.5999	38.54	-10.74	27.80	43.50	-15.70	QP
4		399.5699	36.57	-3.58	32.99	46.00	-13.01	QP
5		750.7100	27.90	3.87	31.77	46.00	-14.23	QP
6		989.3300	26.37	7.96	34.33	54.00	-19.67	QP

Report No.: WSCT-ANAB-R&E250900072A-BT
Vertical:

Issued: 20 October 2025

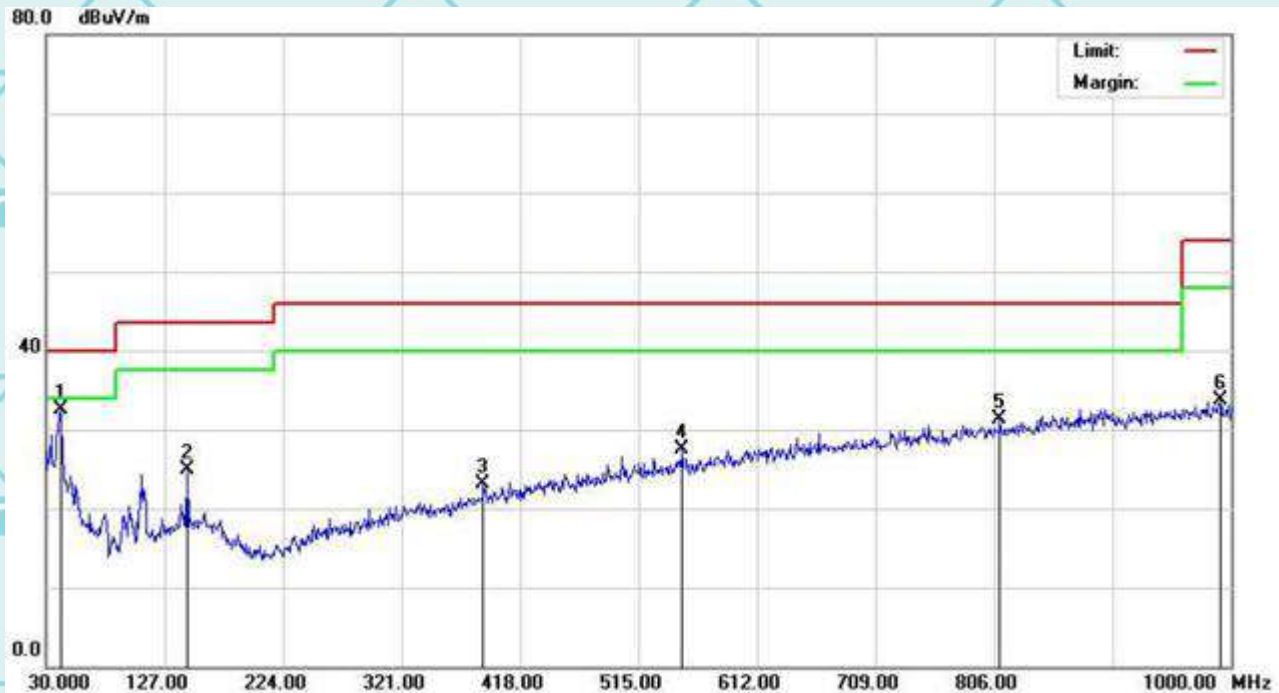

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	41.6400	52.93	-20.52	32.41	40.00	-7.59	QP
2		145.4299	44.86	-19.96	24.90	43.50	-18.60	QP
3		387.9300	41.90	-18.83	23.07	46.00	-22.93	QP
4		550.8900	45.49	-17.99	27.50	46.00	-18.50	QP
5		810.8500	47.97	-16.59	31.38	46.00	-14.62	QP
6		991.2700	49.01	-15.33	33.68	54.00	-20.32	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E250900072A-BT Issued: 20 October 2025

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

**Suspected Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1339.3750	38.73	-0.81	39.54	74	-35.27	167	Horizontal	PK	Pass
1	1339.3750	29.9	-0.81	30.71	54	-24.1	167	Horizontal	AV	Pass
2	2457.5000	48.35	7.77	40.58	74	-25.65	48.7	Horizontal	PK	Pass
2	2457.5000	37.52	7.77	29.75	54	-16.48	48.7	Horizontal	AV	Pass
3	5183.7500	60.52	17.91	42.61	74	-13.48	7.9	Horizontal	PK	Pass
3	5183.7500	45.83	17.91	27.92	54	-8.17	7.9	Horizontal	AV	Pass
4	7060.5000	35.14	35.59	-0.45	74	-38.86	122.5	Horizontal	PK	Pass
4	7060.5000	28.14	35.59	-7.45	54	-25.86	122.5	Horizontal	AV	Pass
5	10713.0000	44.19	39.1	5.09	74	-29.81	200.2	Horizontal	PK	Pass
5	10713.0000	36.71	39.1	-2.39	54	-17.29	200.2	Horizontal	AV	Pass
6	17529.0000	51.07	43.34	7.73	74	-22.93	105.8	Horizontal	PK	Pass
6	17529.0000	43.31	43.34	-0.03	54	-10.69	105.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

Vertical:



Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1728.1250	59.16	0.49	58.67	74	-14.84	358.9	Vertical	PK	Pass
1	1728.1250	31.4	0.49	30.91	54	-22.6	358.9	Vertical	AV	Pass
2	3541.8750	47.98	9.86	38.12	74	-26.02	358.6	Vertical	PK	Pass
2	3541.8750	38.51	9.86	28.65	54	-15.49	358.6	Vertical	AV	Pass
3	5182.5000	67.46	17.89	49.57	74	-6.54	358.6	Vertical	PK	Pass
3	5182.5000	49.45	17.89	31.56	54	-4.55	358.6	Vertical	AV	Pass
4	7168.5000	35.41	35.75	-0.34	74	-38.59	89	Vertical	PK	Pass
4	7168.5000	29.3	35.75	-6.45	54	-24.7	89	Vertical	AV	Pass
5	11049.0000	45.04	39.46	5.58	74	-28.96	1.2	Vertical	PK	Pass
5	11049.0000	37.77	39.46	-1.69	54	-16.23	1.2	Vertical	AV	Pass
6	17400.0000	50.79	42.48	8.31	74	-23.21	176.2	Vertical	PK	Pass
6	17400.0000	42.7	42.48	0.22	54	-11.3	176.2	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

Middle channel: 2441MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1317.5000	38.22	-1.08	39.3	74	-35.78	27.2	Horizontal	PK	Pass
1	1317.5000	29.78	-1.08	30.86	54	-24.22	27.2	Horizontal	AV	Pass
2	2449.3750	48.94	7.74	41.2	74	-25.06	170.6	Horizontal	PK	Pass
2	2449.3750	38.05	7.74	30.31	54	-15.95	170.6	Horizontal	AV	Pass
3	5179.3750	65.02	17.83	47.19	74	-8.98	53.4	Horizontal	PK	Pass
3	5179.3750	46.23	17.83	28.4	54	-7.77	53.4	Horizontal	AV	Pass
4	7146.0000	36.21	35.72	0.49	74	-37.79	244.5	Horizontal	PK	Pass
4	7146.0000	29.14	35.72	-6.58	54	-24.86	244.5	Horizontal	AV	Pass
5	11521.5000	45.69	39.03	6.66	74	-28.31	1.2	Horizontal	PK	Pass
5	11521.5000	37.49	39.03	-1.54	54	-16.51	1.2	Horizontal	AV	Pass
6	17832.0000	52.1	45.37	6.73	74	-21.9	291	Horizontal	PK	Pass
6	17832.0000	45.42	45.37	0.05	54	-8.58	291	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1208.1250	38.39	-1.87	40.26	74	-35.61	213.7	Vertical	PK	Pass
1	1208.1250	28.7	-1.87	30.57	54	-25.3	213.7	Vertical	AV	Pass
2	2335.6250	56.4	4.99	51.41	74	-17.6	181.4	Vertical	PK	Pass
2	2335.6250	34.58	4.99	29.59	54	-19.42	181.4	Vertical	AV	Pass
3	5183.1250	60.71	17.9	42.81	74	-13.29	137.1	Vertical	PK	Pass
3	5183.1250	45.84	17.9	27.94	54	-8.16	137.1	Vertical	AV	Pass
4	6990.0000	35.76	35.47	0.29	74	-38.24	9.3	Vertical	PK	Pass
4	6990.0000	27.78	35.47	-7.69	54	-26.22	9.3	Vertical	AV	Pass
5	11418.0000	45.63	39.12	6.51	74	-28.37	7	Vertical	PK	Pass
5	11418.0000	37.63	39.12	-1.49	54	-16.37	7	Vertical	AV	Pass
6	17653.5000	50.85	44.18	6.67	74	-23.15	316.2	Vertical	PK	Pass
6	17653.5000	43.96	44.18	-0.22	54	-10.04	316.2	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

High channel: 2480MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1220.0000	38.08	-1.81	39.89	74	-35.92	313	Horizontal	PK	Pass
1	1220.0000	29.22	-1.81	31.03	54	-24.78	313	Horizontal	AV	Pass
2	2516.8750	59.63	6.72	52.91	74	-14.37	266.2	Horizontal	PK	Pass
2	2516.8750	36.47	6.72	29.75	54	-17.53	266.2	Horizontal	AV	Pass
3	5234.3750	61.97	18.85	43.12	74	-12.03	338.9	Horizontal	PK	Pass
3	5234.3750	47.03	18.85	28.18	54	-6.97	338.9	Horizontal	AV	Pass
4	7132.5000	35.62	35.7	-0.08	74	-38.38	360.1	Horizontal	PK	Pass
4	7132.5000	28.99	35.7	-6.71	54	-25.01	360.1	Horizontal	AV	Pass
5	11584.5000	45.14	38.97	6.17	74	-28.86	341.2	Horizontal	PK	Pass
5	11584.5000	37.8	38.97	-1.17	54	-16.2	341.2	Horizontal	AV	Pass
6	17554.5000	50.9	43.52	7.38	74	-23.1	37.6	Horizontal	PK	Pass
6	17554.5000	43.1	43.52	-0.42	54	-10.9	37.6	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900072A-BT

Issued: 20 October 2025

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1208.1250	37.46	-1.87	39.33	74	-36.54	23.7	Vertical	PK	Pass
1	1208.1250	28.6	-1.87	30.47	54	-25.4	23.7	Vertical	AV	Pass
2	2480.0000	46.4	7.84	38.56	74	-27.6	73.8	Vertical	PK	Pass
2	2480.0000	37.55	7.84	29.71	54	-16.45	73.8	Vertical	AV	Pass
3	5175.6250	62.05	17.76	44.29	74	-11.95	88.2	Vertical	PK	Pass
3	5175.6250	45.91	17.76	28.15	54	-8.09	88.2	Vertical	AV	Pass
4	7254.0000	35.7	35.88	-0.18	74	-38.3	360.1	Vertical	PK	Pass
4	7254.0000	28.83	35.88	-7.05	54	-25.17	360.1	Vertical	AV	Pass
5	11037.0000	44.1	39.47	4.63	74	-29.9	61.4	Vertical	PK	Pass
5	11037.0000	37.54	39.47	-1.93	54	-16.46	61.4	Vertical	AV	Pass
6	17610.0000	50.67	43.89	6.78	74	-23.33	352.9	Vertical	PK	Pass
6	17610.0000	43.93	43.89	0.04	54	-10.07	352.9	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) - Limits (dBμV)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	64.36	-8.76	55.60	74	18.40	H	PK
2387	53.29	-8.76	44.53	54	9.47	H	AV
2387	60.79	-8.73	52.06	74	21.94	V	PK
2387	57.83	-8.73	49.10	54	4.90	V	AV
2390	63.64	-8.76	54.88	74	19.12	H	PK
2390	54.24	-8.76	45.48	54	8.52	H	AV
2390	62.31	-8.73	53.58	74	20.42	V	PK
2390	54.56	-8.73	45.83	54	8.17	V	AV
High Channel							
2483.5	64.82	-8.76	56.06	74	17.94	H	PK
2483.5	54.65	-8.76	45.89	54	8.11	H	AV
2483.5	62.51	-8.73	53.78	74	20.22	V	PK
2483.5	56.96	-8.73	48.23	54	5.77	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******