


FCC PART 27
FCC PART 22H, PART 24E, PART 90
TEST REPORT

For

Beijing Wiseasy Technology CO., Ltd.

Room 2701-01, 24th Floor, Building 1, No. 16 Guangshun South Street, Chaoyang District, Beijing, China

FCC ID: 2AXOJ-P5PRO

Report Type: Original Report	Product Name: EMV Android POS
Report Number:	<u>RKSA260311002-00G</u>
Report Date:	<u>2026-05-07</u>
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Kyle Xu</u> 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	7
MEASUREMENT UNCERTAINTY	7
TEST FACILITY	7
SYSTEM TEST CONFIGURATION.....	8
JUSTIFICATION	8
CHANNEL LIST	8
EQUIPMENT MODIFICATIONS	10
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
TEST EQUIPMENT LIST	12
SUMMARY OF TEST RESULTS	14
FCC §1.1307(B) & §2.1093 - RF EXPOSURE	15
APPLICABLE STANDARD	15
FCC §2.1047 - MODULATION CHARACTERISTIC	16
FCC §2.1046; § 22.913 (A); §24.232 (C); §27.50 (C) (D) (H);§90.635 (B) - RF OUTPUT POWER	17
APPLICABLE STANDARDS.....	17
TEST PROCEDURE	17
TEST DATA: SEE APPENDIX A.....	17
FCC §2.1049, §22.917, §22.905 & §24.238, §27.53, §90.209 - OCCUPIED BANDWIDTH	18
APPLICABLE STANDARDS	18
TEST PROCEDURE	18
TEST DATA: SEE APPENDIX A & APPENDIX B	18
FCC § 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (G) (H) (M); § 90.691 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	19
APPLICABLE STANDARDS	19
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX A & APPENDIX D	20
FCC § 2.1053; § 22.917 (A); § 24.238 (A) & §27.53 (G) (H) (M); § 90.691 - SPURIOUS RADIATED EMISSIONS	21
APPLICABLE STANDARDS	21
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX A.....	22
FCC § 22.917 (A); § 24.238 (A); §27.53 (G) (H) (M); § 90.691 - BAND EDGES	23
APPLICABLE STANDARDS	23
TEST PROCEDURE	24
TEST DATA: SEE APPENDIX A&C	24
FCC §2.1055; §22.355; §24.235; §27.54; §90.213 - FREQUENCY STABILITY	25
APPLICABLE STANDARDS	25
TEST PROCEDURE	26
TEST DATA: SEE APPENDIX A.....	26
EUT PHOTOGRAPHS.....	27

TEST SETUP PHOTOGRAPHS28

APPENDIX A - TEST DATA.....29

RF OUTPUT POWER.....29

OCCUPIED BANDWIDTH34

SPURIOUS EMISSIONS AT ANTENNA TERMINALS45

SPURIOUS RADIATED EMISSIONS.....68

BAND EDGES84

FREQUENCY STABILITY92

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA260311002-00G	R1V1	2026-05-07	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Beijing Wiseasy Technology CO., Ltd.	
Tested Model:	P5-PRO	
Product Name:	EMV Android POS	
Power Supply:	DC 5V from adapter or DC 7.4V from battery	
Maximum Conducted Output Power:	GPRS 850: 33.05 dBm; EGPRS 850: 25.92 dBm GPRS 1900: 29.45 dBm; EGPRS 1900: 23.78 dBm WCDMA Band II: 23.99 dBm; Band IV: 24.23 dBm; Band V: 23.96 dBm LTE: Band 2: 24.54 dBm; Band 4: 23.82 dBm; Band 5: 24.59 dBm; Band 7: 24 dBm; Band 12: 24.34 dBm; Band 17: 24.12 dBm; Band 25: 24.51 dBm; Band 26 (814-824MHz): 24.65 dBm; Band 26 (824MHz): 24.63 dBm; Band 26 (824-849MHz): 24.43 dBm ; Band 41: 23.7 dBm; Band 66: 23.71 dBm ;	
RF Function:	GPRS/EGPRS, WCDMA, LTE	
Operating Band/Frequency:	GPRS/EGPRS 850: 824-849 MHz(TX), 869-894 MHz(RX) GPRS/EGPRS 1900: 1850-1910 MHz(TX), 1930-1990 MHz(RX) WCDMA Band II: 1850-1910 MHz(TX), 1930-1990 MHz(RX) WCDMA Band IV: 1710-1755 MHz(TX), 2110-2155 MHz(RX) WCDMA Band V: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX), 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX), 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX), 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX), 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX), 1930-1995 MHz(RX) LTE Band 26: 814-849 MHz(TX), 859-894 MHz(RX) LTE Band 41: 2496-2690 MHz(TX), 2496-2690 MHz MHz(RX) LTE Band 66: 1710-1780 MHz(TX), 2110-2180 MHz(RX)	
Modulation Type:	GPRS/EGPRS: GMSK, 8PSK WCDMA: BPSK, QPSK, 16QAM LTE: QPSK, 16QAM	
Antenna Type:	FPC Antenna	
★Maximum Antenna Gain :	GPRS/EGPRS 850: -4.39 dBi GPRS/EGPRS 1900: -3.80 dBi WCDMA Band II : -3.80 dBi WCDMA Band IV: -4.02 dBi WCDMA Band V: -4.39 dBi LTE Band 2: -3.80 dBi LTE Band 4: -4.02 dBi LTE Band 5: -4.39 dBi	LTE Band 7: -0.63 dBi LTE Band 12: -4.68 dBi LTE Band 17: -4.68 dBi LTE Band 25: -3.80 dBi LTE Band 26: -4.39 dBi LTE Band 41: -0.38 dBi LTE Band 66: -3.82 dBi

Adapter Information:

Model: TPA-418G050200UU01

Input: 100-240V, 50/60Hz, 0.3A

Output: 5.0V, 2.0A, 10.0W

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA260311002-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2026-03-11.)

Objective

This type approval report is prepared for *Beijing Wiseasy Technology CO., Ltd.* in accordance with Part 2, Part 22-Subpart H and Part 24-Subpart E, Part 27 and Part 90 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
 Part 24 Subpart E - Personal Communication Services
 Part 27 – Miscellaneous wireless communications services
 Part 90- PRIVATE LAND MOBILE RADIO SERVICES

Applicable Standards: ANSI C63.26-2015.

Measurement Uncertainty

Item		Uncertainty
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
RF conducted test with spectrum		0.9dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6GHz~18GHz	4.92dB
	18GHz~40GHz	5.21dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%
Supply voltages		$\pm 0.4\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The final qualification test was performed with the EUT operating at normal mode.

Channel List

Mode	Test Frequency (MHz)		
	Low	Middle	High
GPRS/EGPRS 850	824.2	836.6	848.8
GPRS/EGPRS 1900	1850.2	1880	1909.8
WCDMA Band II	1852.4	1880	1907.6
WCDMA Band IV	1712.4	1732.6	1752.6
WCDMA Band V	826.4	836.6	846.6

Frequency Band	Bandwidth (MHz)	Test Frequency (MHz)		
		Low	Middle	High
LTE Band 2	1.4	1850.7	1880.0	1909.3
	3	1851.5	1880.0	1908.5
	5	1852.5	1880.0	1907.5
	10	1855.0	1880.0	1905.0
	15	1857.5	1880.0	1902.5
	20	1860.0	1880.0	1900.0
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
LTE Band 7	5	2502.5	2535.0	2567.5
	10	2505.0	2535.0	2565.0
	15	2507.5	2535.0	2562.5
	20	2510.0	2535.0	2560.0

Frequency Band	Bandwidth (MHz)	Test Frequency (MHz)		
		Low	Middle	High
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704.0	707.5	711.0
LTE Band 17	5	706.5	710.0	713.5
	10	709.0	710.0	711.0
LTE Band 25	1.4	1850.7	1882.5	1914.3
	3	1851.5	1882.5	1913.5
	5	1852.5	1882.5	1912.5
	10	1855.0	1882.5	1910.0
	15	1857.5	1882.5	1907.5
	20	1860.0	1882.5	1905.0
LTE Band 26 Upper	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
	15	831.5	836.5	841.5
LTE Band 41	5	2498.5	2593.0	2687.5
	10	2501.0	2593.0	2685.0
	15	2503.5	2593.0	2682.5
	20	2506.0	2593.0	2680.0
LTE Band 66	1.4	1710.7	1745.0	1779.3
	3	1711.5	1745.0	1778.5
	5	1712.5	1745.0	1777.5
	10	1715.0	1745.0	1775.0
	15	1717.5	1745.0	1772.5
	20	1720.0	1745.0	1770.0

Frequency Band	Bandwidth (MHz)	Test Frequency (MHz)		
		Low	High	Cross
LTE Band 26 Lower	1.4	814.7	823.3	824
	3	815.5	822.5	824
	5	816.5	821.5	824
	10	819	/	824
	15	821.5	/	824

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

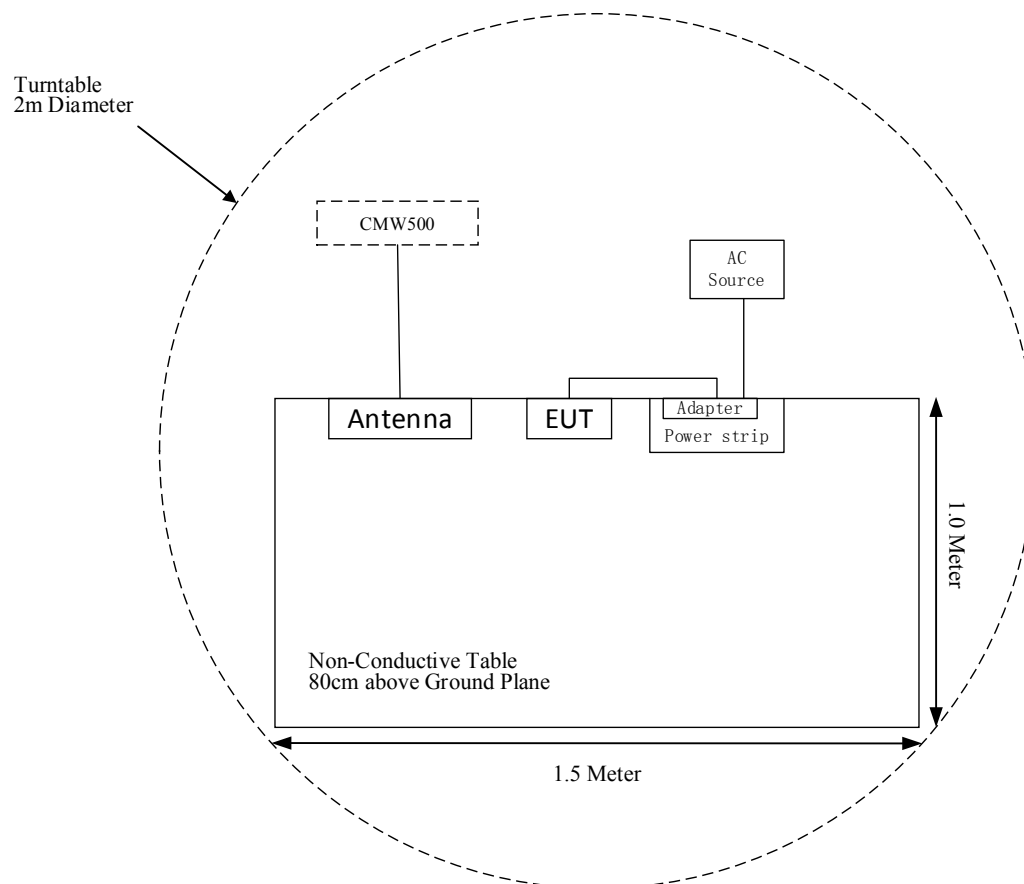
Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478
/	Power strip	/	/

External I/O Cable

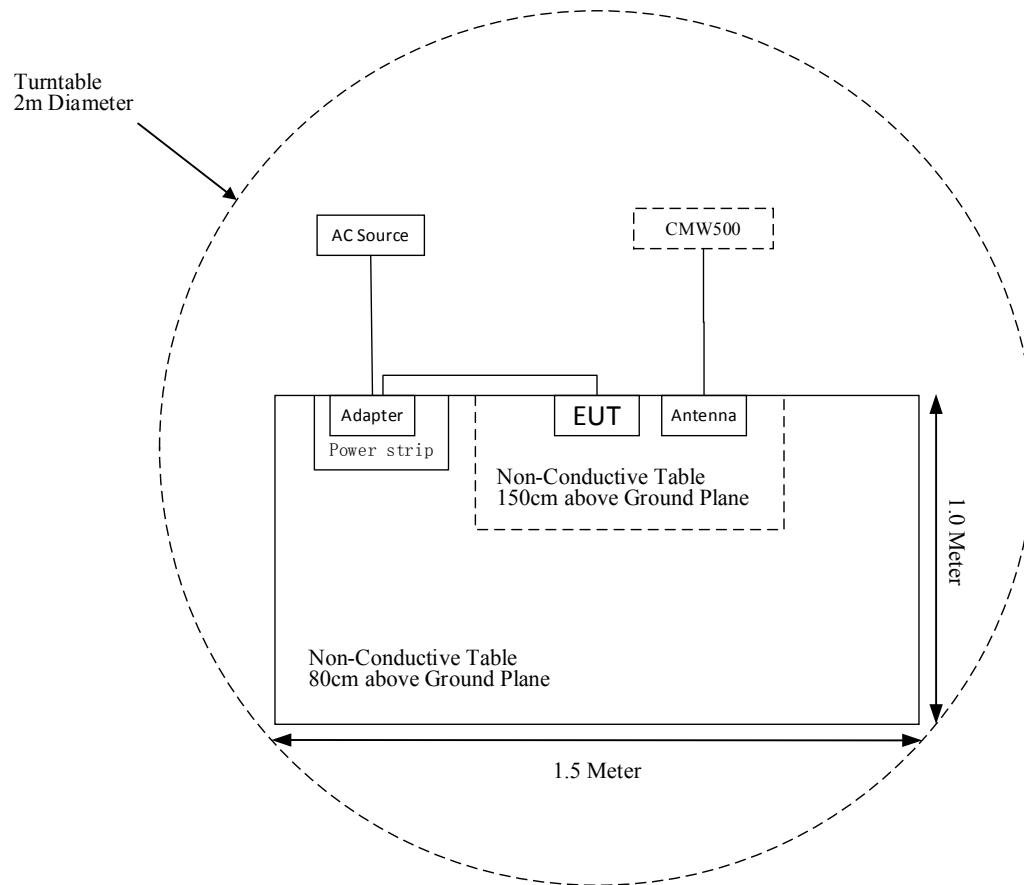
Cable Description	Length (m)	From Port	To
Power Cable 1	1.0	AC Source	Power strip
Power Cable 2	1.0	Adapter	EUT

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):



For Radiated Emissions (Above 1 GHz):



TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2026-03-13	2027-03-12
Keysight	Signal Generator	N5183A	MY47420304	2026-03-13	2027-03-12
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Sunol Sciences	Hybrid Antenna	JB3	A090314-2	2024-10-29	2027-10-28
Sonoma Instrument	Amplifier	310N	171205	2026-03-13	2027-03-12
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-7	007	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-8	008	2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-9	009	2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-10	010	2026-03-13	2027-03-12
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2026-03-12	2027-03-11
Radiated Emission Test (Chamber #2)					
Keysight	Signal Generator	N5183A	MY47420304	2026-03-13	2027-03-12
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2026-03-16	2027-03-15
EMCO	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2026-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
ETS-LINDGREN	Horn Antenna	3116	84159	2024-12-08	2027-12-07
A.H.Systems,inc	Amplifier	PAM-0118P	512	2026-03-16	2027-03-15
EM Electronics Corporation	Amplifier	EM18G40G	060726	2026-03-16	2027-03-15
Wi	Band reject filter	SN1	WRCGV5-804-824-849-869-30SS	2026-03-13	2027-03-12
Wi	Band reject filter	SN1	WRCGV6-1830-1850-1910-1930-30SS	2026-03-13	2027-03-12
Wi	Band reject filter	SN3	WRCJV8-2450-2500-2570-2620-40SS	2026-03-13	2027-03-12
Wi	Band reject filter	SN1	WRCJV8-2550-2570-2620-2640-30SS	2026-03-13	2027-03-12
Wi	Band reject filter	SN2	WRCT16-697-699-716-718-60SS	2026-03-13	2027-03-12
Wi	Band reject filter	SN2	WRCJV8-2436-2496-2690-2750-25SS	2026-03-13	2027-03-12

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-11	011	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-12	012	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-13	013	2026-03-16	2027-03-15
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2026-03-12	2027-03-11
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2026-03-16	2027-03-15
BACL	Temperature & Humidity Chamber	BTH-150	30023	2026-03-16	2027-03-15
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2026-03-16	2027-03-15
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2026-03-12	2027-03-11
Narda	Attenuator	10dB	010	2026-03-16	2027-03-15
Eastsheep	Attenuator	2W-N-JK-18G	10dB-02	2026-03-13	2027-03-12
Eastsheep	Attenuator	2W-N-JK-18G	20dB-01	2026-03-13	2027-03-12
MACOM	Power Splitter	2090-6214-00	96341	2026-03-13	2027-03-12
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A
Unknown	RF Cable	RF Cable C01	C01	Each Time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§2.1046; § 22.913 (a); §24.232 (c); §27.50 (c)(d) (h) §90.635 (b)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§2.1049; §22.905; §22.917; §24.238; §27.53; §90.209	Occupied Bandwidth	Compliant
§2.1051; §22.917 (a); §24.238 (a); §27.53 (g) (h) (m); §90.691	Spurious Emissions at Antenna Terminal	Compliant
§2.1053; §22.917 (a) §24.238 (a); §27.53 (g) (h) (m);§90.691	Spurious Radiated Emissions	Compliant
§22.917 (a); §24.238 (a); §27.53 (g) (h) (m); §90.691	Band Edge	Compliant
§2.1055; §22.355; §24.235; §27.54; §90.213	Frequency stability	Compliant
§1.1307(b)(1)& §2.1093	RF EXPOSURE	Compliant

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307, §2.1093.

Measurement Result

Result: Please refer to the SAR report: RKSA260311002-20B.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27, Part 90 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC §2.1046; § 22.913 (a); §24.232 (c); §27.50 (c) (d) (h);§90.635 (b) - RF OUTPUT POWER

Applicable Standards

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45dBm).

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts (33dBm) EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1780MHz.

According to §27.50(h) (2), Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

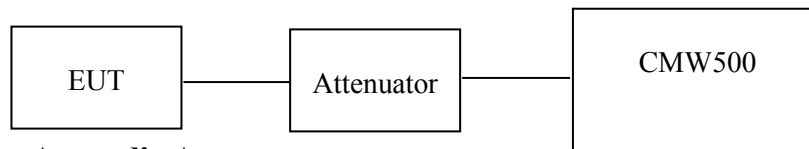
According to FCC §2.1046 and §90.635 (b), The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500 through sufficient attenuation.



Test Data: See Appendix A

FCC §2.1049, §22.917, §22.905 & §24.238, §27.53, §90.209 - OCCUPIED BANDWIDTH

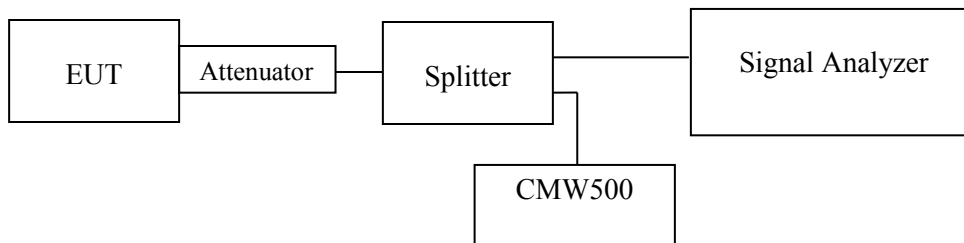
Applicable Standards

FCC 47 §2.1049, §22.917, §22.905 & §24.238, §27.53 and §90.209.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation. The 26 dB & 99% bandwidth was recorded.

Note : The 15dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: Offset (15dB) = Attenuator (10dB) + Cable Loss (0.5dB) + Power Splitter (4.5dB)

Test Data: See Appendix A & Appendix B

FCC § 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (g) (h) (m); § 90.691 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

FCC §2.1051, §22.917(a), §24.238(a), §27.53 (g) (h) (m) and § 90.691.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

According to §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

27.53 (g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

27.53 (h) AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB.

27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

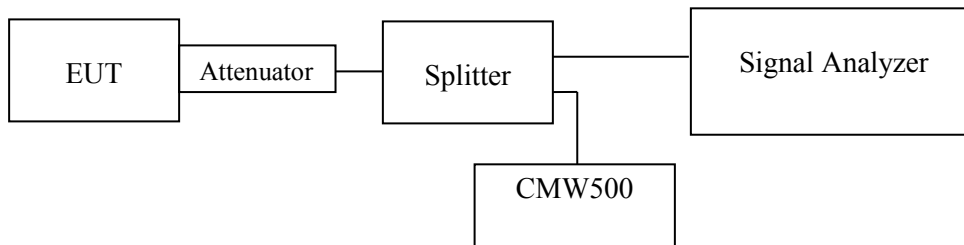
Part 90.691

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz & 1MHz for above 1GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Note : The 15dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: Offset (15.3dB) = Attenuator (10dB) + Cable Loss (0.5dB) + Power Splitter (4.8dB)

Offset (15.8dB) = Attenuator (10dB) + Cable Loss (1.0dB) + Power Splitter (4.8dB)

Test Data: See Appendix A & Appendix D

**FCC § 2.1053; § 22.917 (a); § 24.238 (a) & §27.53 (g) (h) (m); § 90.691 -
SPURIOUS RADIATED EMISSIONS**

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a), §90.691 and § 27.53 (g) (h) (m)

22.917 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53 (g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

27.53 (h) AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Test Procedure

According to ANSI C63.26-2015 Section 5.5.3:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Data: See Appendix A

FCC § 22.917 (a); § 24.238 (a); § 27.53 (g) (h) (m); § 90.691 - BAND EDGES**Applicable Standards****22.917 (a)**

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53 (g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

27.53 (h) AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

§ 90.691(a)

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

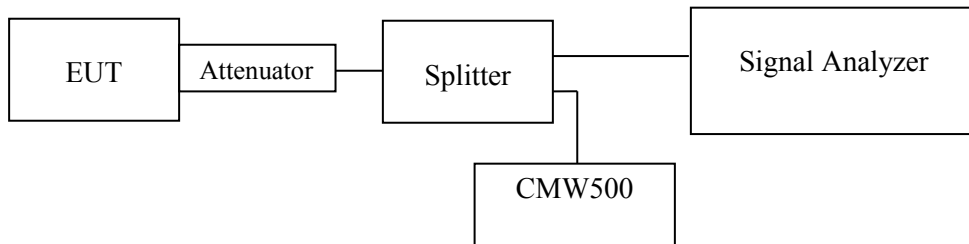
(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Note : The 15dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: Offset (15dB) = Attenuator (10dB) + Cable Loss (0.5dB) + Power Splitter (4.5dB)

For TDD Band, the offset (17.24dB)=Attenuator (10dB) + Cable loss (0.5dB) +Power Splitter(4.5dB)+Duty Cycle Factor(2.24dB)

Test Data: See Appendix A&C

FCC §2.1055; §22.355; §24.235; §27.54; §90.213 - FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235, §27.54 and § 90.213.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

According to §27.54 Frequency stability, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

§90.213(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table. Table 1 to § 90.213(a).

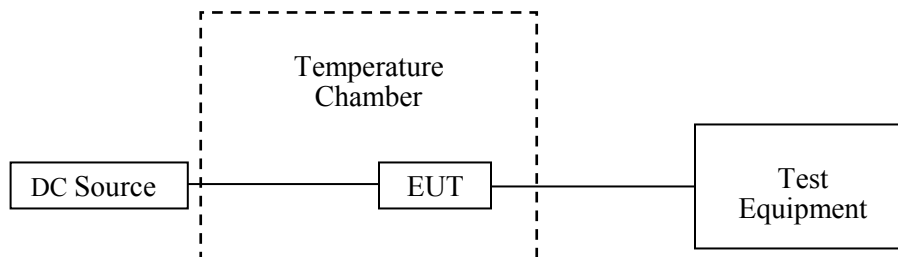
Test Procedure

According to ANSI C63.26-2015 Section 5.6:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Data: See Appendix A

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT F - TEST SETUP PHOTOGRAPHS.

APPENDIX A - TEST DATA

RF OUTPUT POWER

Environmental Conditions & Test Information

Test Date:	2026-03-20 to 2026-03-26	2026-04-10
Temperature:	18.5-25.5℃	21.4℃
Relative Humidity:	48-56 %	51 %
ATM Pressure:	101.6-103.7 kPa	102.0 kPa
Test Result:	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou

Note:

LTE: Please check the APPENDIX F_ RF Output Power for detail.

GPRS/EGPRS 850 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.62	30.97	28.83	27.11	26.08	24.43	22.29	20.57	38.45
	190	836.6	33.05	31.05	29.05	27.32	26.51	24.51	22.51	20.78	38.45
	251	848.8	33.05	31.14	29.13	27.38	26.51	24.60	22.59	20.84	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	25.53	24.37	22.52	20.56	18.99	17.83	15.98	14.02	38.45
	190	836.6	25.72	24.58	22.71	20.82	19.18	18.04	16.17	14.28	38.45
	251	848.8	25.92	24.78	22.96	20.98	19.38	18.24	16.42	14.44	38.45

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

Antenna Gain(dBd) = Antenna Gain(dBi)-2.15

GPRS/EGPRS 1900 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.45	27.89	26.34	24.71	25.65	24.09	22.54	20.91	33
	661	1880	29.27	27.78	26.37	24.71	25.47	23.98	22.57	20.91	33
	810	1909.8	28.96	27.73	26.42	24.85	25.16	23.93	22.62	21.05	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	23.75	22.53	20.59	18.29	19.95	18.73	16.79	14.49	33
	661	1880	23.78	22.56	20.47	18.25	19.98	18.76	16.67	14.45	33
	810	1909.8	23.66	22.44	20.3	18.25	19.86	18.64	16.50	14.45	33

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

WCDMA Band II

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 2)	RMC12.2k		23.44	23.2	23.99	19.64	19.40	20.19
	HSDPA	1	23.04	23.13	19.24	19.33	18.96	18.34
		2	22.93	22.87	19.13	19.07	18.77	18.15
		3	22.65	22.65	18.85	18.85	18.40	17.78
		4	22.07	22.61	18.27	18.81	18.20	17.58
	HSUPA	1	23.51	23.33	19.71	19.53	19.20	18.58
		2	21.99	21.55	18.19	17.75	17.38	16.76
		3	22.50	22.43	18.70	18.63	18.01	17.39
		4	21.53	21.70	17.73	17.90	17.38	16.76
		5	23.51	22.94	19.71	19.14	19.20	18.58
	HSPA+	1	23.35	23.20	19.55	19.40	19.22	18.60

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤33dBm

WCDMA Band V

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			ERP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 5)	RMC12.2k		22.86	22.89	23.71	16.32	16.35	17.17
	HSDPA	1	23.61	23.45	17.07	17.07	16.91	16.77
		2	23.28	22.96	16.74	16.74	16.42	16.37
		3	22.77	22.74	16.23	16.23	16.2	15.77
		4	22.34	22.87	15.8	15.8	16.33	15.72
	HSUPA	1	23.96	23.86	17.42	17.42	17.32	17.19
		2	22.2	22.19	15.66	15.66	15.65	15.61
		3	22.95	22.7	16.41	16.41	16.16	16.25
		4	22.11	22.1	15.57	15.57	15.56	15.53
		5	23.91	23.72	17.37	17.37	17.18	16.76
	HSPA+	1	23.87	23.84	17.33	17.33	17.3	17.23

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

Antenna Gain(dBd) = Antenna Gain(dBi)-2.15

Limit: ERP≤38.45dBm

WCDMA Band IV

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 4)	RMC12.2k		23.76	24.00	24.23	19.74	19.98	20.21
	HSDPA	1	22.62	22.71	18.60	18.69	18.82	18.53
		2	22.44	22.35	18.42	18.33	18.35	18.06
		3	22.24	22.02	18.22	18.00	17.74	17.45
		4	21.70	21.97	17.68	17.95	17.88	17.59
	HSUPA	1	22.91	23.02	18.89	19.00	19.07	18.78
		2	21.26	21.29	17.24	17.27	17.33	17.04
		3	21.81	21.99	17.79	17.97	18.14	17.85
		4	21.29	21.16	17.27	17.14	17.52	17.23
		5	22.58	22.81	18.56	18.79	18.74	18.45
	HSPA+	1	22.96	23.07	18.94	19.05	19.17	18.88

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤30dBm

Peak-to-average ratio (PAR):

LTE: Please check the APPENDIX E_ Peak-to-average Ratio for detail.

GPRS 850 Band

Mode	Channel	PAR (dB)	Limit (dB)
GPRS	Low	0.9	≤ 13
	Middle	1.11	≤ 13
	High	0.64	≤ 13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.73	≤ 13
	Middle	0.92	≤ 13
	High	0.53	≤ 13

Note: The test configuration is 1 slot of GPRS/EGPRS.

WCDMA Band V

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (Rel99)	Low	5.12	≤ 13
	Middle	5.17	≤ 13
	High	4.7	≤ 13
WCDMA (HSDPA)	Low	4.5	≤ 13
	Middle	4.69	≤ 13
	High	4.77	≤ 13
WCDMA (HSUPA)	Low	4.93	≤ 13
	Middle	4.8	≤ 13
	High	5.38	≤ 13
WCDMA (HSPA+)	Low	4.94	≤ 13
	Middle	4.57	≤ 13
	High	4.57	≤ 13

WCDMA Band IV

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (Rel99)	Low	5.15	≤ 13
	Middle	4.51	≤ 13
	High	4.58	≤ 13
WCDMA (HSDPA)	Low	5.42	≤ 13
	Middle	5.16	≤ 13
	High	4.87	≤ 13
WCDMA (HSUPA)	Low	4.64	≤ 13
	Middle	5.22	≤ 13
	High	4.55	≤ 13
WCDMA (HSPA+)	Low	4.81	≤ 13
	Middle	4.88	≤ 13
	High	5.47	≤ 13

PCS 1900

Mode	Channel	PAR (dB)	Limit (dB)
GPRS 1slot	Low	1.39	≤ 13
	Middle	0.58	≤ 13
	High	0.84	≤ 13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.92	≤ 13
	Middle	0.73	≤ 13
	High	0.58	≤ 13

Note: The test configuration is 1 slot of GPRS/EGPRS.

WCDMA Band II

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (Rel99)	Low	4.83	≤ 13
	Middle	4.51	≤ 13
	High	5.17	≤ 13
WCDMA (HSDPA)	Low	5.49	≤ 13
	Middle	5.08	≤ 13
	High	5.17	≤ 13
WCDMA (HSUPA)	Low	4.5	≤ 13
	Middle	5.46	≤ 13
	High	4.97	≤ 13
WCDMA (HSPA+)	Low	4.78	≤ 13
	Middle	5.32	≤ 13
	High	4.92	≤ 13

OCCUPIED BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2026-03-23	2026-03-25	2026-03-26
Temperature:	18.5°C	21.4°C	24.5°C
Relative Humidity:	51%	51%	51%
ATM Pressure:	101.6 kPa	102.0 kPa	102.5 kPa
Test Result:	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou

EUT operation mode: Transmitting

LTE: Please check the APPENDIX B_Occupied bandwidth for detail.

GPRS 850 Band

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GPRS (GMSK)	824.2	0.316	0.241
	836.6	0.313	0.240
	848.8	0.313	0.242
EGPRS (8PSK)	824.2	0.315	0.247
	836.6	0.314	0.248
	848.8	0.307	0.244

WCDMA Band V

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (RMC)	826.4	4.110	4.715
	836.6	4.120	4.725
	846.6	4.160	4.745
WCDMA (HSDPA)	826.4	4.090	4.705
	836.6	4.140	4.725
	846.6	4.130	4.705
WCDMA (HSUPA)	826.4	4.120	4.745
	836.6	4.130	4.715
	846.6	4.140	4.725
WCDMA (HSPA+)	826.4	4.110	4.705
	836.6	4.120	4.725
	846.6	4.140	4.705

PCS 1900

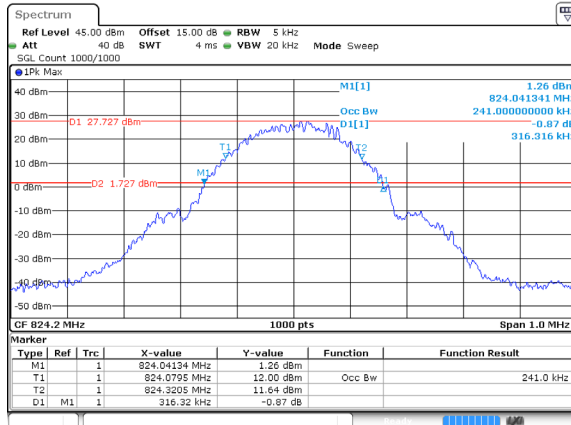
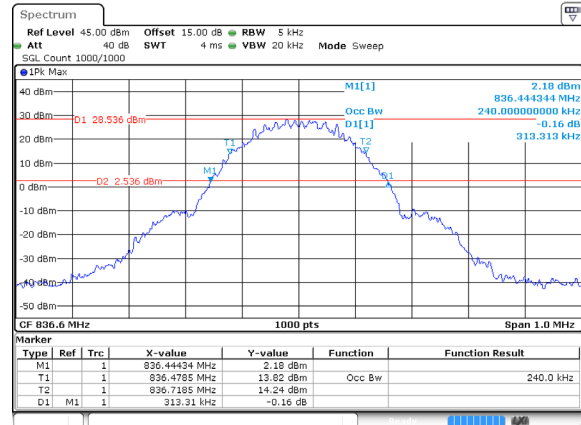
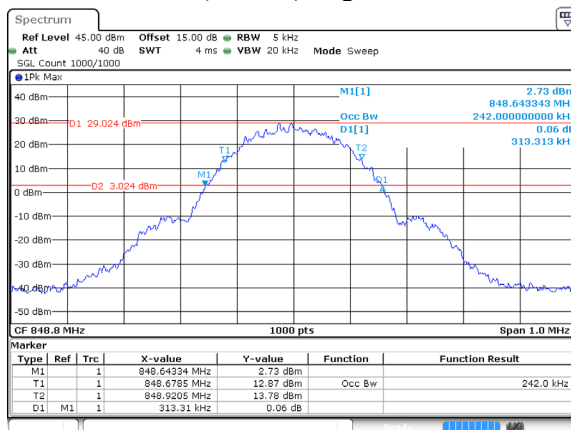
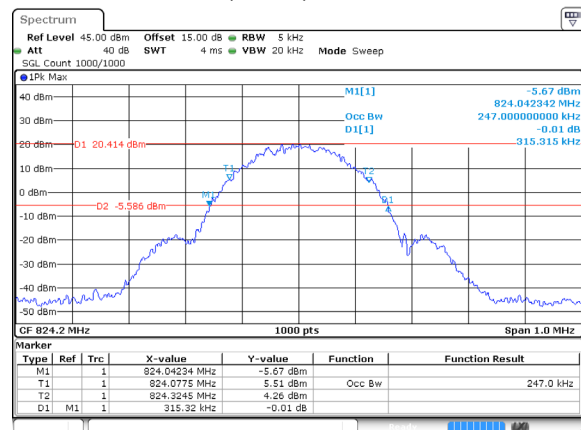
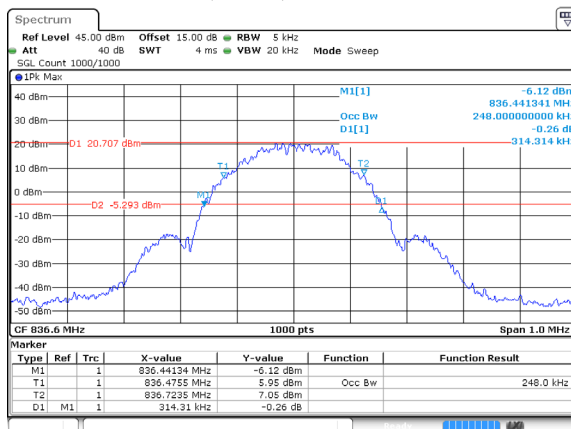
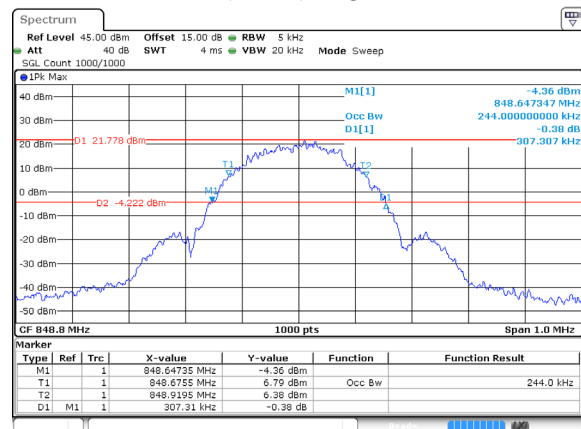
Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GPRS (GMSK)	1850.2	0.314	0.244
	1880	0.318	0.246
	1909.8	0.318	0.247
EGPRS (8PSK)	1850.2	0.310	0.247
	1880	0.317	0.241
	1909.8	0.314	0.244

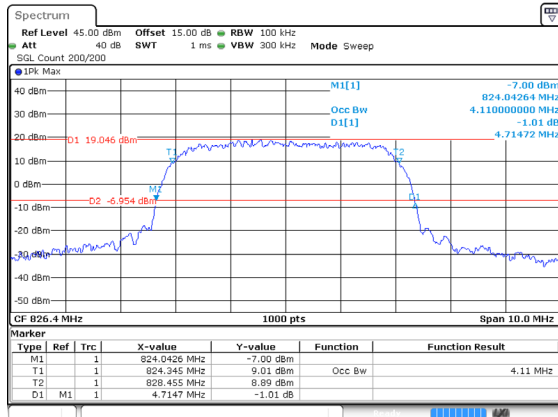
WCDMA Band II

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (Rel 99)	1852.4	4.130	4.725
	1880	4.120	4.735
	1907.6	4.110	4.705
WCDMA (HSDPA)	1852.4	4.100	4.715
	1880	4.120	4.715
	1907.6	4.120	4.735
WCDMA (HSUPA)	1852.4	4.130	4.715
	1880	4.110	4.735
	1907.6	4.120	4.705
WCDMA (HSPA+)	1852.4	4.130	4.705
	1880	4.140	4.745
	1907.6	4.130	4.725

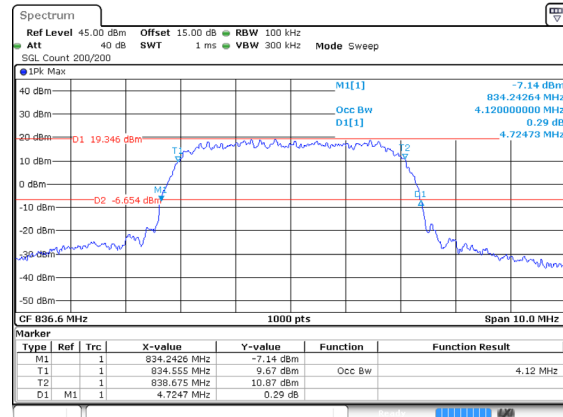
WCDMA Band IV

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (Rel 99)	1712.4	4.100	4.725
	1732.6	4.130	4.735
	1752.6	4.130	4.715
WCDMA (HSDPA)	1712.4	4.130	4.695
	1732.6	4.130	4.725
	1752.6	4.160	4.715
WCDMA (HSUPA)	1712.4	4.130	4.705
	1732.6	4.150	4.725
	1752.6	4.130	4.725
WCDMA (HSPA+)	1712.4	4.120	4.735
	1732.6	4.110	4.755
	1752.6	4.140	4.735

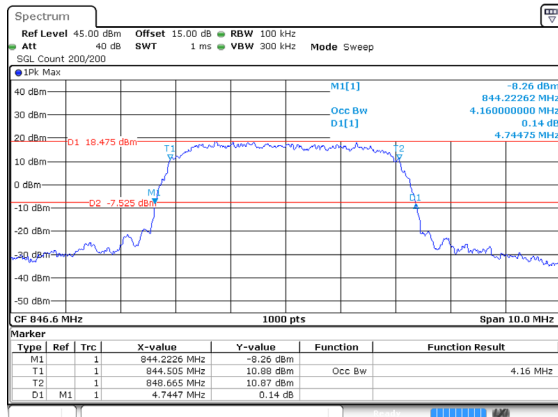
GPRS 850 Band99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Low channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:56:1899% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Middle channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:56:4799% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) High channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:57:1699% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Low channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:57:4599% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Middle channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:58:1599% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) High channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 25 MAR 2026 15:58:43

WCDMA Band V**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Low channel**

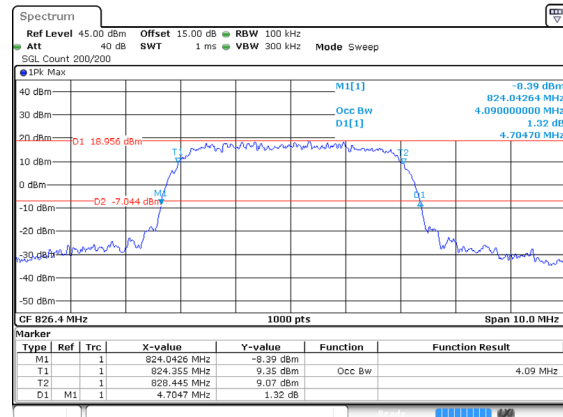
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:00:49

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Middle channel

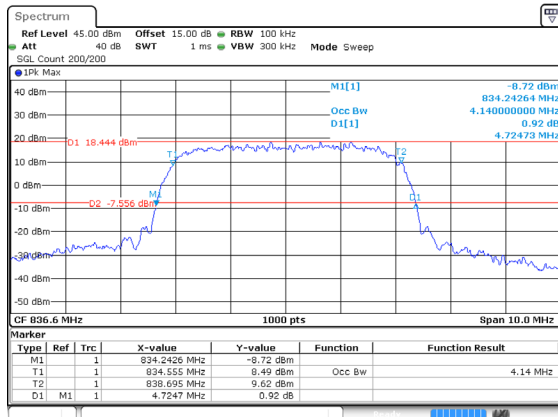
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:01:10

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) High channel

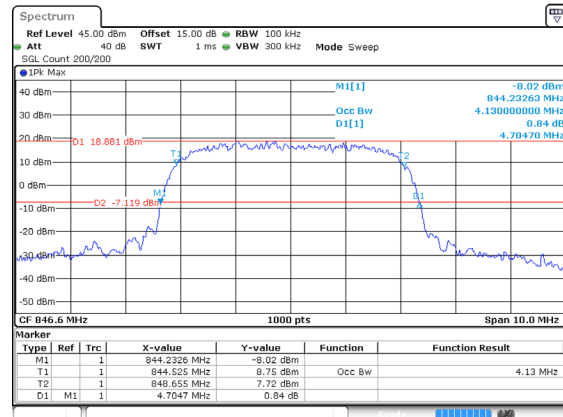
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:01:34

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Low channel

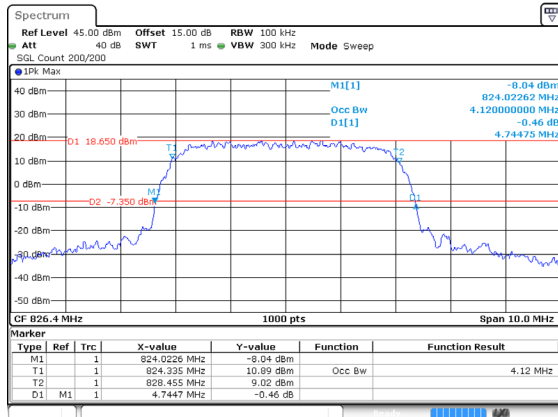
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:42:47

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Middle channel

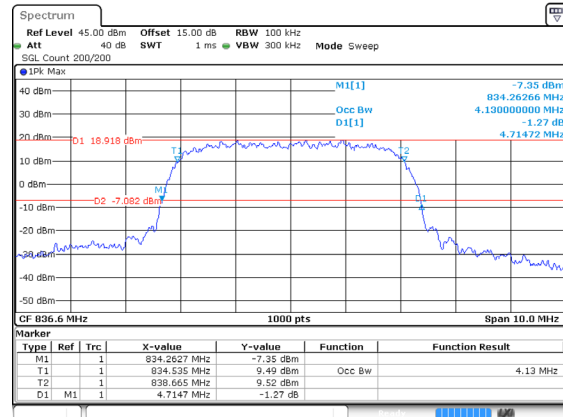
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:43:09

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) High channel

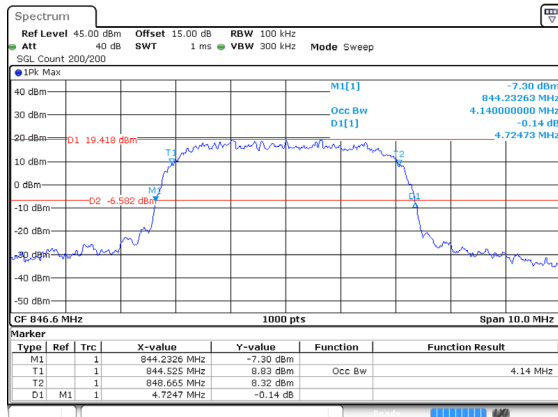
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 11:43:33

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Low channel

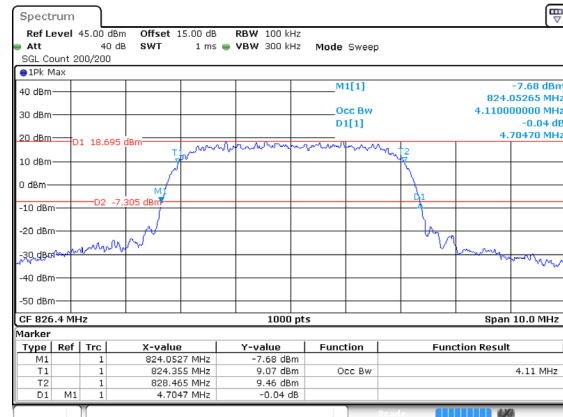
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:07:13

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Middle channel

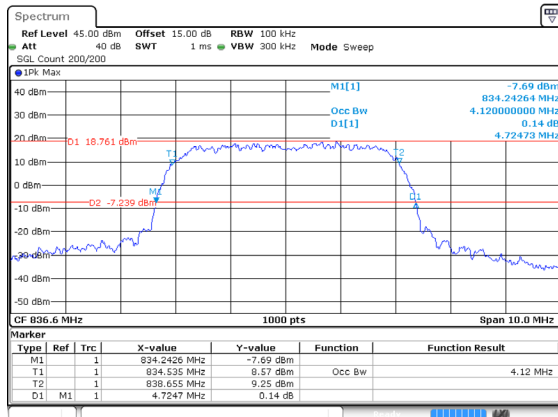
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:07:35

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) High channel

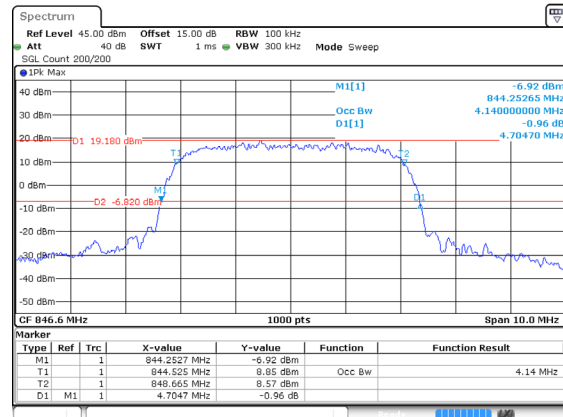
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:07:59

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Low channel

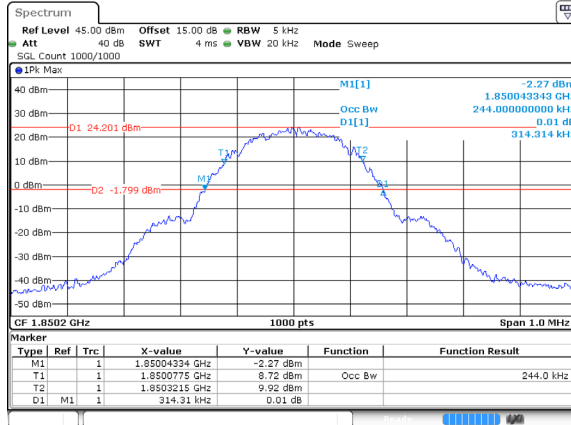
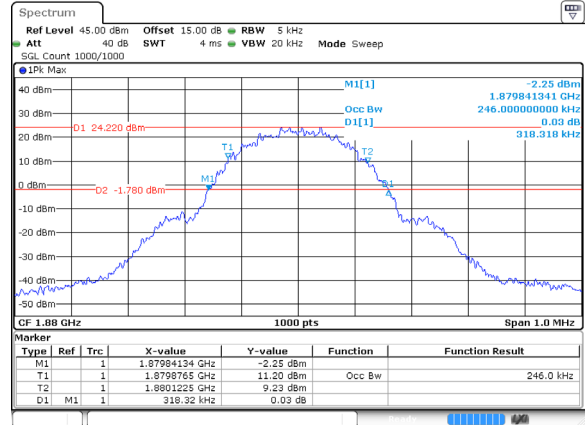
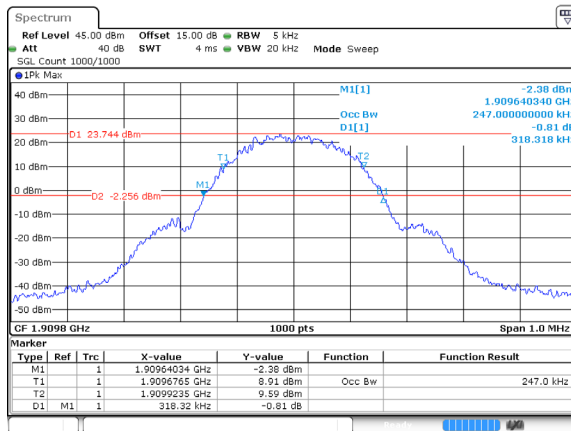
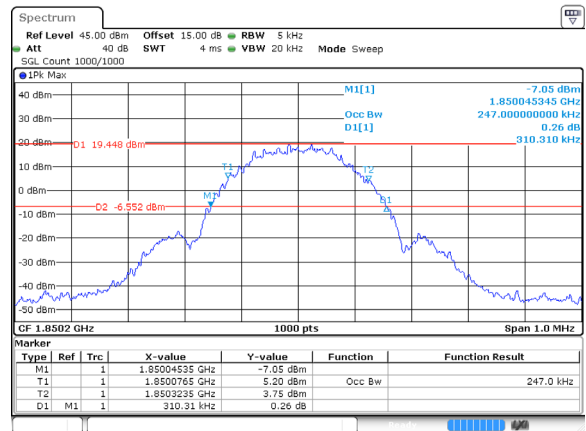
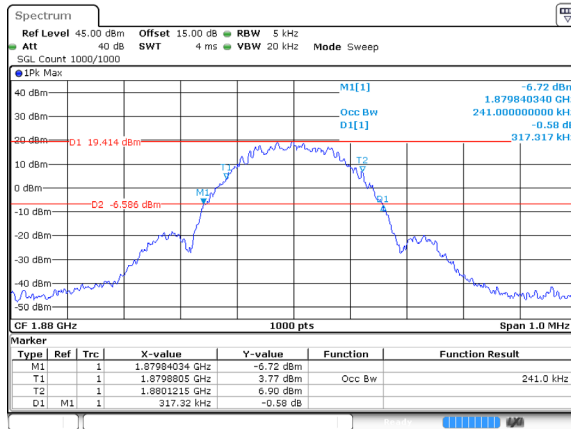
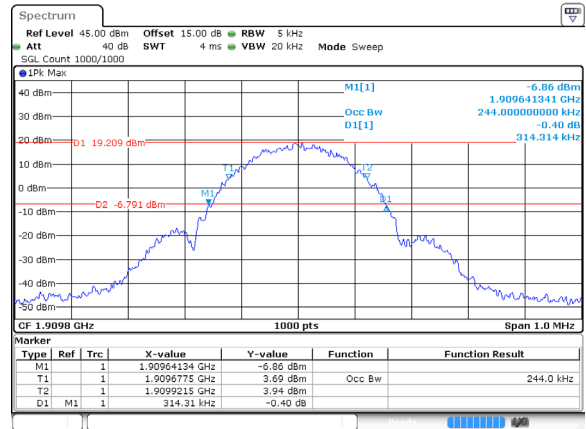
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:41:49

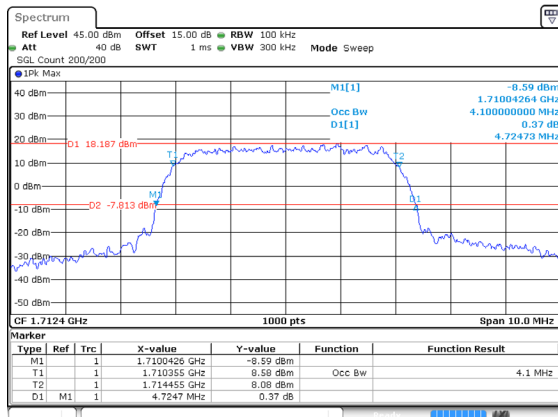
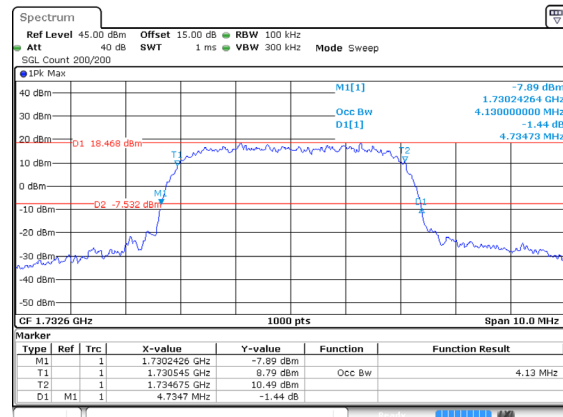
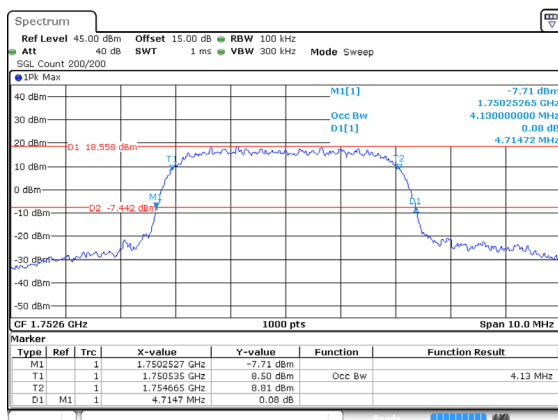
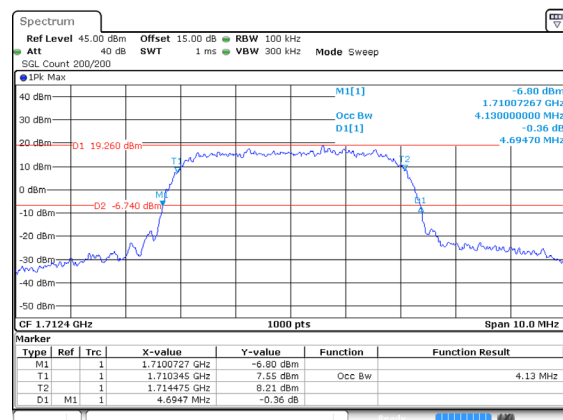
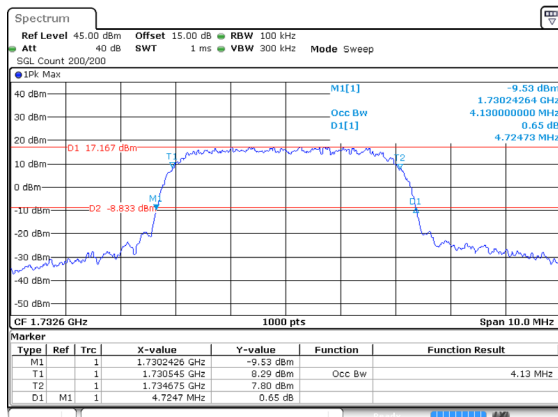
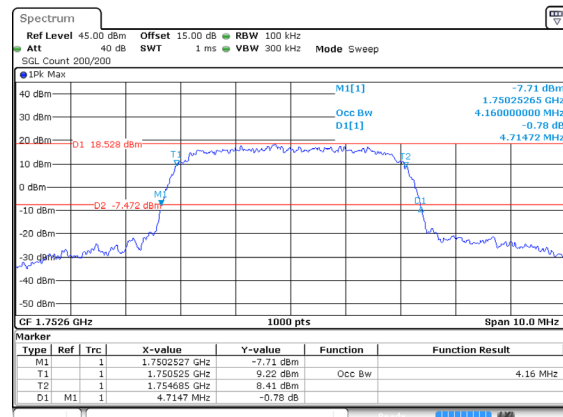
99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Middle channel

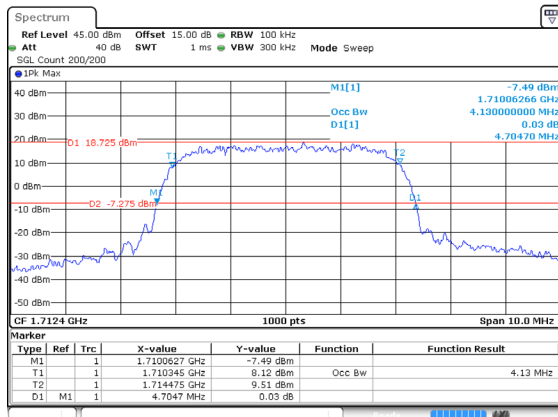
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:42:11

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) High channel

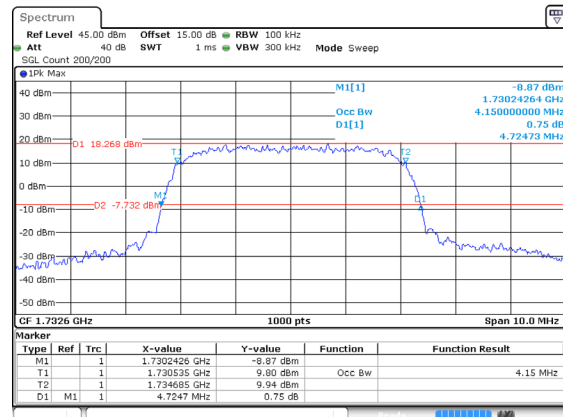
ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 14:42:34

PCS 1900 Band**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Low channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:00:20**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Middle channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:00:49**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) High channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:01:18**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Low channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:01:47**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Middle channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:02:15**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) High channel**ProjectNo.:RKSA260311002 Tester:Neil Zhou
Date: 25.MAR.2026 16:02:44

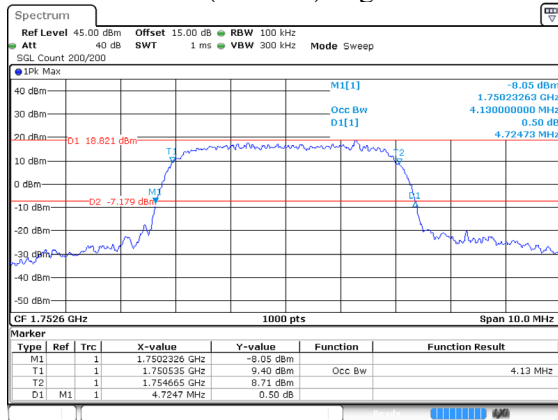
WCDMA Band IV99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (Rel 99) Low channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 10:53:5599% Occupied & 26 dB Emissions Bandwidth for
WCDMA (Rel 99) Middle channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 10:54:1999% Occupied & 26 dB Emissions Bandwidth for
WCDMA (Rel 99) High channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 10:54:4199% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSDPA) Low channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:32:5699% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSDPA) Middle channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:33:2099% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSDPA) High channelProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:33:42

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Low channel

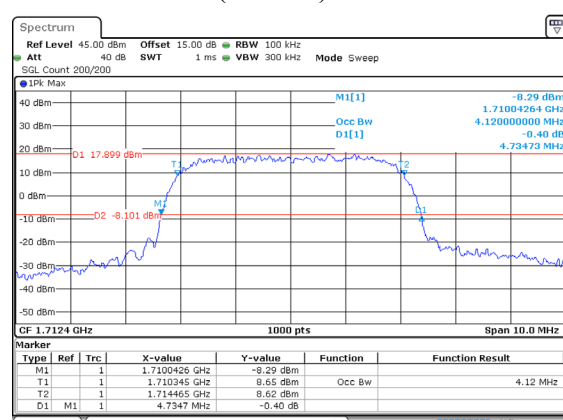
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:53:15

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Middle channel

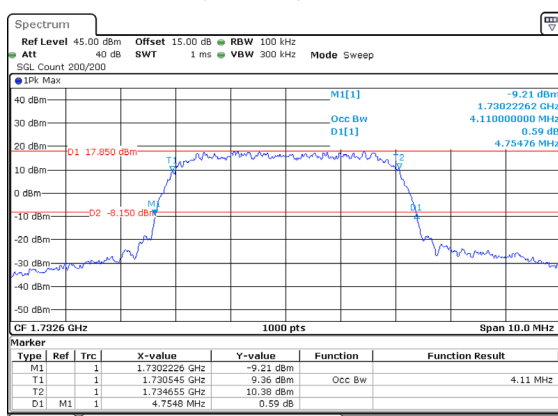
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:53:39

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) High channel

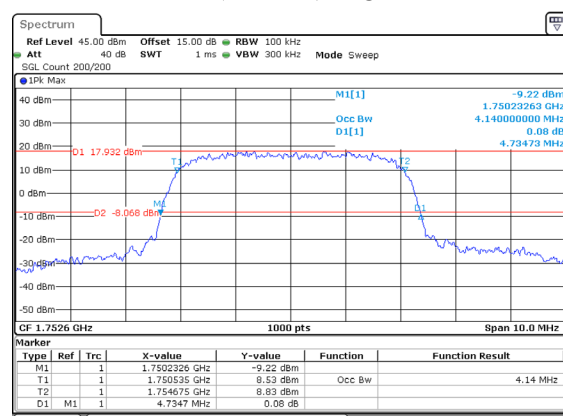
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:54:01

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Low channel

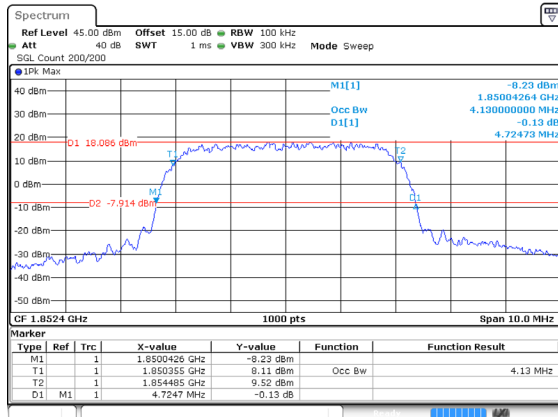
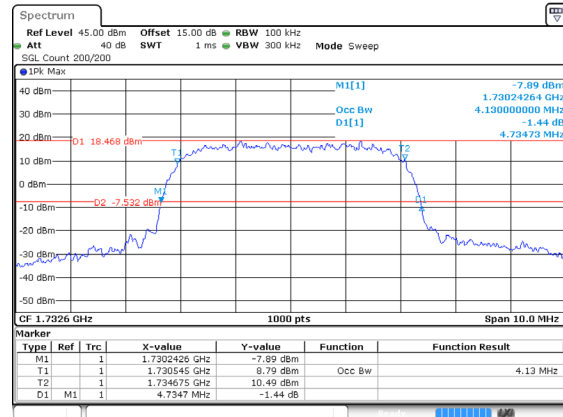
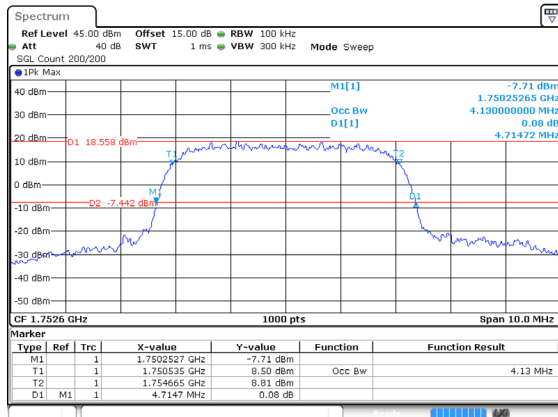
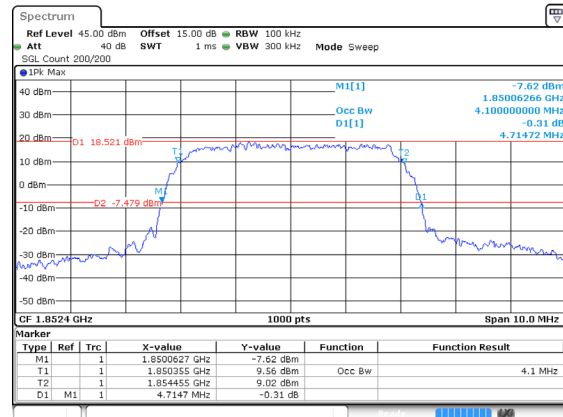
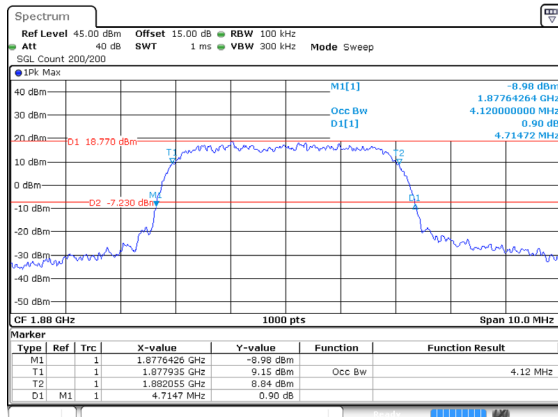
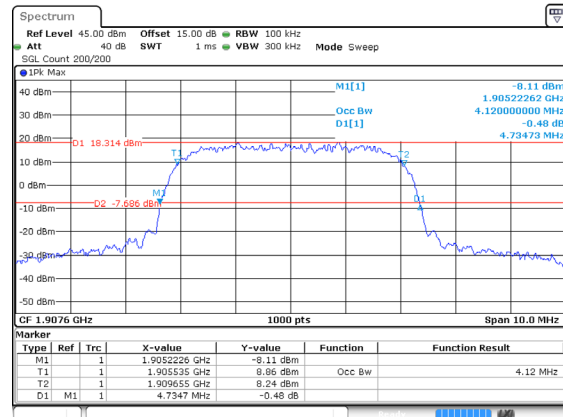
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:30:48

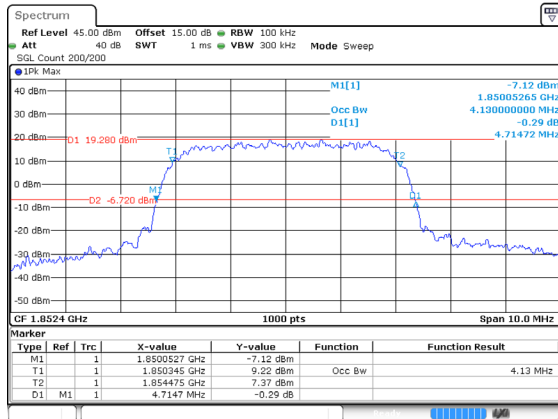
99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Middle channel

ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:31:11

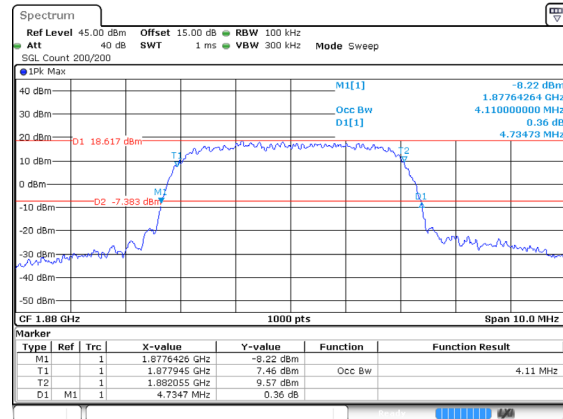
99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) High channel

ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:31:34

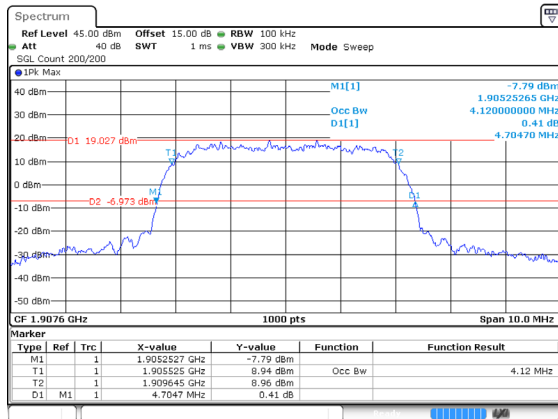
WCDMA Band II**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Low channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 10:52:44**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Middle channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 10:54:19**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) High channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 10:54:41**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Low channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 13:31:50**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Middle channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 13:32:12**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) High channel**ProjectNo: RKSA260311002 Tester:Neil Zhou
Date: 26 MAR 2026 13:32:34

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Low channel

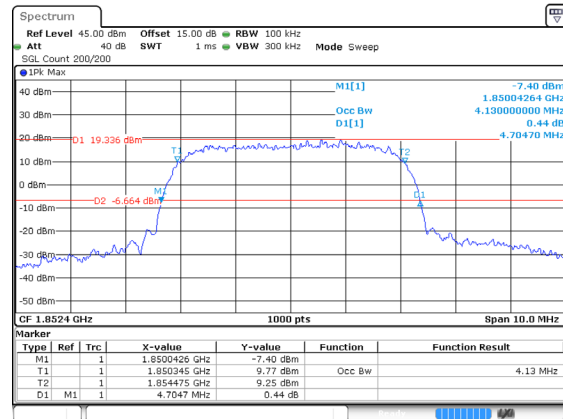
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:52:06

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Middle channel

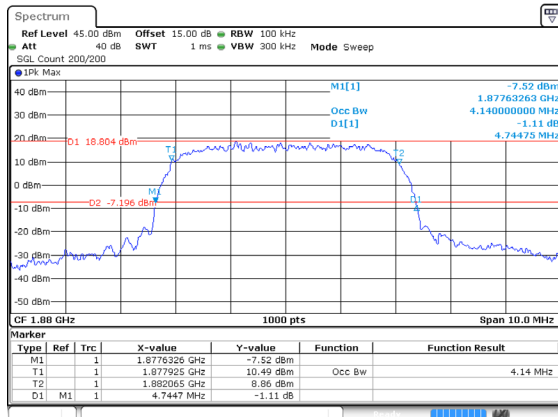
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:52:28

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) High channel

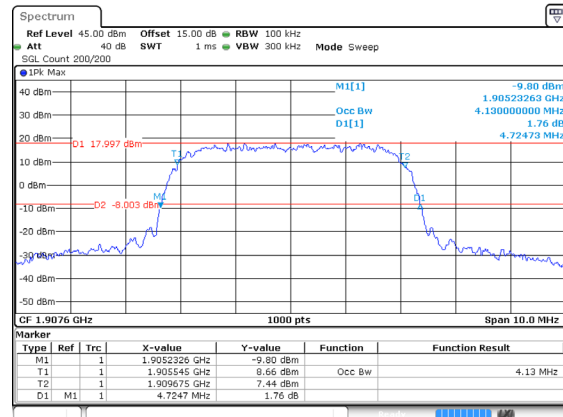
ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 13:52:49

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Low channel

ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:29:37

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) Middle channel

ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:29:58

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSPA+) High channel

ProjectNo.: RKSA260311002 Tester: Neil Zhou
Date: 26 MAR 2026 14:30:23

SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Environmental Conditions & Test Information**

Test Date:	2026-03-25	2026-03-26	2026-04-09	2026-04-30
Temperature:	21.4°C	24.5°C	21.2°C	21.5°C
Relative Humidity:	51%	51%	50 %	53 %
ATM Pressure:	102.0 kPa	102.5 kPa	100.5 kPa	102.5 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou

EUT operation mode: Transmitting

Test Result: Compliance

Note: the maximum path attenuation was added into the offset

LTE: Please check the APPENDIX D_TX spurious for detail.