

# Test Report

## Part 15 Subpart C 15.247


**Equipment under test** iiRcade GOLD PCBA  
**Model name** IRORO2-PCBA  
**FCC ID** 2AXRRIRORO2-PCBA  
**Applicant** IIRCADE, INC.  
**Manufacturer** IIRCADE, INC.  
**Date of test(s)** 2022.08.16 ~ 2022.08.31  
**Date of issue** 2022.10.12

**Issued to**  
**IIRCADE, INC.**

No.A-627, 338 GwanggyoJungang-Ro, Suji-Gu, Yongin-Si, Gyeonggi-Do, 16942  
Republic of Korea  
Tel: +82-31-893-1540 Fax : +82-31-893-1541

**Issued by**  
**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by :                                                      | Report approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Bong-Seok, Kim<br>Test engineer                                                     | Yeong-Jun Cho<br>Technical manager                                                   |

This test report is not related to KS Q ISO/IEC 17025 and KOLAS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0133  
Page ( 2 ) of ( 53 )

**Revision history**

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| -        | 2022.10.12    | KES-RF1-22T0133 | Initial     |
|          |               |                 |             |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## TABLE OF CONTENTS

|             |                                                     |    |
|-------------|-----------------------------------------------------|----|
| 1.          | General information.....                            | 4  |
| 1.1.        | EUT description .....                               | 4  |
| 1.2.        | Requirements for Bluetooth transmitter .....        | 6  |
| 1.3.        | Test configuration.....                             | 7  |
| 1.4.        | Information about derivative model .....            | 7  |
| 1.5.        | Accessory information.....                          | 7  |
| 1.6.        | Sample calculation .....                            | 7  |
| 1.7.        | Measurement Uncertainty .....                       | 8  |
| 1.8.        | Maximum average output power .....                  | 8  |
| 1.9.        | Frequency/channel operations .....                  | 9  |
| 2.          | Summary of tests .....                              | 11 |
| 3.          | Test results .....                                  | 12 |
| 3.1.        | 20 dB bandwidth .....                               | 12 |
| 3.2.        | Output power.....                                   | 16 |
| 3.3.        | Carrier frequency separation .....                  | 18 |
| 3.4.        | Number of hopping frequency.....                    | 20 |
| 3.5.        | Time of occupancy .....                             | 22 |
| 3.6.        | Radiated restricted band and emissions.....         | 26 |
| 3.7.        | Conducted band edge and out of band emissions ..... | 44 |
| 3.8.        | AC conducted emissions .....                        | 50 |
| Appendix A. | Measurement equipment .....                         | 52 |
| Appendix B. | Test setup photo .....                              | 53 |

**1. General information**

Applicant: IIRCADE, INC.  
Applicant address: No.A-627, 338 GwanggyoJungang-Ro, Suji-Gu, Yongin-Si, Gyeonggi-Do,16942  
Republic of Korea  
Test site: KES Co., Ltd.  
Test site address: ☐ 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
☒ 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea  
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC,IC rule part(s): FCC : 15.247  
FCC ID: 2AXRRIRORO2-PCBA  
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

**1.1. EUT description**

Equipment under test: iiRcade GOLD PCBA  
Frequency range: **2 402 MHz ~ 2 480 MHz (BDR/EDR)**  
2 402 MHz ~ 2 480 MHz (LE 1Mbps)  
2 412 MHz ~ 2 462 MHz (11b/g/n\_HT20)  
2 422 MHz ~ 2 452 MHz (11n\_HT40)  
UNII-1: 5 180 MHz ~ 5 240 MHz (11a/an\_VHT20/ac\_VHT20)  
5 190 MHz ~ 5 230 MHz (11an\_VHT40/ac\_VHT40)  
5 210 MHz (11ac\_VHT80)  
UNII-2A: 5 260 MHz ~ 5 320 MHz (11a/an\_VHT20/ac\_VHT20)  
5 270 MHz ~ 5 310 MHz (11an\_VHT40/ac\_VHT40)  
5 290 MHz (11ac\_VHT80)  
UNII-2C: 5 500 MHz ~ 5 700 MHz (11a/an\_VHT20/ac\_VHT20)  
5 510 MHz ~ 5 670 MHz (11an\_VHT40/ac\_VHT40)  
5 530 MHz ~ 5 610 MHz (11ac\_VHT80)  
UNII-3: 5 745 MHz ~ 5 825 MHz (11a/an\_VHT20/ac\_VHT20)  
5 755 MHz ~ 5 795 MHz (11an\_VHT40/ac\_VHT40)  
5 775 MHz (11ac\_VHT80)  
Model: IRORO2-PCBA  
Modulation technique: **GFSK,  $\pi/4$ QPSK, 8DPSK, OFDM**

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 5 ) of ( 53 )

|                       |                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of channels    | <b>2 402 MHz ~ 2 480 MHz (BDR/EDR) : 79ch</b><br>2 402 MHz ~ 2 480 MHz (LE 1Mbps) : 40ch<br>2 412 MHz ~ 2 462 MHz (11b/g/n_HT20) : 11ch<br>2 422 MHz ~ 2 452 MHz (11n_HT40) : 7ch |
| UNII-1                | 5 180 MHz ~ 5 240 MHz (11a/an_VHT20/ac_VHT20) : 4ch<br>5 190 MHz ~ 5 230 MHz (11an_VHT40/ac_VHT40) : 2ch<br>5 210 MHz (11ac_VHT80) : 1ch                                          |
| UNII-2A               | 5 260 MHz ~ 5 320 MHz (11a/an_VHT20/ac_VHT20) : 4ch<br>5 270 MHz ~ 5 310 MHz (11an_VHT40/ac_VHT40) : 2ch<br>5 290 MHz (11ac_VHT80) : 1ch                                          |
| UNII-2C               | 5 500 MHz ~ 5 700 MHz (11a/an_VHT20/ac_VHT20) : 11ch<br>5 510 MHz ~ 5 670 MHz (11an_VHT40/ac_VHT40) : 5ch<br>5 530 MHz ~ 5 610 MHz (11ac_VHT80) : 2ch                             |
| UNII-3                | 5 745 MHz ~ 5 825 MHz (11a/an_VHT20/ac_VHT20) : 5ch<br>5 755 MHz ~ 5 795 MHz (11an_VHT40/ac_VHT40) : 2ch<br>5 775 MHz (11ac_VHT80) : 1ch                                          |
| Antenna specification | PCB Antenna<br>BT / LE : 4.38 dBi, 2.4G WiFi : 4.21 dBi<br>UNII-1 : 2.86 dBi / UNII-2A : 2.33 dBi / UNII-2C : 1.33 dBi / UNII-3 : 1.03 dBi                                        |
| Power source          | AC 120 V( Adapter output DC 24 V )                                                                                                                                                |
| H/W version           | 6.2                                                                                                                                                                               |
| S/W version           | 9.010.000                                                                                                                                                                         |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 1.2. Requirements for Bluetooth transmitter

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

### Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

### Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

### Example of a 79 hopping sequence in data mode:

5, 60, 4, 40, 26, 2, 65, 10, 51, 53, 16, 8, 13, 66, 45, 59, 44, 62, 36, 20, 75, 74, 49, 69, 67, 64, 47, 38, 72, 17, 39, 57, 23, 11, 77, 29, 25, 00, 71, 3, 61, 78, 73, 43, 76, 12, 21, 27, 58, 63, 56, 42, 19, 55, 35, 9, 6, 1, 32, 50, 54, 30, 18, 24, 41, 52, 22, 31, 70, 7, 14, 34, 33, 46, 68, 28, 15, 48, 37, 69, 20, 9, 18, 57, 22, 76, 60, 44, 58, 52, 2, 1, 68, 51, 14, 13, 50, 62, 43, 40, 53, 77, 32, 67, 61, 38, 75, 24, 27, 8, 35, 42, 11, 33, 70, 56, 16, 28, 6, 12, 30, 39, 41, 26, 78, 46, 65, 00, 7, 21, 31, 29, 19, 72, 17, 34, 25, 54, 73, 55, 63, 23, 59, 3, 37, 36, 66, 47, 74, 48, 5, 71, 45, 4, 15, 64, 10, 49

### System receiver input bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

**1.3. Test configuration**

The IIRCADE, INC.// iiRcade GOLD PCBA // IRORO2-PCBA //

FCC ID: 2AXRRIRORO2-PCBA was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247  
KDB 558074 D01 v05 r02  
ANSI C63.10-2013

**1.4. Information about derivative model**

N/A

**1.5. Accessory information**

| Equipment | Manufacturer | Model | Serial No. | Power source |
|-----------|--------------|-------|------------|--------------|
| -         | -            | -     | -          | -            |

**1.6. Sample calculation**

Where relevant, the following sample calculation is provided  
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.72 + 10 = 10.72 \text{ (dB)}\end{aligned}$$

For Radiation test :

$$\text{Field strength level (dB}\mu\text{V/m)} = \text{Measured level (dB}\mu\text{V)} + \text{Antenna factor (dB)} + \text{Cable loss (dB)} - \text{Amplifier gain (dB)}$$

### 1.7. Measurement Uncertainty

| Test Item                                                                                                                                     |             | Uncertainty                |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------|
| Uncertainty for Conduction emission test                                                                                                      |             | 2.38 dB ( SHIELD ROOM #6 ) |
| Uncertainty for Radiation emission test<br>(include Fundamental emission)                                                                     | Below 1 GHz | 4.50 dB ( SAC #6 )         |
|                                                                                                                                               | Above 1 GHz | 4.90 dB ( SAC #5 )         |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |             |                            |

### 1.8. Maximum average output power

Refer to the average output power

Note.

1. Radiated emission were performed with the EUT set to transmit at the channel with highest output Power as worst-case scenario.
2. Worst-case data rates as provided by the client were:

BDR,EDR,LE ; **Default**

b : **1Mbps**, g : **6Mbps**, n\_HT20 : **MCS0**, n\_HT40 : **MCS0**

UNII-1 a : **6 Mbps**, an\_VHT20/40 : **MCS0**, ac\_VHT20/40/80 : **MCS0**

UNII-2A a : **6 Mbps**, an\_VHT20/40 : **MCS0**, ac\_VHT20/40/80 : **MCS0**

UNII-2C a : **6 Mbps**, an\_VHT20/40 : **MCS0**, ac\_VHT20/40/80 : **MCS0**

UNII-3 a : **6 Mbps**, an\_VHT20/40 : **MCS0**, ac\_VHT20/40/80 : **MCS0**

## 1.9. Frequency/channel operations

| Ch. | Frequency (MHz) | Mode                                     |
|-----|-----------------|------------------------------------------|
| 00  | 2 402           | BDR 1 Mbps,<br>EDR 2 Mbps,<br>EDR 3 Mbps |
| .   | .               | .                                        |
| 40  | 2 442           | BDR 1 Mbps,<br>EDR 2 Mbps,<br>EDR 3 Mbps |
| .   | .               | .                                        |
| 78  | 2 480           | BDR 1 Mbps,<br>EDR 2 Mbps,<br>EDR 3 Mbps |

| Ch. | Frequency (MHz) | Mode       |
|-----|-----------------|------------|
| 00  | 2 402           | BLE 1 Mbps |
| .   | .               | .          |
| 20  | 2 442           | BLE 1 Mbps |
| .   | .               | .          |
| 39  | 2 480           | BLE 1 Mbps |

| Ch. | Frequency (MHz) | Mode             |
|-----|-----------------|------------------|
| 1   | 2 412           | 802.11b/g/n_HT20 |
| .   | .               | .                |
| 6   | 2 437           | 802.11b/g/n_HT20 |
| .   | .               | .                |
| 11  | 2 462           | 802.11b/g/n_HT20 |

| Ch. | Frequency (MHz) | Mode         |
|-----|-----------------|--------------|
| 3   | 2 422           | 802.11n_HT40 |
| .   | .               | .            |
| 6   | 2 437           | 802.11n_HT40 |
| .   | .               | .            |
| 9   | 2 452           | 802.11n_HT40 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 10 ) of ( 53 )

**UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 36  | 5 180           |
| 44  | 5 220           |
| 48  | 5 240           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 52  | 5 260           |
| 56  | 5 280           |
| 64  | 5 320           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 100 | 5 500           |
| 120 | 5 600           |
| 140 | 5 700           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 149 | 5 745           |
| 157 | 5 785           |
| 165 | 5 825           |

**802.11a/an\_VHT20/ac\_VHT20 mode****UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 38  | 5 190           |
| 46  | 5 230           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 54  | 5 270           |
| 62  | 5 310           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 102 | 5 510           |
| 118 | 5 590           |
| 134 | 5 670           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 151 | 5 755           |
| 159 | 5 795           |

**802.11an\_VHT40/ac\_VHT40 mode****UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 42  | 5 210           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 58  | 5 290           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 106 | 5 530           |
| 122 | 5 610           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 155 | 5 775           |

**802.11ac\_VHT80 mode**

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

**2. Summary of tests**

| Section in<br>FCC Part 15 | Parameter                                 | Test results |
|---------------------------|-------------------------------------------|--------------|
| 15.247(a)(1)(iii)         | 20 dB bandwidth                           | Pass         |
| 15.247(b)(1)              | Output power                              | Pass         |
| 15.247(a)(1)              | Channel separation                        | Pass         |
| 15.247(a)(1)(iii)         | Number of channels                        | Pass         |
| 15.247(a)(1)(iii)         | Time of occupancy                         | Pass         |
| 15.205, 15.209            | Radiated restricted band and emission     | Pass         |
| 15.207(a)                 | AC Conducted emissions                    | Pass         |
| 15.207(d)                 | Conducted spurious emission and band edge | Pass         |
| 15.203                    | Antenna Requirement                       | Pass         |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


### 3. Test results

#### 3.1. 20 dB bandwidth

##### Test procedure

ANSI 63.10-2013

##### Test setup



##### Test setting

1. Span = Set between two times and five times the OBW
2. RBW  $\geq 1\%$  to  $5\%$  of the OBW
3. VBW  $\geq 3 * RBW$
4. Sweep = Auto
5. Detector function = Peak
6. Sweep = Auto couple
7. Trace mode = Max hold
8. All the trace to stabilize

##### **Limit**

Not applicable

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 13 ) of ( 53 )

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Measured bandwidth(MHz) |
|----------------|-------------|-----------------|-------------------------|
| 2 402          | 00          | BDR 1 Mbps      | 0.92                    |
| 2 442          | 40          |                 | 0.93                    |
| 2 480          | 78          |                 | 0.94                    |
| 2 402          | 00          | EDR 2 Mbps      | 1.24                    |
| 2 442          | 40          |                 | 1.24                    |
| 2 480          | 78          |                 | 1.24                    |
| 2 402          | 00          | EDR 3 Mbps      | 1.24                    |
| 2 442          | 40          |                 | 1.24                    |
| 2 480          | 78          |                 | 1.24                    |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133


Page ( 14 ) of ( 53 )

### BDR(1Mbps)

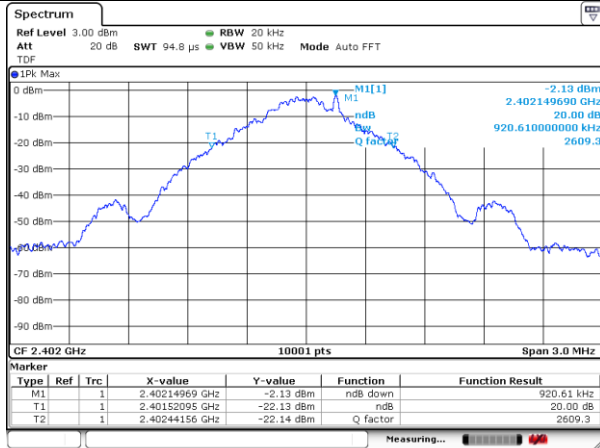


Date: 19.AUG.2022 14:34:37


### EDR(2Mbps)

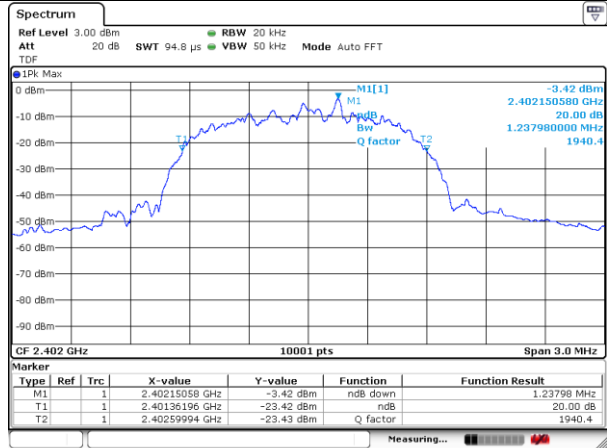


Date: 19.AUG.2022 14:37:03

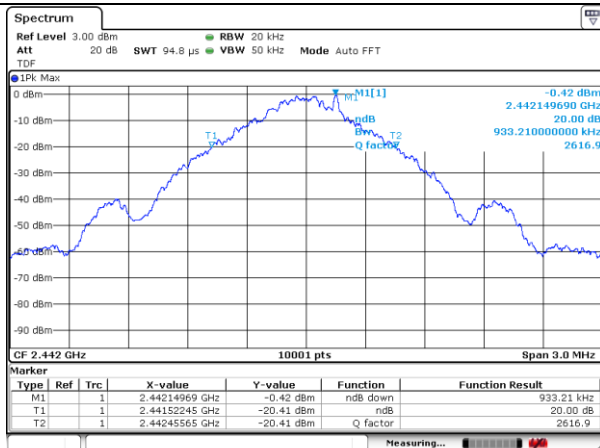


Date: 19.AUG.2022 14:35:13

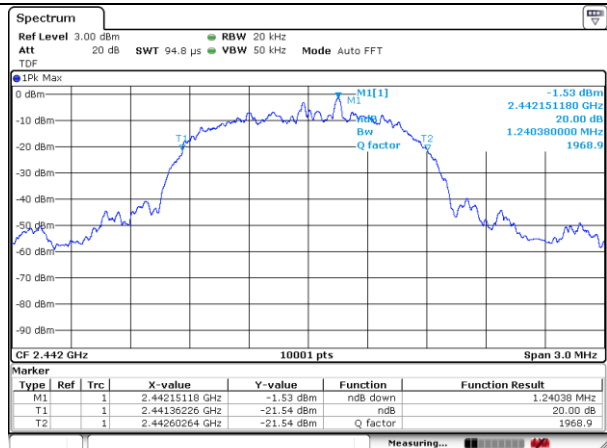

Date: 19.AUG.2022 14:36:25

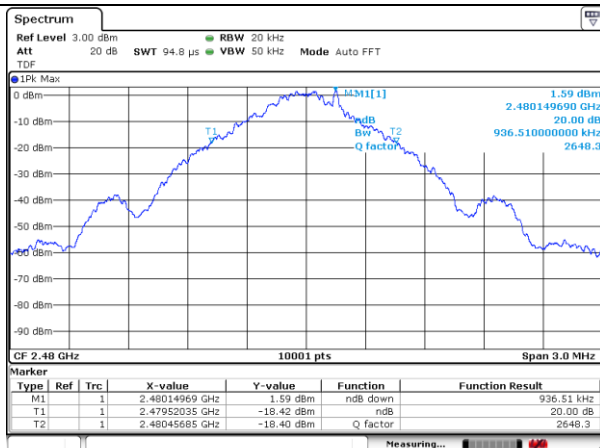

Date: 19.AUG.2022 14:35:36

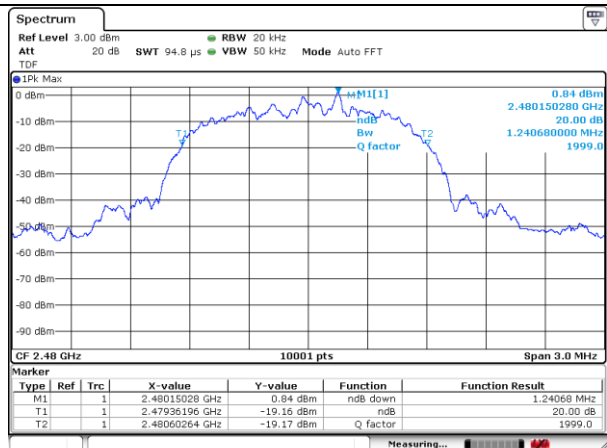


Date: 19.AUG.2022 14:36:05


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




### EDR(3Mbps)

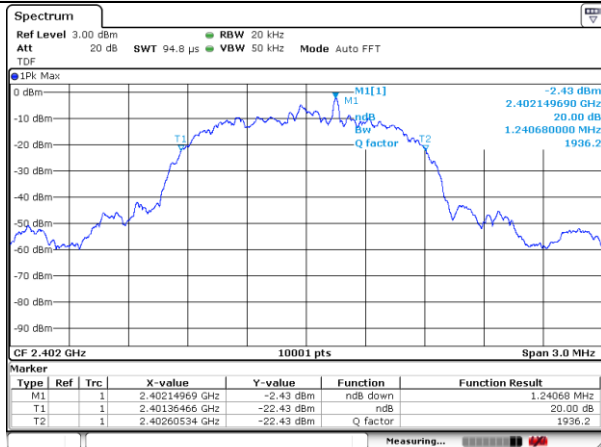

Date: 19.AUG.2022 14:37:32

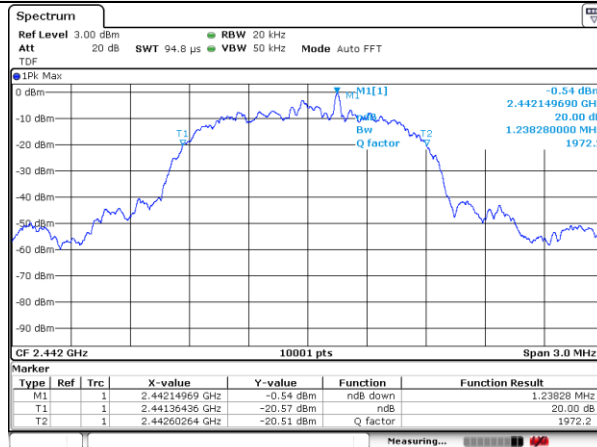

Date: 19.AUG.2022 14:37:53

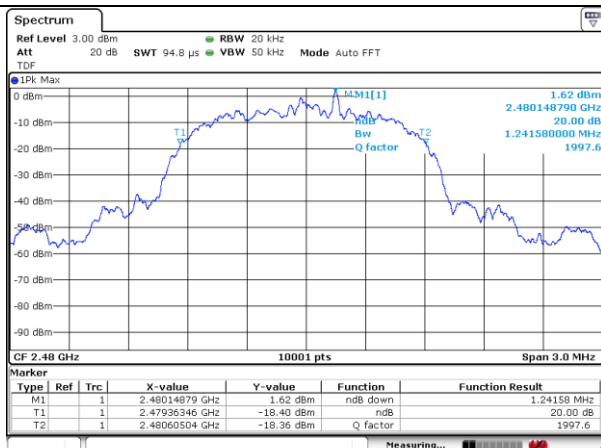

Date: 19.AUG.2022 14:38:16

Blank

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.2. Output power

#### Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013 – Section 11.9.2.1 and 11.9.2.3.2

#### Test setup



#### Test setting

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

According to §15.247(a)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0133  
Page ( 17 ) of ( 53 )

**Test results**

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Average Power (dBm) | Peak Power (dBm) | Power Limit (dBm) |
|----------------|-------------|-----------------|---------------------|------------------|-------------------|
| 2 402          | 00          | BDR 1 Mbps      | 4.39                | 4.65             | 20.97             |
| 2 442          | 40          |                 | 3.85                | 4.03             | 20.97             |
| 2 480          | 78          |                 | 3.41                | 3.62             | 20.97             |
| 2 402          | 00          | EDR 2 Mbps      | 2.00                | 4.70             | 20.97             |
| 2 442          | 40          |                 | 1.57                | 4.26             | 20.97             |
| 2 480          | 78          |                 | 1.08                | 3.73             | 20.97             |
| 2 402          | 00          | EDR 3 Mbps      | 2.09                | 5.50             | 20.97             |
| 2 442          | 40          |                 | 1.52                | 4.90             | 20.97             |
| 2 480          | 78          |                 | 1.11                | 4.45             | 20.97             |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.3. Carrier frequency separation

#### Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

#### Test setup



#### Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
4. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold
8. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

#### Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-RF1-22T0133

Page ( 19 ) of ( 53 )

### Test results

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Channel Separation (MHz) | Limit (MHz)  |
|----------------|-------------|-----------------|--------------------------|--------------|
| 2 442          | 40          | BDR 1 Mbps      | 1.023                    | $\geq 0.627$ |
| 2 442          | 40          | EDR 3 Mbps      | 1.123                    | $\geq 0.827$ |

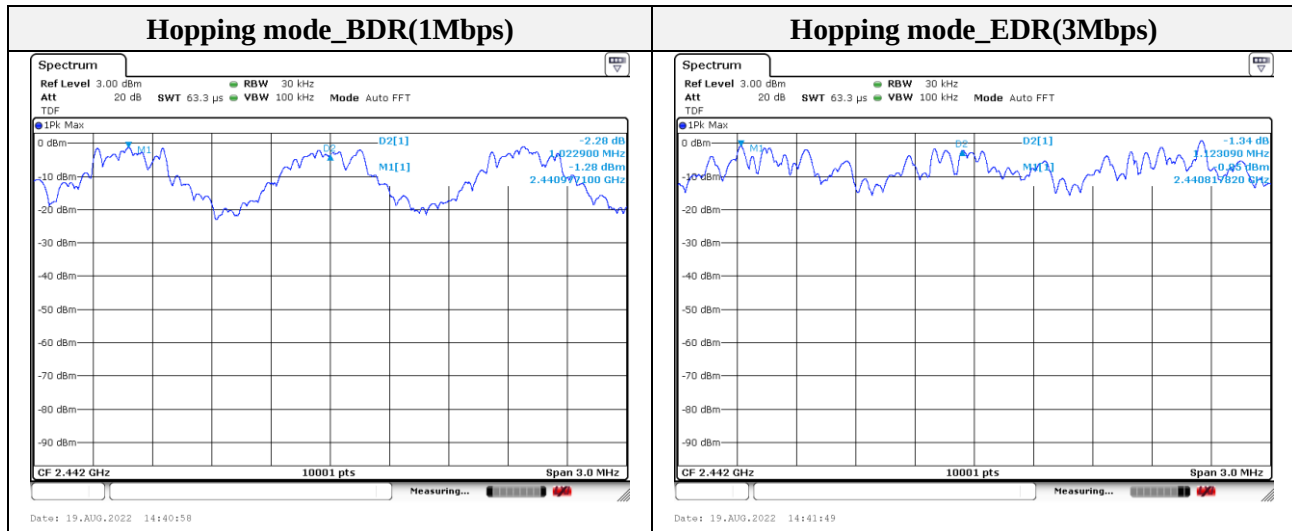

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.4. Number of hopping frequency

#### Test procedure

KDB 558074 v05r02 &amp; ANSI 63.10-2013

#### Test setup



#### Test setting

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings.

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW.
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

#### Test results

| Frequency         | Data rate(Mbps) | Number of hopping frequency | Limit     |
|-------------------|-----------------|-----------------------------|-----------|
| 2 402 ~ 2 480 MHz | BDR 1 Mbps      | 79                          | $\geq 15$ |
| 2 402 ~ 2 480 MHz | EDR 3 Mbps      | 79                          | $\geq 15$ |

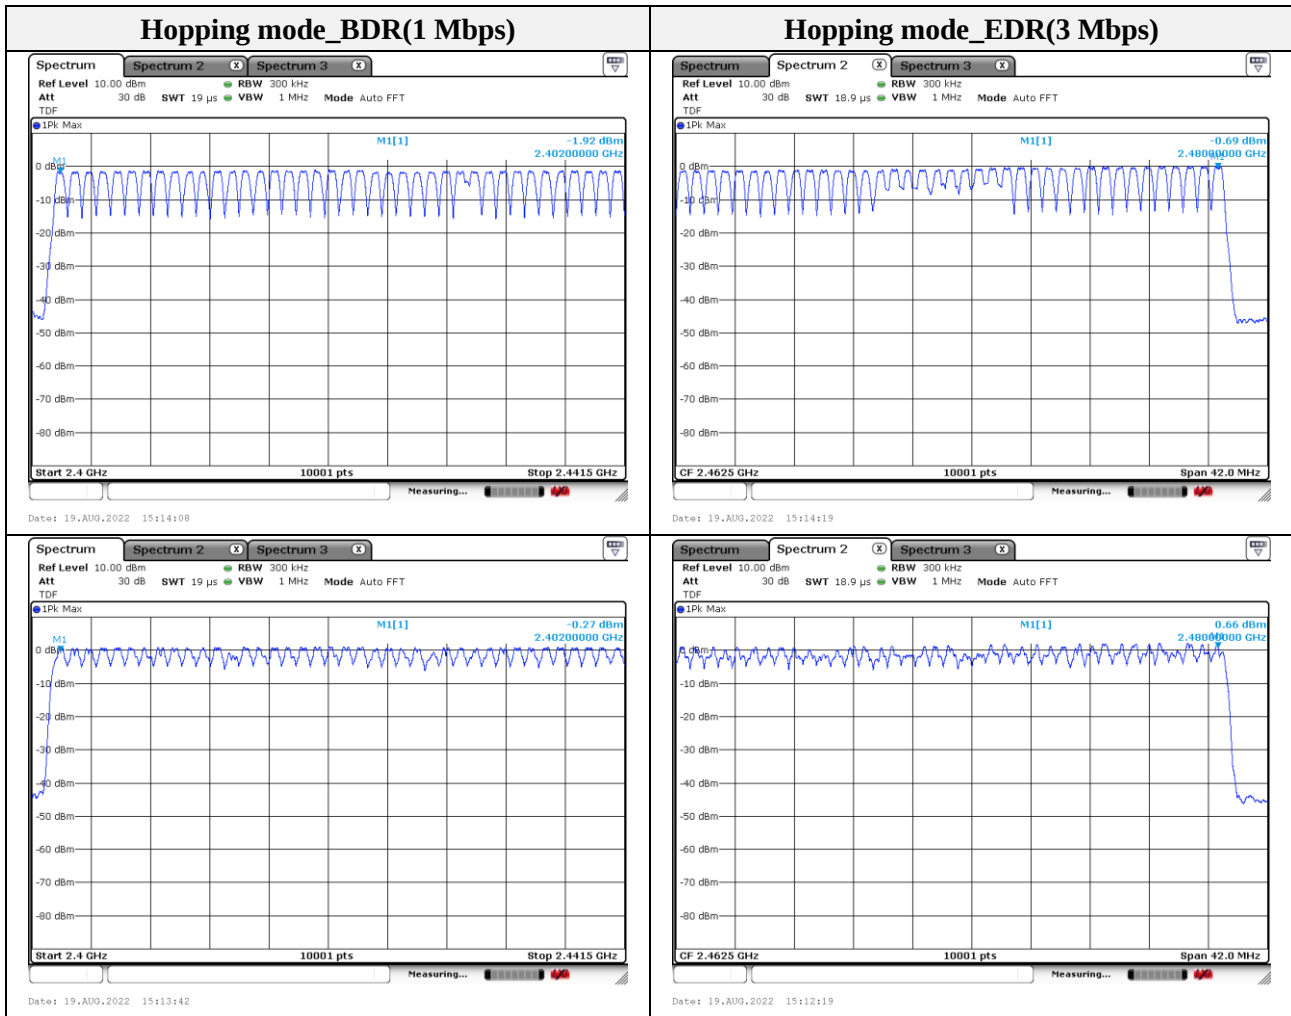

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.5. Time of occupancy

#### Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

#### Test setup



#### Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
3. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel.
4. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
5. Detector function = peak
6. Trace = max hold

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

$$\text{A period time} = 0.4(\text{s}) \times 79 = 31.6(\text{s})$$

Time of occupancy on the TX channel in 31.6 sec

$$= \text{time domain slot length} \times (\text{hop rate} \div \text{number of hop per channel}) \times 31.6$$

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 23 ) of ( 53 )

**Operation mode: GFSK ,  $\pi/4$ -DQPSK, 8DPSK**


| Packet type | Frequency (MHz) | Dwell time (ms) | Time of occupancy on the Tx channel in 31.6 sec (ms) | Limit for time of occupancy on the Tx channel in 31.6 sec (ms) |
|-------------|-----------------|-----------------|------------------------------------------------------|----------------------------------------------------------------|
| DH1         | 2 442           | 0.40            | 126.40                                               | 400                                                            |
| DH3         | 2 442           | 1.65            | 263.20                                               | 400                                                            |
| DH5         | 2 442           | 2.90            | 309.33                                               | 400                                                            |
| 2-DH1       | 2 442           | 0.40            | 126.40                                               | 400                                                            |
| 2-DH3       | 2 442           | 1.65            | 264.00                                               | 400                                                            |
| 2-DH5       | 2 442           | 2.90            | 308.80                                               | 400                                                            |
| 3-DH1       | 2 442           | 0.40            | 126.40                                               | 400                                                            |
| 3-DH3       | 2 442           | 1.65            | 263.20                                               | 400                                                            |
| 3-DH5       | 2 442           | 2.90            | 309.33                                               | 400                                                            |

**Note:****Normal Mode**DH1: Dwell time (ms)  $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 126.40\ (ms)$ DH3: Dwell time (ms)  $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 263.20\ (ms)$ DH5: Dwell time (ms)  $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 309.33\ (ms)$ 2-DH1: Dwell time (ms)  $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 126.40\ (ms)$ 2-DH3: Dwell time (ms)  $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 264.00\ (ms)$ 2-DH5: Dwell time (ms)  $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 308.80\ (ms)$ 3-DH1: Dwell time (ms)  $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 126.40\ (ms)$ 3-DH3: Dwell time (ms)  $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 263.20\ (ms)$ 3-DH5: Dwell time (ms)  $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 309.33\ (ms)$ 


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

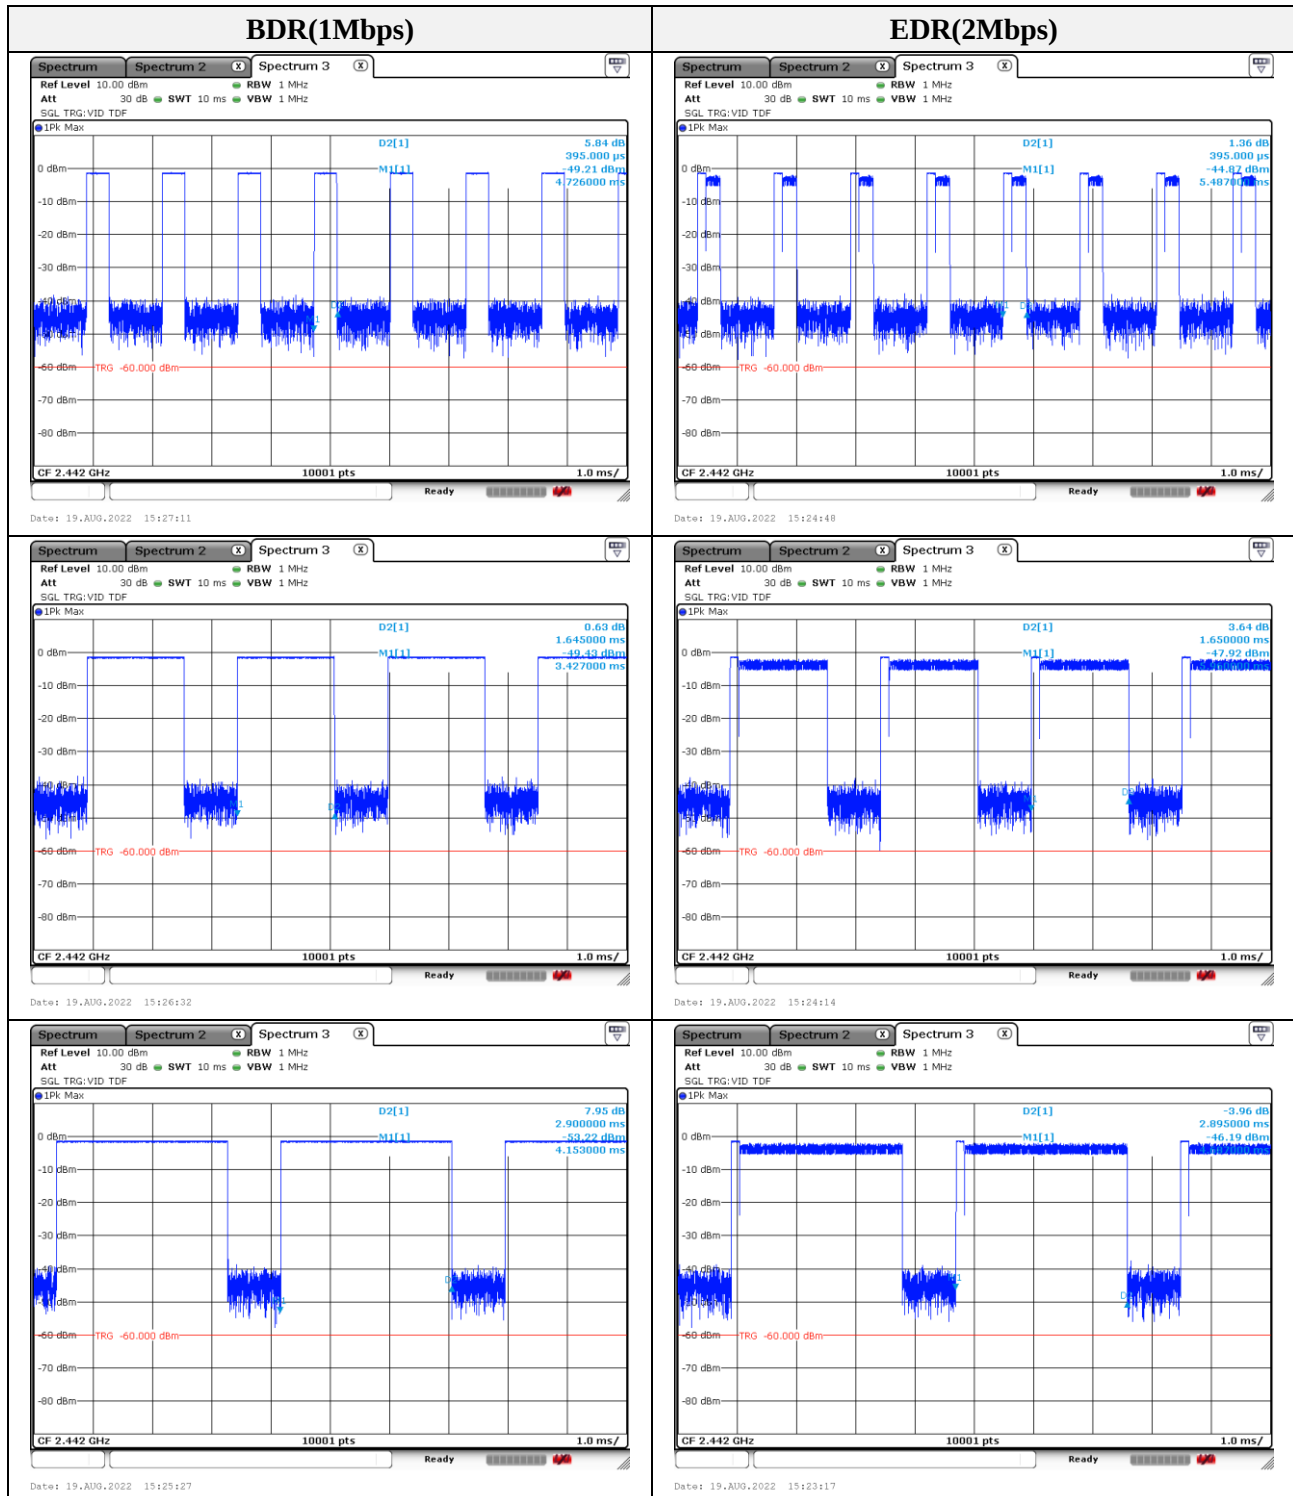

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

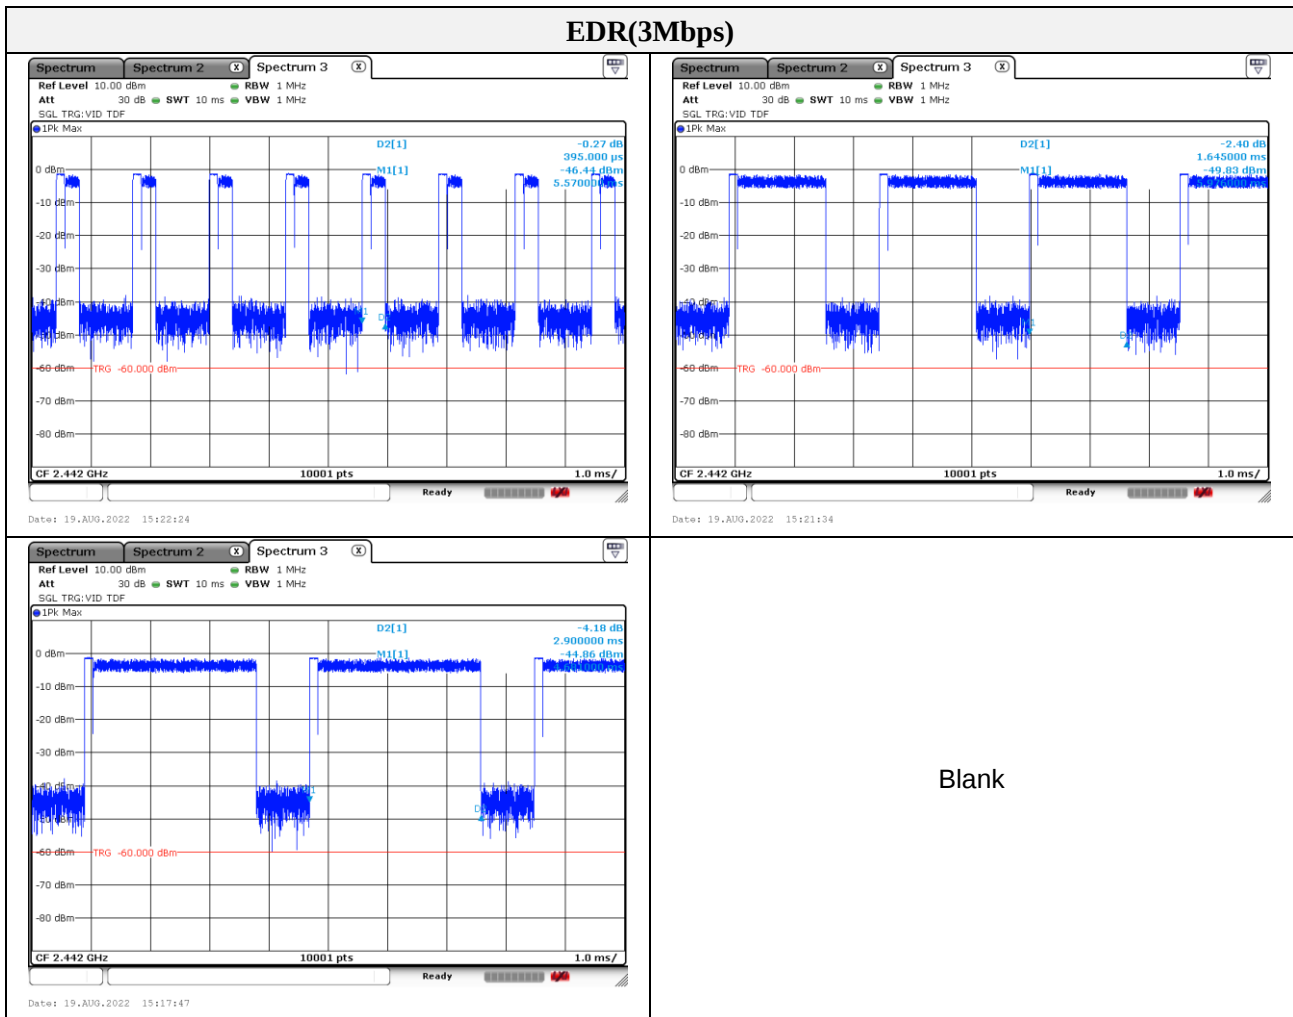


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


### 3.6. Radiated restricted band and emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

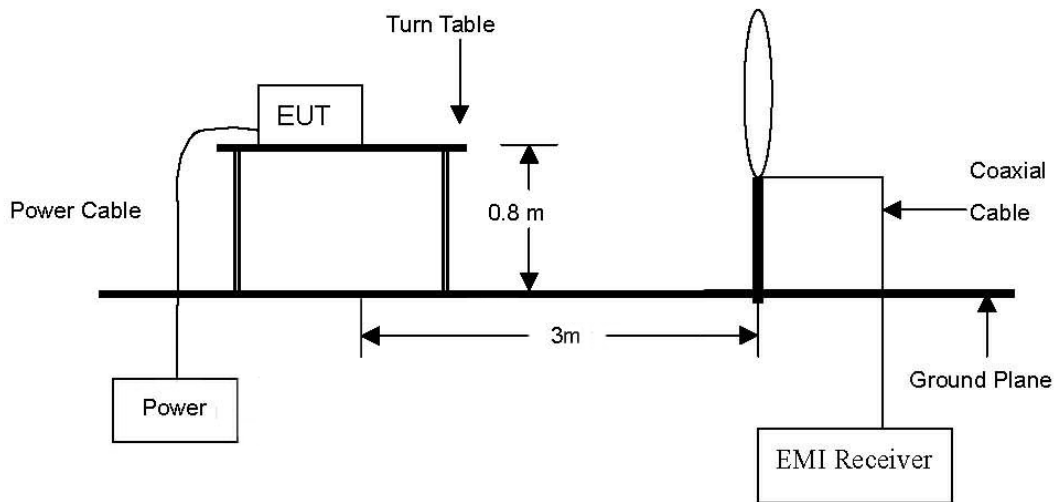

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

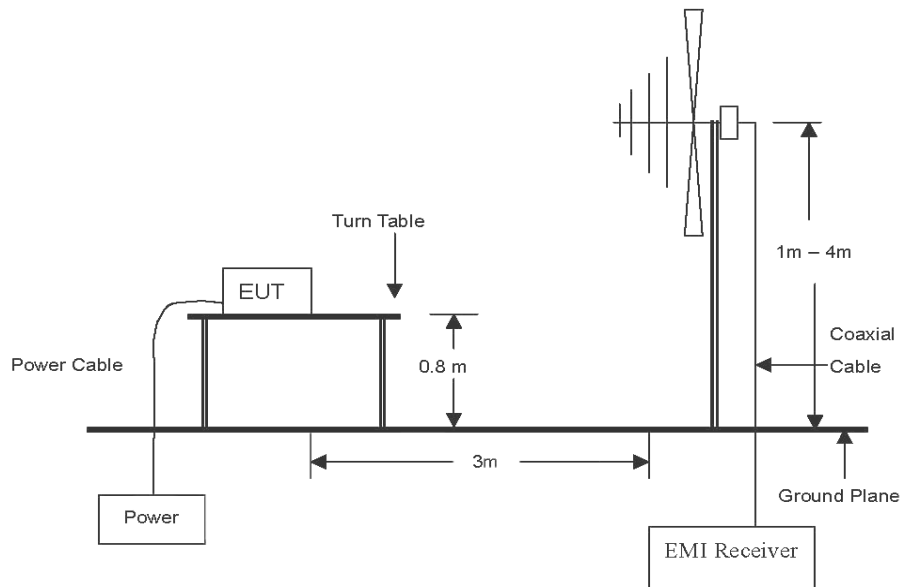

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

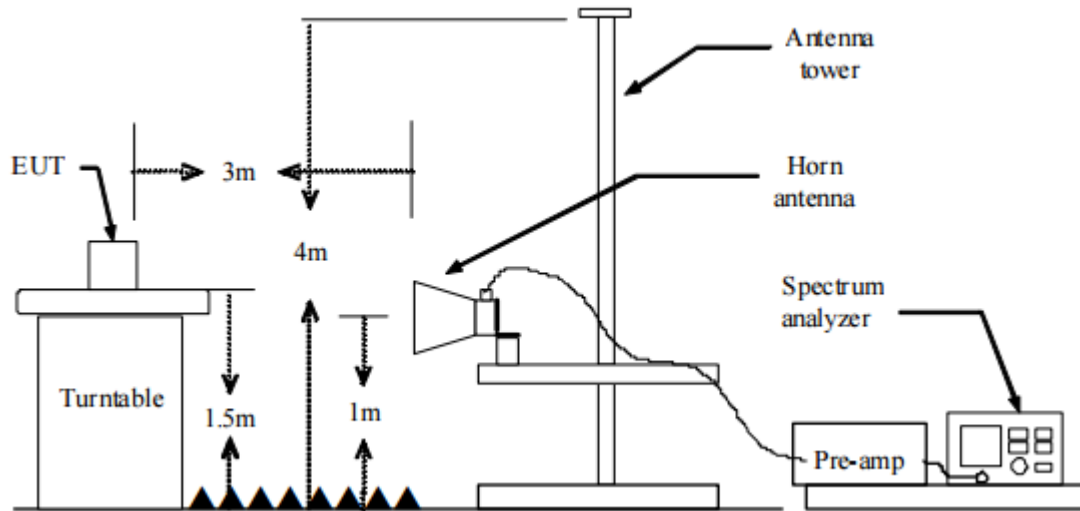

### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel**.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for  $f < 1$  GHz:

- ① Span = wide enough to fully capture the emission being measured
- ② RBW = 100 kHz
- ③ VBW  $\geq$  RBW
- ④ Detector = quasi peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold

6. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3$  MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for  $f \geq 1$  GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times$  RBW
- ④ Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m/D_s)$   
 Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
2. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
9. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|-----------------------|
| 0.009 ~ 0.490   | 300               | 2400/F(kHz)           |
| 0.490 ~ 1.705   | 30                | 24000/F(kHz)          |
| 1.705 ~ 30.0    | 30                | 30                    |
| 30 ~ 88         | 3                 | 100**                 |
| 88 ~ 216        | 3                 | 150**                 |
| 216 ~ 960       | 3                 | 200**                 |
| Above 960       | 3                 | 500                   |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

## Duty cycle


Regarding to KDB 558074 D01\_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

| Mode        | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|-------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| BDR(1 Mbps) | 2.89                      | 3.79        | 0.76                | 76.35          | 1.17                              |
| EDR(3 Mbps) | 2.89                      | 3.79        | 0.76                | 76.30          | 1.17                              |

Duty cycle (Linear) = T<sub>on</sub> time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

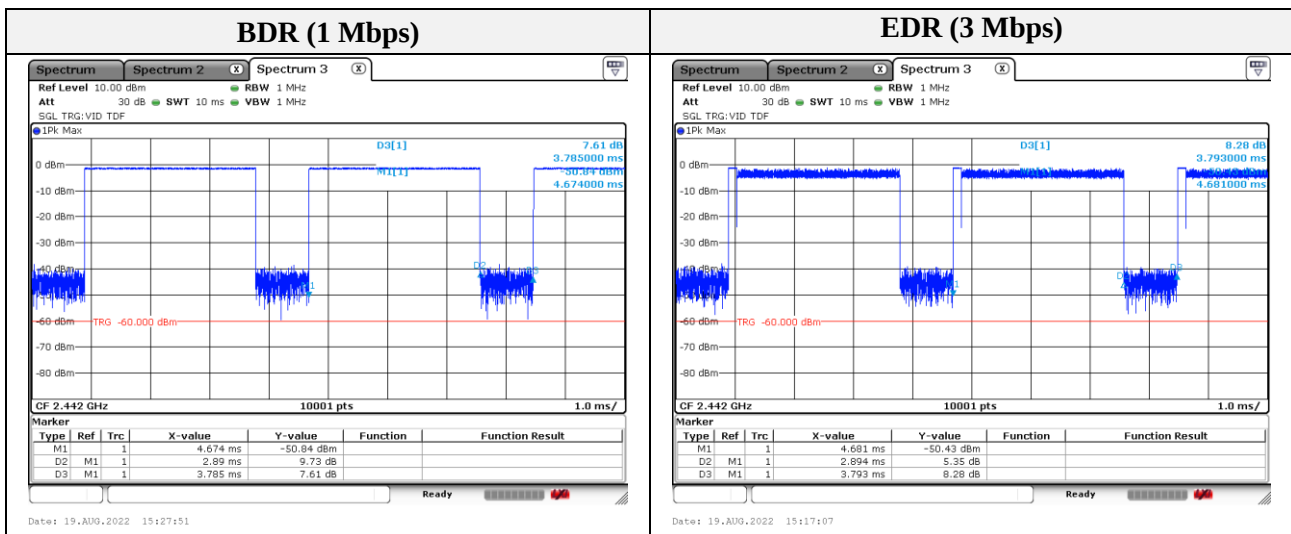



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-RF1-22T0133

Page ( 31 ) of ( 53 )

### Test results (Below 30 MHz)

Mode: BDR  
Distance of measurement: 3 meter  
Channel: 0 (Worst case)

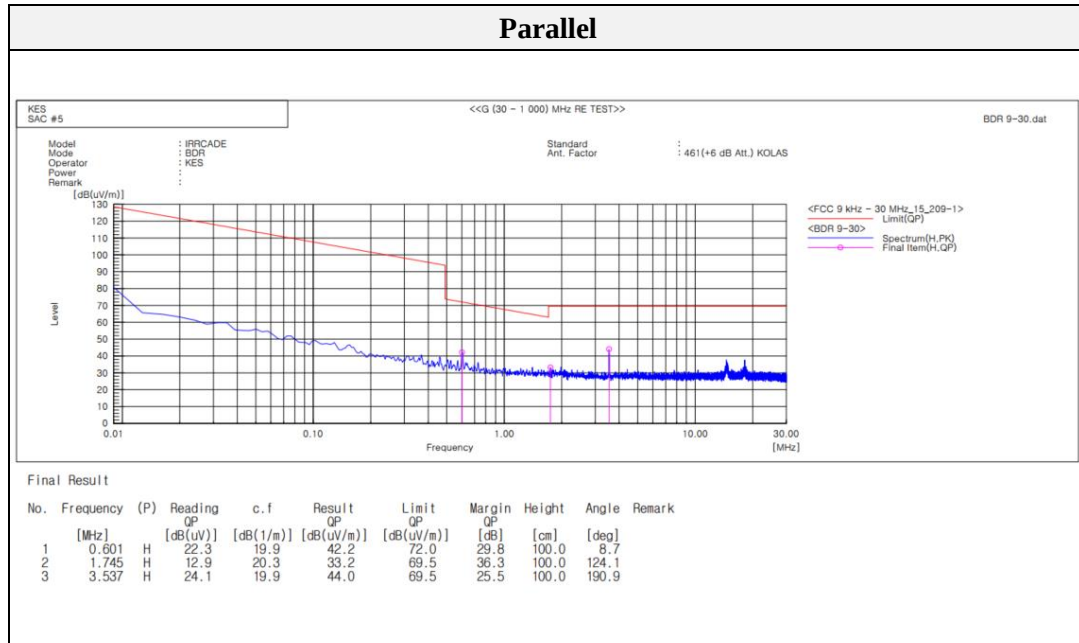

Note.

1. No spurious emission were detected under 30 MHz, the above test result is the peak result.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:


KES-RF1-22T0133

Page ( 32 ) of ( 53 )

### Test results (Below 1 000 MHz) – Worst case

Mode: BDR  
Distance of measurement: 3 meter  
Channel: 0 (Worst case)

#### Horizontal // Vertical

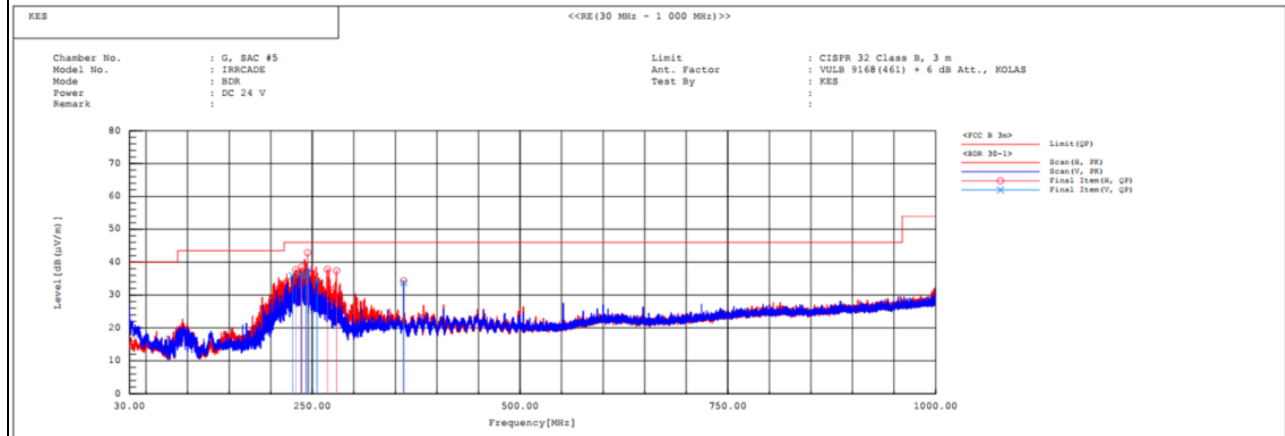

#### Final Result

| No. | Frequency [MHz] | Pol | Reading QP [dB (μV)] | c.f [dB (1/m)] | Result QP [dB (μV/m)] | Limit QP [dB (μV/m)] | Margin QP [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|----------------------|----------------|-----------------------|----------------------|----------------|-------------|-------------|--------|
| 1   | 226.037         | V   | 50.9                 | -15.0          | 35.9                  | 46.0                 | 10.1           | 100.0       | 311.3       |        |
| 2   | 229.917         | H   | 52.5                 | -14.8          | 37.7                  | 46.0                 | 8.3            | 205.0       | 20.5        |        |
| 3   | 236.610         | V   | 51.0                 | -14.6          | 36.4                  | 46.0                 | 9.6            | 100.0       | 305.6       |        |
| 4   | 237.483         | H   | 53.1                 | -14.5          | 38.6                  | 46.0                 | 7.4            | 188.0       | 105.5       |        |
| 5   | 242.333         | V   | 50.2                 | -14.3          | 35.9                  | 46.0                 | 10.1           | 123.0       | 228.4       |        |
| 6   | 244.467         | H   | 57.1                 | -14.2          | 42.9                  | 46.0                 | 3.1            | 100.0       | 92.4        |        |
| 7   | 245.728         | V   | 52.0                 | -14.2          | 37.8                  | 46.0                 | 8.2            | 133.0       | 132.3       |        |
| 8   | 255.816         | V   | 47.9                 | -13.8          | 34.1                  | 46.0                 | 11.9           | 153.0       | 115.8       |        |
| 9   | 268.135         | H   | 51.1                 | -13.3          | 37.8                  | 46.0                 | 8.2            | 100.0       | 107.3       |        |
| 10  | 279.096         | H   | 50.3                 | -12.9          | 37.4                  | 46.0                 | 8.6            | 188.0       | 77.8        |        |
| 11  | 359.994         | V   | 44.7                 | -11.0          | 33.7                  | 46.0                 | 12.3           | 156.0       | 171.3       |        |
| 12  | 359.994         | H   | 45.3                 | -11.0          | 34.3                  | 46.0                 | 11.7           | 200.0       | 232.6       |        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 33 ) of ( 53 )

### Test results (Above 1 000 MHz)


Mode: BDR  
Distance of measurement: 3 meter  
Channel: 00

#### - Spurious

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 224.68        | 49.98        | Peak        | V               | -8.13   | -        | 41.85                   | 74.00          | 32.15       |
| 1 375.06        | 49.94        | Peak        | H               | -7.20   | -        | 42.74                   | 74.00          | 31.26       |

#### - Band edge

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 2 359.37        | 44.17        | Peak        | H               | -0.86   | -        | 43.31                   | 74.00          | 30.69       |
| 2 371.05        | 42.99        | Peak        | V               | -0.84   | -        | 42.15                   | 74.00          | 31.85       |

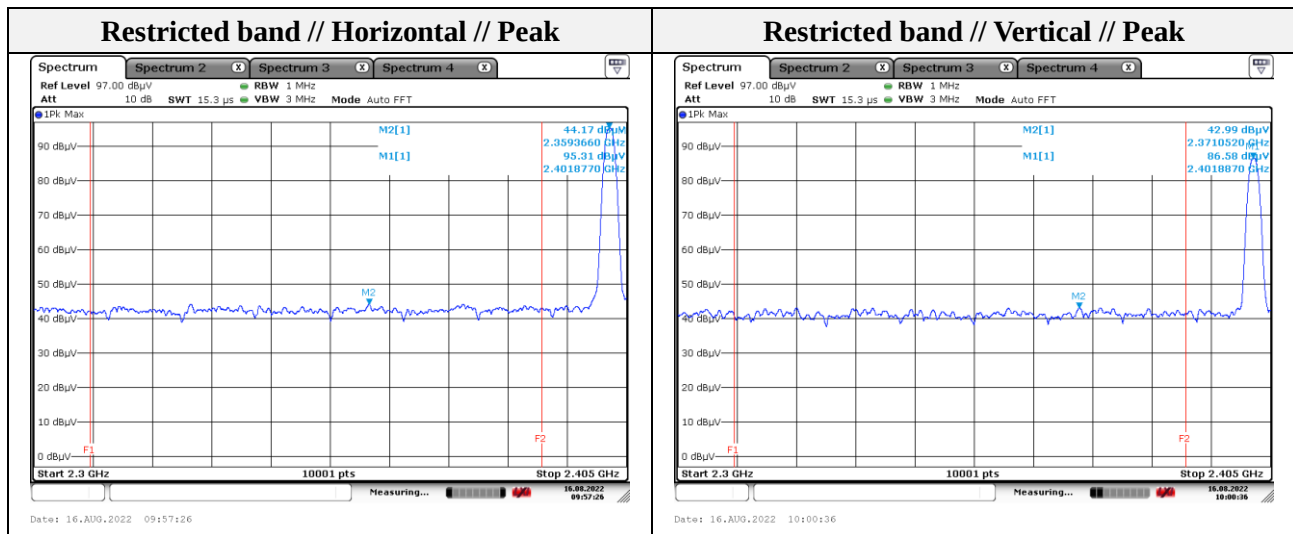

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 34 ) of ( 53 )

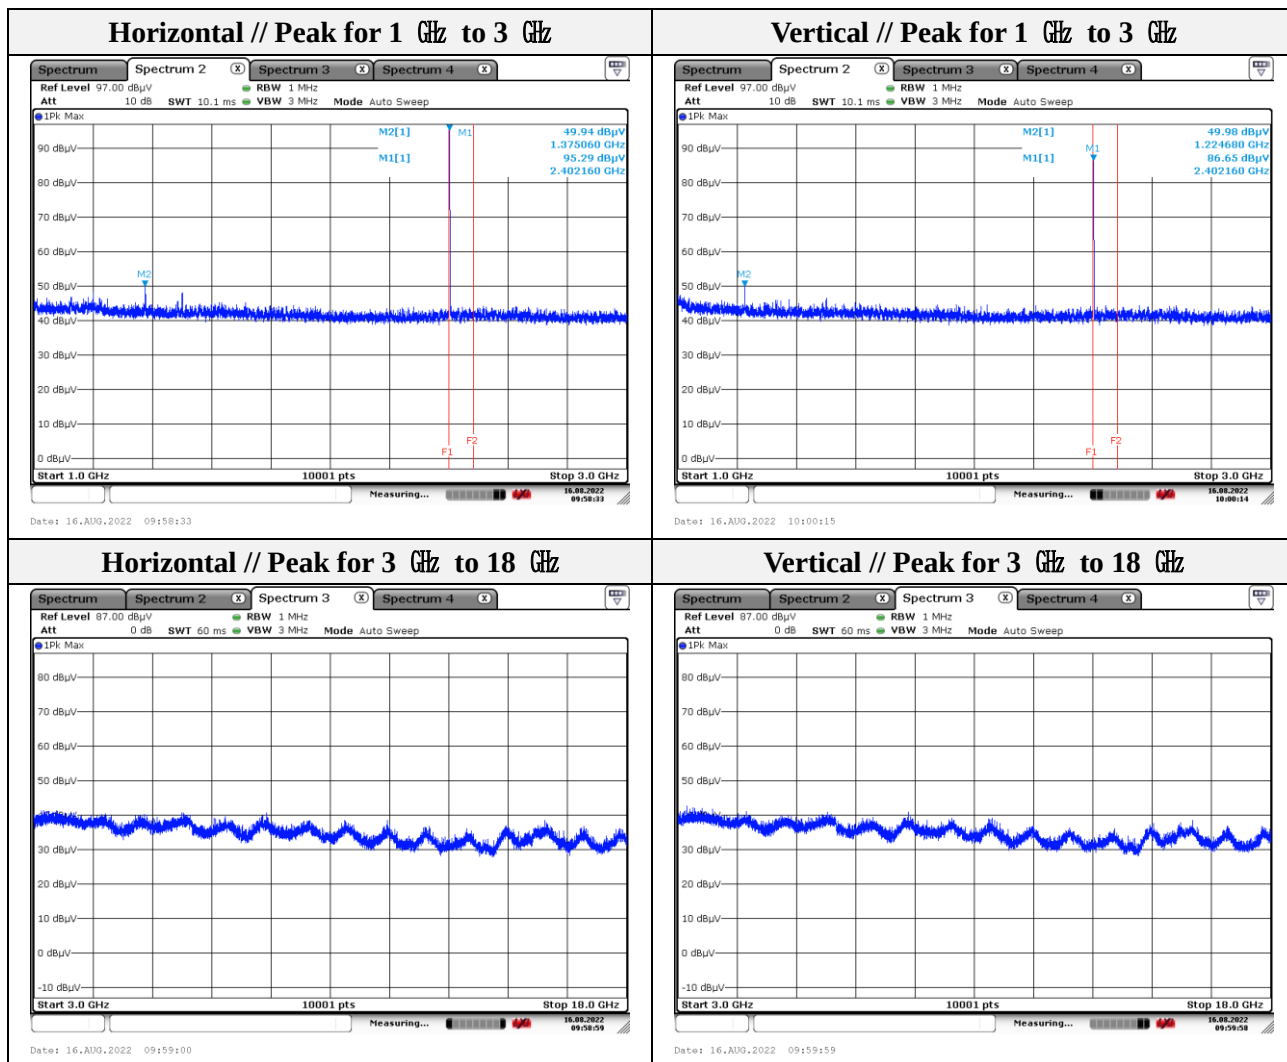

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-RF1-22T0133

Page ( 35 ) of ( 53 )

Mode: BDR  
Distance of measurement: 3 meter  
Channel: 40

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 000.10        | 47.66        | Peak        | V               | -9.44   | -        | 38.22                   | 74.00          | 35.78       |
| 1 375.06        | 49.90        | Peak        | H               | -7.20   | -        | 42.70                   | 74.00          | 31.30       |

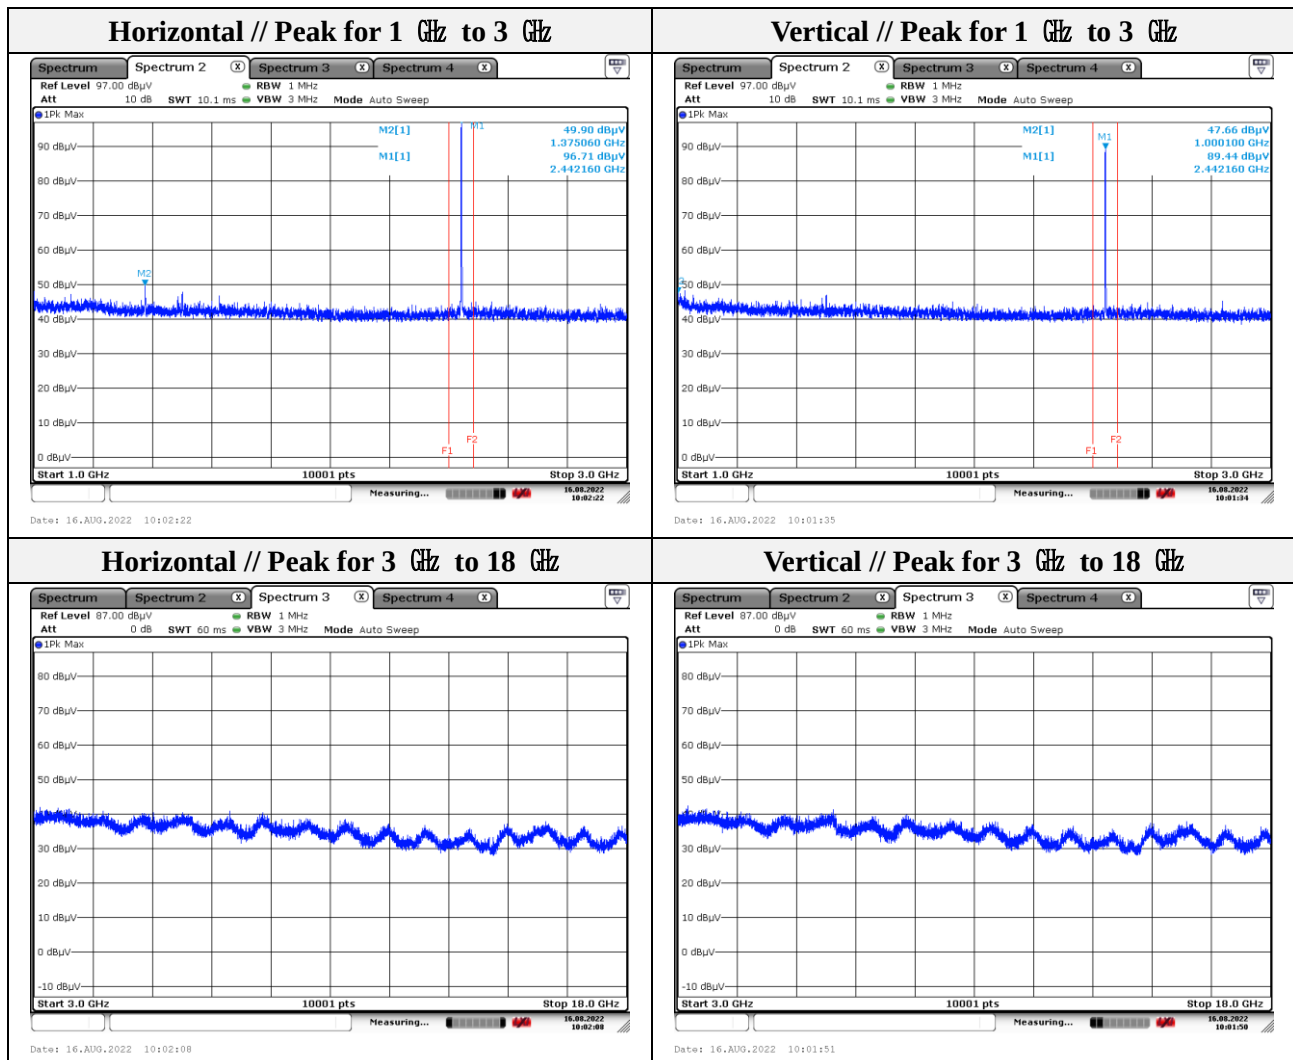

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 36 ) of ( 53 )


|                          |         |
|--------------------------|---------|
| Mode:                    | BDR     |
| Transfer rate:           | 1 Mbps  |
| Distance of measurement: | 3 meter |
| Channel:                 | 78      |

### - Spurious

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 000.10        | 48.47        | Peak        | V               | -9.44   | -        | 39.03                   | 74.00          | 34.97       |
| 1 375.66        | 50.06        | Peak        | H               | -7.20   | -        | 42.86                   | 74.00          | 31.14       |

### - Band edge

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 2 484.40        | 53.47        | Peak        | H               | -0.77   | -        | 52.70                   | 74.00          | 21.30       |
| 2 499.76        | 44.21        | Peak        | V               | -0.76   | -        | 43.45                   | 74.00          | 30.55       |

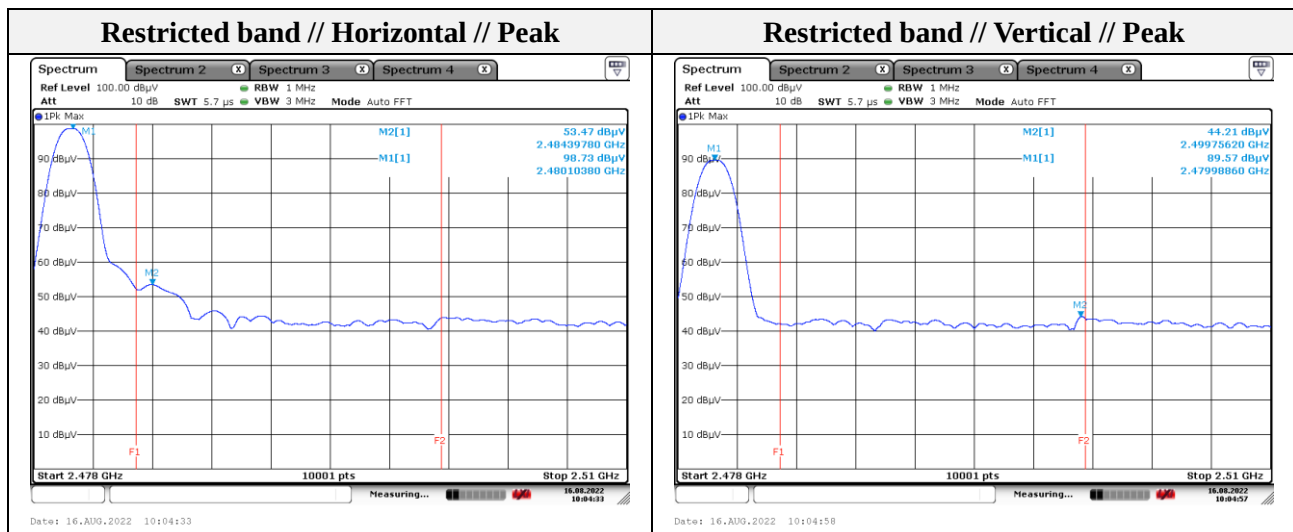

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 37 ) of ( 53 )

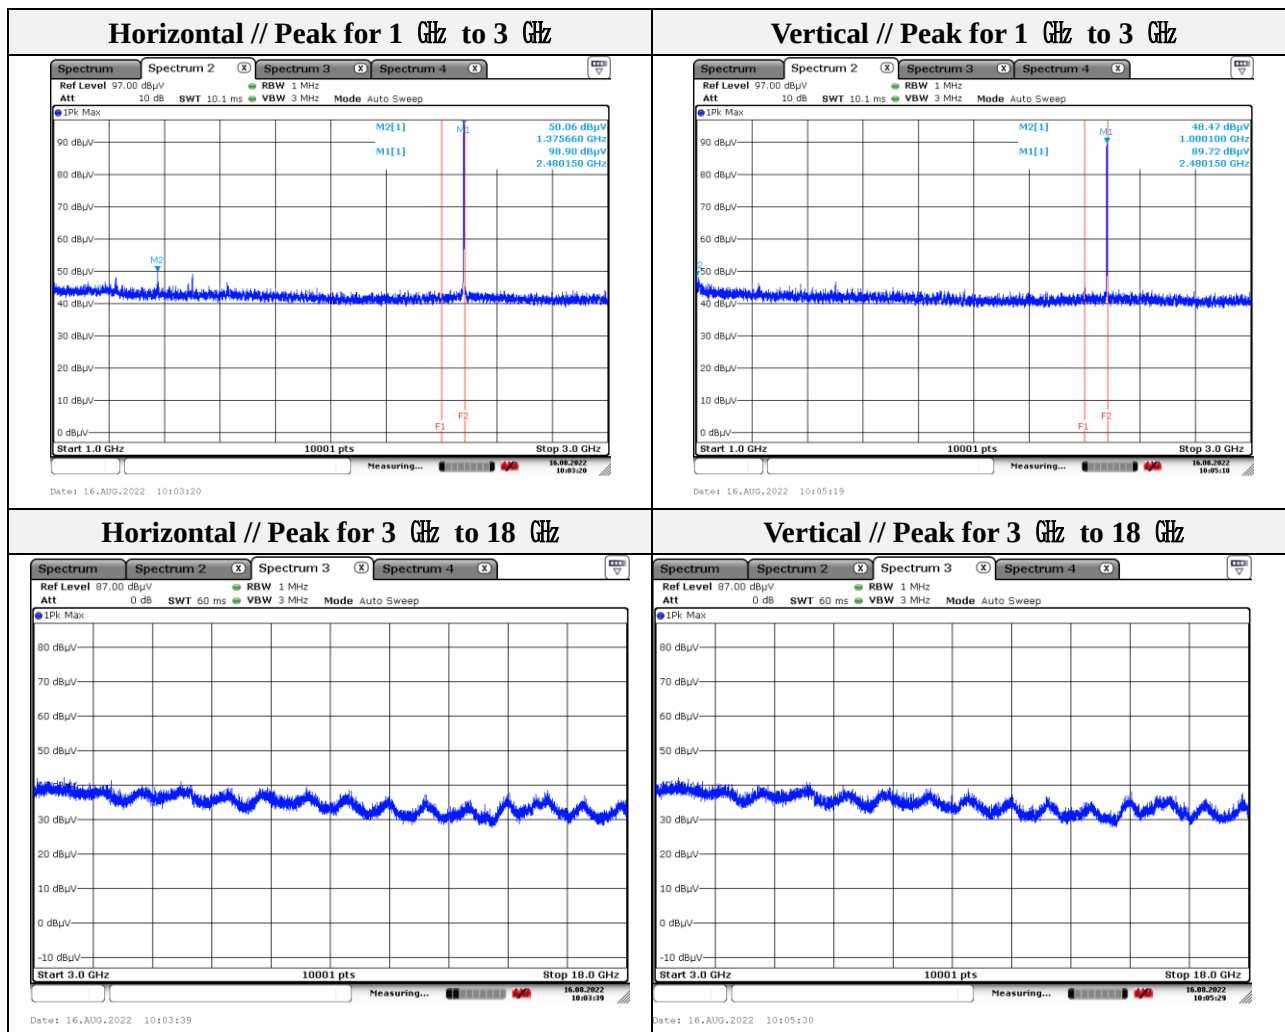

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 38 ) of ( 53 )


Mode: EDR  
Transfer rate: 3 Mbps(Worst case)  
Distance of measurement: 3 meter  
Channel: 00

### - Spurious


| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 000.10        | 48.64        | Peak        | V               | -9.44   | -        | 39.20                   | 74.00          | 34.80       |
| 1 050.50        | 49.57        | Peak        | H               | -9.15   | -        | 40.42                   | 74.00          | 33.58       |

### - Band edge

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 2 356.61        | 43.80        | Peak        | H               | -0.86   | -        | 42.94                   | 74.00          | 31.06       |
| 2 368.01        | 42.89        | Peak        | V               | -0.85   | -        | 42.04                   | 74.00          | 31.96       |

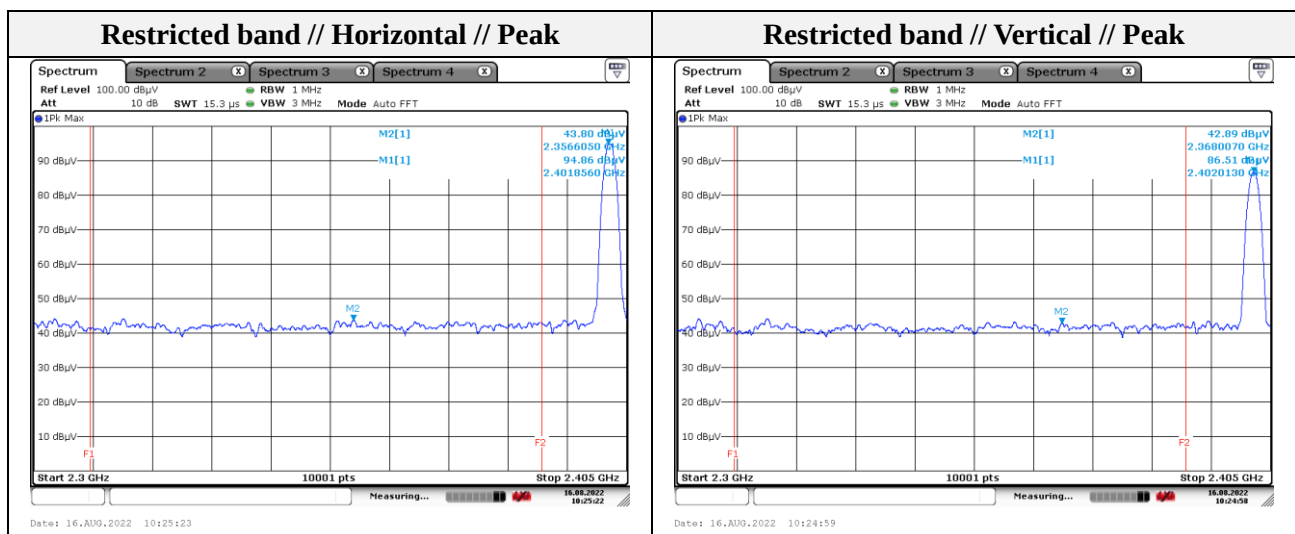

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

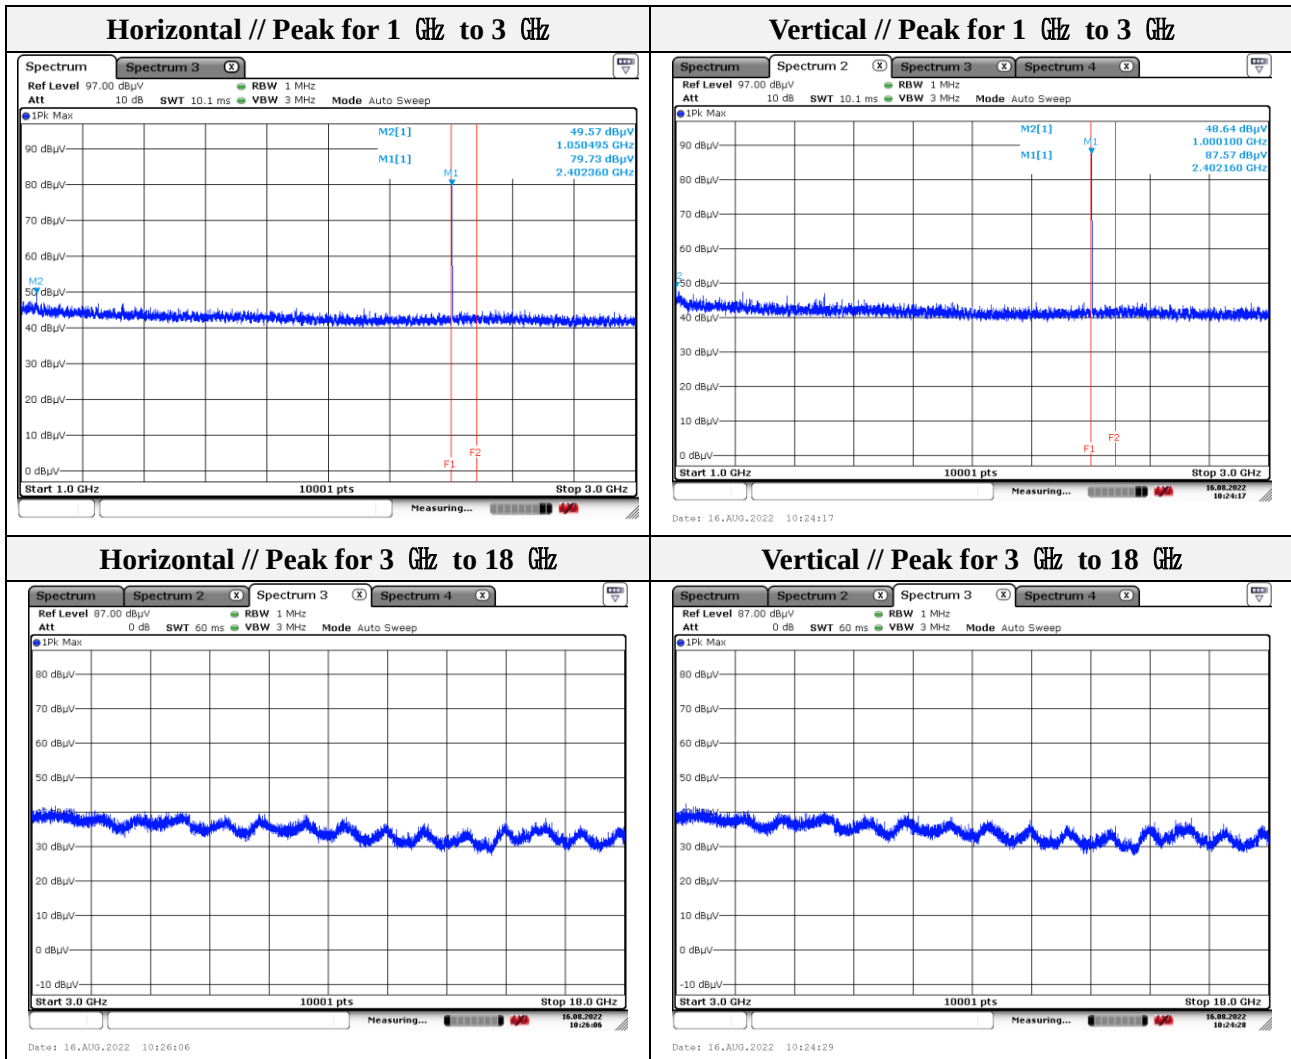


Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

|                          |                    |
|--------------------------|--------------------|
| Mode:                    | EDR                |
| Transfer rate:           | 3 Mbps(Worst case) |
| Distance of measurement: | 3 meter            |
| Channel:                 | 40                 |
| - Spurious               |                    |

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 000.10        | 47.79        | Peak        | V               | -9.44   | -        | 38.35                   | 74.00          | 35.65       |
| 1 051.50        | 48.00        | Peak        | H               | -9.14   | -        | 38.86                   | 74.00          | 35.14       |
| 1 331.67        | 46.73        | Peak        | H               | -7.47   | -        | 39.26                   | 74.00          | 34.74       |

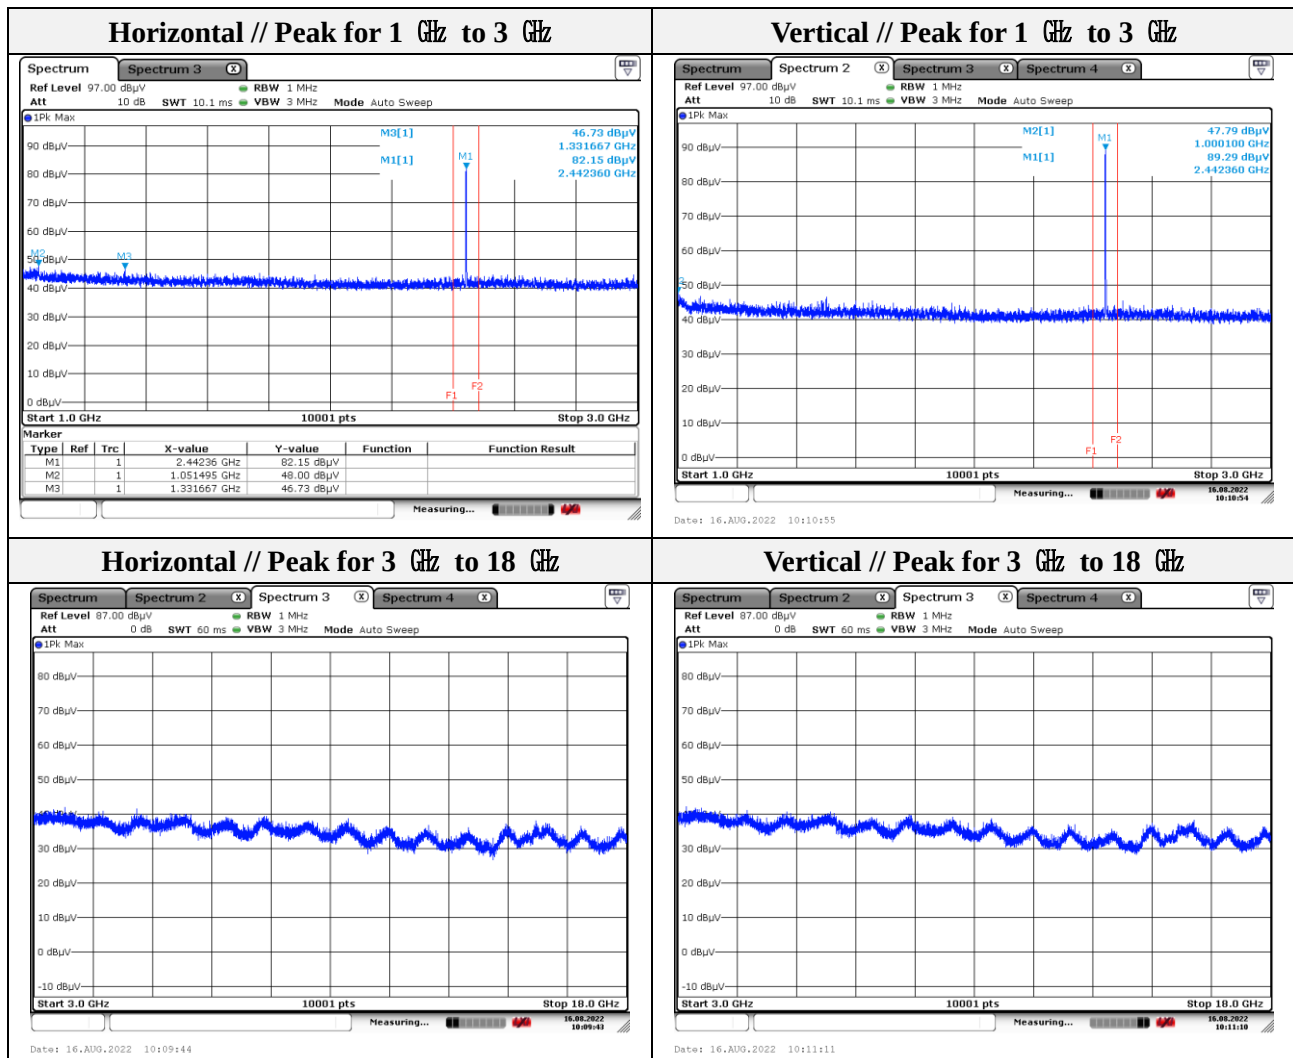

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 41 ) of ( 53 )


Mode: EDR  
Transfer rate: 3 Mbps(Worst case)  
Distance of measurement: 3 meter  
Channel: 78

### - Spurious


| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 002.90        | 47.55        | Peak        | V               | -9.43   | -        | 38.12                   | 74.00          | 35.88       |
| 1 125.49        | 47.96        | Peak        | H               | -8.71   | -        | 39.25                   | 74.00          | 34.75       |

### - Band edge

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 2 486.05        | 45.22        | Peak        | H               | -0.77   | -        | 44.45                   | 74.00          | 29.55       |
| 2 497.06        | 43.60        | Peak        | V               | -0.76   | -        | 42.84                   | 74.00          | 31.16       |

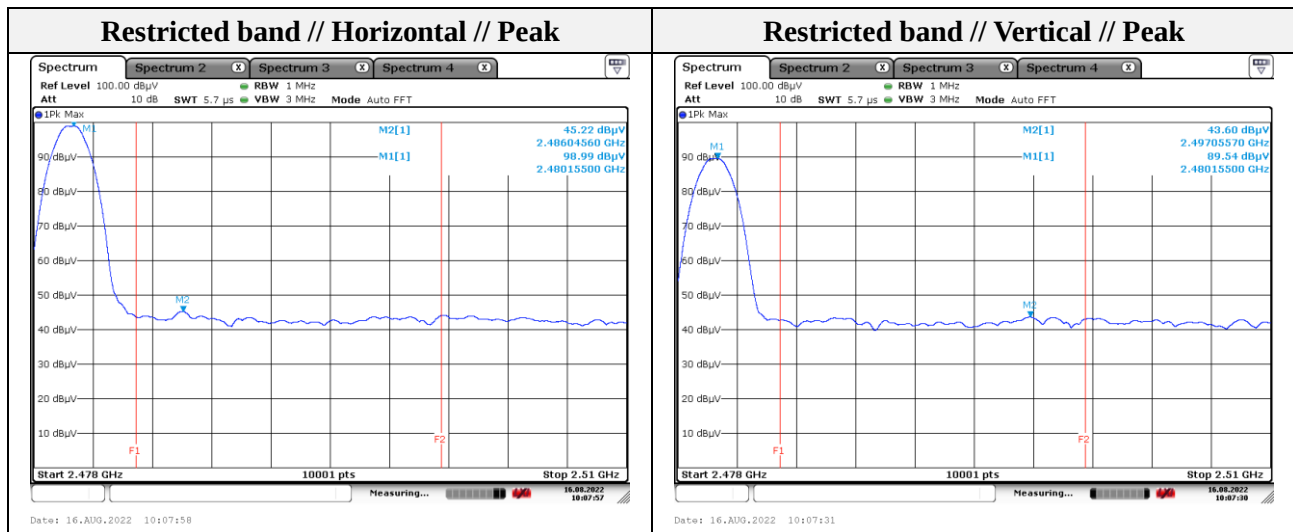

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

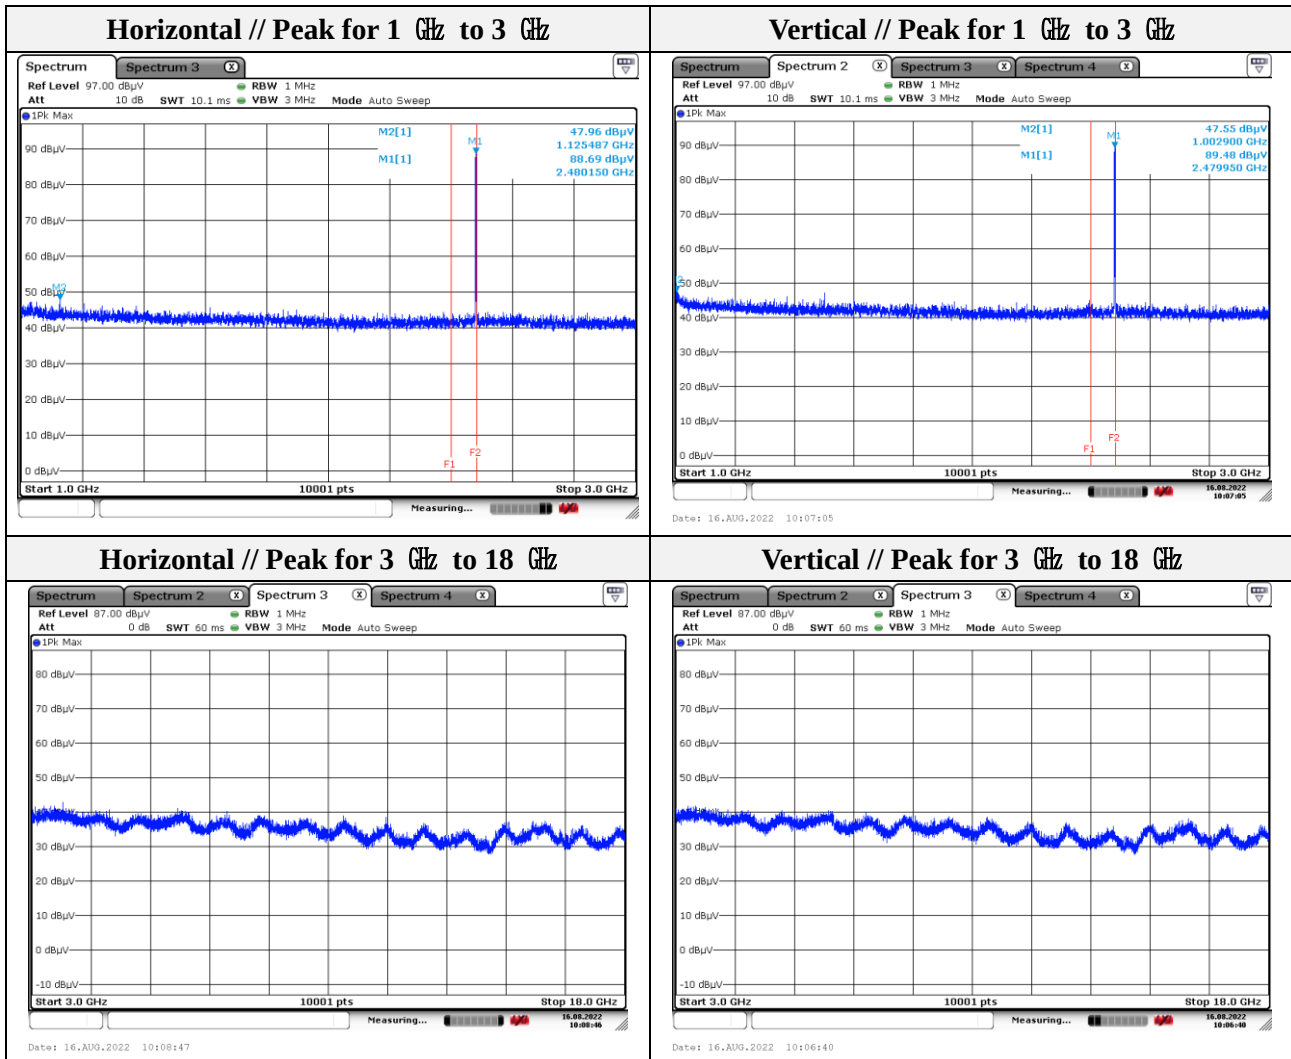

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


**Test results (18 GHz to 30 GHz)**

Mode: BDR (Worst case)

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 0 (Worst case)

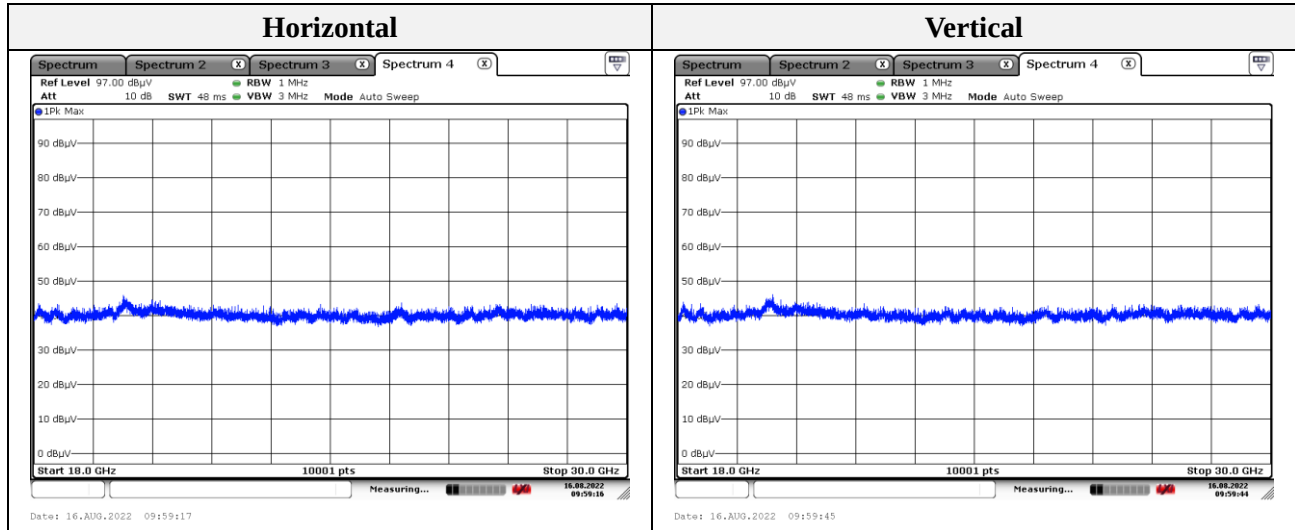

Note.

1. No spurious emission were detected above 18 GHz.

### 3.7. Conducted band edge and out of band emissions

#### Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

#### Test setup



#### Test setting


1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW  $\geq$  300 kHz
4. Detector = Peak
5. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))



## Test results

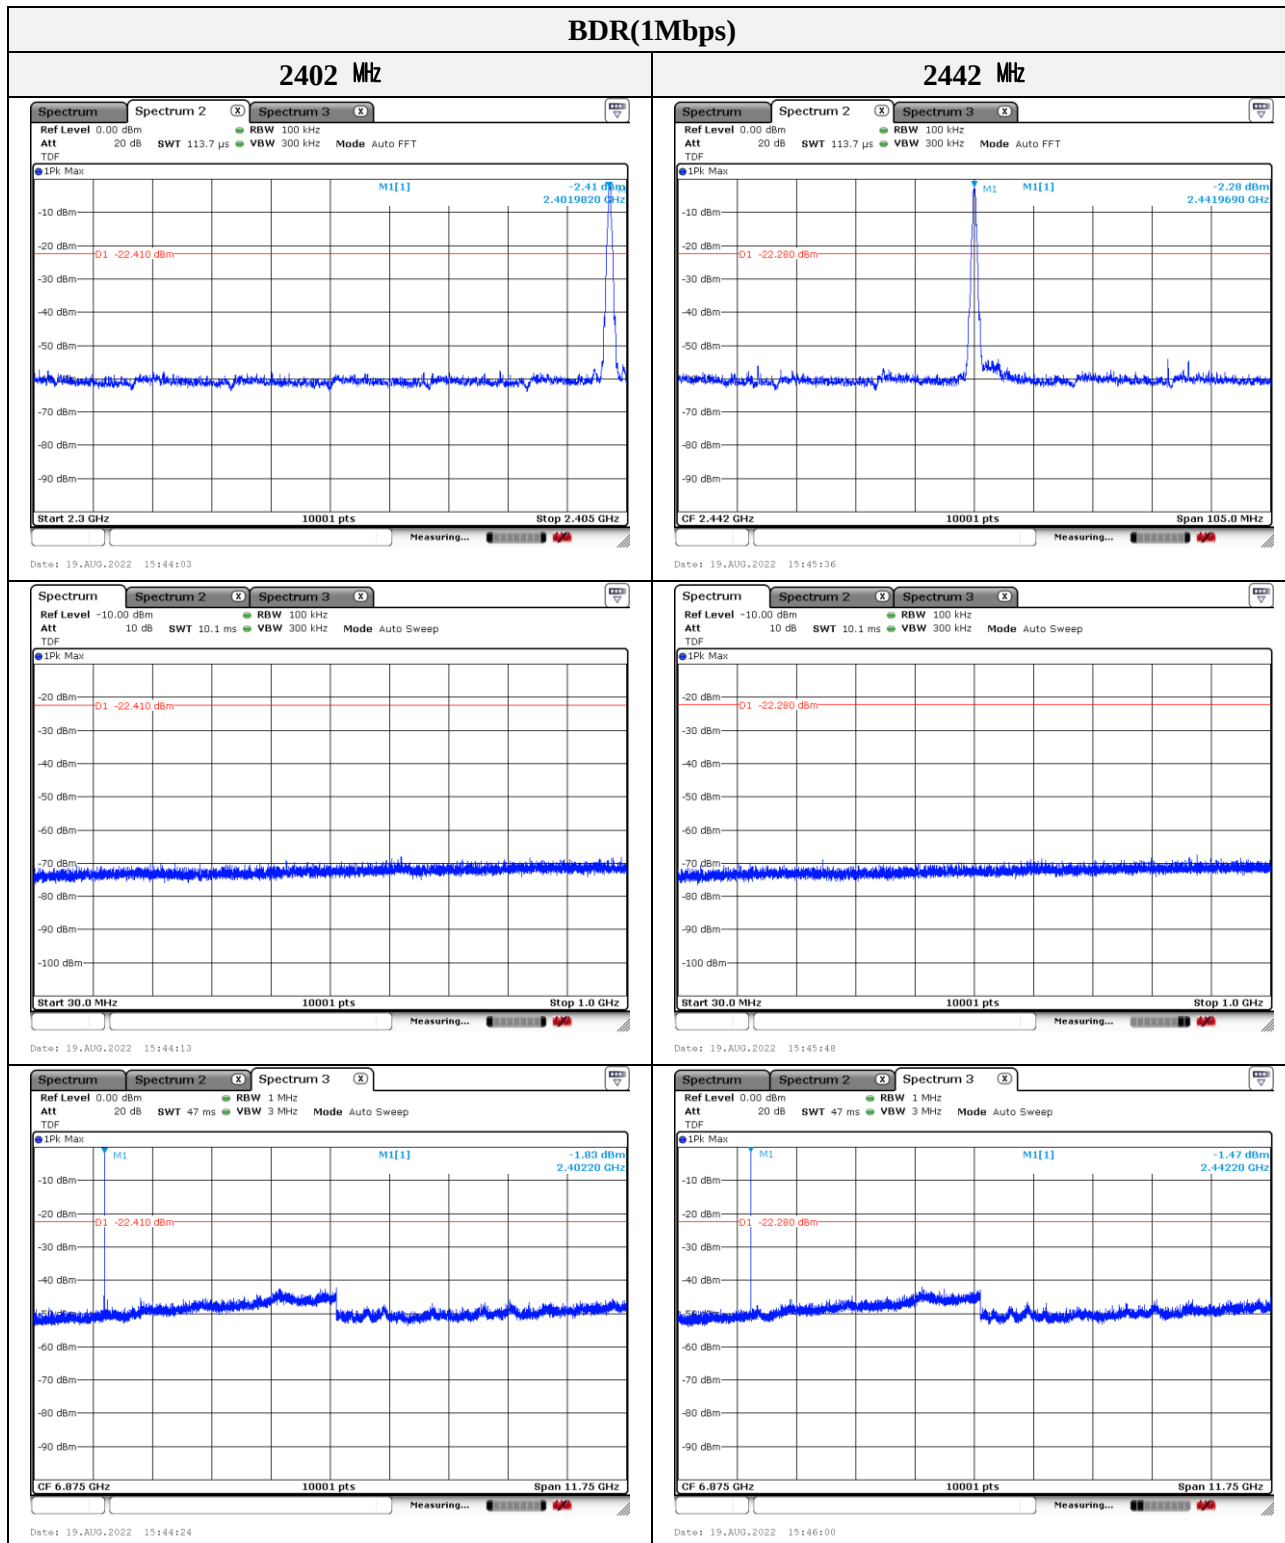

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:


KES-RF1-22T0133

Page ( 46 ) of ( 53 )

## BDR(1Mbps)


2480 MHz

-

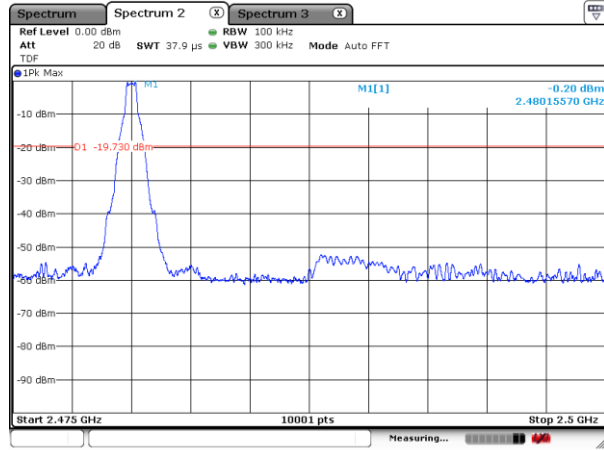


Date: 19.AUG.2022 15:46:39

BLANK

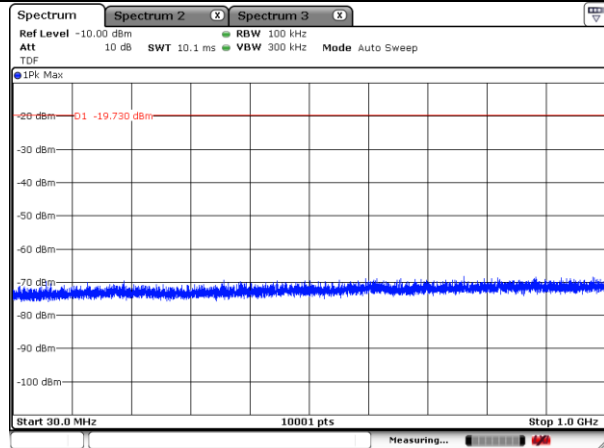

Date: 19.AUG.2022 15:46:50


BLANK

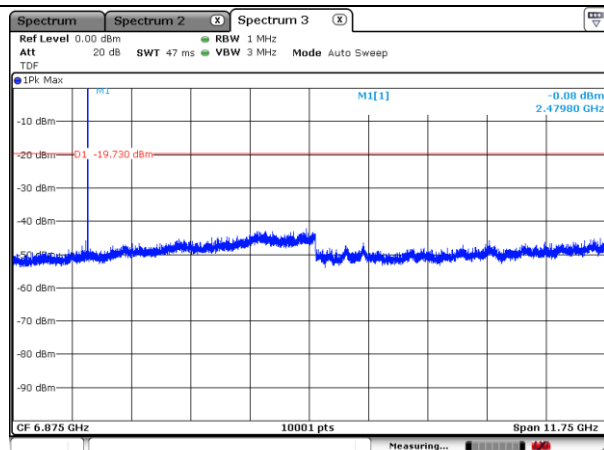

Date: 19.AUG.2022 15:47:00

BLANK

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

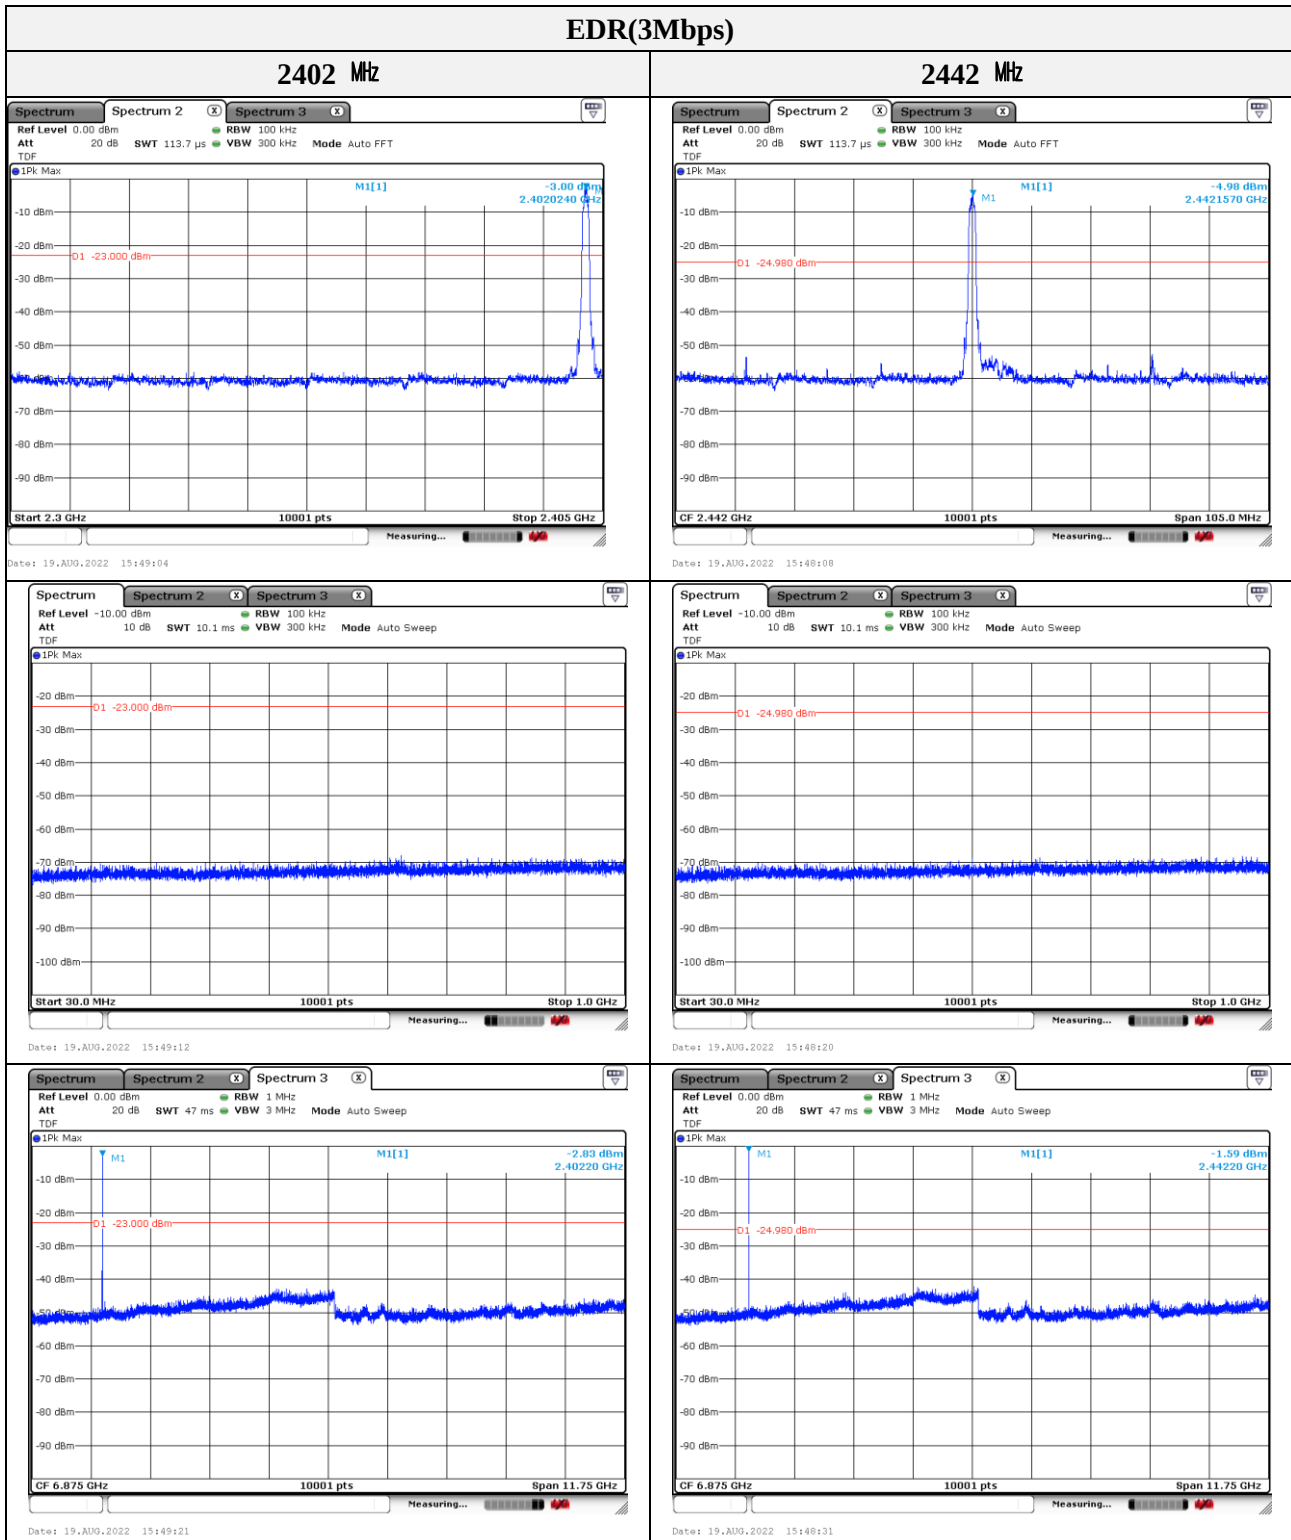

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:


KES-RF1-22T0133

Page ( 48 ) of ( 53 )


## EDR(3Mbps)

2480 MHz


-

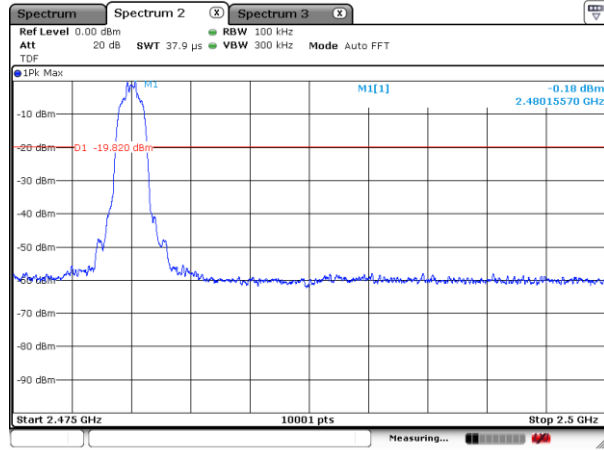

BLANK

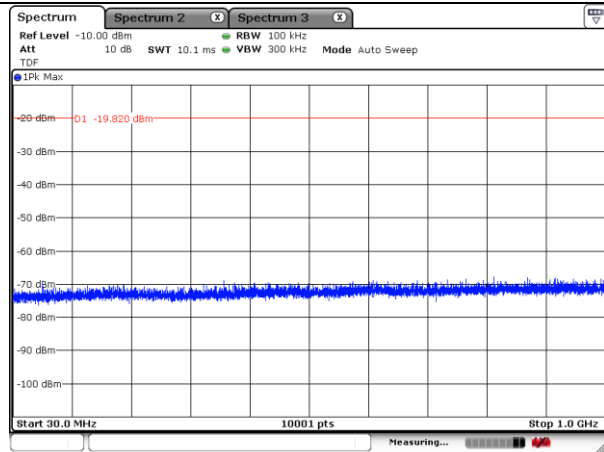

BLANK


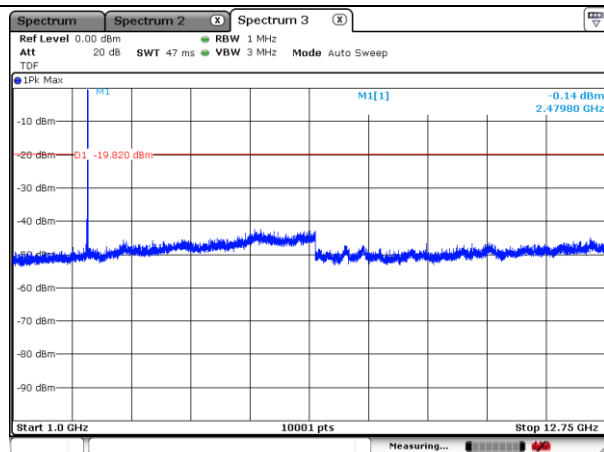


BLANK



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



### Hopping mode\_BDR(1Mbps)

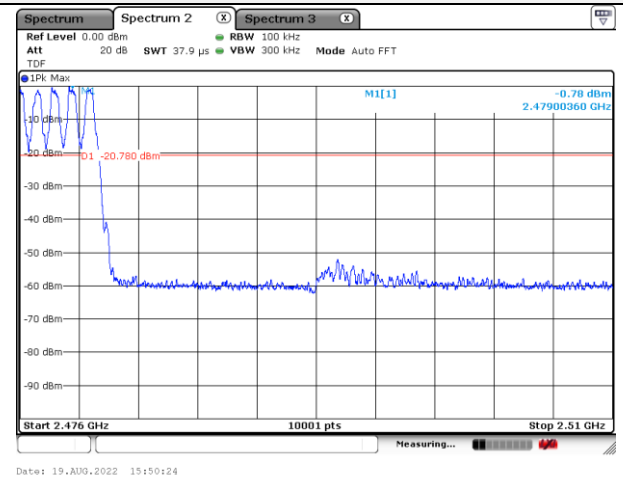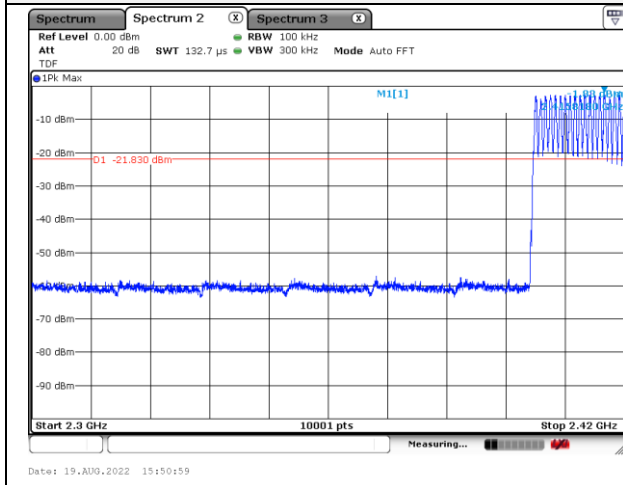

### Hopping mode\_EDR(3Mbps)

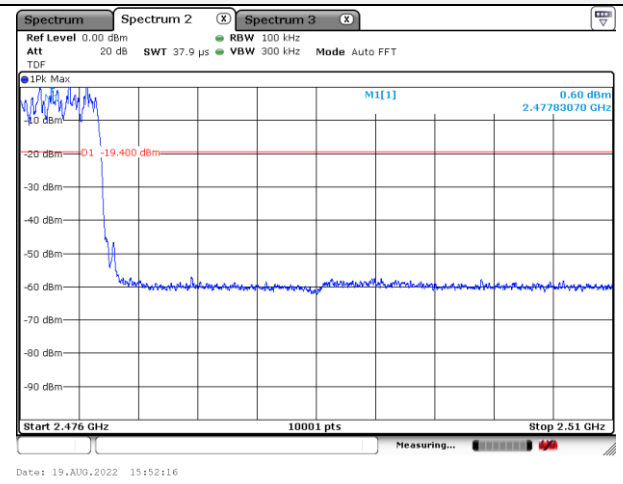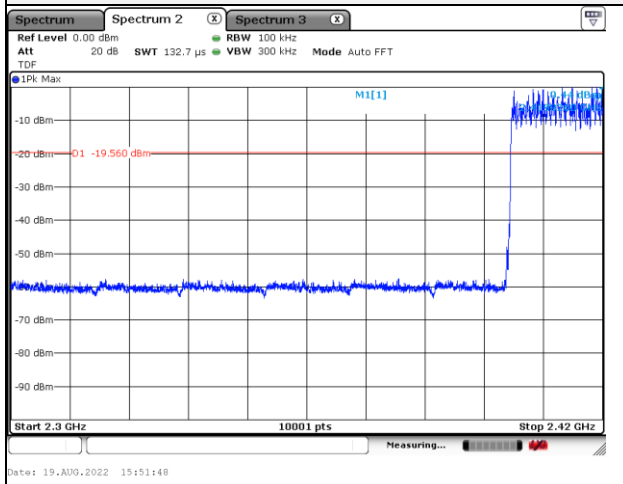

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.8. AC conducted emissions

#### Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dBμV/m) |          |
|-----------------------------|--------------------------|----------|
|                             | Quasi-peak               | Average  |
| 0.15 – 0.50                 | 66 - 56*                 | 56 - 46* |
| 0.50 – 5.00                 | 56                       | 46       |
| 5.00 – 30.0                 | 60                       | 50       |



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-RF1-22T0133

Page ( 51 ) of ( 53 )

### Test results


Mode: BDR (Worst case)

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 0 (Worst case)


### Hot Line

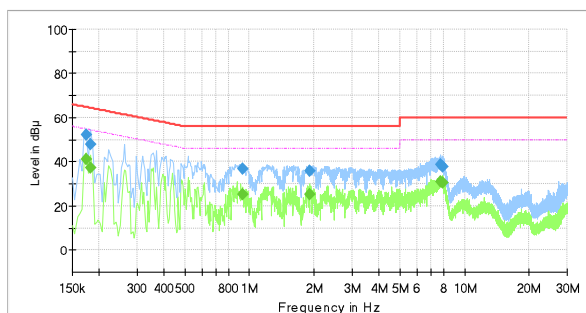

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.174000        | ---              | 40.96          | 54.77        | 13.81       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.174000        | 52.45            | ---            | 64.77        | 12.32       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.182000        | ---              | 37.27          | 54.39        | 17.12       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.182000        | 48.04            | ---            | 64.39        | 16.35       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.926000        | ---              | 25.38          | 46.00        | 20.62       | 1000.0          | 9.000           | L1   | 20.2       |
| 0.926000        | 36.85            | ---            | 56.00        | 19.15       | 1000.0          | 9.000           | L1   | 20.2       |
| 1.894000        | ---              | 25.24          | 46.00        | 20.76       | 1000.0          | 9.000           | L1   | 20.5       |
| 1.894000        | 35.76            | ---            | 56.00        | 20.24       | 1000.0          | 9.000           | L1   | 20.5       |
| 7.766000        | ---              | 30.96          | 50.00        | 19.04       | 1000.0          | 9.000           | L1   | 19.9       |
| 7.766000        | 38.68            | ---            | 60.00        | 21.32       | 1000.0          | 9.000           | L1   | 19.9       |
| 7.914000        | ---              | 30.46          | 50.00        | 19.54       | 1000.0          | 9.000           | L1   | 19.9       |
| 7.914000        | 37.85            | ---            | 60.00        | 22.15       | 1000.0          | 9.000           | L1   | 19.9       |

### Neutral Line

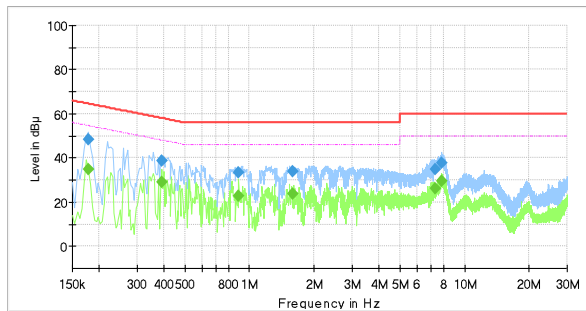

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.178000        | 48.23            | ---            | 64.58        | 16.35       | 1000.0          | 9.000           | N    | 19.5       |
| 0.178000        | ---              | 34.83          | 54.58        | 19.75       | 1000.0          | 9.000           | N    | 19.5       |
| 0.390000        | 38.74            | ---            | 58.06        | 19.32       | 1000.0          | 9.000           | N    | 19.7       |
| 0.390000        | ---              | 29.05          | 48.06        | 19.01       | 1000.0          | 9.000           | N    | 19.7       |
| 0.890000        | 33.42            | ---            | 56.00        | 22.58       | 1000.0          | 9.000           | N    | 20.2       |
| 0.890000        | ---              | 22.67          | 46.00        | 23.43       | 1000.0          | 9.000           | N    | 20.2       |
| 1.578000        | 33.95            | ---            | 56.00        | 22.05       | 1000.0          | 9.000           | N    | 20.4       |
| 1.578000        | ---              | 23.60          | 46.00        | 22.40       | 1000.0          | 9.000           | N    | 20.4       |
| 7.302000        | 35.10            | ---            | 60.00        | 24.90       | 1000.0          | 9.000           | N    | 19.8       |
| 7.302000        | ---              | 25.98          | 50.00        | 24.02       | 1000.0          | 9.000           | N    | 19.8       |
| 7.842000        | ---              | 29.71          | 50.00        | 20.29       | 1000.0          | 9.000           | N    | 19.9       |
| 7.842000        | 38.00            | ---            | 60.00        | 22.00       | 1000.0          | 9.000           | N    | 19.9       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0133  
Page ( 52 ) of ( 53 )

**Appendix A. Measurement equipment**

| Equipment                   | Manufacturer         | Model         | Serial No.      | Calibration interval | Calibration due. |
|-----------------------------|----------------------|---------------|-----------------|----------------------|------------------|
| Spectrum analyzer           | R&S                  | FSV40-N       | 102194          | 1 year               | 2023.08.11       |
| SIGNAL GENERATOR            | KEYSIGHT             | N5182B        | MY59100115      | 1 year               | 2023.04.27       |
| SIGNAL GENERATOR            | Anritsu              | 68369B        | 002118          | 1 year               | 2023.05.13       |
| Power Meter                 | Anritsu              | ML2495A       | 2010001         | 1 year               | 2023.04.27       |
| Pulse Power Sensor          | Anritsu              | MA2411B       | 1911111         | 1 year               | 2023.04.27       |
| Attenuator                  | Mini-Circuits        | BW-S10-2W263+ | 3               | 1 year               | 2023.01.17       |
| Loop Antenna                | Schwarzbeck          | FMZB1513      | 225             | 2 years              | 2023.01.18       |
| BILOG ANTENNA               | Schwarzbeck          | VULB 9168     | 9168-461        | 2 years              | 2022.12.22       |
| Horn Antenna                | A.H                  | SAS-571       | 414             | 1 year               | 2023.01.18       |
| Horn Antenna                | SCHWARZBECK          | BBHA9170      | BBHA<br>9170550 | 1 year               | 2023.01.18       |
| Amplifier                   | SONOMA<br>INSTRUMENT | 310N          | 401123          | 1 year               | 2023.06.02       |
| PREAMPLIFIER                | HP                   | 8449B         | 3008A00538      | 1 year               | 2023.06.02       |
| BROADBAND<br>AMPLIFIER      | SCHWARZBECK          | BBV9721       | PS9721-003      | 1 year               | 2023.01.17       |
| Attenuator                  | HUBER+SHHNER         | 6806.17.A     | NONE            | 1 year               | 2023.04.01       |
| AC POWER<br>SOURCE/ANALYZER | HP                   | 6813A         | 3729A00754      | 1 year               | 2023.01.14       |
| EMI Test Receiver           | R&S                  | ESU26         | 100552          | 1 year               | 2023.03.31       |
| LISN                        | ENV216               | R & S         | 101787          | 1 year               | 2022.12.27       |
| EMI TEST RECEIVER           | ESR3                 | R & S         | 101783          | 1 year               | 2022.12.28       |
| PULSE LIMITER               | ESH3-Z2              | R & S         | 101915          | 1 year               | 2022.12.27       |

**Peripheral devices**

| Device            | Manufacturer         | Model No. | Serial No.    |
|-------------------|----------------------|-----------|---------------|
| Notebook computer | LG Electronics Inc., | LGS53     | 306QCZP560949 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr