

TEST REPORT

Applicant: 5-Link Technology Co., Ltd.
Address: No. 7, Xingwang Road, Xiwang Industrial District,
Tiantangwei, Fenggang Town, Dongguan City,
Guangdong, China
Equipment Type: ANC Gaming Headphone
Model Name: Bloody M320 (refer section 2.4)
Brand Name: Bloody, 2drumtek, Ziibi
FCC ID: 2AXWI-M320
Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)
Test Date: Feb. 01, 2021 - Mar. 14, 2021
Date of Issue: Jun. 21, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yu Yingyuan

Checked by: Ye Hongji

Approved by: Liao Jianming
(Technical Director)

Yu Ying Yuan

Ye Hongji

Jim Liao

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 17, 2021</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 17, 2022</u>	<u>Updated Network and Wireless Connectivity in Section 2.5</u>
<u>Rev. 03</u>	<u>Jun. 21, 2022</u>	<u>Update the Test Plots in Chapter A.1</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	12
4.4	Measurement Uncertainty	12
4.5	Description of Test Setup	13
4.6	Measurement Results Explanation Example	16
5	TEST ITEMS	17
5.1	Antenna Requirements	17
5.2	Frequency Hopping Systems	18

5.3	Number of Hopping Frequencies	20
5.4	Peak Output Power	21
5.5	Occupied Bandwidth	22
5.6	Carrier Frequency Separation	23
5.7	Time of Occupancy (Dwell time)	24
5.8	Conducted Spurious Emission & Authorized-band band-edge	26
5.9	Conducted Emission	27
5.10	Radiated Spurious Emission	28
5.11	Band Edge (Restricted-band band-edge).....	30
ANNEX A	TEST RESULT	31
A.1	Number of Hopping Frequency	31
A.2	Peak Output Power	32
A.3	20 dB and 99% bandwidth	35
A.4	Hopping Frequency Separation.....	40
A.5	Average Time of Occupancy	41
A.6	Conducted Spurious Emissions & Authorized-band band-edge	44
A.7	Conducted Emissions.....	51
A.8	Radiated Spurious Emission	53
A.9	Band Edge (Restricted-band band-edge).....	71
ANNEX B	TEST SETUP PHOTOS	74
ANNEX C	EUT EXTERNAL PHOTOS	74
ANNEX D	EUT INTERNAL PHOTOS	74

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	5-Link Technology Co., Ltd.
Address	No. 7, Xingwang Road, Xiwang Industrial District, Tiantangwei, Fenggang Town, Dongguan City, Guangdong, China

2.2 Manufacturer Information

Manufacturer	5-Link Technology Co., Ltd.
Address	No. 7, Xingwang Road, Xiwang Industrial District, Tiantangwei, Fenggang Town, Dongguan City, Guangdong, China

2.3 Factory Information

Factory	5-Link Technology Co., Ltd.
Address	No. 7, Xingwang Road, Xiwang Industrial District, Tiantangwei, Fenggang Town, Dongguan City, Guangdong, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	ANC Gaming Headphone
Model Name Under Test	Bloody M320
Series Model Name	2drumtek B320, Ziibi Z320
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name.
Hardware Version	V1.0
Software Version	V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR)
-----------------------------------	--------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PCB Antenna
Antenna Gain	1.10 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-


2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMW.
------	---

Power level setup in software			
Test Software Version	Blue Test 3		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

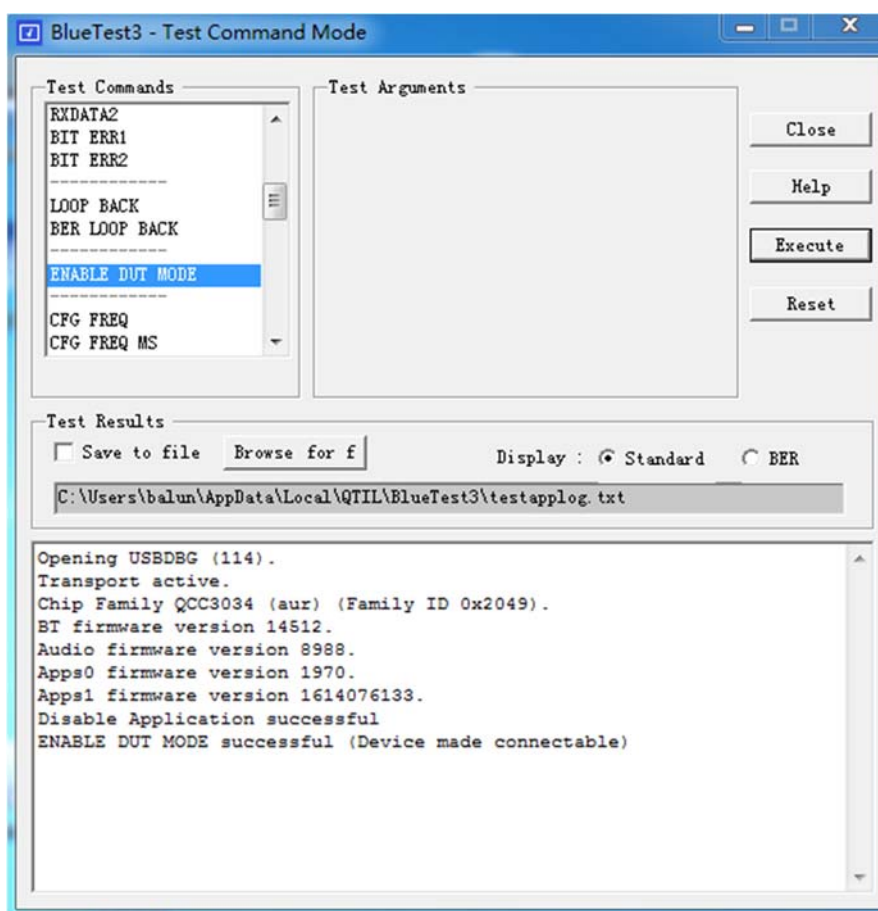

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
Signaling Unit	ROHDE&SCHWARZ	CMW270	100607	2020.06.08	2021.06.07
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2020.02.19	2021.02.18
Audio analyzer	B&K	UPL 16	100129	2020.02.28	2021.02.27

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
Signaling Unit	ROHDE&SCHWARZ	CMW270	100607	2020.06.08	2021.06.07
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2021.02.18	2022.02.17
Power Amplifier	OPHIR RF	5273F	1016	2021.02.18	2022.02.17
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2021.02.18	2022.02.17
Audio analyzer	B&K	UPL 16	100129	2021.02.27	2022.02.26

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

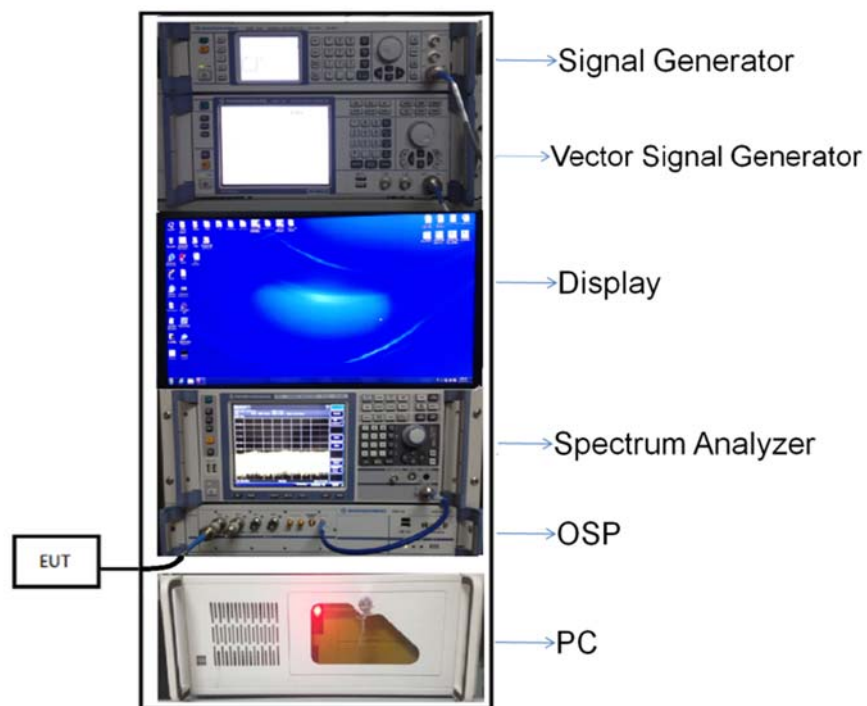


(Diagram 1)

4.5.2 For AC Power Supply Port Test

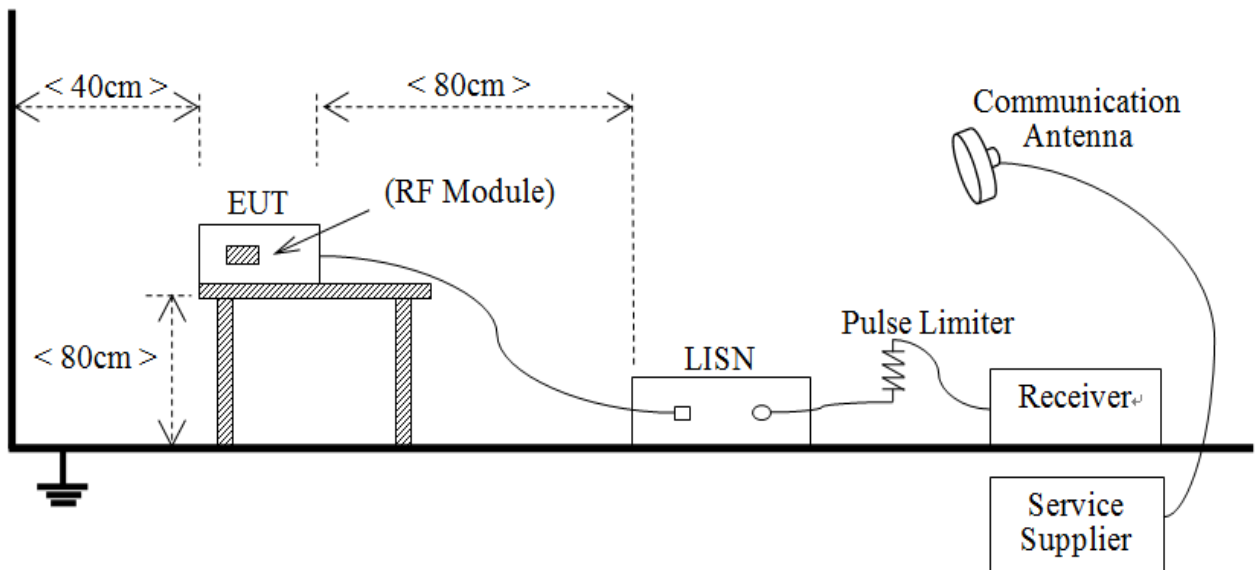


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

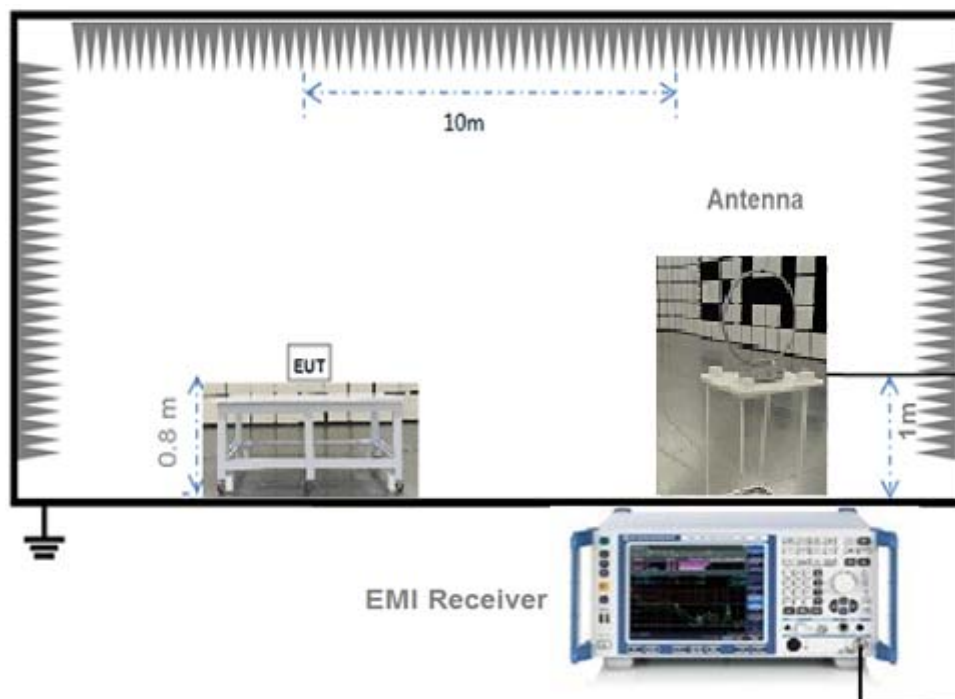


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

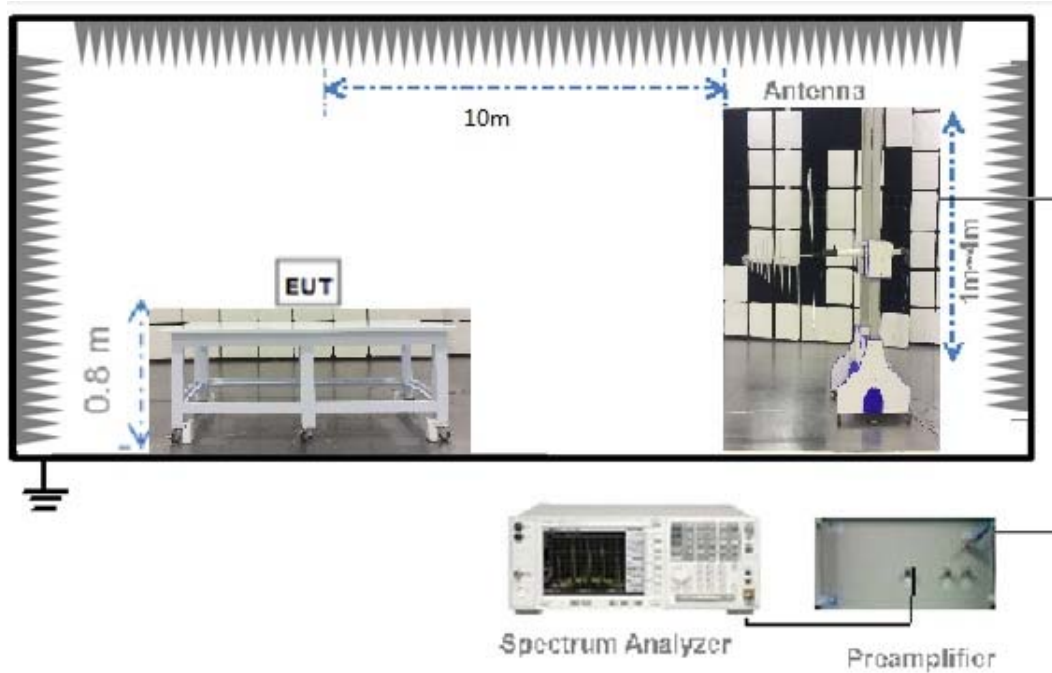

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

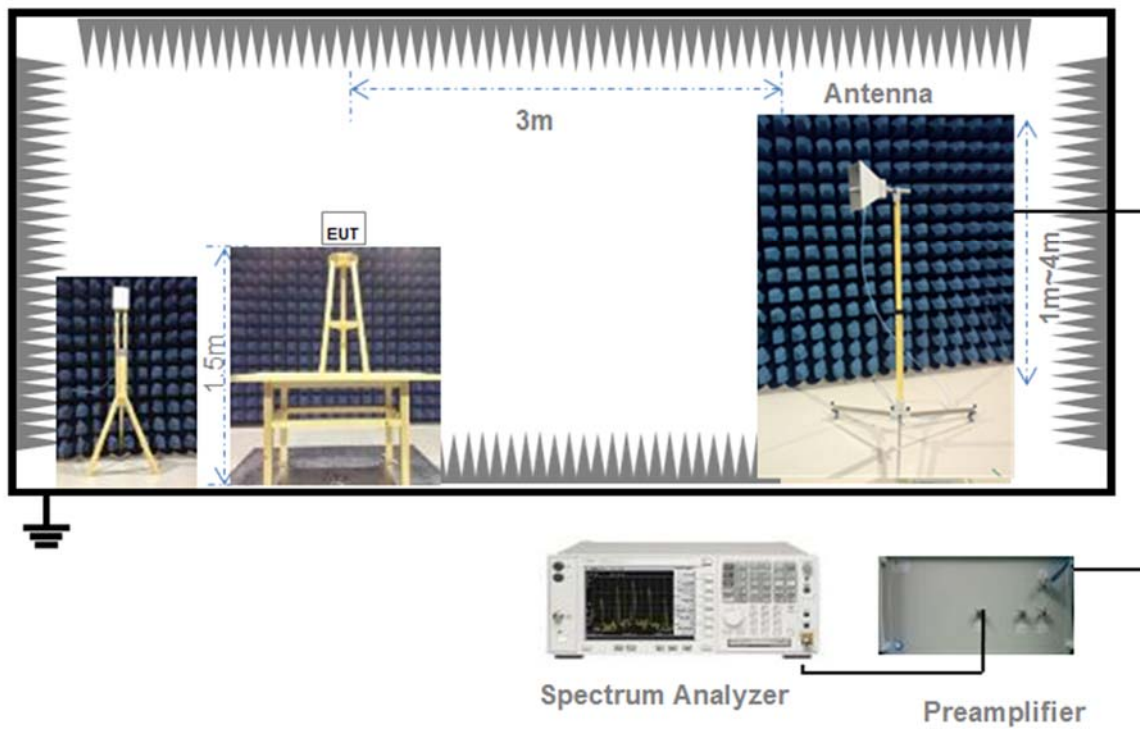

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

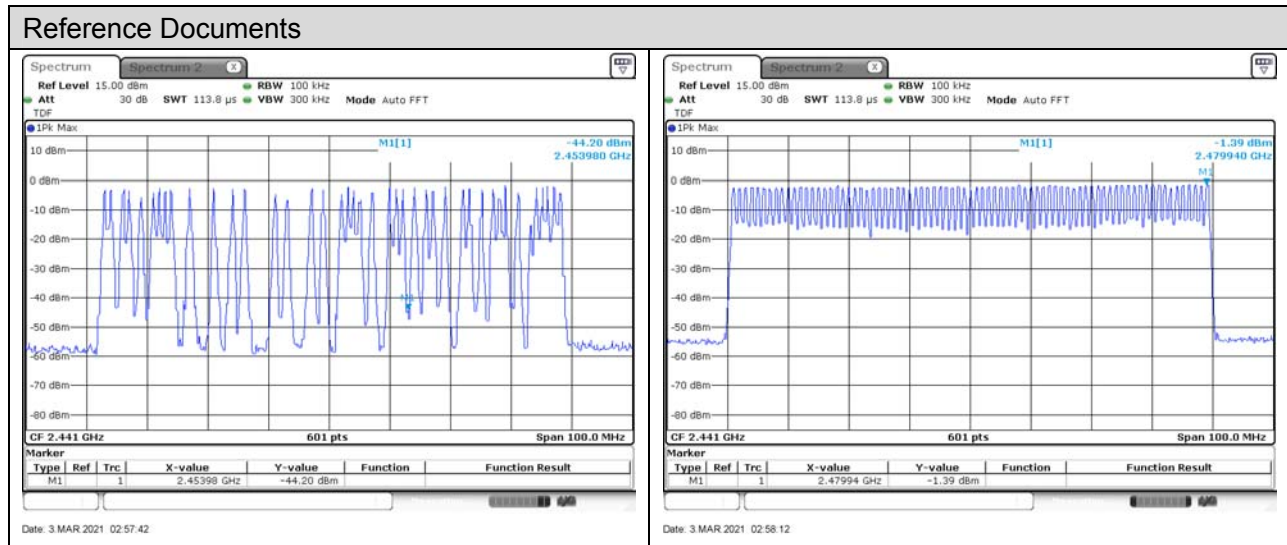

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

For DH3 package type

$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

For DH5 package type

$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots


GFSK 2.4 GHz ~ 2.4415 GHz

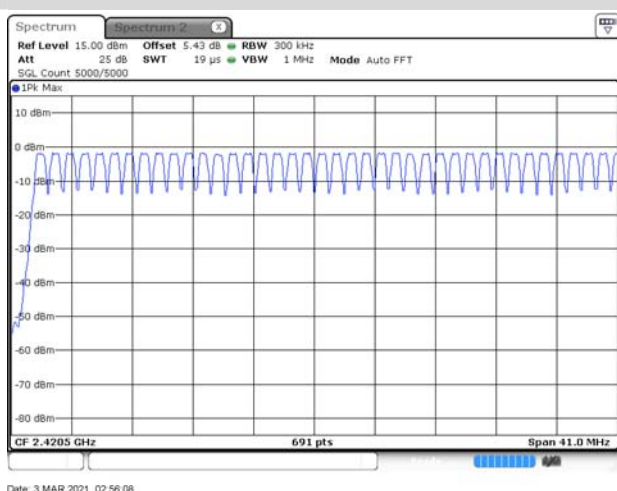


GFSK 2.4415 GHz ~ 2.4835 GHz



8-DPSK 2.4 GHz ~ 2.4415 GHz

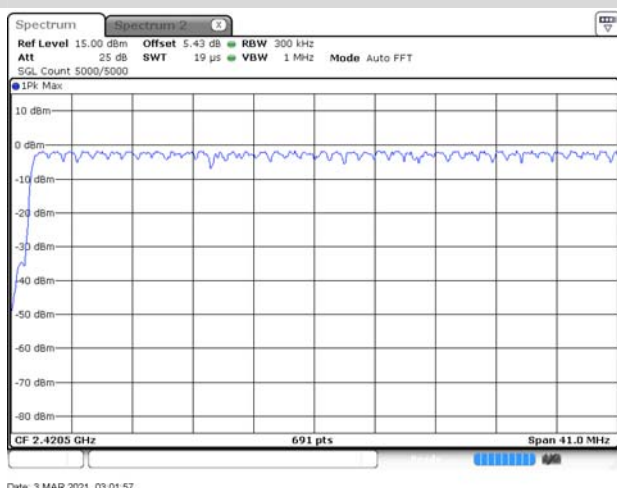

8-DPSK 2.4415 GHz ~ 2.4835 GHz

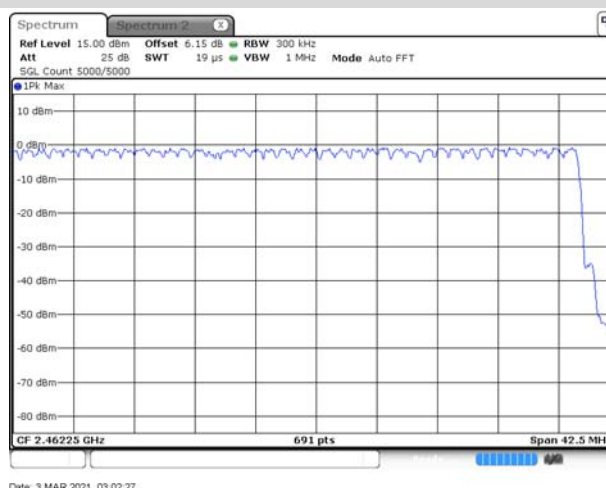

A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	-1.42	0.72	0.95	1.24	1.64	1.46	21	125	Pass
Middle	-1.20	0.76	1.05	1.27	1.70	1.48			Pass
High	-0.60	0.87	1.47	1.40	2.03	1.60			Pass


Test Plots

GFSK LOW CHANNEL




Date: 3 MAR 2021 02:37:04

GFSK MIDDLE CHANNEL

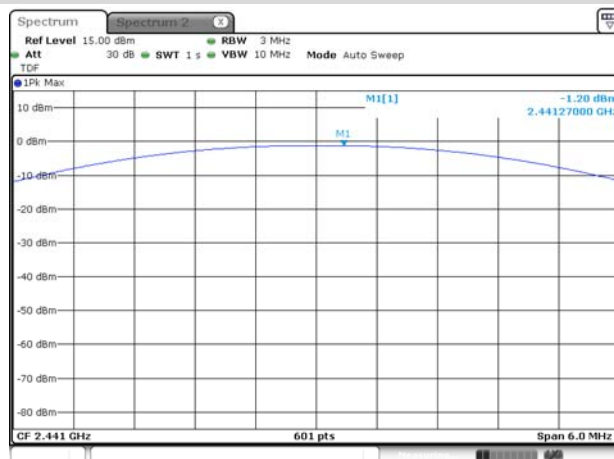


Date: 3 MAR 2021 02:39:52

GFSK HIGH CHANNEL

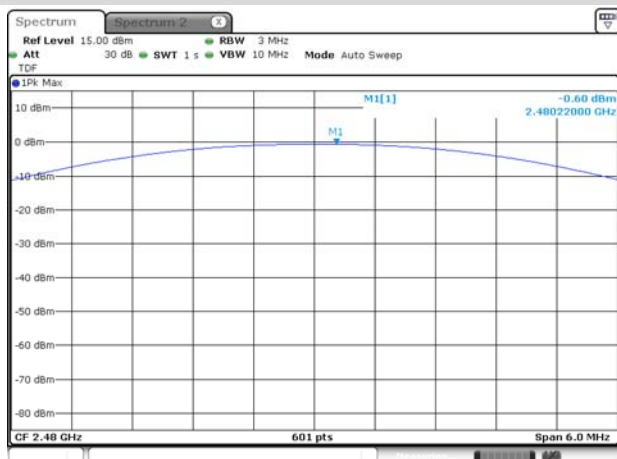


Date: 3 MAR 2021 02:41:45

$\pi/4$ -DQPSK LOW CHANNEL

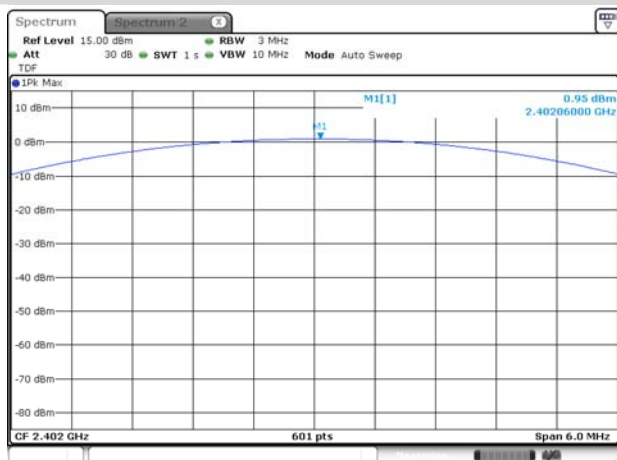


Date: 3 MAR 2021 02:45:04

$\pi/4$ -DQPSK MIDDLE CHANNEL

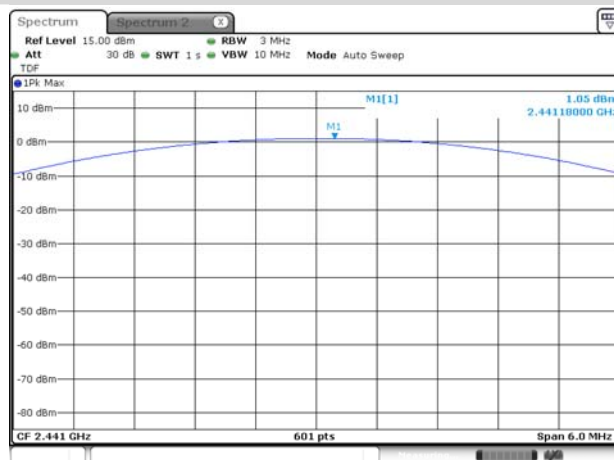


Date: 3 MAR 2021 02:46:08

$\pi/4$ -DQPSK HIGH CHANNEL

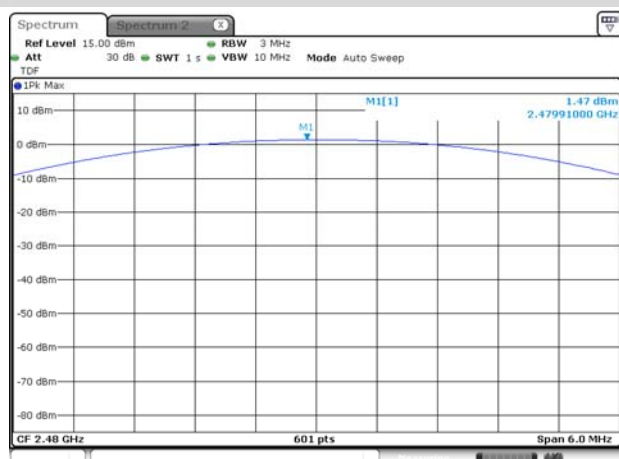


Date: 3 MAR 2021 02:47:07

8-DPSK LOW CHANNEL

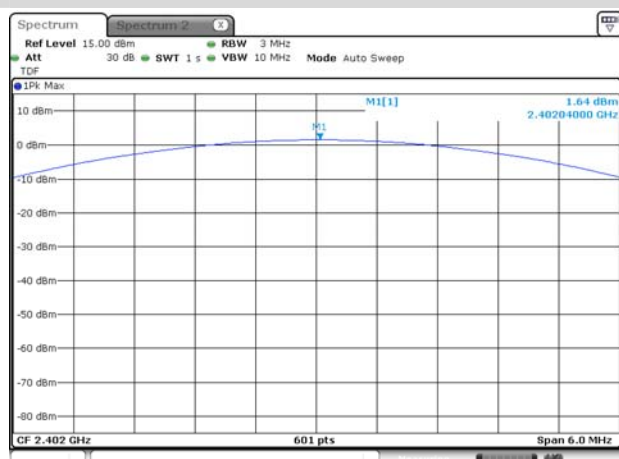


Date: 3 MAR 2021 02:48:10

8-DPSK MIDDLE CHANNEL

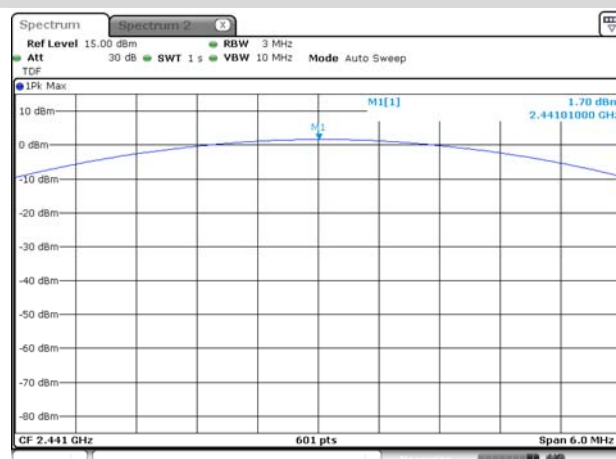

Date: 3 MAR 2021 02:50:40

8-DPSK HIGH CHANNEL

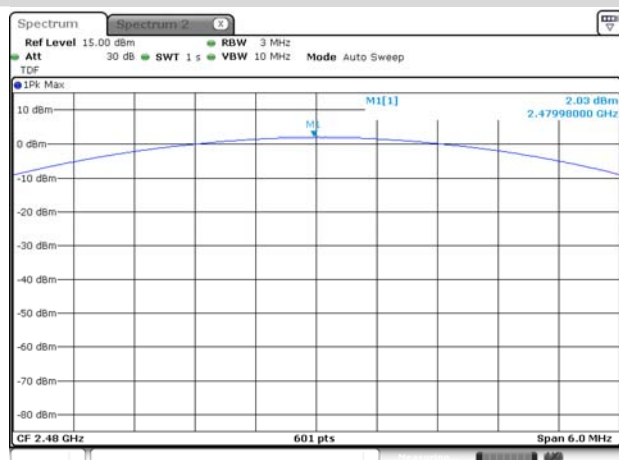

Date: 3 MAR 2021 02:52:53

A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.965332	0.881331
Middle	0.969727	0.890014
High	0.965332	0.881331
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.343506	1.193922
Middle	1.347900	1.193922
High	1.347900	1.189580
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.334717	1.189580
Middle	1.343506	1.193922
High	1.339111	1.193922

Test Plots


20 dB Bandwidth

GFSK LOW CHANNEL



Date: 3 MAR 2021 02:37:20

GFSK MIDDLE CHANNEL

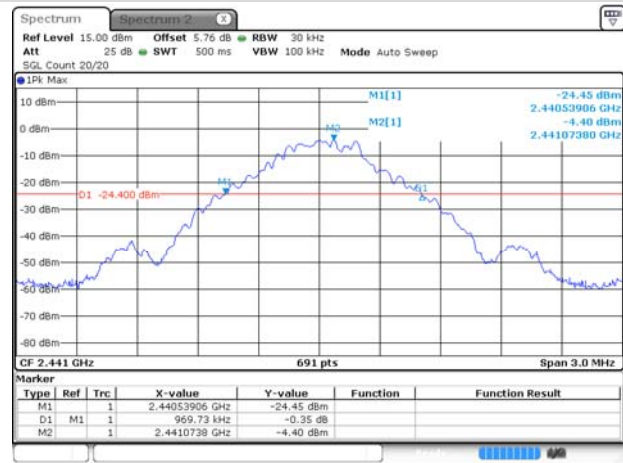

Date: 3 MAR 2021 02:40:07

GFSK HIGH CHANNEL



Date: 3 MAR 2021 02:42:01

 $\pi/4$ -DQPSK LOW CHANNEL

Date: 3 MAR 2021 02:45:20

 $\pi/4$ -DQPSK MIDDLE CHANNEL

Date: 3 MAR 2021 02:46:24

$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL




8-DPSK HIGH CHANNEL




99% Bandwidth

GFSK LOW CHANNEL

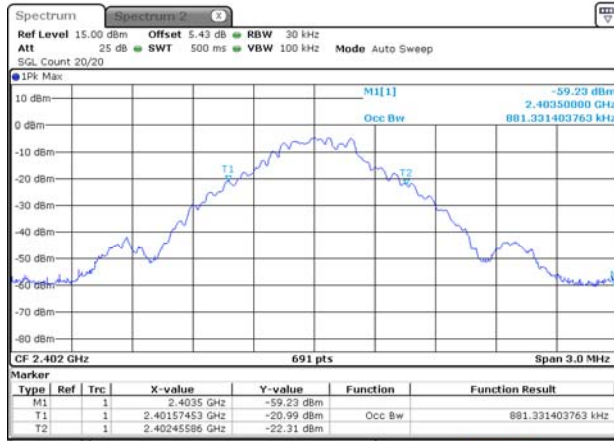

Date: 3 MAR 2021 02:37:36

GFSK MIDDLE CHANNEL

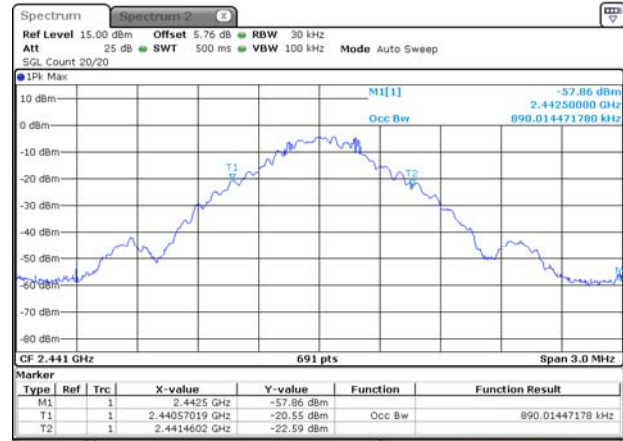

Date: 3 MAR 2021 02:40:23

GFSK HIGH CHANNEL



Date: 3 MAR 2021 02:42:16


 $\pi/4$ -DQPSK LOW CHANNEL

Date: 3 MAR 2021 02:45:36


 $\pi/4$ -DQPSK MIDDLE CHANNEL

Date: 3 MAR 2021 02:46:39

π/4-DQPSK HIGH CHANNEL

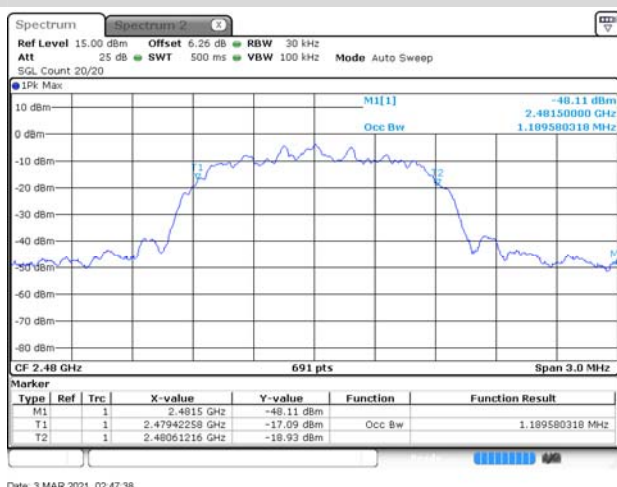

8-DPSK LOW CHANNEL

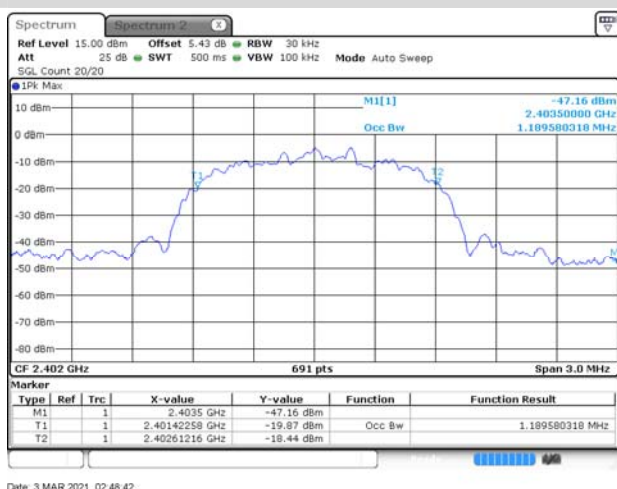

8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL




A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.0033	0.646485	Pass
8-DPSK	1.0033	0.895671	Pass


Test Plots

GFSK

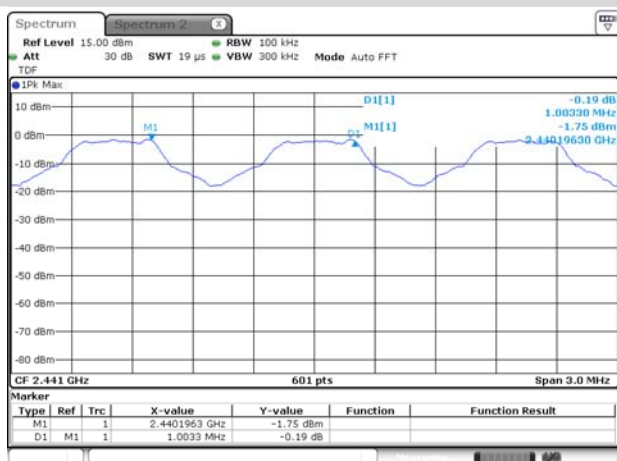

Date: 3 MAR 2021 02:57:12

8-DPSK

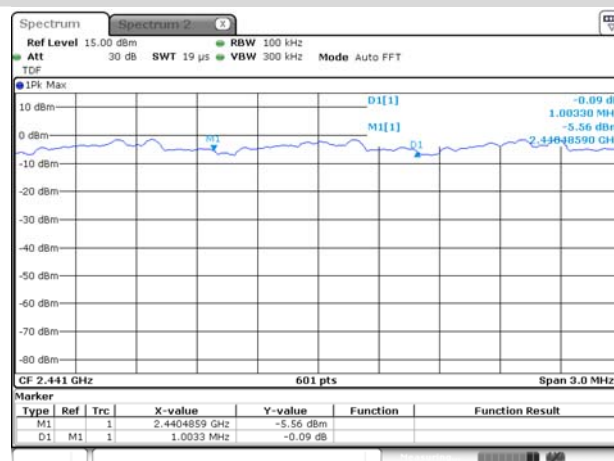

Date: 3 MAR 2021 03:03:40


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37440	119.808	0.4	Pass
DH 3	1.62730	260.368	0.4	Pass
DH 5	2.88700	307.947	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38477	123.126	0.4	Pass
DH 3	1.63717	261.947	0.4	Pass
DH 5	2.87530	306.699	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37377	59.803	0.4	Pass
DH 3	1.61643	129.314	0.4	Pass
DH 5	2.87670	153.424	0.4	Pass


Test Plots

GFSK DH1

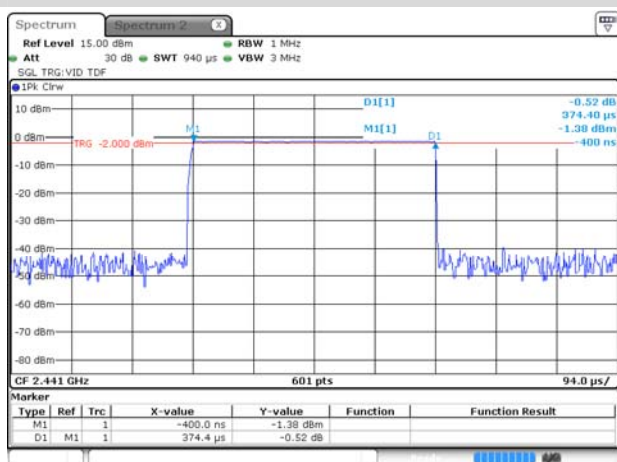


Date: 3 MAR 2021 03:07:47

GFSK DH3

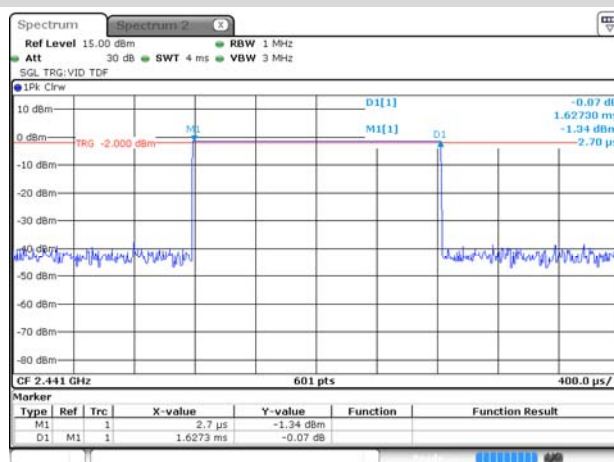


Date: 3 MAR 2021 03:08:30

GFSK DH5

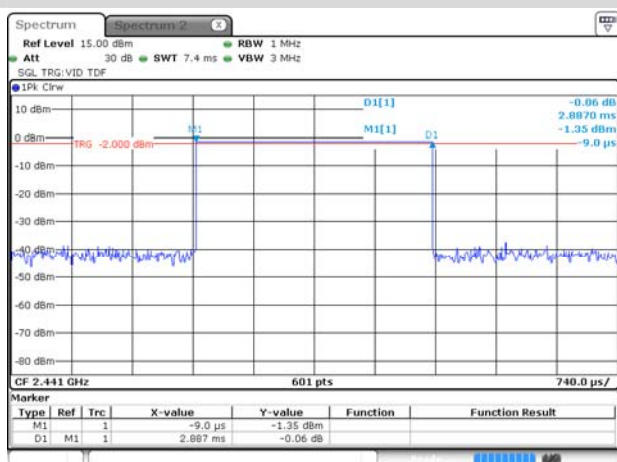


Date: 3 MAR 2021 03:09:06

8-DPSK DH1

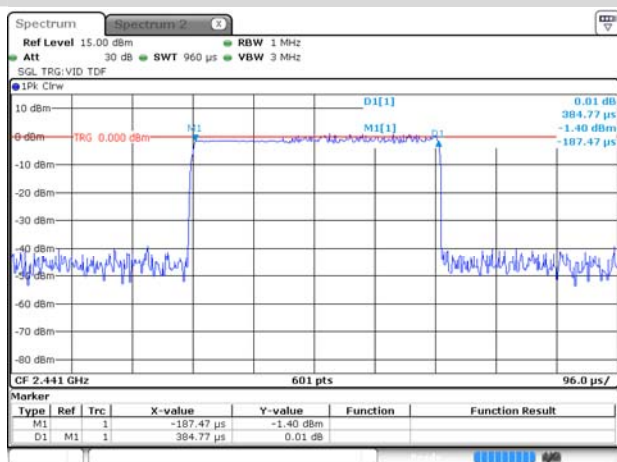


Date: 3 MAR 2021 03:13:16

8-DPSK DH3

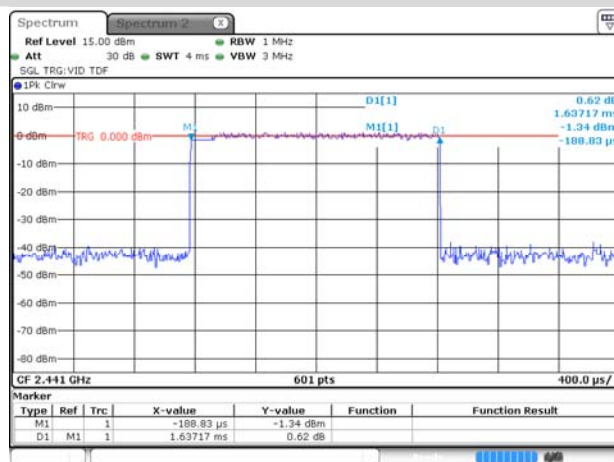


Date: 3 MAR 2021 03:13:54

8-DPSK DH5

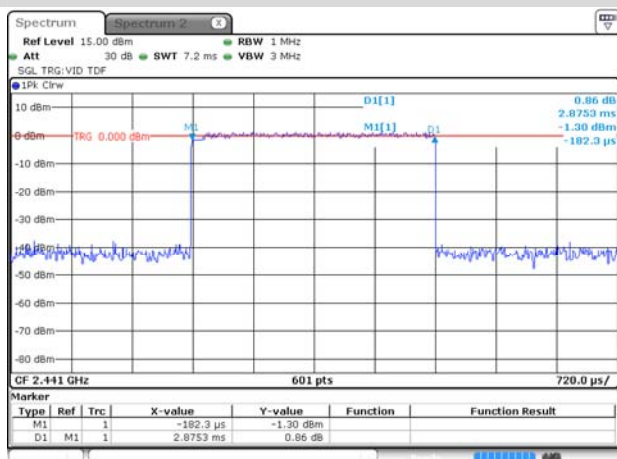


Date: 3 MAR 2021 03:14:33

AFH Mode DH1

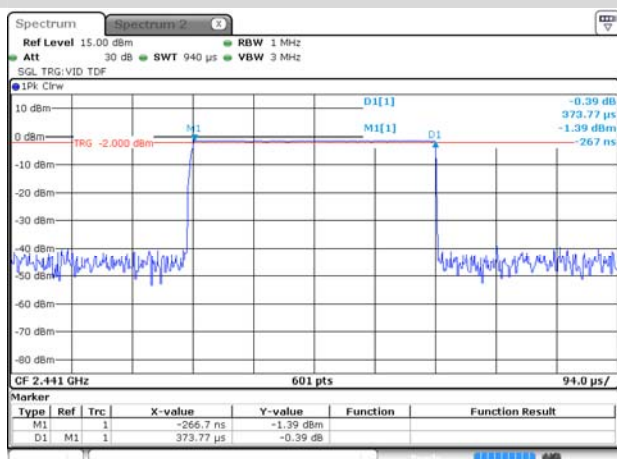


Date: 3 MAR 2021 03:10:15

AFH Mode DH3

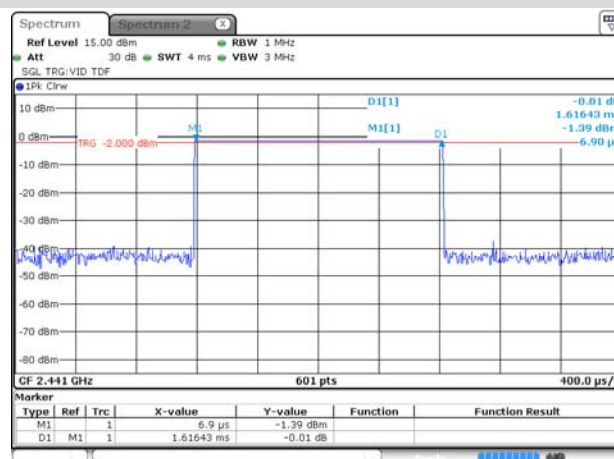

Date: 3 MAR 2021 03:10:52

AFH Mode DH5

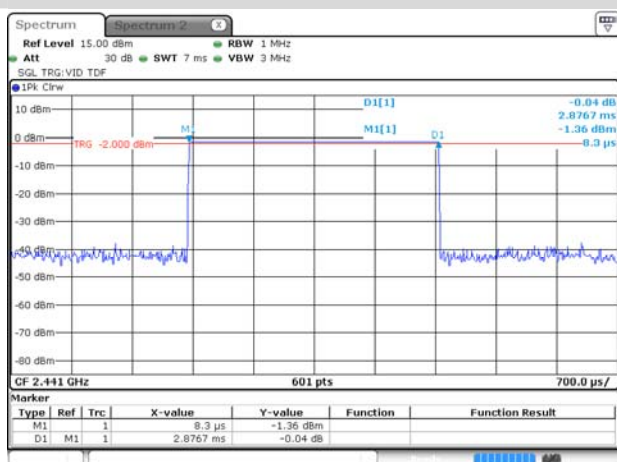

Date: 3 MAR 2021 03:11:34

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-33.78	-1.58	-21.58	Pass
Middle	-34.84	-1.35	-21.35	Pass
High	-34.75	-0.73	-20.73	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.56	-1.59	-21.59	Pass
Middle	-34.83	-1.35	-21.35	Pass
High	-34.87	-0.76	-20.76	Pass

Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-34.30	-1.39	-21.39	Pass
8-DPSK	-33.96	-0.96	-20.96	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

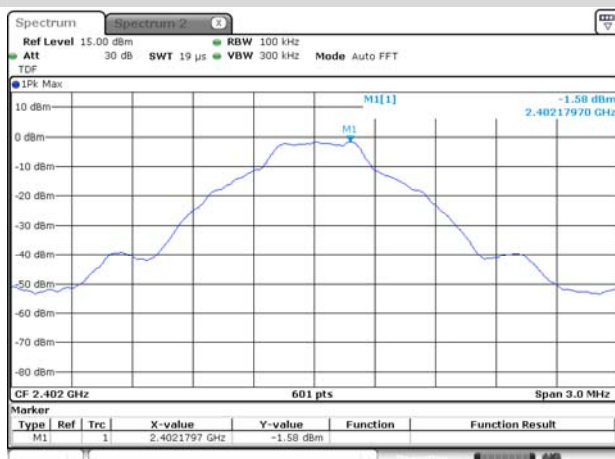


Date: 3 MAR 2021 02:37:56


GFSK LOW CHANNEL, BAND EDGE

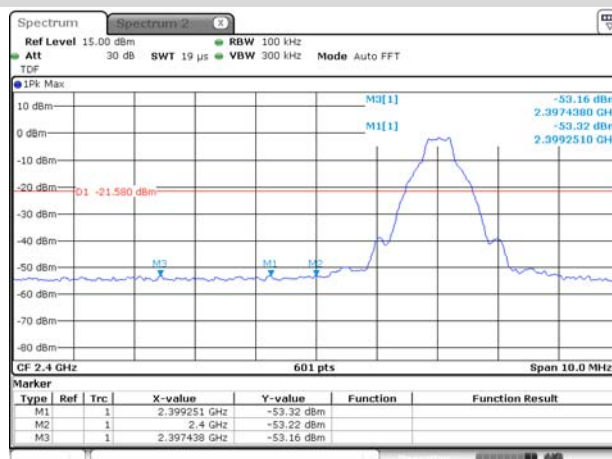

Date: 3 MAR 2021 02:39:26

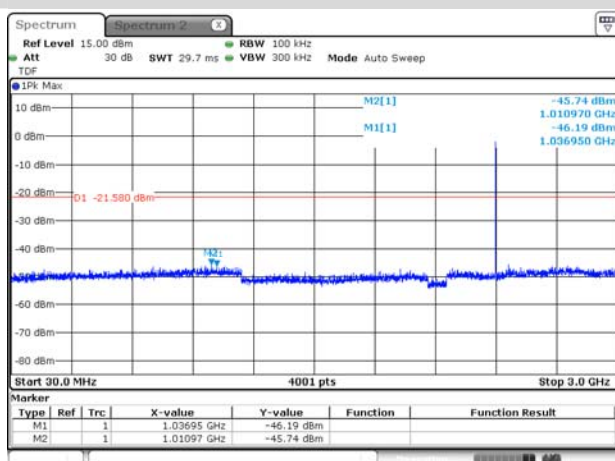
GFSK LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

Date: 3 MAR 2021 02:38:31

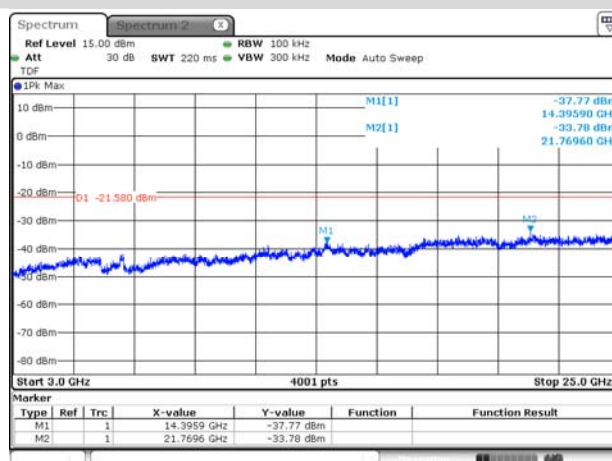GFSK LOW CHANNEL, SPURIOUS
3 GHz ~ 25 GHz


Date: 3 MAR 2021 02:38:44

GFSK MIDDLE CHANNEL, CARRIER LEVEL

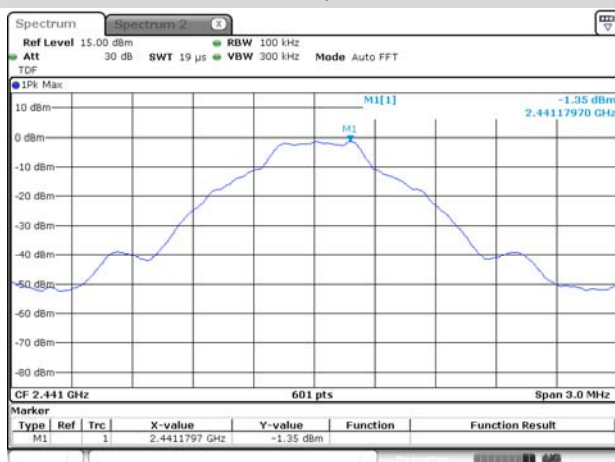


Date: 3 MAR 2021 02:40:35

GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

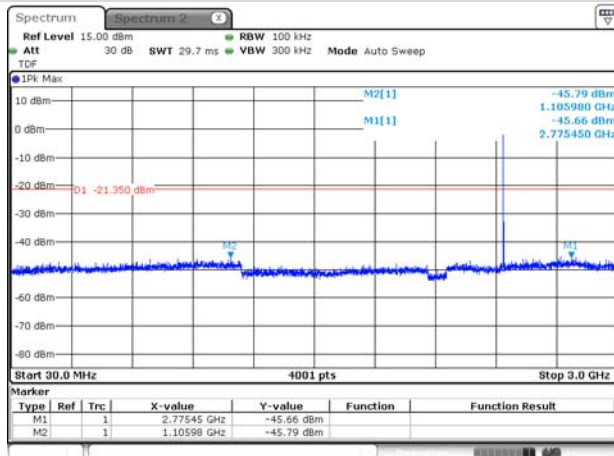


Date: 3 MAR 2021 02:41:00

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

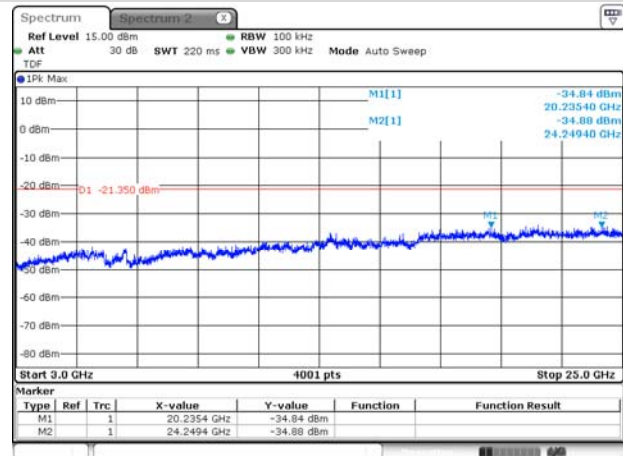


Date: 3 MAR 2021 02:41:15

GFSK HIGH CHANNEL, CARRIER LEVEL

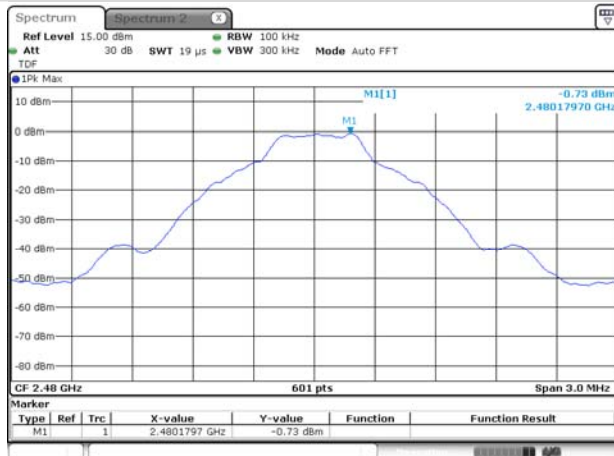


Date: 3 MAR 2021 02:42:29

GFSK HIGH CHANNEL, BAND EDGE

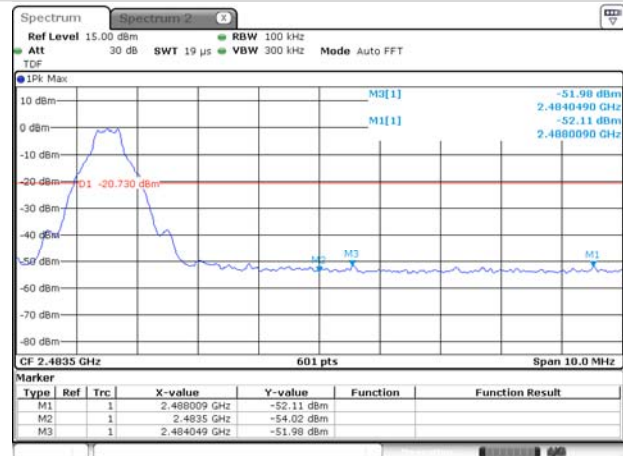


Date: 3 MAR 2021 02:44:02

GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

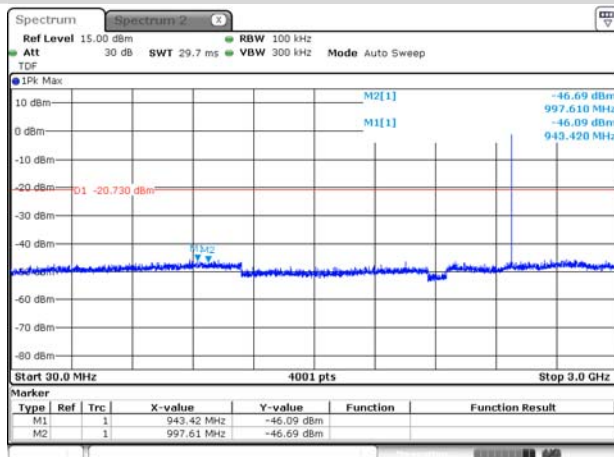


Date: 3 MAR 2021 02:43:13

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

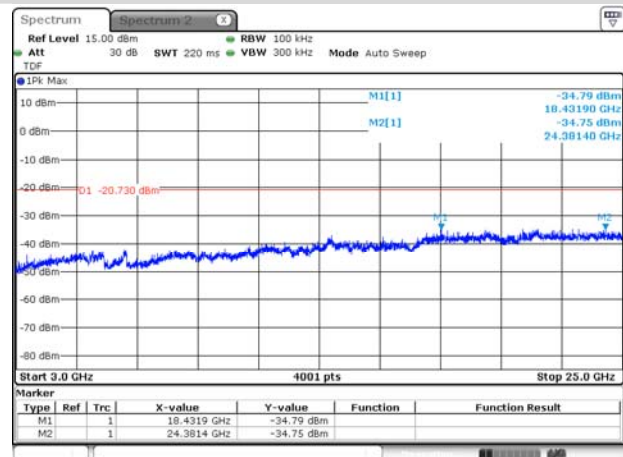


Date: 3 MAR 2021 02:43:26

8-DPSK LOW CHANNEL, CARRIER LEVEL

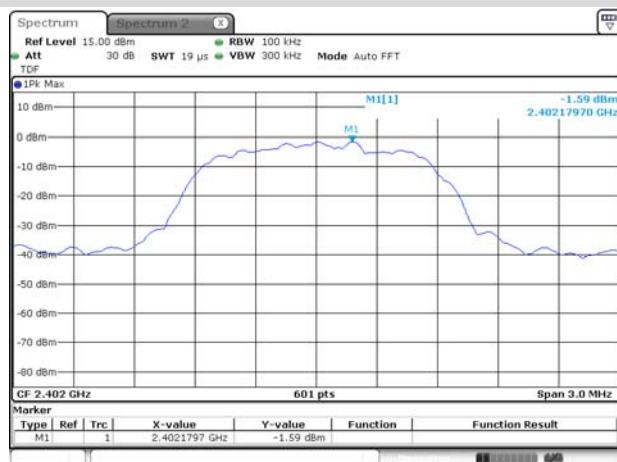


Date: 3 MAR 2021 02:48:55


8-DPSK LOW CHANNEL, BAND EDGE

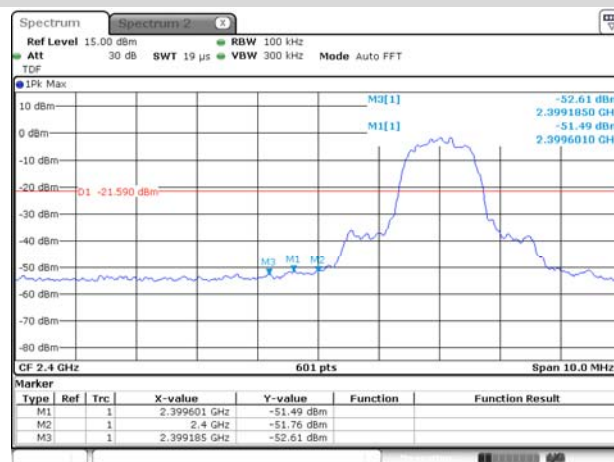

Date: 3 MAR 2021 02:50:15

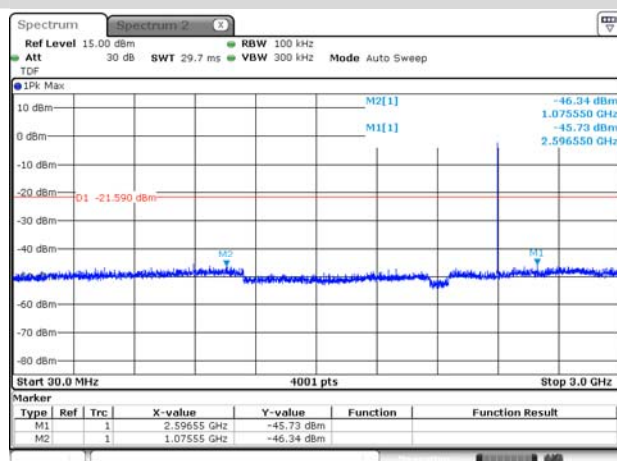
8-DPSK LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

Date: 3 MAR 2021 02:49:25

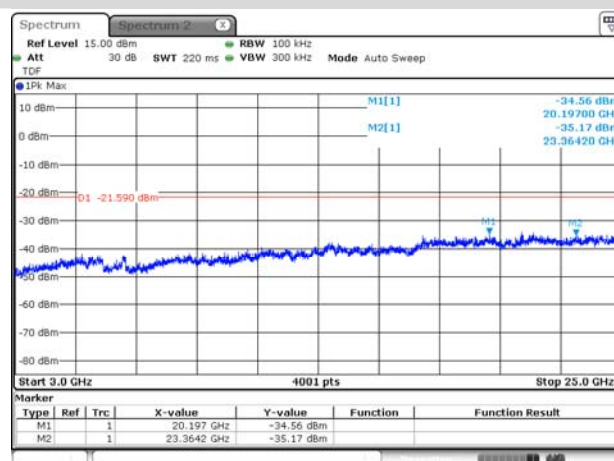8-DPSK LOW CHANNEL, SPURIOUS
3 GHz ~ 25 GHz


Date: 3 MAR 2021 02:49:39

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

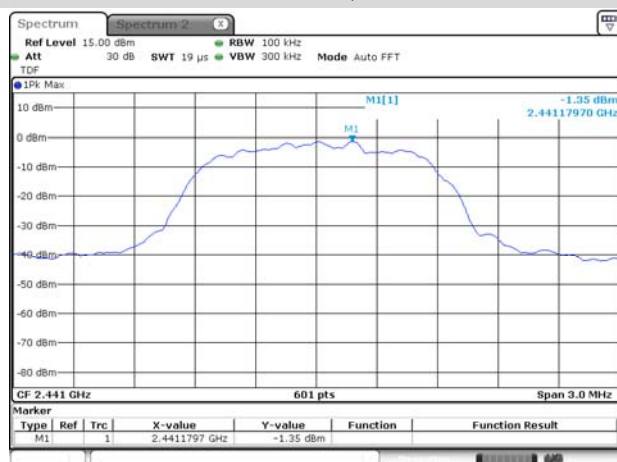


Date: 3 MAR 2021 02:51:24

8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

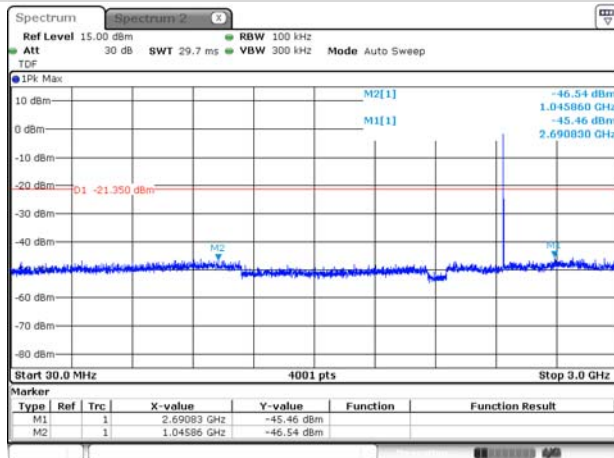


Date: 3 MAR 2021 02:51:48

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

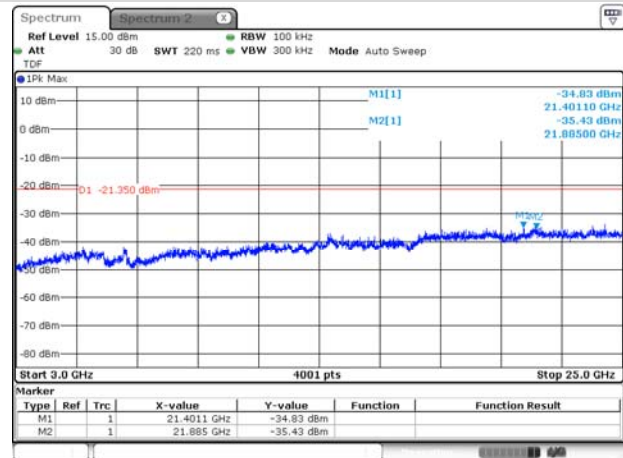


Date: 3 MAR 2021 02:52:00

8-DPSK HIGH CHANNEL, CARRIER LEVEL

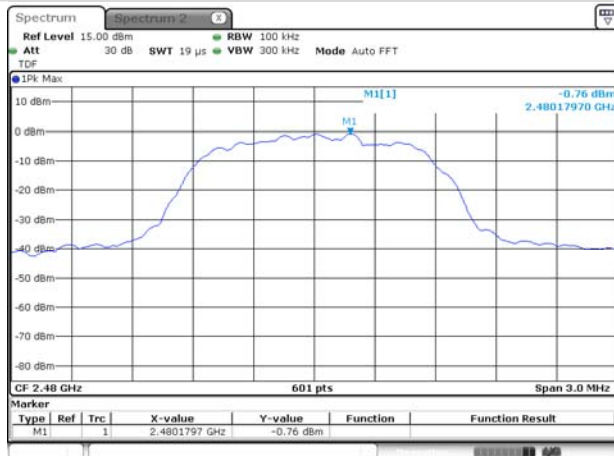


Date: 3 MAR 2021 02:53:37

8-DPSK HIGH CHANNEL, BAND EDGE

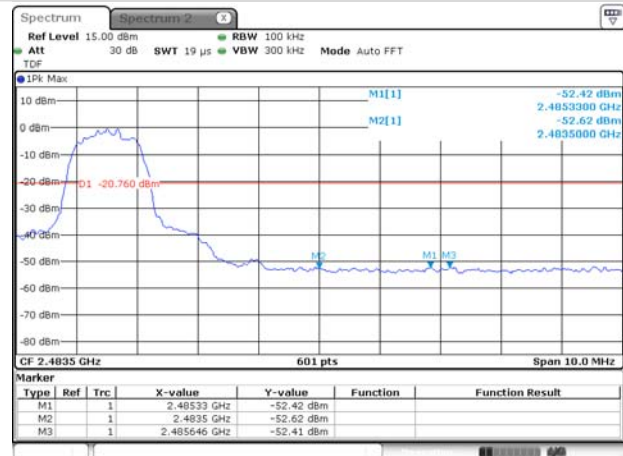


Date: 3 MAR 2021 02:55:00

8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

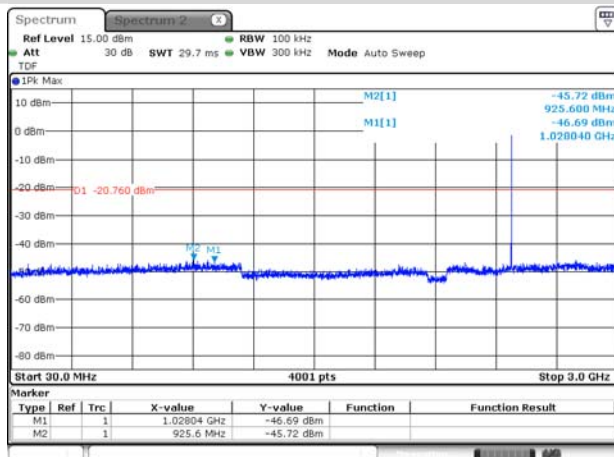


Date: 3 MAR 2021 02:54:03

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

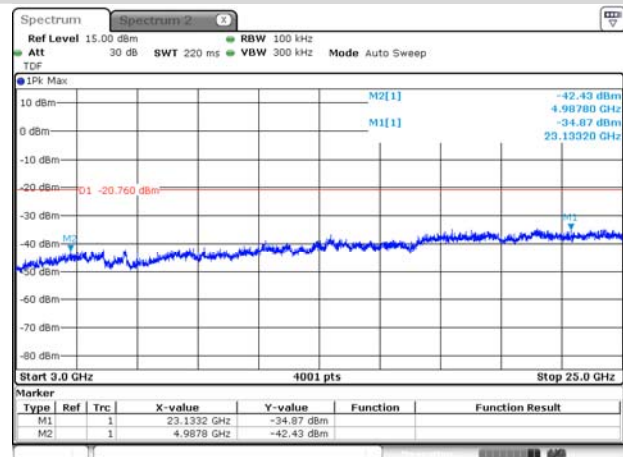


Date: 3 MAR 2021 02:54:18




GFSK HOPPING, CARRIER LEVEL

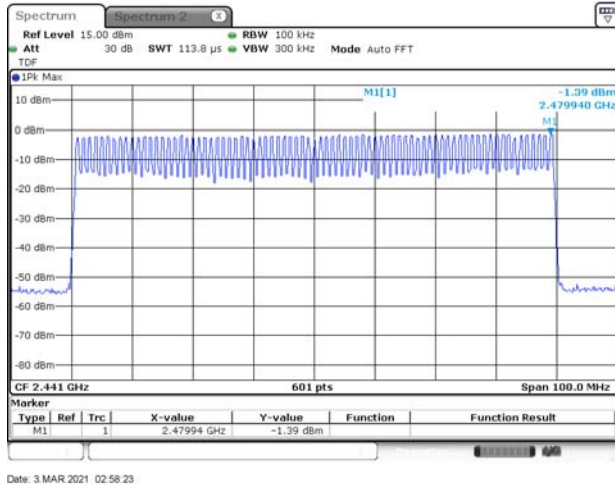


GFSK HOPPING BAND EDGE (LOW)

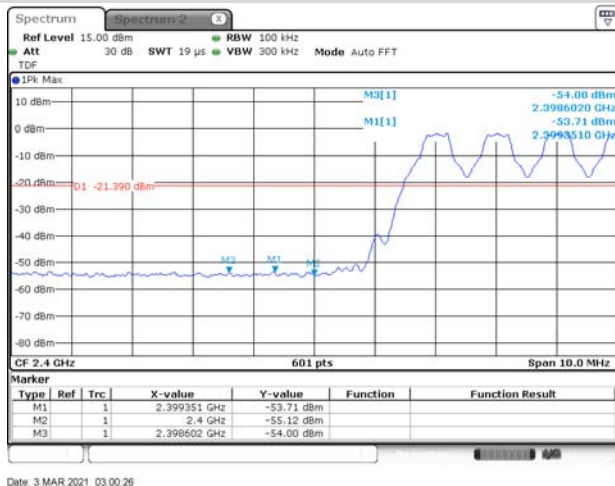

GFSK HOPPING BAND EDGE (HIGH)

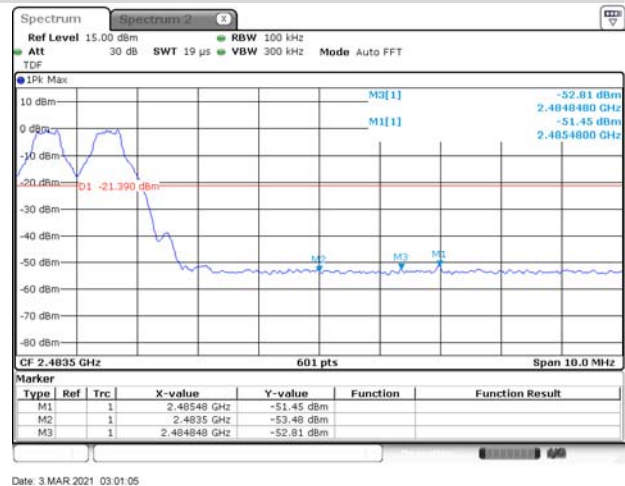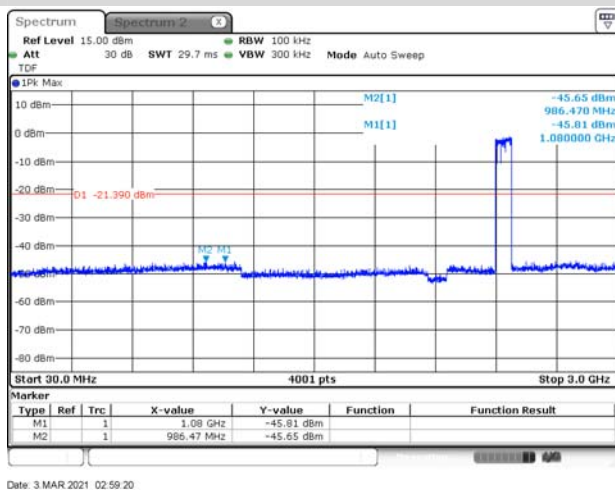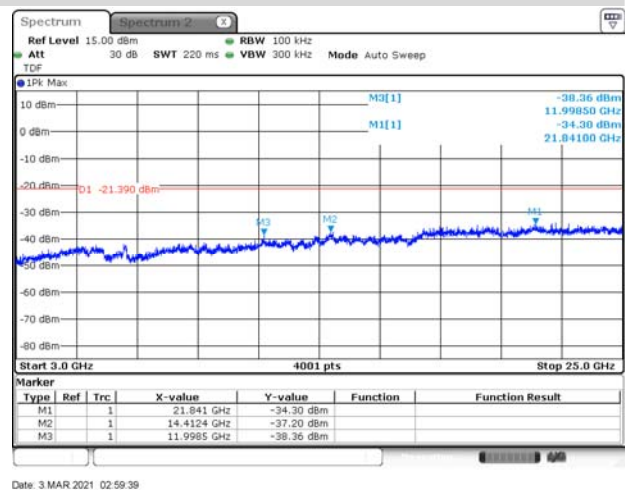
GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

8-DPSK HOPPING, CARRIER LEVEL

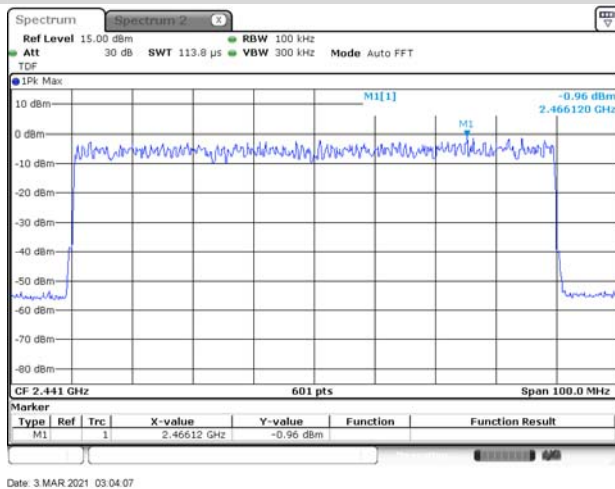


Date: 3 MAR 2021 03:04:07

8-DPSK Hopping BAND EDGE (LOW)

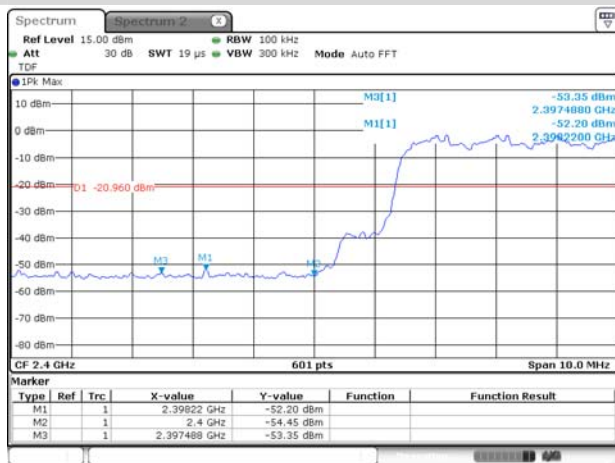


Date: 3 MAR 2021 03:05:56


8-DPSK Hopping BAND EDGE (HIGH)

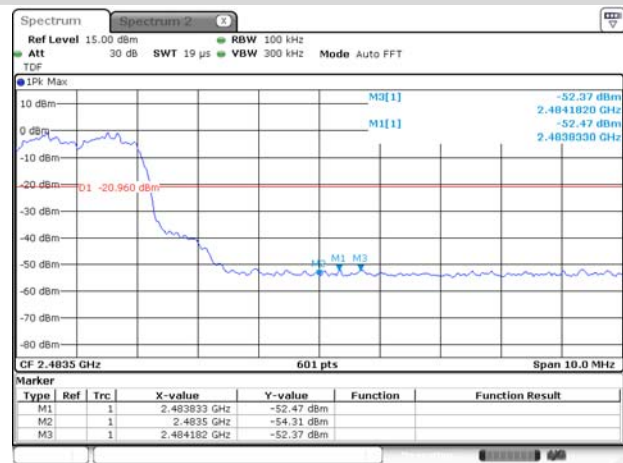

Date: 3 MAR 2021 03:06:28

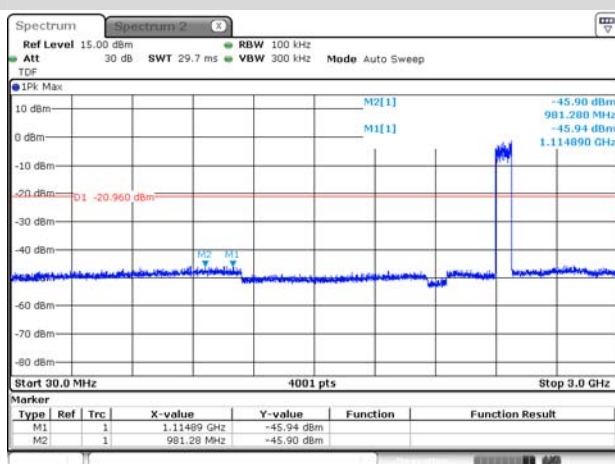8-DPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz

Date: 3 MAR 2021 03:04:48

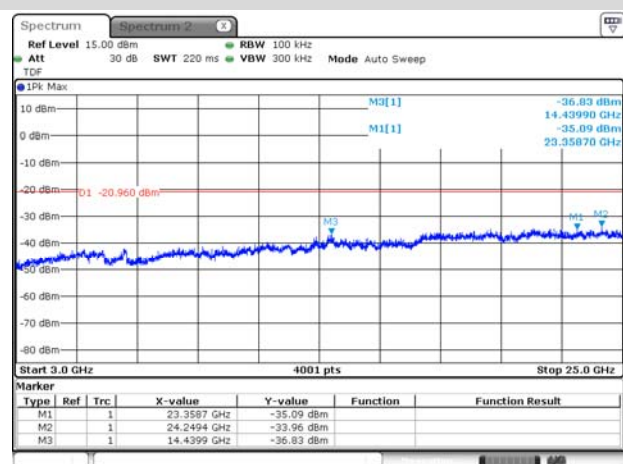8-DPSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

Date: 3 MAR 2021 03:05:05

A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_ Class B

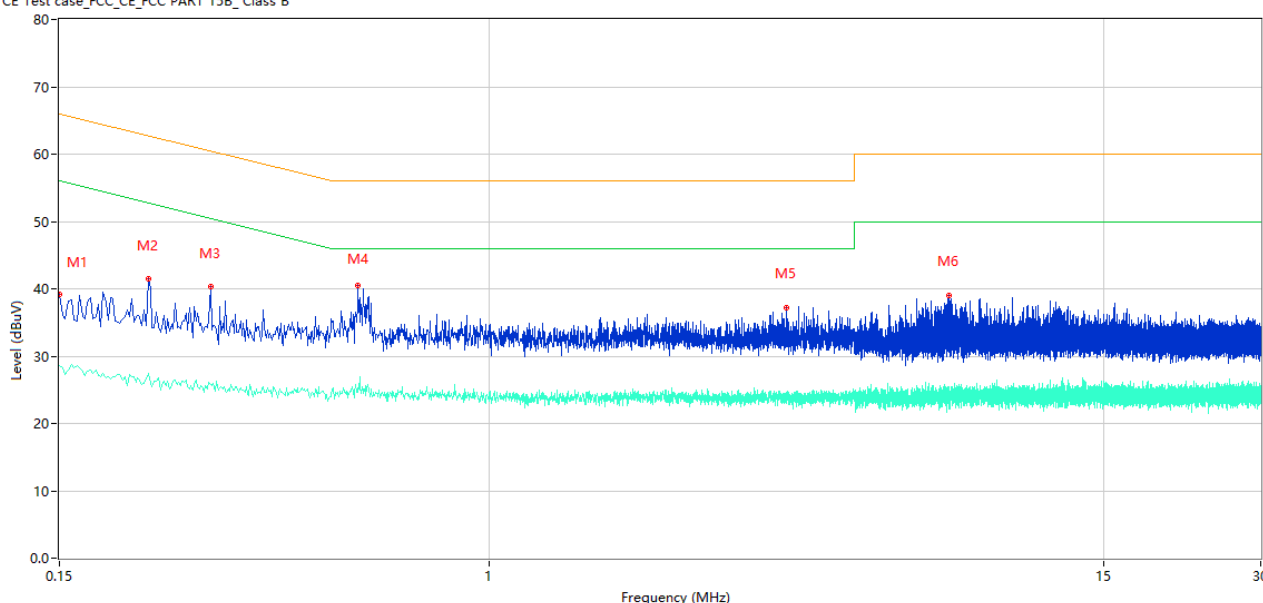

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	39.20	10.41	66.00	-26.80	Peak	L	Pass
1**	0.150	28.66	10.41	56.00	-27.34	AV	L	Pass
2	0.222	41.49	10.37	62.74	-21.25	Peak	L	Pass
2**	0.222	27.38	10.37	52.74	-25.36	AV	L	Pass
3	0.292	40.27	10.34	60.47	-20.20	Peak	L	Pass
3**	0.292	25.79	10.34	50.47	-24.68	AV	L	Pass
4	0.560	40.55	10.28	56.00	-15.45	Peak	L	Pass
4**	0.560	25.33	10.28	46.00	-20.67	AV	L	Pass
5	3.702	37.26	10.29	56.00	-18.74	Peak	L	Pass
5**	3.702	23.99	10.29	46.00	-22.01	AV	L	Pass
6	7.588	38.96	10.34	60.00	-21.04	Peak	L	Pass
6**	7.588	25.11	10.34	50.00	-24.89	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

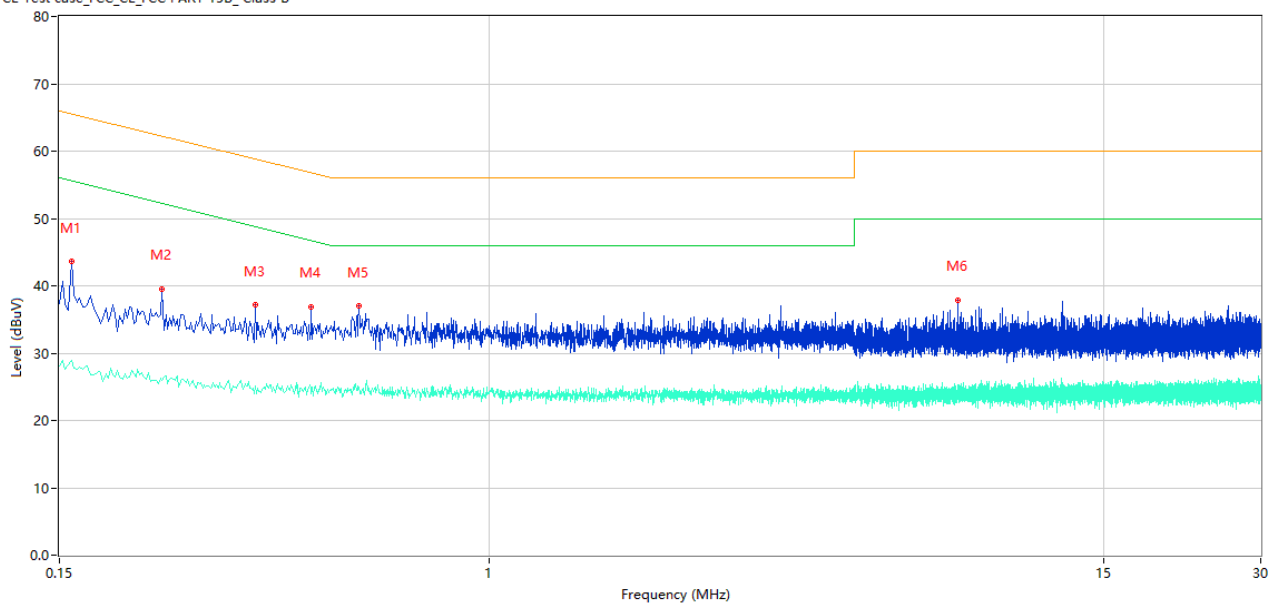

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.158	43.66	10.40	65.57	-21.91	Peak	N	Pass
1**	0.158	28.90	10.40	55.57	-26.67	AV	N	Pass
2	0.236	39.59	10.35	62.24	-22.65	Peak	N	Pass
2**	0.236	25.95	10.35	52.24	-26.29	AV	N	Pass
3	0.356	37.17	10.31	58.82	-21.65	Peak	N	Pass
3**	0.356	25.14	10.31	48.82	-23.68	AV	N	Pass
4	0.456	36.92	10.30	56.77	-19.85	Peak	N	Pass
4**	0.456	24.00	10.30	46.77	-22.77	AV	N	Pass
5	0.562	37.00	10.28	56.00	-19.00	Peak	N	Pass
5**	0.562	24.92	10.28	46.00	-21.08	AV	N	Pass
6	7.902	37.85	10.34	60.00	-22.15	Peak	N	Pass
6**	7.902	24.30	10.34	50.00	-25.70	AV	N	Pass

A.8 Radiated Spurious Emission

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots


30 MHz to 1 GHz, ANT H

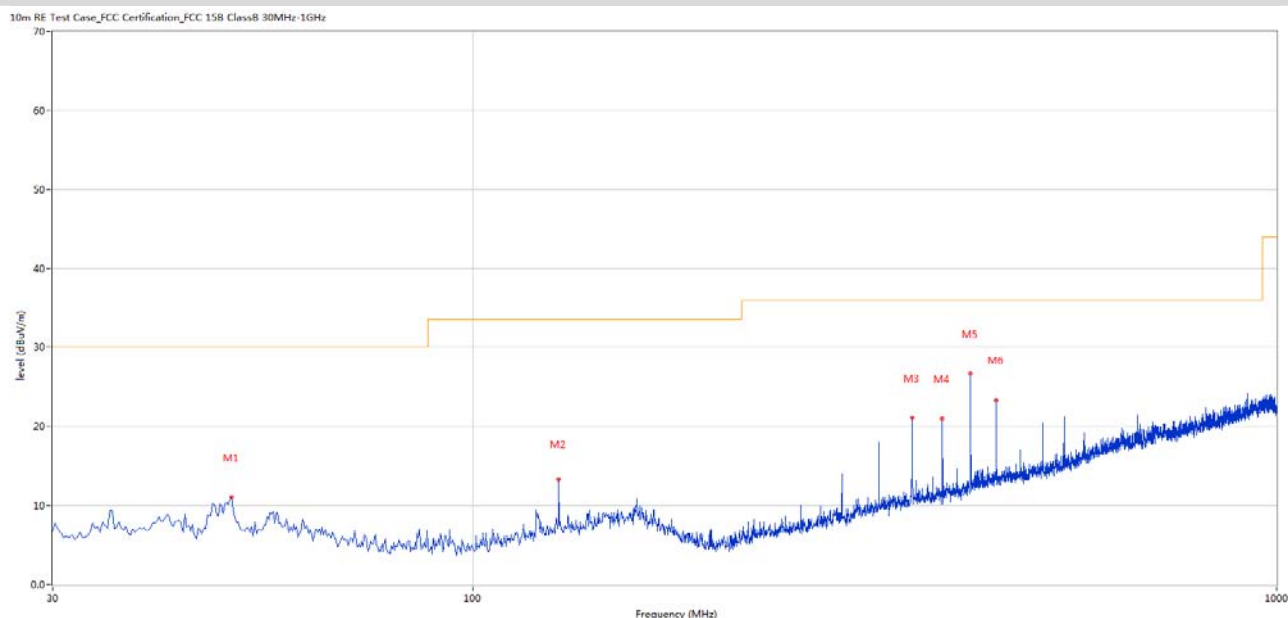

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.122	11.00	-27.26	30.0	-19.00	Peak	315.00	400	Horizontal	Pass
2	127.946	13.31	-27.34	33.5	-20.19	Peak	100.00	100	Horizontal	Pass
3	351.960	21.05	-24.31	36.0	-14.95	Peak	360.00	400	Horizontal	Pass
4	383.962	20.94	-23.58	36.0	-15.06	Peak	130.00	300	Horizontal	Pass
5	415.964	26.63	-22.73	36.0	-9.37	Peak	30.00	300	Horizontal	Pass
6	447.966	23.27	-21.59	36.0	-12.73	Peak	55.00	300	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

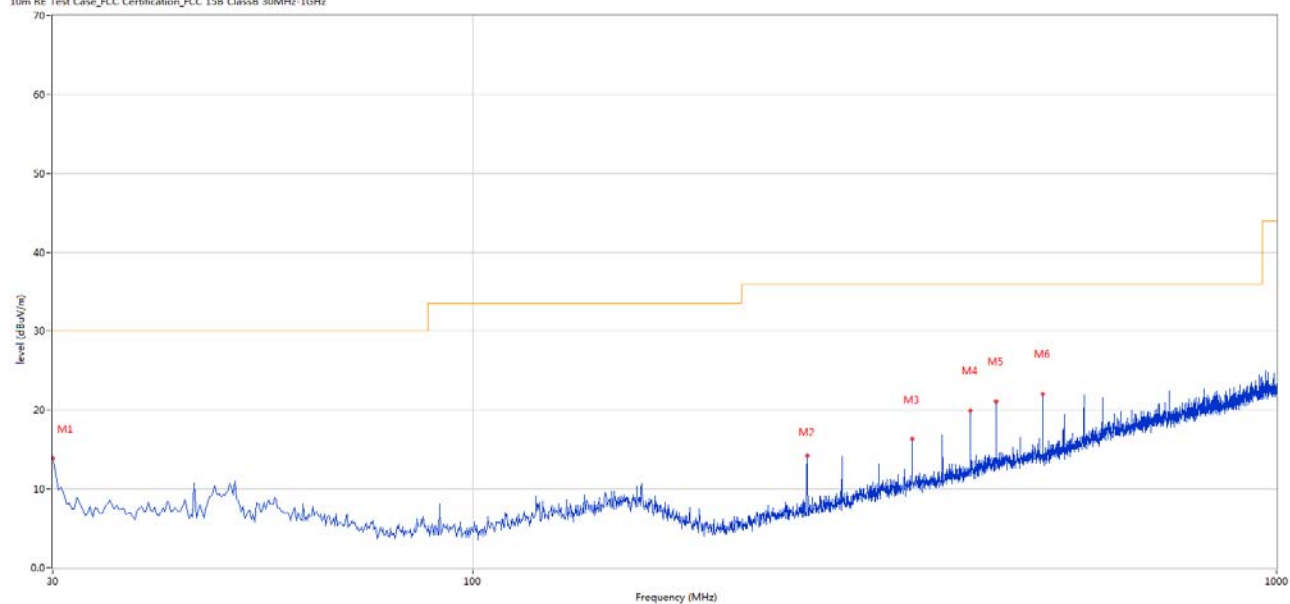


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	13.90	-27.47	30.0	-16.10	Peak	360.00	200	Vertical	Pass
2	260.560	14.21	-27.23	36.0	-21.79	Peak	199.00	200	Vertical	Pass
3	351.960	16.29	-24.31	36.0	-19.71	Peak	307.00	100	Vertical	Pass
4	415.964	19.90	-22.73	36.0	-16.10	Peak	307.00	100	Vertical	Pass
5	447.966	21.04	-21.59	36.0	-14.96	Peak	4.00	300	Vertical	Pass
6	511.970	22.01	-20.42	36.0	-13.99	Peak	216.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

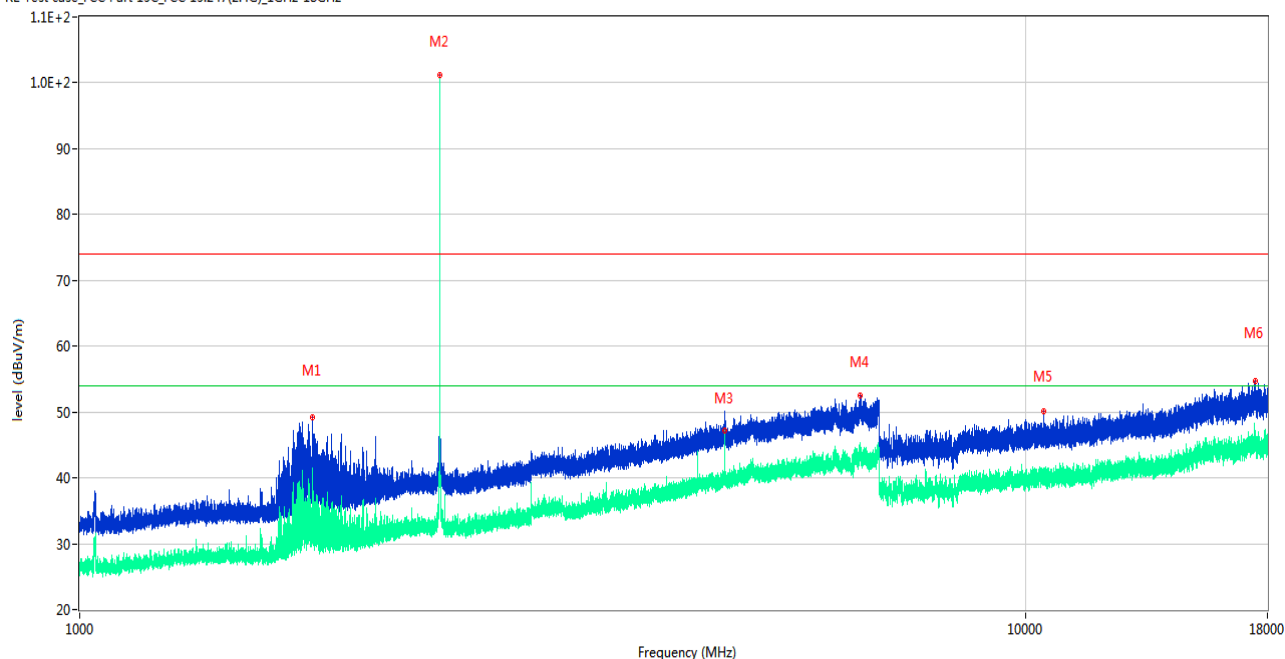

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1759.900	49.27	-17.19	74.0	-24.73	Peak	109.00	150	Horizontal	Pass
1**	1759.900	34.30	-17.19	54.0	-19.70	AV	109.00	150	Horizontal	Pass
2	2401.800	101.12	-12.26	74.0	27.12	Peak	127.00	150	Horizontal	N/A
2**	2401.800	99.42	-12.26	54.0	45.42	AV	127.00	150	Horizontal	N/A
3	4804.200	49.51	-2.76	74.0	-24.49	Peak	199.00	150	Horizontal	Pass
3**	4804.200	47.27	-2.76	54.0	-6.73	AV	199.00	150	Horizontal	Pass
4	6685.600	52.42	-0.19	74.0	-21.58	Peak	130.00	150	Horizontal	Pass
4**	6685.600	44.33	-0.19	54.0	-9.67	AV	130.00	150	Horizontal	Pass
5	10449.424	50.04	-0.57	74.0	-23.96	Peak	344.00	150	Horizontal	Pass
5**	10449.424	40.36	-0.57	54.0	-13.64	AV	344.00	150	Horizontal	Pass
6	17463.714	54.69	2.88	74.0	-19.31	Peak	124.00	150	Horizontal	Pass
6**	17463.714	45.83	2.88	54.0	-8.17	AV	124.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

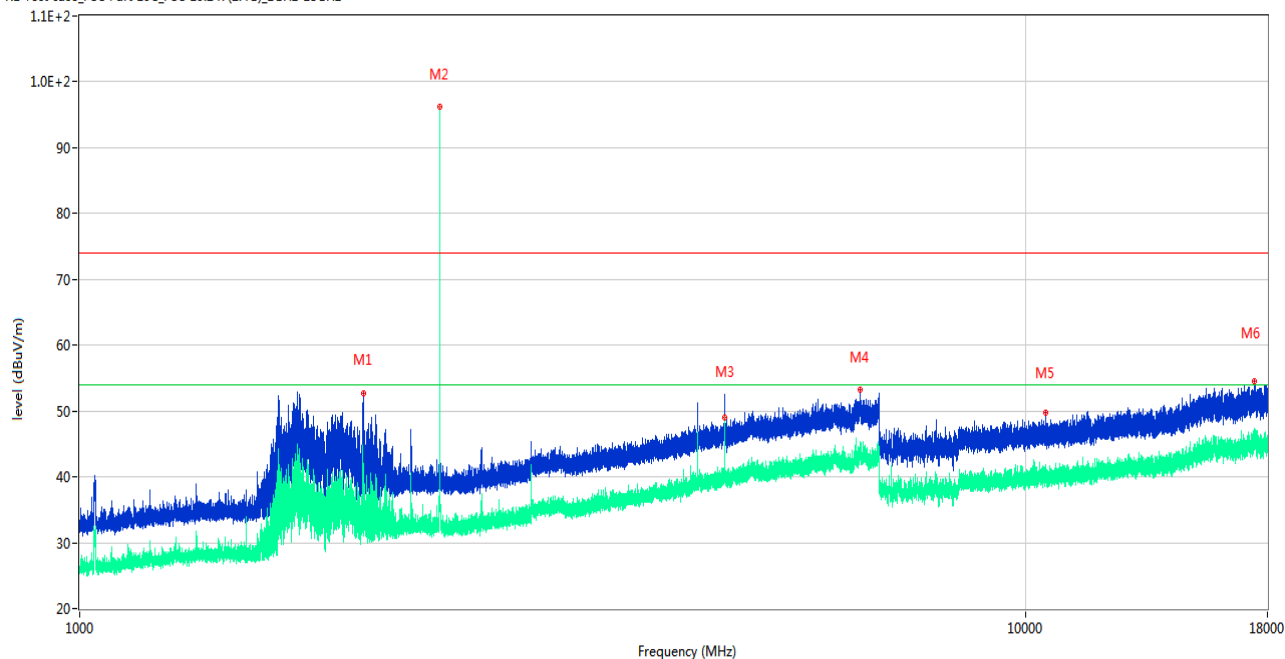

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.400	52.74	-15.59	74.0	-21.26	Peak	89.00	150	Vertical	Pass
1**	1994.400	39.38	-15.59	54.0	-14.62	AV	89.00	150	Vertical	Pass
2	2401.800	96.53	-12.26	74.0	22.53	Peak	51.00	150	Vertical	N/A
2**	2401.800	94.53	-12.26	54.0	40.53	AV	51.00	150	Vertical	N/A
3	4804.400	51.92	-2.78	74.0	-22.08	Peak	293.00	150	Vertical	Pass
3**	4804.400	48.97	-2.78	54.0	-5.03	AV	293.00	150	Vertical	Pass
4	6685.000	53.24	-0.21	74.0	-20.76	Peak	0.00	150	Vertical	Pass
4**	6685.000	44.60	-0.21	54.0	-9.40	AV	0.00	150	Vertical	Pass
5	10482.775	49.81	-0.86	74.0	-24.19	Peak	361.00	150	Vertical	Pass
5**	10482.775	39.56	-0.86	54.0	-14.44	AV	361.00	150	Vertical	Pass
6	17421.187	54.52	3.72	74.0	-19.48	Peak	122.00	150	Vertical	Pass
6**	17421.187	45.30	3.72	54.0	-8.70	AV	122.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

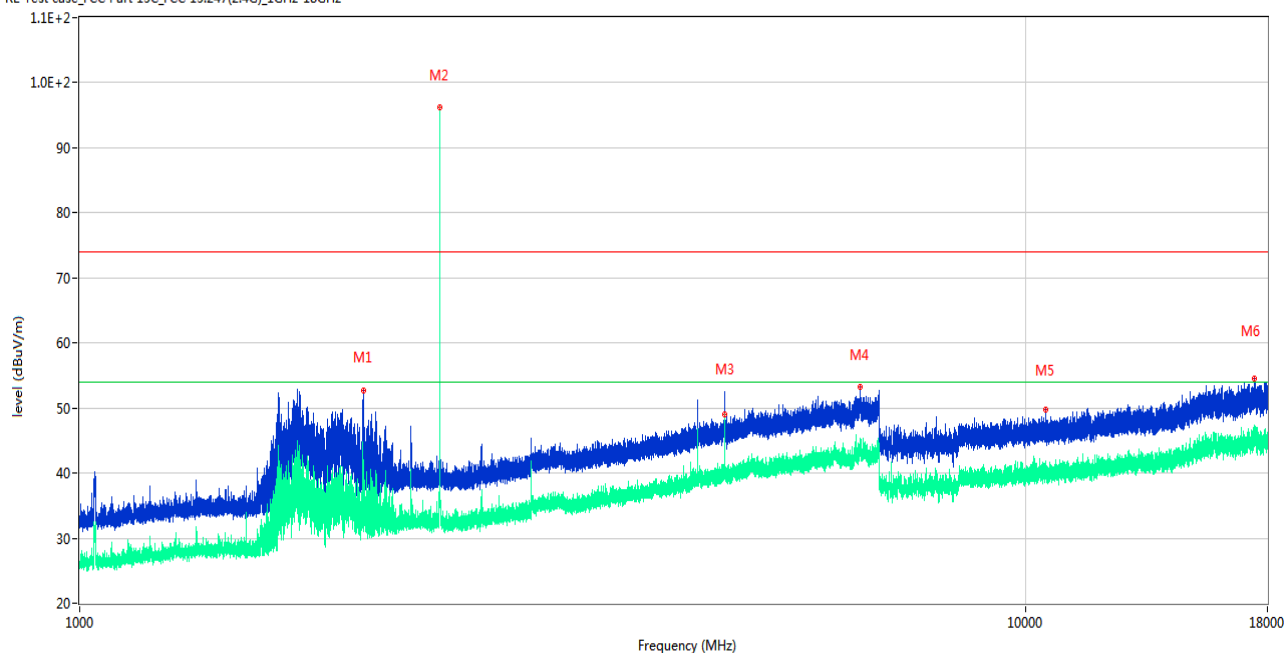

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.400	52.74	-15.59	74.0	-21.26	Peak	89.00	150	Vertical	Pass
1**	1994.400	39.38	-15.59	54.0	-14.62	AV	89.00	150	Vertical	Pass
2	2401.800	96.53	-12.26	74.0	22.53	Peak	51.00	150	Vertical	N/A
2**	2401.800	94.53	-12.26	54.0	40.53	AV	51.00	150	Vertical	N/A
3	4804.400	51.92	-2.78	74.0	-22.08	Peak	293.00	150	Vertical	Pass
3**	4804.400	48.97	-2.78	54.0	-5.03	AV	293.00	150	Vertical	Pass
4	6685.000	53.24	-0.21	74.0	-20.76	Peak	0.00	150	Vertical	Pass
4**	6685.000	44.60	-0.21	54.0	-9.40	AV	0.00	150	Vertical	Pass
5	10482.775	49.81	-0.86	74.0	-24.19	Peak	361.00	150	Vertical	Pass
5**	10482.775	39.56	-0.86	54.0	-14.44	AV	361.00	150	Vertical	Pass
6	17421.187	54.52	3.72	74.0	-19.48	Peak	122.00	150	Vertical	Pass
6**	17421.187	45.30	3.72	54.0	-8.70	AV	122.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

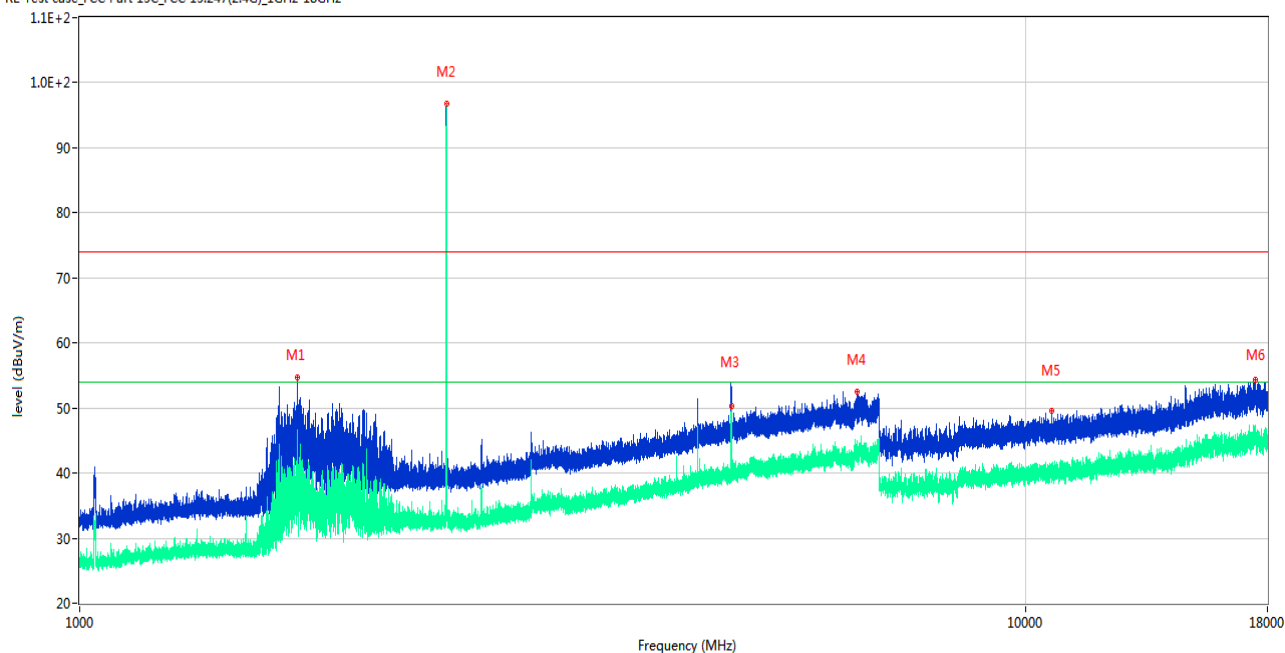

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1698.000	54.71	-17.30	74.0	-19.29	Peak	5.00	150	Vertical	Pass
1**	1698.000	42.43	-17.30	54.0	-11.57	AV	5.00	150	Vertical	Pass
2	2440.800	97.13	-12.79	74.0	23.13	Peak	49.00	150	Vertical	N/A
2**	2440.800	95.99	-12.79	54.0	41.99	AV	49.00	150	Vertical	N/A
3	4882.000	52.87	-3.42	74.0	-21.13	Peak	237.00	150	Vertical	Pass
3**	4882.000	50.26	-3.42	54.0	-3.74	AV	237.00	150	Vertical	Pass
4	6632.400	52.44	-0.35	74.0	-21.56	Peak	223.00	150	Vertical	Pass
4**	6632.400	42.68	-0.35	54.0	-11.32	AV	223.00	150	Vertical	Pass
5	10654.412	49.55	-0.67	74.0	-24.45	Peak	115.00	150	Vertical	Pass
5**	10654.412	39.45	-0.67	54.0	-14.55	AV	115.00	150	Vertical	Pass
6	17465.025	54.31	2.89	74.0	-19.69	Peak	-3.00	150	Vertical	Pass
6**	17465.025	45.64	2.89	54.0	-8.36	AV	-3.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

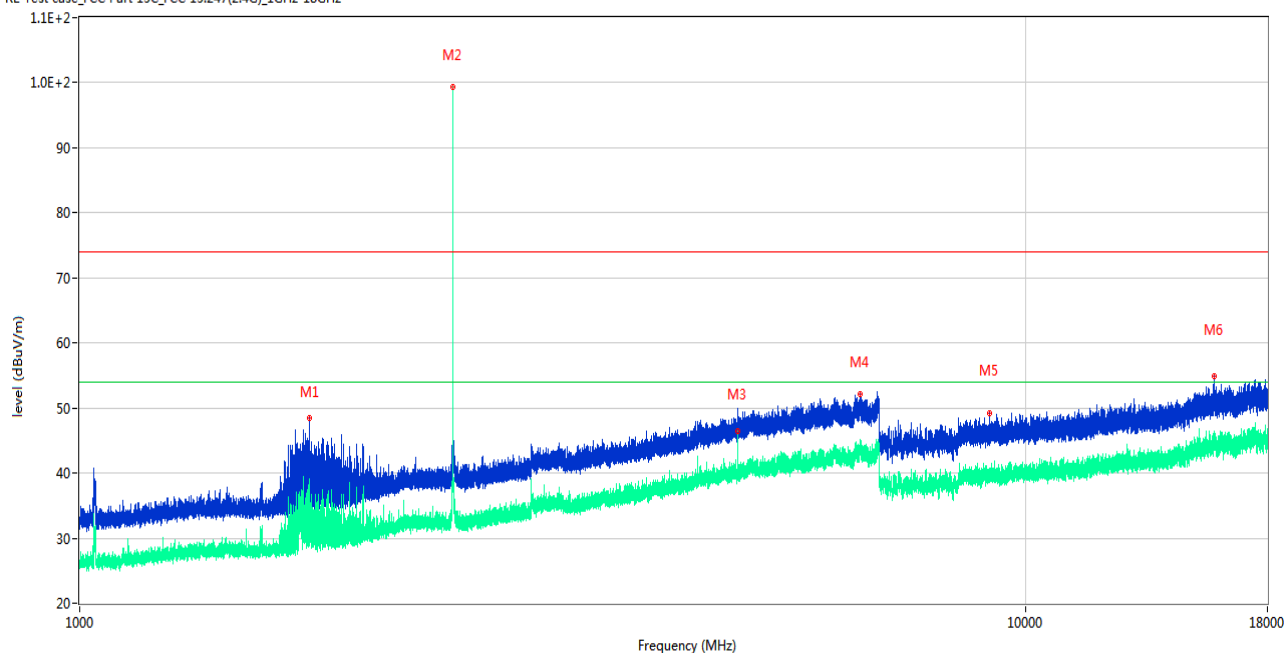

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1750.900	48.44	-17.29	74.0	-25.56	Peak	132.00	150	Horizontal	Pass
1**	1750.900	35.88	-17.29	54.0	-18.12	AV	132.00	150	Horizontal	Pass
2	2479.800	99.67	-12.43	74.0	25.67	Peak	157.00	150	Horizontal	N/A
2**	2479.800	97.83	-12.43	54.0	43.83	AV	157.00	150	Horizontal	N/A
3	4960.400	49.92	-3.27	74.0	-24.08	Peak	161.00	150	Horizontal	Pass
3**	4960.400	46.51	-3.27	54.0	-7.49	AV	161.00	150	Horizontal	Pass
4	6674.600	52.07	-0.66	74.0	-21.93	Peak	237.00	150	Horizontal	Pass
4**	6674.600	43.45	-0.66	54.0	-10.55	AV	237.00	150	Horizontal	Pass
5	9153.375	49.24	-1.57	74.0	-24.76	Peak	50.00	150	Horizontal	Pass
5**	9153.375	39.64	-1.57	54.0	-14.36	AV	50.00	150	Horizontal	Pass
6	15800.250	54.88	2.33	74.0	-19.12	Peak	360.00	150	Horizontal	Pass
6**	15800.250	44.66	2.33	54.0	-9.34	AV	360.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

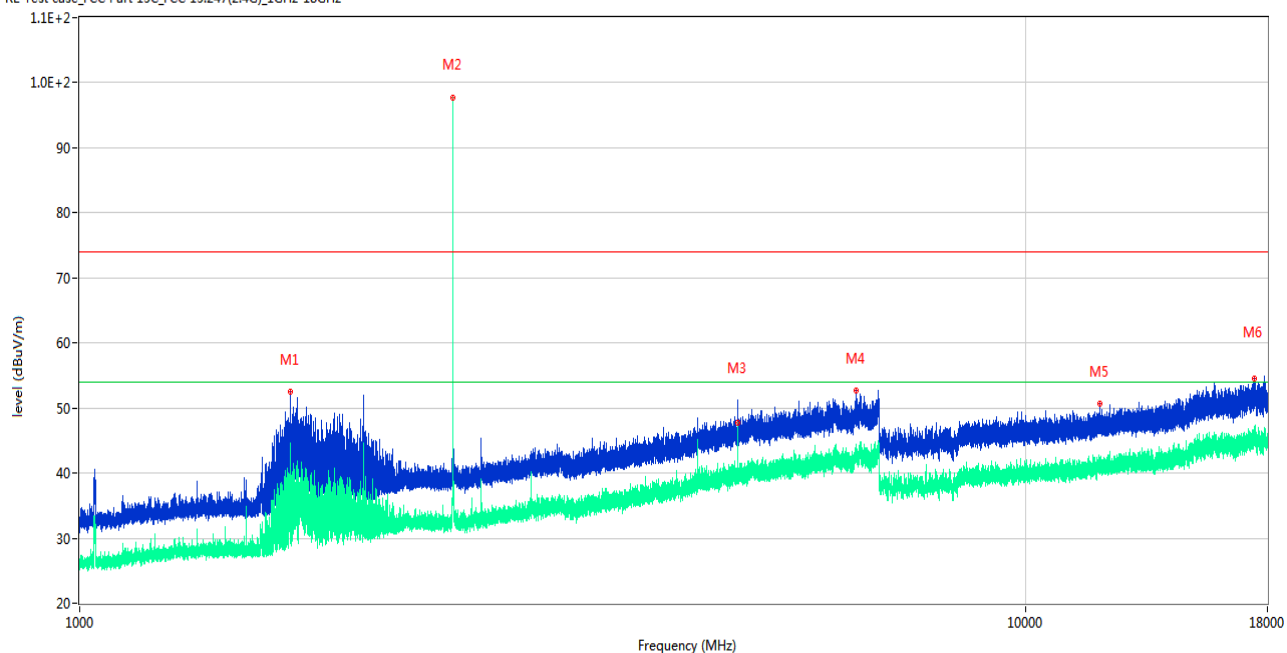

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1668.100	52.55	-17.34	74.0	-21.45	Peak	360.00	150	Vertical	Pass
1**	1668.100	30.24	-17.34	54.0	-23.76	AV	360.00	150	Vertical	Pass
2	2479.800	97.95	-12.43	74.0	23.95	Peak	28.00	150	Vertical	N/A
2**	2479.800	97.06	-12.43	54.0	43.06	AV	28.00	150	Vertical	N/A
3	4960.400	49.79	-3.27	74.0	-24.21	Peak	278.00	150	Vertical	Pass
3**	4960.400	47.71	-3.27	54.0	-6.29	AV	278.00	150	Vertical	Pass
4	6608.800	52.71	0.13	74.0	-21.29	Peak	339.00	150	Vertical	Pass
4**	6608.800	43.00	0.13	54.0	-11.00	AV	339.00	150	Vertical	Pass
5	11982.375	50.67	0.92	74.0	-23.33	Peak	138.00	150	Vertical	Pass
5**	11982.375	40.98	0.92	54.0	-13.02	AV	138.00	150	Vertical	Pass
6	17421.449	54.55	3.72	74.0	-19.45	Peak	109.00	150	Vertical	Pass
6**	17421.449	46.20	3.72	54.0	-7.80	AV	109.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

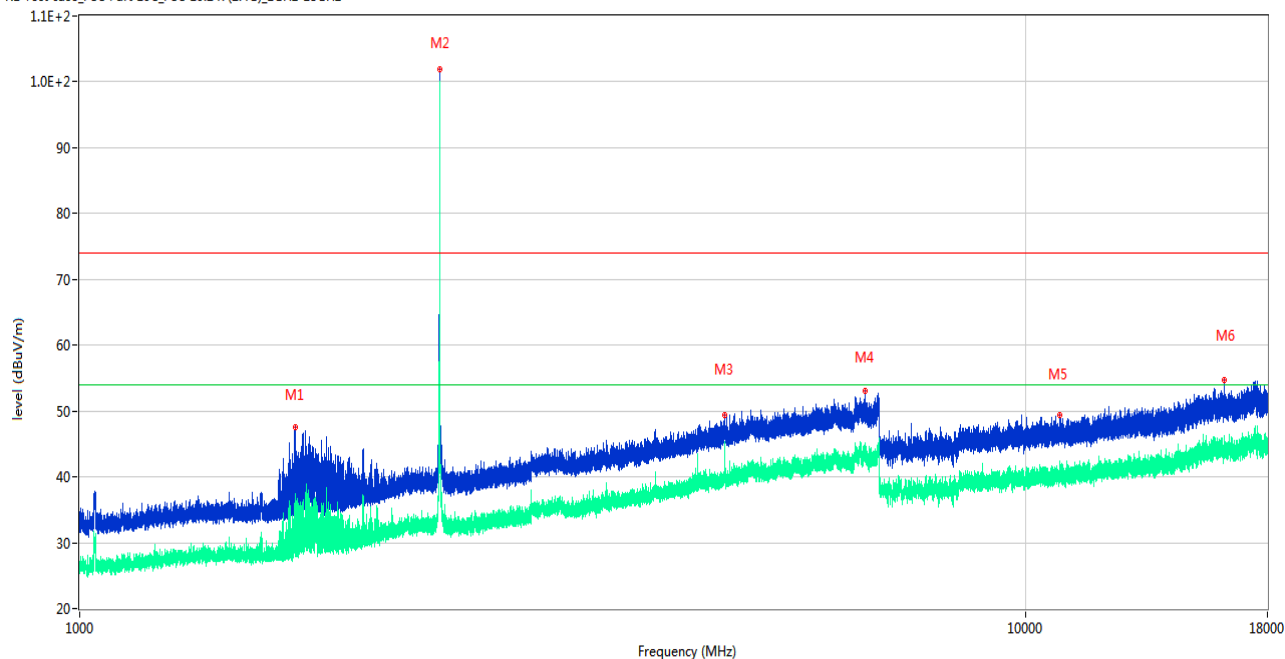

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1691.100	47.51	-17.27	74.0	-26.49	Peak	105.00	150	Horizontal	Pass
1**	1691.100	31.00	-17.27	54.0	-23.00	AV	105.00	150	Horizontal	Pass
2	2401.800	102.01	-12.26	74.0	28.01	Peak	130.00	150	Horizontal	N/A
2**	2401.800	99.34	-12.26	54.0	45.34	AV	130.00	150	Horizontal	N/A
3	4804.000	49.30	-2.75	74.0	-24.70	Peak	188.00	150	Horizontal	Pass
3**	4804.000	43.94	-2.75	54.0	-10.06	AV	188.00	150	Horizontal	Pass
4	6756.000	53.08	-0.91	74.0	-20.92	Peak	349.00	150	Horizontal	Pass
4**	6756.000	42.51	-0.91	54.0	-11.49	AV	349.00	150	Horizontal	Pass
5	10867.162	49.34	-0.18	74.0	-24.66	Peak	363.00	150	Horizontal	Pass
5**	10867.162	40.59	-0.18	54.0	-13.41	AV	363.00	150	Horizontal	Pass
6	16221.563	54.70	1.29	74.0	-19.30	Peak	198.00	150	Horizontal	Pass
6**	16221.563	44.48	1.29	54.0	-9.52	AV	198.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

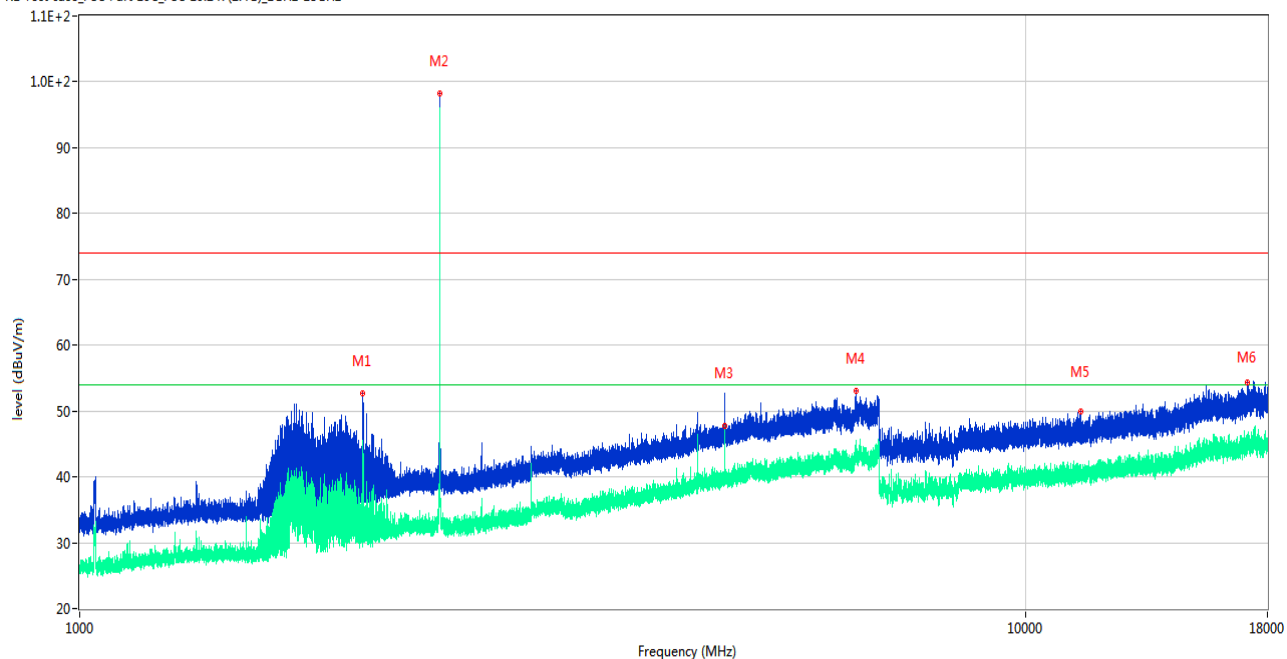

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.800	52.72	-15.53	74.0	-21.28	Peak	30.00	150	Vertical	Pass
1**	1991.800	36.81	-15.53	54.0	-17.19	AV	30.00	150	Vertical	Pass
2	2402.000	98.23	-12.26	74.0	24.23	Peak	47.00	150	Vertical	N/A
2**	2402.000	95.76	-12.26	54.0	41.76	AV	47.00	150	Vertical	N/A
3	4804.200	52.62	-2.76	74.0	-21.38	Peak	280.00	150	Vertical	Pass
3**	4804.200	47.76	-2.76	54.0	-6.24	AV	280.00	150	Vertical	Pass
4	6612.400	53.09	0.19	74.0	-20.91	Peak	136.00	150	Vertical	Pass
4**	6612.400	43.31	0.19	54.0	-10.69	AV	136.00	150	Vertical	Pass
5	11417.725	49.91	-0.12	74.0	-24.09	Peak	361.00	150	Vertical	Pass
5**	11417.725	40.01	-0.12	54.0	-13.99	AV	361.00	150	Vertical	Pass
6	17132.700	54.33	2.23	74.0	-19.67	Peak	334.00	150	Vertical	Pass
6**	17132.700	45.27	2.23	54.0	-8.73	AV	334.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

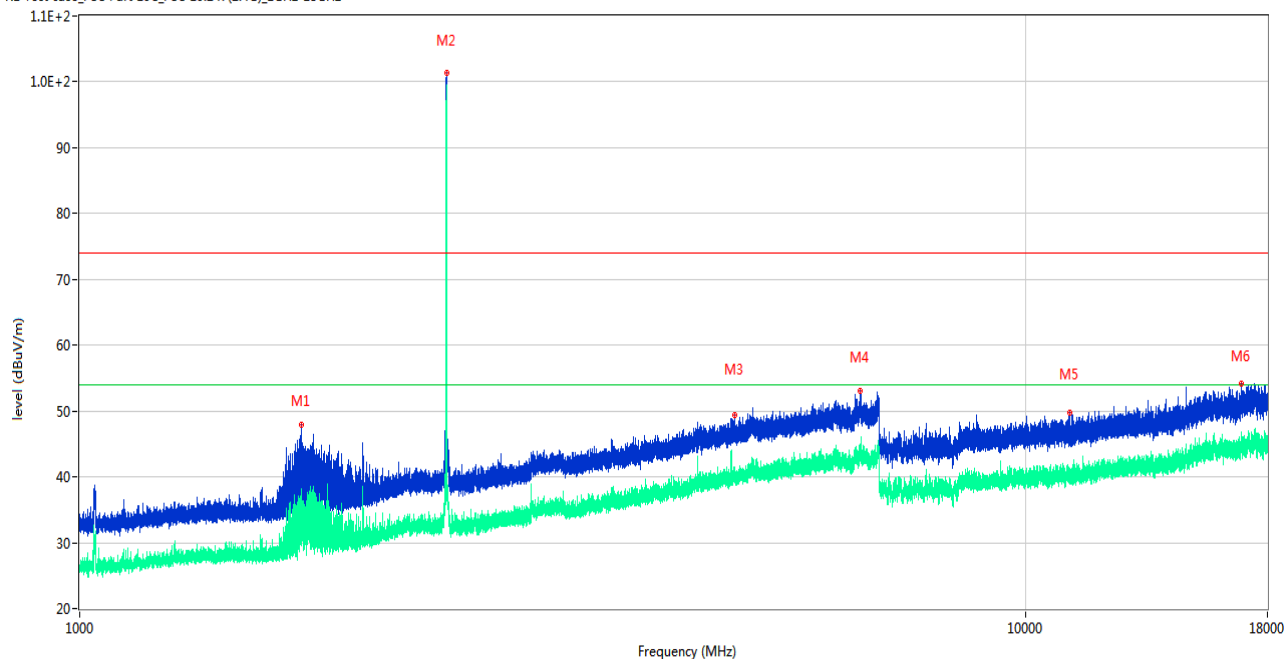

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1714.700	47.95	-17.23	74.0	-26.05	Peak	98.00	150	Horizontal	Pass
1**	1714.700	32.84	-17.23	54.0	-21.16	AV	98.00	150	Horizontal	Pass
2	2440.900	101.31	-12.80	74.0	27.31	Peak	115.00	150	Horizontal	N/A
2**	2440.900	98.30	-12.80	54.0	44.30	AV	115.00	150	Horizontal	N/A
3	4921.800	49.45	-2.53	74.0	-24.55	Peak	153.00	150	Horizontal	Pass
3**	4921.800	40.35	-2.53	54.0	-13.65	AV	153.00	150	Horizontal	Pass
4	6687.800	53.01	-0.24	74.0	-20.99	Peak	0.00	150	Horizontal	Pass
4**	6687.800	43.30	-0.24	54.0	-10.70	AV	0.00	150	Horizontal	Pass
5	11119.875	49.82	-0.68	74.0	-24.18	Peak	310.00	150	Horizontal	Pass
5**	11119.875	39.96	-0.68	54.0	-14.04	AV	310.00	150	Horizontal	Pass
6	16886.738	54.23	1.16	74.0	-19.77	Peak	26.00	150	Horizontal	Pass
6**	16886.738	45.63	1.16	54.0	-8.37	AV	26.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

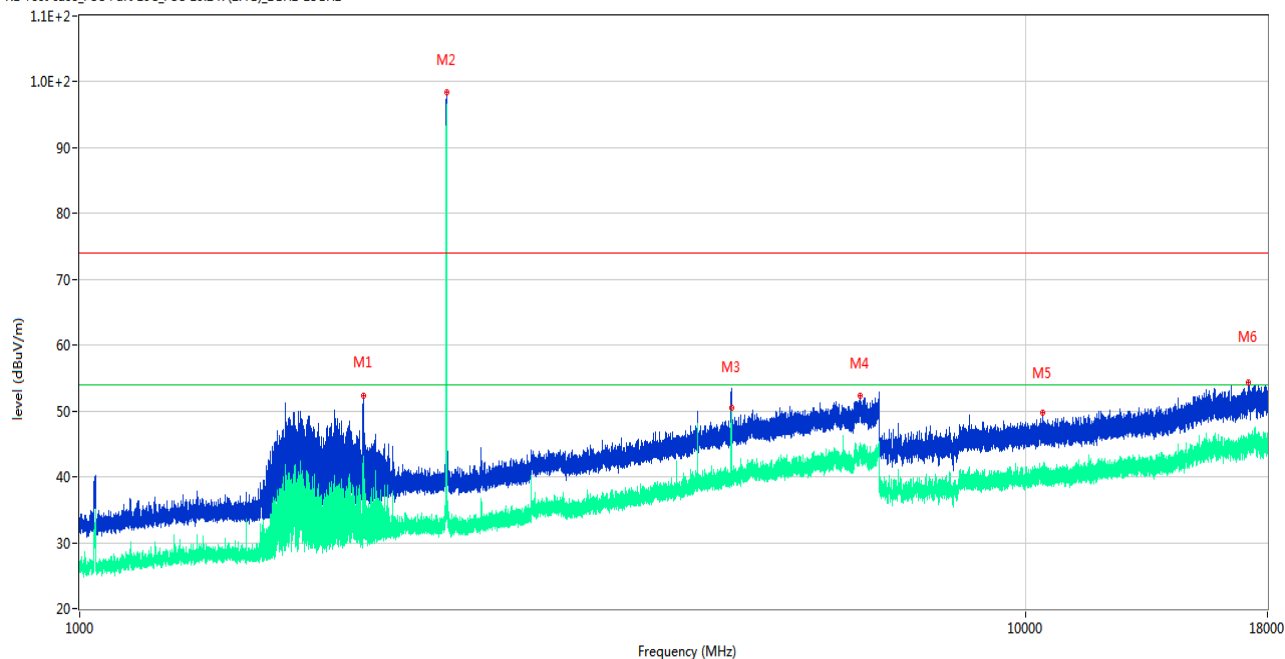

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1996.200	52.40	-15.52	74.0	-21.60	Peak	96.00	150	Vertical	Pass
1**	1996.200	32.31	-15.52	54.0	-21.69	AV	96.00	150	Vertical	Pass
2	2441.100	98.40	-12.83	74.0	24.40	Peak	46.00	150	Vertical	N/A
2**	2441.100	96.26	-12.83	54.0	42.26	AV	46.00	150	Vertical	N/A
3	4882.400	52.90	-3.40	74.0	-21.10	Peak	269.00	150	Vertical	Pass
3**	4882.400	50.45	-3.40	54.0	-3.55	AV	269.00	150	Vertical	Pass
4	6687.000	52.27	-0.22	74.0	-21.73	Peak	243.00	150	Vertical	Pass
4**	6687.000	43.78	-0.22	54.0	-10.22	AV	243.00	150	Vertical	Pass
5	10417.512	49.70	0.04	74.0	-24.30	Peak	172.00	150	Vertical	Pass
5**	10417.512	39.67	0.04	54.0	-14.33	AV	172.00	150	Vertical	Pass
6	17178.375	54.43	2.62	74.0	-19.57	Peak	232.00	150	Vertical	Pass
6**	17178.375	44.83	2.62	54.0	-9.17	AV	232.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

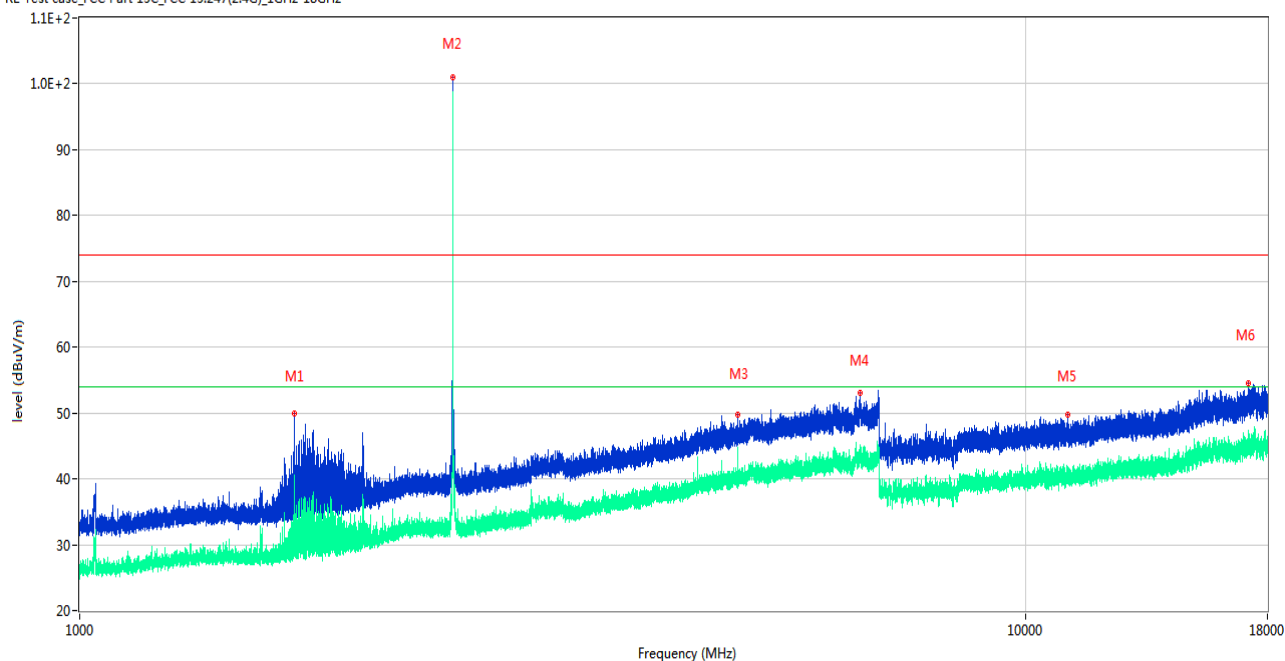

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1684.800	49.93	-17.41	74.0	-24.07	Peak	101.00	150	Horizontal	Pass
1**	1684.800	32.98	-17.41	54.0	-21.02	AV	101.00	150	Horizontal	Pass
2	2480.100	101.08	-12.43	74.0	27.08	Peak	144.00	150	Horizontal	N/A
2**	2480.100	98.42	-12.43	54.0	44.42	AV	144.00	150	Horizontal	N/A
3	4960.200	49.78	-3.28	74.0	-24.22	Peak	155.00	150	Horizontal	Pass
3**	4960.200	43.41	-3.28	54.0	-10.59	AV	155.00	150	Horizontal	Pass
4	6686.800	53.13	-0.22	74.0	-20.87	Peak	36.00	150	Horizontal	Pass
4**	6686.800	44.08	-0.22	54.0	-9.92	AV	36.00	150	Horizontal	Pass
5	11070.425	49.72	-1.10	74.0	-24.28	Peak	38.00	150	Horizontal	Pass
5**	11070.425	40.35	-1.10	54.0	-13.65	AV	38.00	150	Horizontal	Pass
6	17200.425	54.62	1.87	74.0	-19.38	Peak	262.00	150	Horizontal	Pass
6**	17200.425	45.08	1.87	54.0	-8.92	AV	262.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

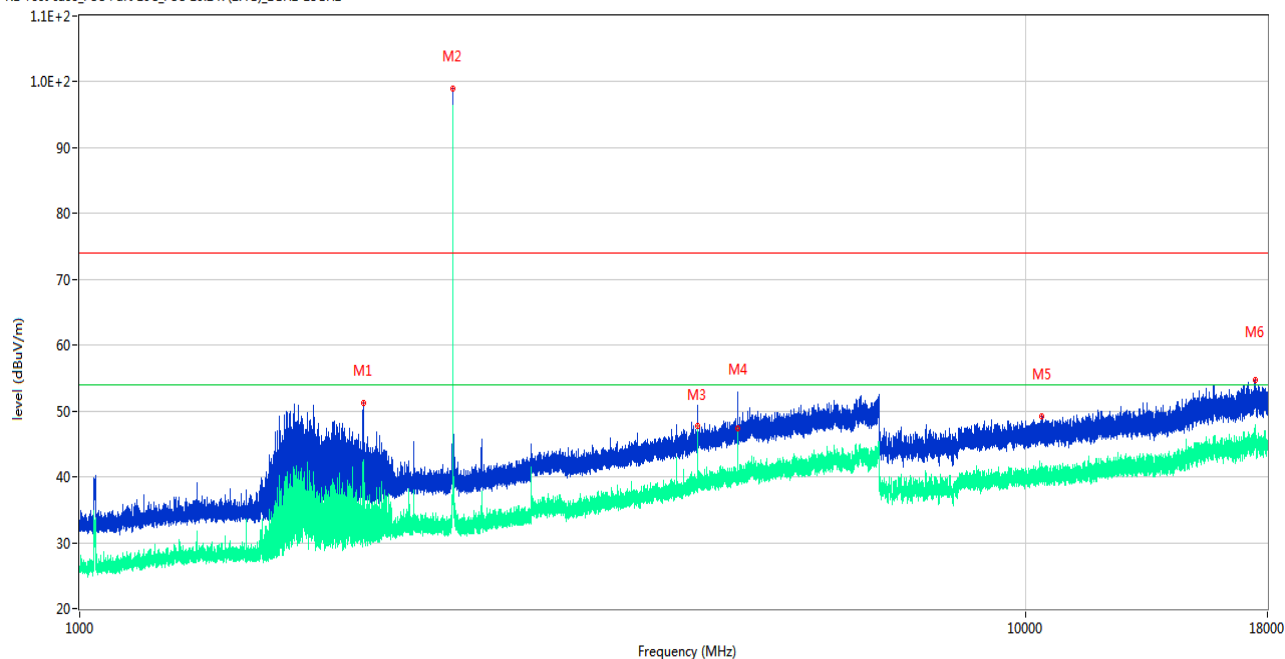


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.600	51.27	-15.59	74.0	-22.73	Peak	89.00	150	Vertical	Pass
1**	1994.600	42.55	-15.59	54.0	-11.45	AV	89.00	150	Vertical	Pass
2	2479.900	98.92	-12.43	74.0	24.92	Peak	13.00	150	Vertical	N/A
2**	2479.900	95.03	-12.43	54.0	41.03	AV	13.00	150	Vertical	N/A
3	4500.000	50.93	-4.46	74.0	-23.07	Peak	88.00	150	Vertical	Pass
3**	4500.000	47.69	-4.46	54.0	-6.31	AV	88.00	150	Vertical	Pass
4	4960.200	51.09	-3.28	74.0	-22.91	Peak	302.00	150	Vertical	Pass
4**	4960.200	47.45	-3.28	54.0	-6.55	AV	302.00	150	Vertical	Pass
5	10404.000	49.13	-0.07	74.0	-24.87	Peak	360.00	150	Vertical	Pass
5**	10404.000	39.99	-0.07	54.0	-14.01	AV	360.00	150	Vertical	Pass
6	17466.864	54.72	2.90	74.0	-19.28	Peak	360.00	150	Vertical	Pass
6**	17466.864	45.42	2.90	54.0	-8.58	AV	360.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

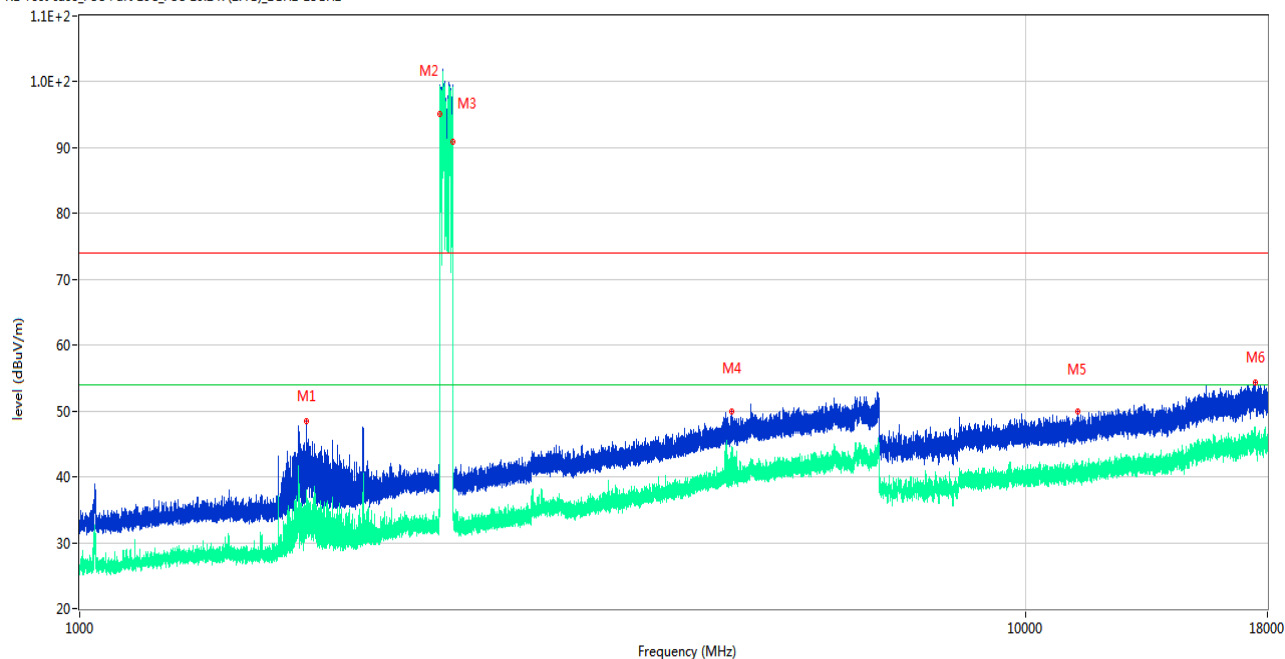

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1737.300	48.40	-17.06	74.0	-25.60	Peak	102.00	150	Horizontal	Pass
1**	1737.300	31.75	-17.06	54.0	-22.25	AV	102.00	150	Horizontal	Pass
2	2402.700	99.30	-12.27	74.0	25.30	Peak	110.00	150	Horizontal	N/A
2**	2402.700	95.17	-12.27	54.0	41.17	AV	110.00	150	Horizontal	N/A
3	2480.800	91.15	-12.42	74.0	17.15	Peak	149.00	150	Horizontal	N/A
3**	2480.800	90.91	-12.42	54.0	36.91	AV	149.00	150	Horizontal	N/A
4	4893.600	49.93	-3.21	74.0	-24.07	Peak	192.00	150	Horizontal	Pass
4**	4893.600	40.48	-3.21	54.0	-13.52	AV	192.00	150	Horizontal	Pass
5	11357.350	49.85	-0.19	74.0	-24.15	Peak	147.00	150	Horizontal	Pass
5**	11357.350	40.50	-0.19	54.0	-13.50	AV	147.00	150	Horizontal	Pass
6	17463.714	54.27	2.88	74.0	-19.73	Peak	58.00	150	Horizontal	Pass
6**	17463.714	46.24	2.88	54.0	-7.76	AV	58.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

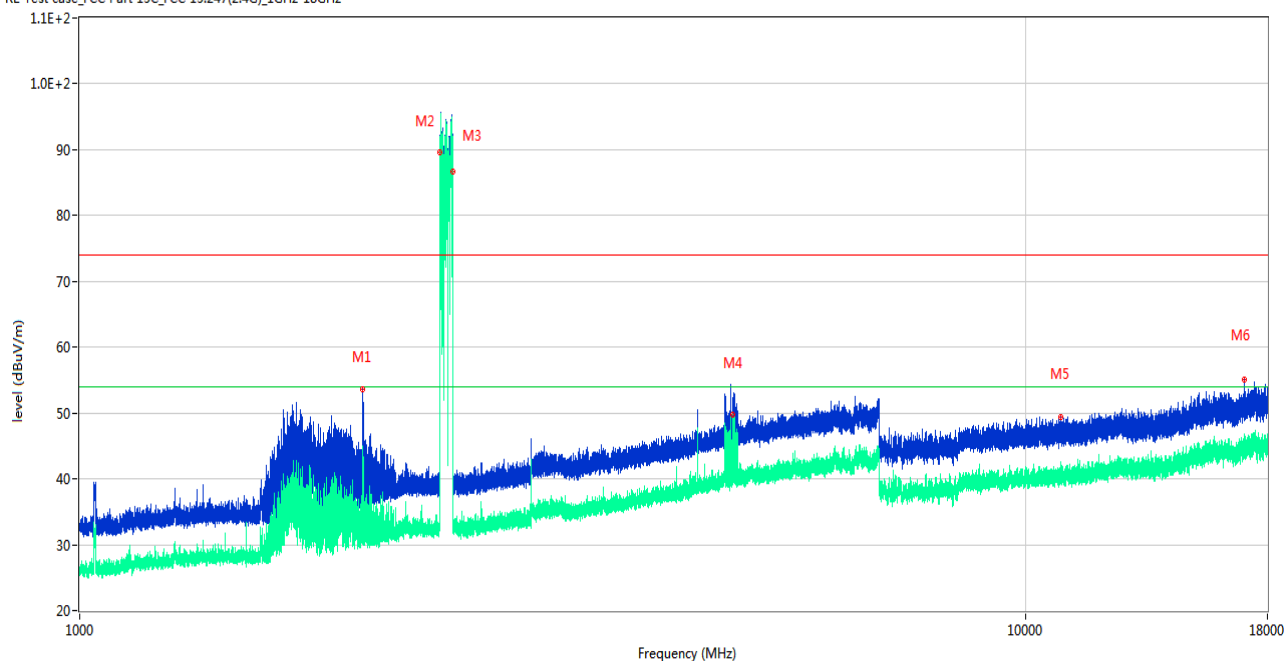

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.500	53.64	-15.51	74.0	-20.36	Peak	98.00	150	Vertical	Pass
1**	1991.500	37.02	-15.51	54.0	-16.98	AV	98.00	150	Vertical	Pass
2	2402.800	91.93	-12.27	74.0	17.93	Peak	25.00	150	Vertical	N/A
2**	2402.800	89.66	-12.27	54.0	35.66	AV	25.00	150	Vertical	N/A
3	2479.300	86.42	-12.44	74.0	12.42	Peak	74.00	150	Vertical	N/A
3**	2479.300	86.26	-12.44	54.0	32.26	AV	74.00	150	Vertical	N/A
4	4902.400	51.03	-2.69	74.0	-22.97	Peak	277.00	150	Vertical	Pass
4**	4902.400	49.79	-2.69	54.0	-4.21	AV	277.00	150	Vertical	Pass
5	10894.474	49.41	0.09	74.0	-24.59	Peak	49.00	150	Vertical	Pass
5**	10894.474	42.58	0.09	54.0	-11.42	AV	49.00	150	Vertical	Pass
6	17009.324	55.07	1.70	74.0	-18.93	Peak	-3.00	150	Vertical	Pass
6**	17009.324	46.32	1.70	54.0	-7.68	AV	-3.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

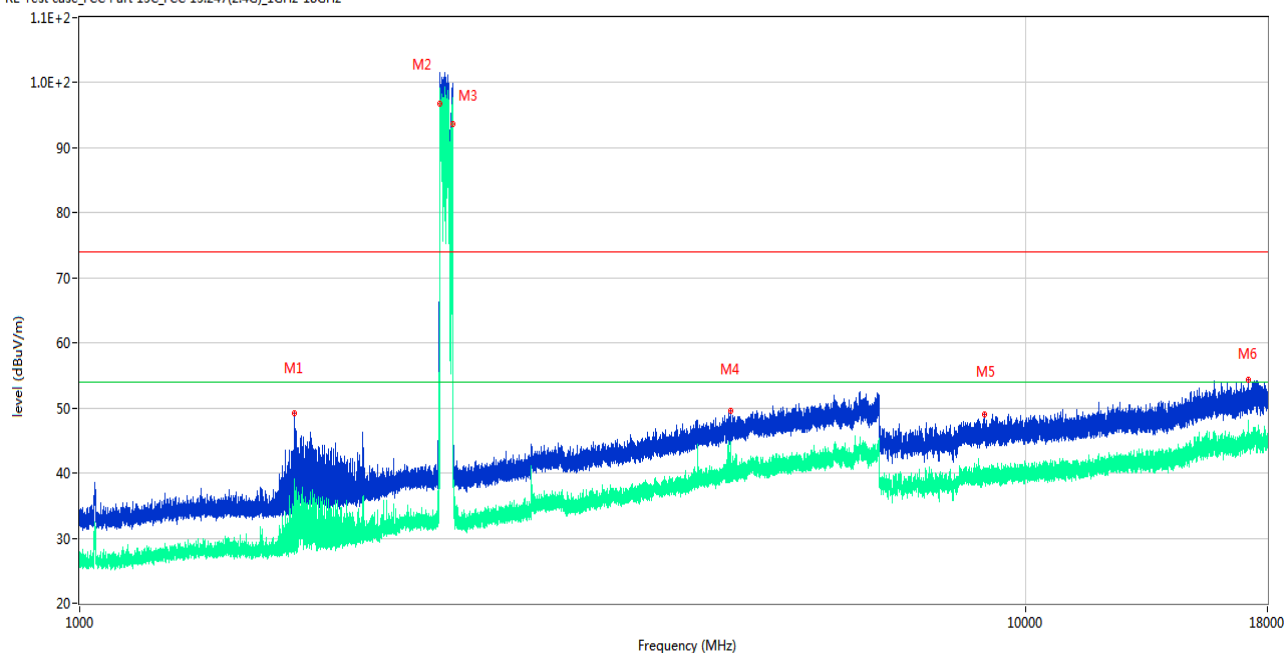

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1686.400	49.25	-17.47	74.0	-24.75	Peak	99.00	150	Horizontal	Pass
1**	1686.400	31.31	-17.47	54.0	-22.69	AV	99.00	150	Horizontal	Pass
2	2401.800	101.44	-12.26	74.0	27.44	Peak	115.00	150	Horizontal	N/A
2**	2401.800	96.81	-12.26	54.0	42.81	AV	115.00	150	Horizontal	N/A
3	2478.200	96.00	-12.47	74.0	22.00	Peak	165.00	150	Horizontal	N/A
3**	2478.200	93.72	-12.47	54.0	39.72	AV	165.00	150	Horizontal	N/A
4	4872.400	49.55	-3.30	74.0	-24.45	Peak	233.00	150	Horizontal	Pass
4**	4872.400	44.60	-3.30	54.0	-9.40	AV	233.00	150	Horizontal	Pass
5	9038.950	49.00	-1.06	74.0	-25.00	Peak	137.00	150	Horizontal	Pass
5**	9038.950	39.17	-1.06	54.0	-14.83	AV	137.00	150	Horizontal	Pass
6	17203.837	54.42	1.70	74.0	-19.58	Peak	26.00	150	Horizontal	Pass
6**	17203.837	45.01	1.70	54.0	-8.99	AV	26.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

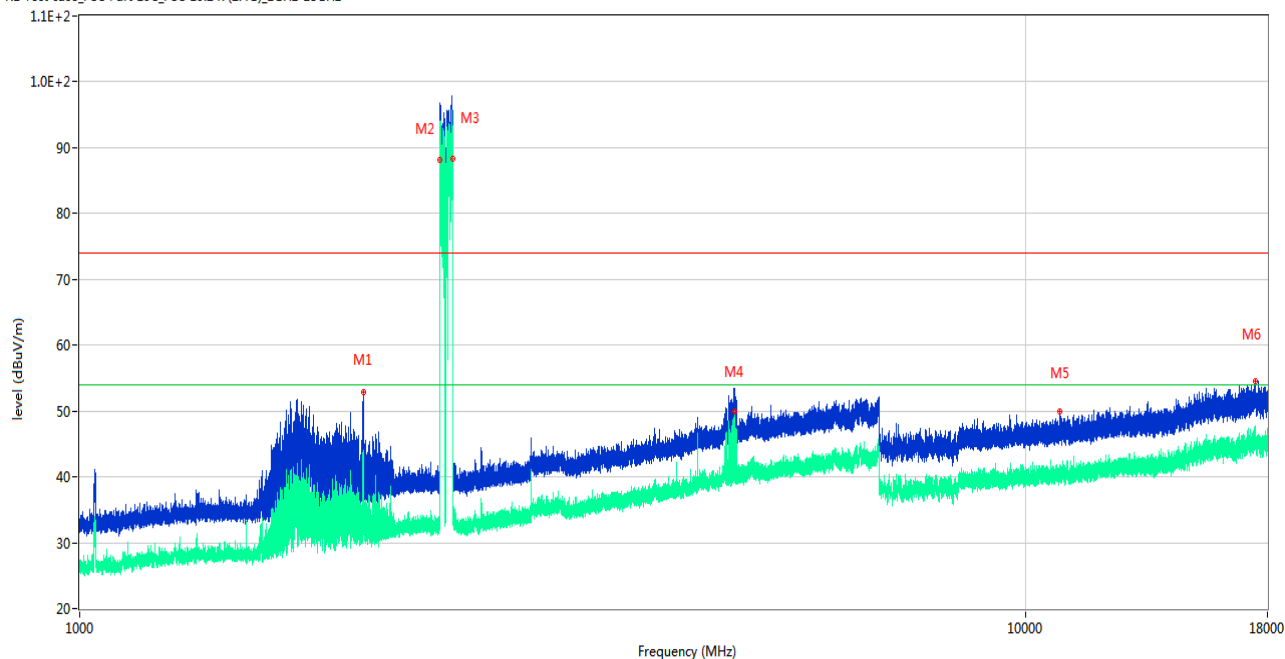

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.500	52.81	-15.59	74.0	-21.19	Peak	87.00	150	Vertical	Pass
1**	1994.500	36.67	-15.59	54.0	-17.33	AV	87.00	150	Vertical	Pass
2	2402.400	90.55	-12.27	74.0	16.55	Peak	53.00	150	Vertical	N/A
2**	2402.400	88.17	-12.27	54.0	34.17	AV	53.00	150	Vertical	N/A
3	2479.000	92.33	-12.45	74.0	18.33	Peak	155.00	150	Vertical	N/A
3**	2479.000	88.32	-12.45	54.0	34.32	AV	155.00	150	Vertical	N/A
4	4918.400	52.68	-2.33	74.0	-21.32	Peak	300.00	150	Vertical	Pass
4**	4918.400	50.00	-2.33	54.0	-4.00	AV	300.00	150	Vertical	Pass
5	10866.875	50.03	-0.17	74.0	-23.97	Peak	360.00	150	Vertical	Pass
5**	10866.875	40.04	-0.17	54.0	-13.96	AV	360.00	150	Vertical	Pass
6	17474.474	54.62	2.83	74.0	-19.38	Peak	361.00	150	Vertical	Pass
6**	17474.474	45.75	2.83	54.0	-8.25	AV	361.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note⁴: The Level (dBuV/m) has been corrected by factor.

Test Data


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	54.013	32.61	74	19.987	PEAK	Pass
		2390.00	44.638	32.61	54	9.362	AVERAGE	Pass
GFSK	HIGH	2483.50	53.057	32.54	74	20.943	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	53.819	32.61	74	20.181	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	54.907	32.54	74	19.093	PEAK	Pass
		2483.50	45.219	32.54	54	8.781	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	53.824	32.61	74	20.176	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	53.619	32.54	74	20.381	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	53.480	32.61	74	20.520	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	53.443	32.54	74	20.557	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots

GFSK LOW CHANNEL, PEAK

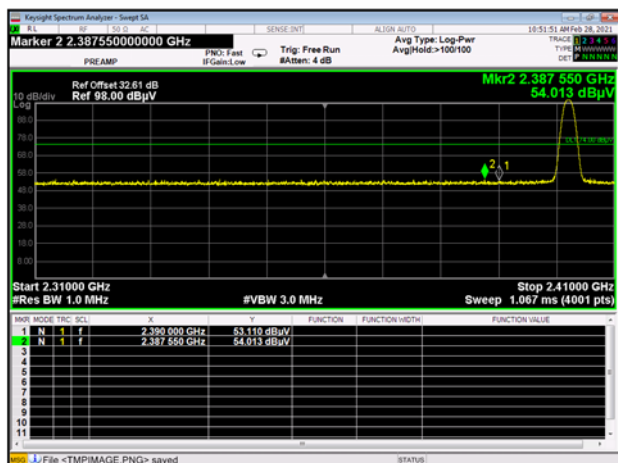


GFSK HIGH CHANNEL, PEAK

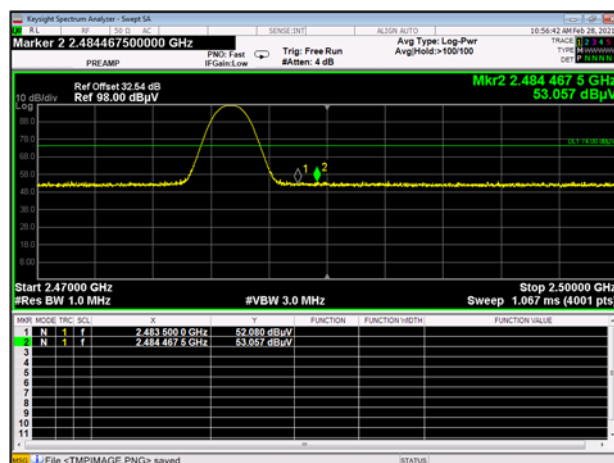


GFSK LOW CHANNEL, AV




8-DPSK LOW CHANNEL, PEAK

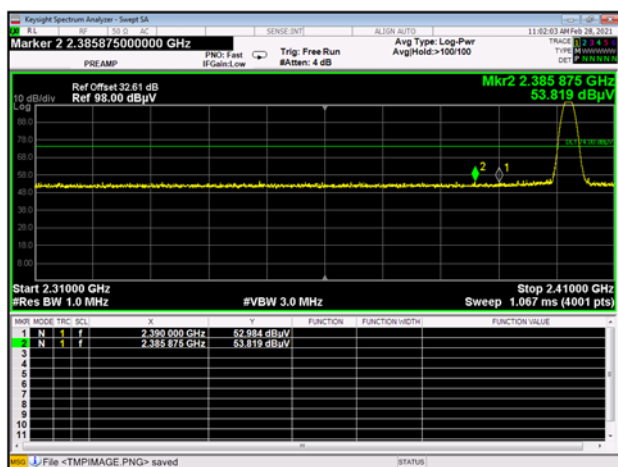

8-DPSK HIGH CHANNEL, PEAK

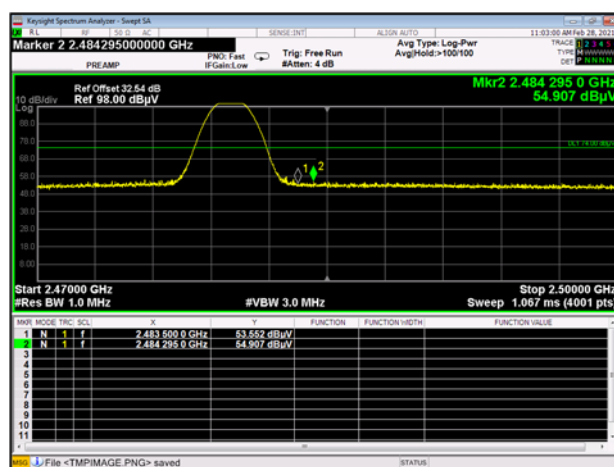


8-DPSK HIGH CHANNEL, AV

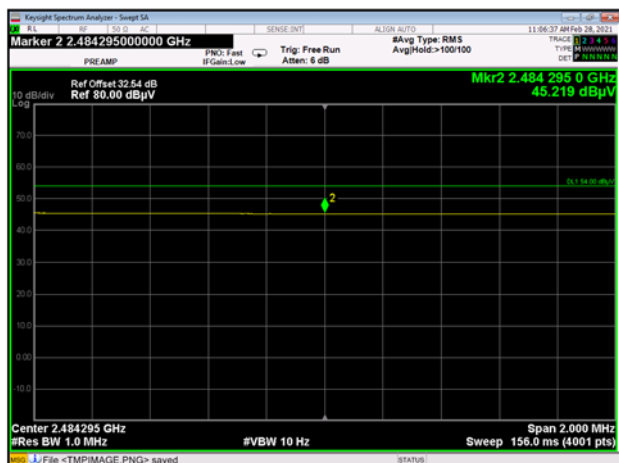

Hopping Mode:


GFSK LOW FREQUENCY BAND, PEAK

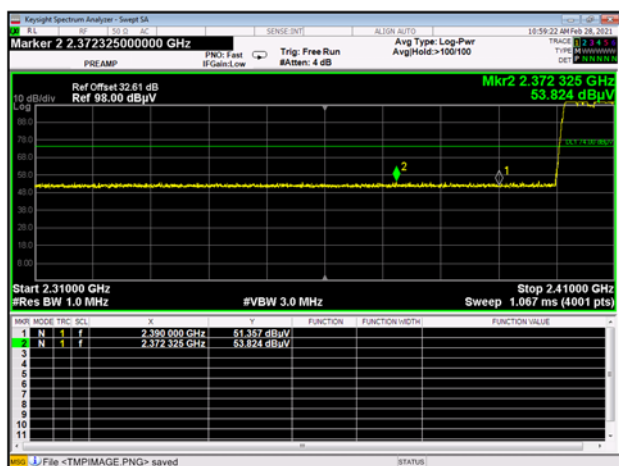


GFSK HIGH FREQUENCY BAND, PEAK



8-DPSK LOW FREQUENCY BAND, PEAK

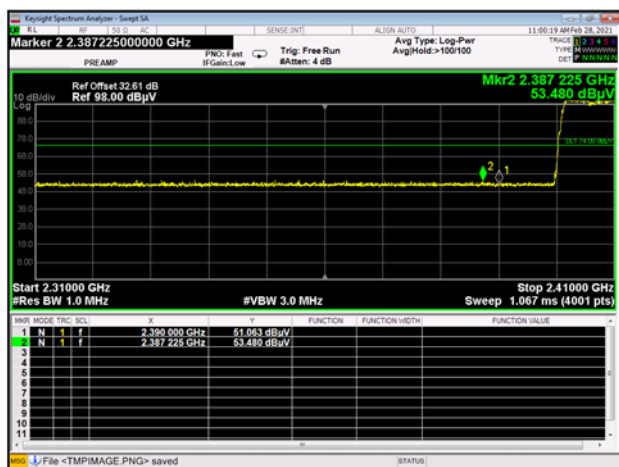

8-DPSK HIGH FREQUENCY BAND, PEAK

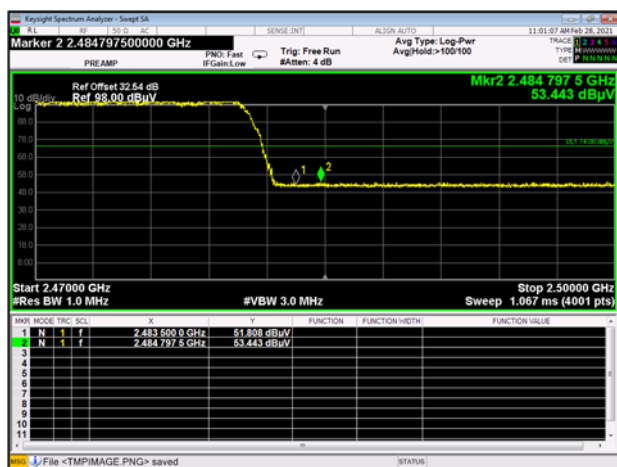

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2110415-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2110415-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2110415-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--