



FCC Test Report

Report No: FCS202510086W01

Issued for

Applicant:	Guangzhou Zhiying Technology Co., Ltd
Address:	Room 2401, Room 2402, Room 2403, Room 2404, Room 2409, No. 68, Huadi Avenue Middle, Liwan District, Guangzhou, China
Product Name:	Full Duplex Wireless Intercom Headset System
Brand Name:	SYNCO
Model Name:	Xtalk Master
Series Model:	Xtalk Master Plus, Xtalk Master Hub, Xtalk Master Node, Xtalk Master Fusion, Xtalk Fusion, Xtalk Master Axis, Xtalk Axis, Xtalk Master Trio, Xtalk Trio, Xtalk Master Base
FCC ID:	2AXWL-XM001
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 0769-27280901 Fax:0769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant Name.....: Guangzhou Zhiying Technology Co., Ltd

Address.....: Room 2401, Room 2402, Room 2403, Room 2404, Room 2409,
No. 68, Huadi Avenue Middle, Liwan District, Guangzhou, China

Manufacture Name.....: Guangzhou Shengke Technology Co., Ltd

Address.....: Room 405, Room 202, Building 1, Jiuwu Technology Park, No. 6
Baishan Road, Zhongcun Street, Panyu District, Guangzhou City

Product Description

Product Name.....: Full Duplex Wireless Intercom Headset System

Brand Name: SYNCO

Model Name.....: Xtalk Master

Series Model.....: See the first page of the report

Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249

Test Procedure.....: ANSI C63.10:2020

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: Oct. 14, 2025~Nov.18, 2025

Date of Issue.....: Nov.18, 2025

Test Result.....: Pass

Tested by : Mike Tan
(Mike Tan)

Reviewed by : Nels wang
(Nels Wang)

Approved by : Jack Wang
(Jack Wang)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
3 CONDUCTED EMISSION MEASUREMENT	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	14
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	18
5. BAND EDGE TEST	30
5.1 LIMIT	30
5.2 TEST PROCEDURE	30
5.3 TEST SETUP	31
5.4 TEST RESULTS	32
6. 20 DB BANDWIDTH TEST	32
6.1 LIMIT	36
6.2 TEST PROCEDURE	36
6.3 TEST SETUP	36
6.4 TEST RESULTS	37
7. ANTENNA REQUIREMENT	41
7.1 STANDARD REQUIREMENT	41
7.2 EUT ANTENNA	41

Revision History

Rev.	Issue Date	Effect Page	Contents
00	Nov.18, 2025	N/A	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	--
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2020
- (3) Cable loss compensation is in Offset. Correction is not set for compensation; only Correction is enabled

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 30MHz-1000MHz	± 3.2 dB
6	All emissions, radiated (1GHz -18GHz)	± 3.66 dB
7	All emissions, radiated (18GHz -40GHz)	± 4.31 dB
8	Occupied bandwidth	± 0.3 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Full Duplex Wireless Intercom Headset System
Trade Name	SYNCO
Model Name	Xtalk Master
Series Model	See the first page of the report
Model Difference	PCB board, structure and internal of these model(s) are the same, only differing in Model name and color. So no additional models were tested
Channel List	Please refer to the Note 2.
Specification	Frequency: A:2402-2480MHz B:2402-2480MHz Modulation: GFSK Channel number: 39CH
Power Supply	DC 5V $\pm$ 2A
Battery	DC 3.7V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List

Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Copper tube antenna	N/A	3.24	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: EMI_Test_Tool 1.0.0.0
nRF Connent for Desktop

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
Note: 1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode. 2. For radiated emission, 3 axis were chosen for testing for each applicable mode. 3. The EUT used fully charge battery when tested. 4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data	

Configuration and peripherals

Mode 1:



2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	XIAOMI	AD652G	N/A	this adapter is for testing only in repor

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2025.08.25	2026.08.24
Signal Analyzer	R&S	FSV40-N	FCS-E012	2025.08.25	2026.08.24
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2025.08.25	2026.08.24
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2025.08.25	2026.08.24
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2025.08.25	2026.08.24
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2025.08.25	2026.08.24
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2025.08.25	2026.08.24
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2025.08.25	2026.08.24
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E005	2025.08.25	2026.08.24
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2025.08.25	2026.08.24
LISN	R&S	ENV216	FCS-E007	2025.08.25	2026.08.24
LISN	ETS	3810/2NM	FCS-E009	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E008	2025.08.25	2026.08.24
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2025.08.25	2026.08.24
Spectrum Analyzer	Agilent	E4447A	MY50180039	2025.08.25	2026.08.24
Spectrum Analyzer	R&S	FSV-40	101499	2025.08.25	2026.08.24
Power Sensor	Agilent	UX2021XA	FCS-E021	2025.08.25	2026.08.24
Attenuator	Valley wave technology	SMA-CA110E 10 dB	FCS-E022	2025.08.25	2026.08.24
Power Meter	Keysight	N1912A	FCS-E023	2025.08.25	2026.08.24
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

3 CONDUCTED EMISSION MEASUREMENT

3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

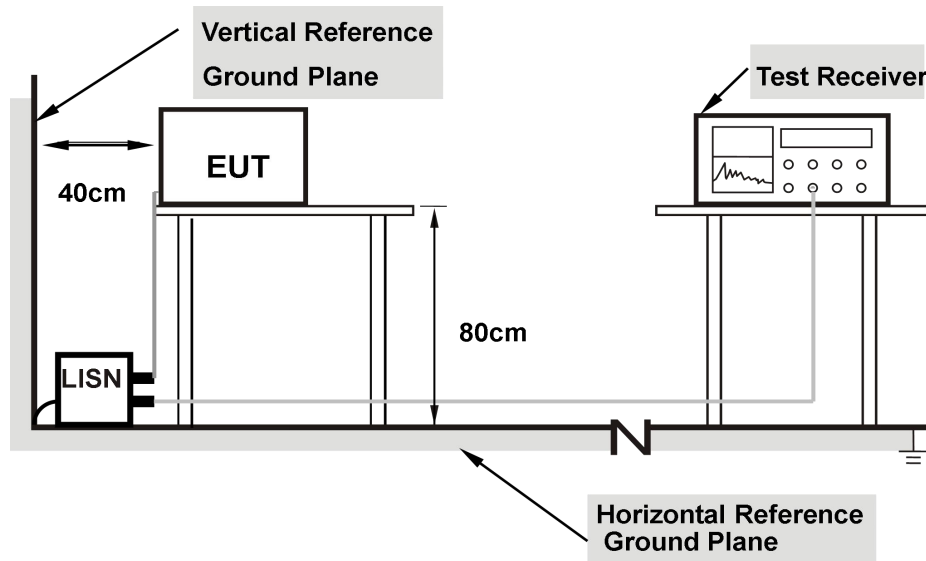


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST RESULTS


Temperature:	23.5℃	Relative Humidity:	59%
Phase:	L	Test Mode:	GFSK
Test Voltage:	DC 5V(Adapter AC 120V/60Hz)	Result:	Pass

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1995	38.92	10.08	49.00	63.63	14.63	QP
2	0.1995	21.78	10.08	31.86	53.63	21.77	AVG
3	0.5100	26.72	10.02	36.74	56.00	19.26	QP
4	0.5100	10.12	10.02	20.14	46.00	25.86	AVG
5	0.9105	22.25	9.99	32.24	56.00	23.76	QP
6	0.9105	1.51	9.99	11.50	46.00	34.50	AVG
7	3.6105	14.06	9.92	23.98	56.00	32.02	QP
8	3.6105	0.53	9.92	10.45	46.00	35.55	AVG
9	7.5525	14.63	9.82	24.45	60.00	35.55	QP
10	7.5525	3.81	9.82	13.63	50.00	36.37	AVG
11	22.1910	16.81	9.93	26.74	60.00	33.26	QP
12	22.1910	6.80	9.93	16.73	50.00	33.27	AVG

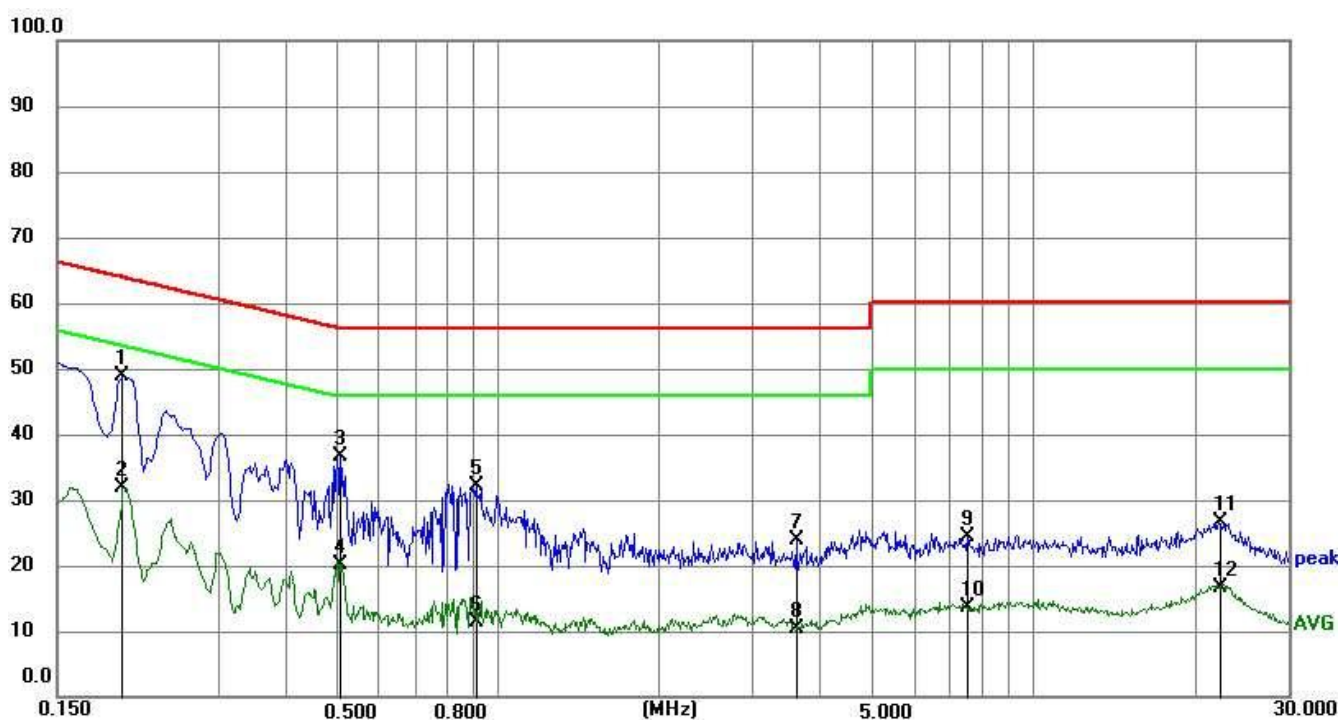

Temperature:	23.5°C	Relative Humidity:	59%
Phase:	N	Test Mode:	GFSK
Test Voltage:	DC 5V(Adapter AC 120V/60Hz)	Result:	Pass

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1725	38.47	10.07	48.54	64.84	16.30	QP
2	0.1725	18.92	10.07	28.99	54.84	25.85	AVG
3	0.2760	30.10	10.04	40.14	60.94	20.80	QP
4	0.2760	10.32	10.04	20.36	50.94	30.58	AVG
5	0.9195	19.64	9.99	29.63	56.00	26.37	QP
6	0.9195	-0.17	9.99	9.82	46.00	36.18	AVG
7	2.2740	15.27	9.95	25.22	56.00	30.78	QP
8	2.2740	1.98	9.95	11.93	46.00	34.07	AVG
9	4.7805	17.03	9.89	26.92	56.00	29.08	QP
10	4.7805	3.99	9.89	13.88	46.00	32.12	AVG
11	23.2395	18.70	9.99	28.69	60.00	31.31	QP
12	23.2395	7.21	9.99	17.20	50.00	32.80	AVG

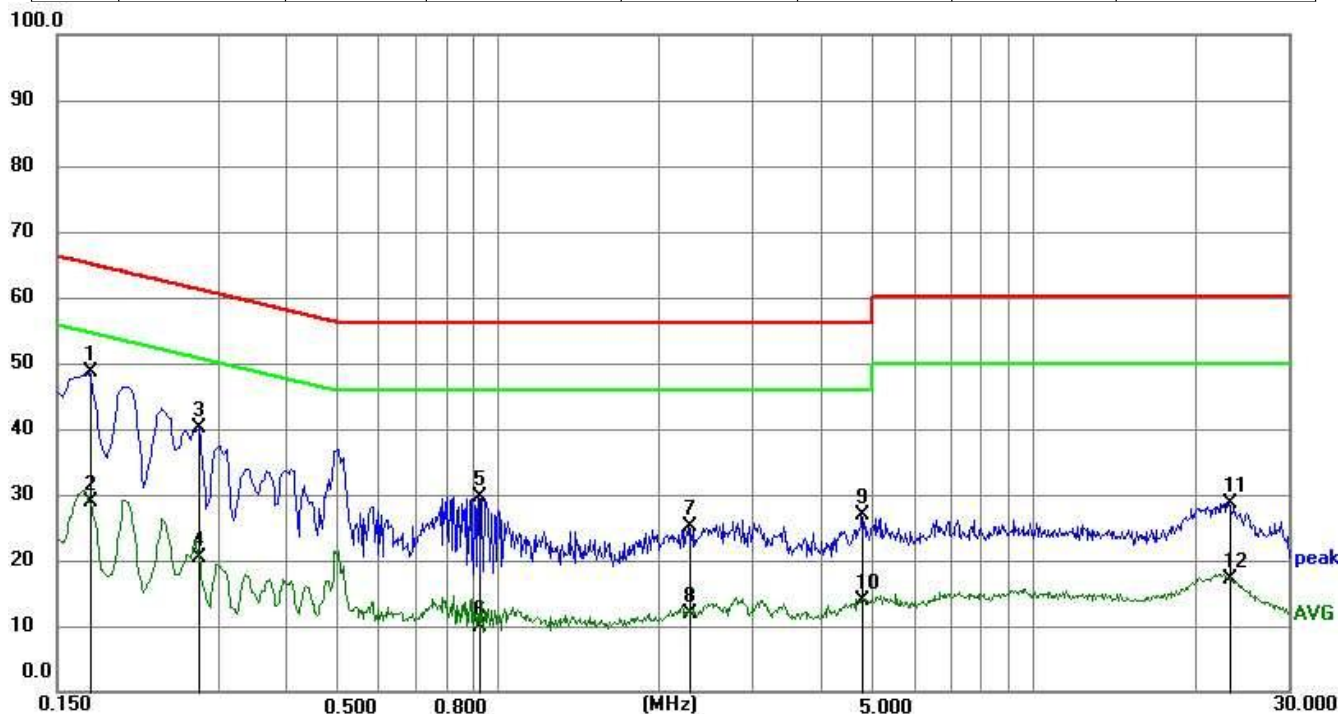

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

4. RADIATED EMISSION MEASUREMENT

4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

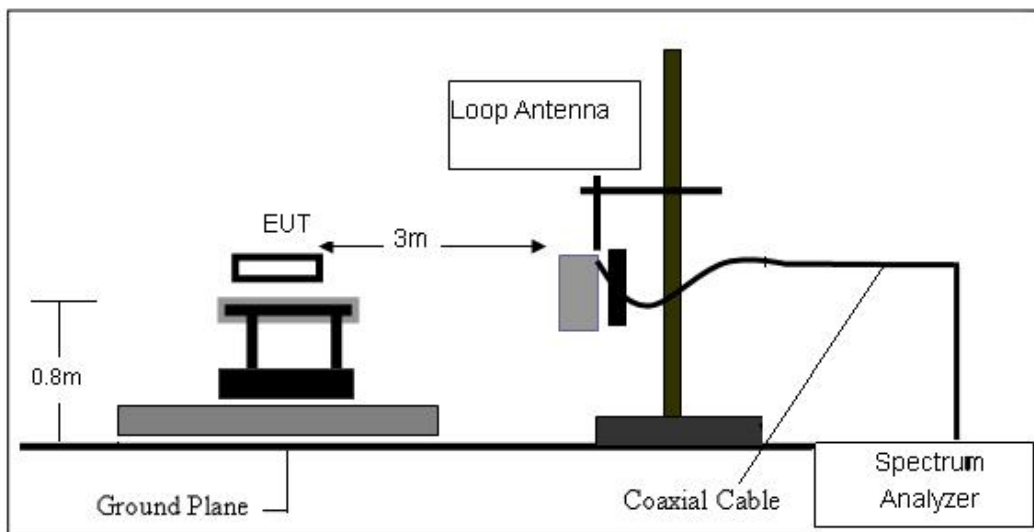

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

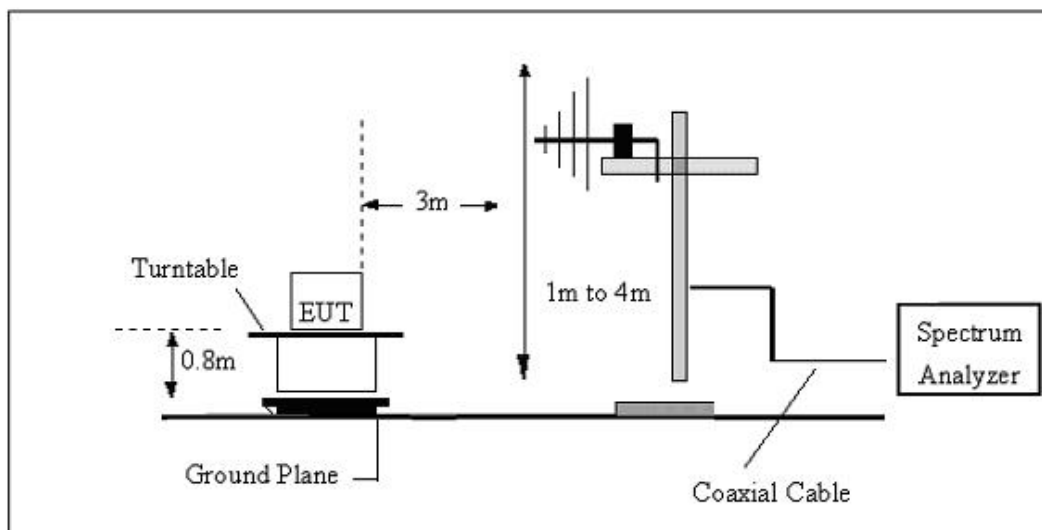

(C) Radiated Emission Test-Up Frequency Above 1GHz

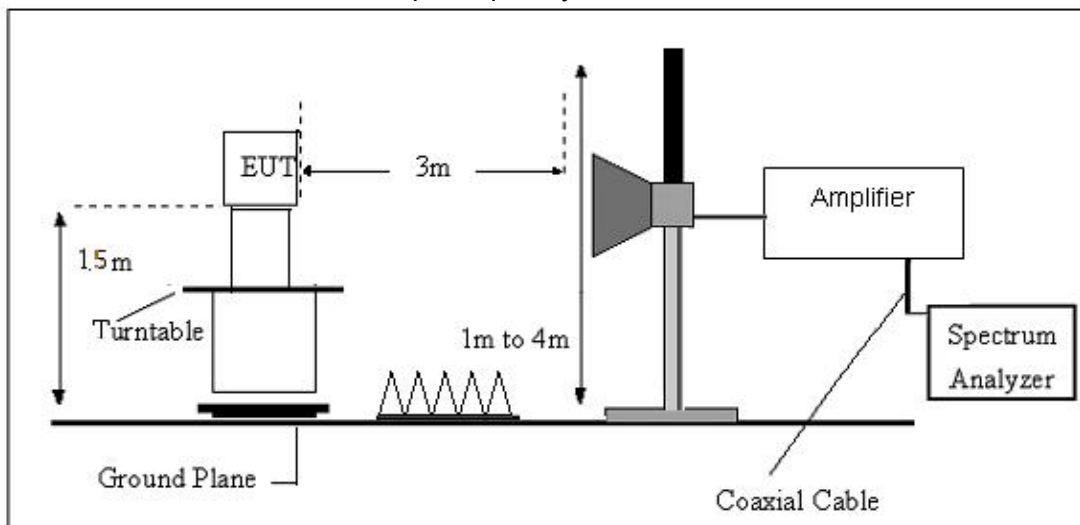

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Test Mode:	GFSK

For field strength of the fundamental signal

Peak ANT A

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	92.62	27.58	5.39	30.18	95.41	114.00	-18.59	Horizontal
2	2402	90.21	27.58	5.39	30.18	93.00	114.00	-21.00	Vertical
3	2440	91.02	27.55	5.43	30.06	93.94	114.00	-20.06	Horizontal
4	2440	89.23	27.55	5.43	30.06	92.15	114.00	-21.85	Vertical
5	2480	93.69	27.52	5.47	29.93	96.75	114.00	-17.25	Horizontal
6	2480	90.66	27.52	5.47	29.93	93.72	114.00	-20.28	Vertical

Avg

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	77.55	27.58	5.39	30.18	80.34	94.00	-13.66	Horizontal
2	2402	75.89	27.58	5.39	30.18	78.68	94.00	-15.32	Vertical
3	2440	76.16	27.55	5.43	30.06	79.08	94.00	-14.92	Horizontal
4	2440	73.51	27.55	5.43	30.06	76.43	94.00	-17.57	Vertical
5	2480	78.14	27.52	5.47	29.93	81.20	94.00	-12.80	Horizontal
6	2480	75.90	27.52	5.47	29.93	78.96	94.00	-15.04	Vertical

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Test Mode:	GFSK

For field strength of the fundamental signal
Peak ANT B

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	91.04	27.58	5.39	30.18	93.83	114.00	-20.17	Horizontal
2	2402	88.63	27.58	5.39	30.18	91.42	114.00	-22.58	Vertical
3	2440	89.44	27.55	5.43	30.06	92.36	114.00	-21.64	Horizontal
4	2440	87.65	27.55	5.43	30.06	90.57	114.00	-23.43	Vertical
5	2480	92.11	27.52	5.47	29.93	95.17	114.00	-18.83	Horizontal
6	2480	89.08	27.52	5.47	29.93	92.14	114.00	-21.86	Vertical

Avg

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	75.95	27.58	5.39	30.18	78.74	94.00	-15.26	Horizontal
2	2402	74.29	27.58	5.39	30.18	77.08	94.00	-16.92	Vertical
3	2440	74.56	27.55	5.43	30.06	77.48	94.00	-16.52	Horizontal
4	2440	71.91	27.55	5.43	30.06	74.83	94.00	-19.17	Vertical
5	2480	76.54	27.52	5.47	29.93	79.60	94.00	-14.40	Horizontal
6	2480	74.30	27.52	5.47	29.93	77.36	94.00	-16.64	Vertical

For spurious emission

(9KHz-30MHz)

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHZ-1000MHZ)


Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	GFSK		

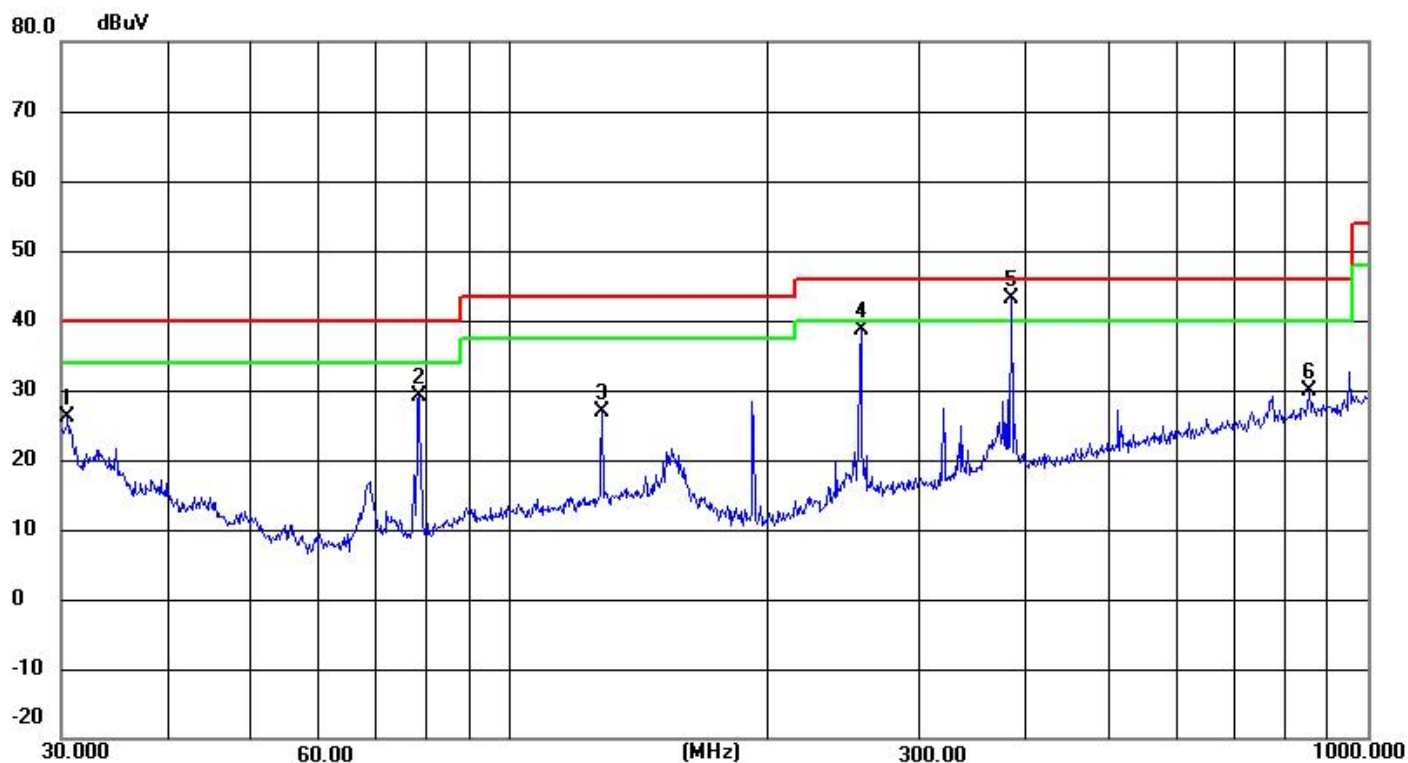

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	30.5306	33.73	-7.53	26.20	40.00	-13.80	QP
2	78.4133	61.19	-32.16	29.03	40.00	-10.97	QP
3	128.1130	59.14	-32.16	26.98	43.50	-16.52	QP
4	256.5211	70.65	-31.96	38.69	46.00	-7.31	QP
5	383.9318	74.81	-31.65	43.16	46.00	-2.84	QP
6	854.0247	60.54	-30.75	29.79	46.00	-16.21	QP

Note: 1. level= Reading level+ Factor, Margin=Measurement-Limit

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	GFSK		

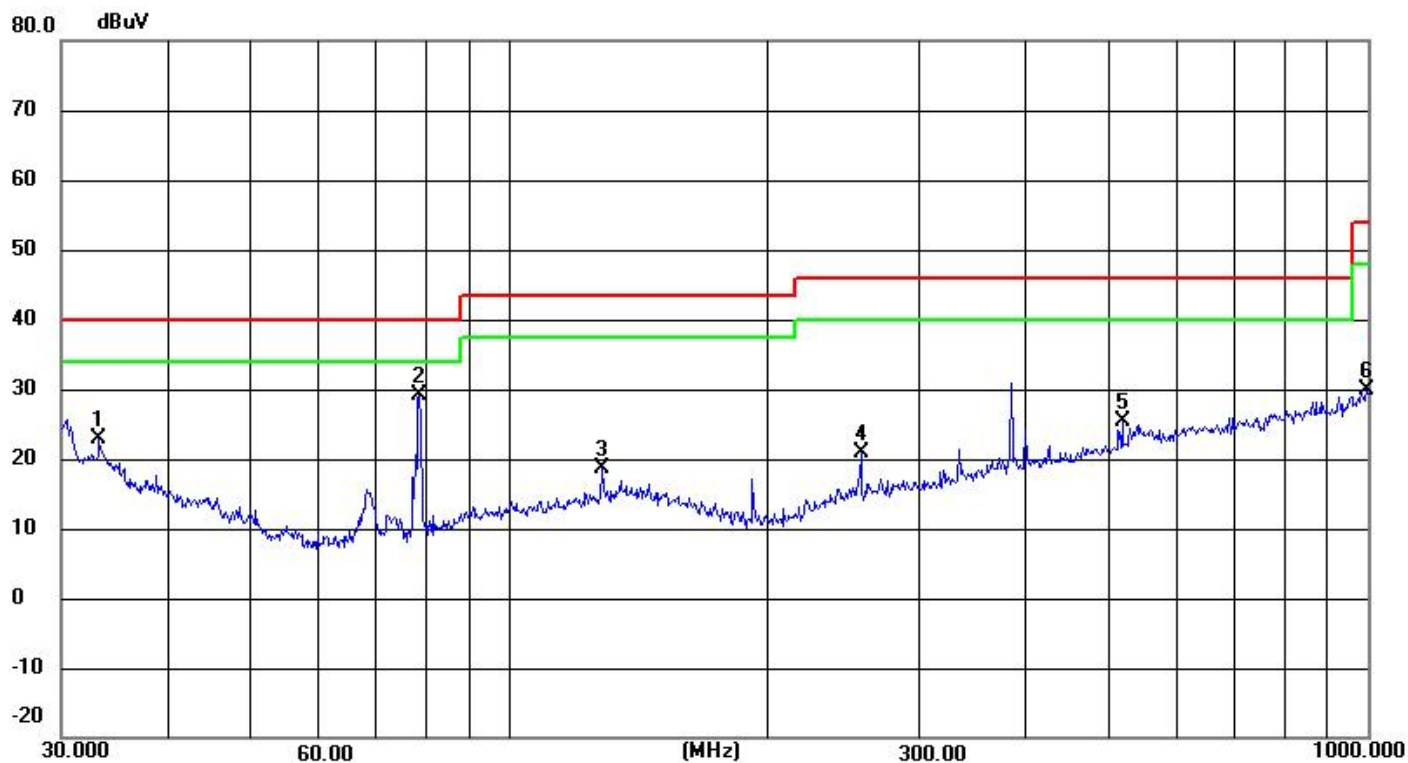

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.2112	32.18	-9.34	22.84	40.00	-17.16	QP
2	78.4133	61.34	-32.16	29.18	40.00	-10.82	QP
3	128.1130	50.72	-32.16	18.56	43.50	-24.94	QP
4	256.5211	52.84	-31.97	20.87	46.00	-25.13	QP
5	517.2480	56.64	-31.27	25.37	46.00	-20.63	QP
6	996.4996	60.37	-30.60	29.77	54.00	-24.23	QP

Note: 1. level= Reading level+ Factor, Margin=Measurement-Limit

(1GHZ~25GHZ)

ANT A

Low CH, Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	34.33	31.78	8.60	32.09	42.62	74	-31.38	Vertical
7206.00	32.32	36.15	11.65	32	48.12	74	-25.88	Vertical
9608.00	33.2	37.95	14.14	31.62	53.67	74	-20.33	Vertical
12010.00	*					74		Vertical
14412.00	*					74		Vertical
4804.00	36.93	31.78	8.60	32.09	45.22	74	-28.78	Horizontal
7206.00	32.12	36.15	11.65	32	47.92	74	-26.08	Horizontal
9608.00	31.25	37.95	14.14	31.62	51.72	74	-22.28	Horizontal
12010.00	*					74		Horizontal
14412.00	*					74		Horizontal

Low CH, AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	27.03	31.78	8.6	32.09	35.32	54	-18.68	Vertical
7206.00	19.17	36.15	11.65	32	34.97	54	-19.03	Vertical
9608.00	17.91	37.95	14.14	31.62	38.38	54	-15.62	Vertical
12010.00	*					54		Vertical
14412.00	*					54		Vertical
4804.00	31.05	31.78	8.6	32.09	39.34	54	-14.66	Horizontal
7206.00	20.99	36.15	11.65	32	36.79	54	-17.21	Horizontal
9608.00	18.1	37.95	14.14	31.62	38.57	54	-15.43	Horizontal
12010.00	*					54		Horizontal
14412.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

Middle Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.00	35.81	31.85	8.67	32.12	44.21	74	-29.79	Vertical
7320.00	30.02	36.37	11.72	31.89	46.22	74	-27.78	Vertical
9760.00	30.09	38.35	14.25	31.62	51.07	74	-22.93	Vertical
12200.00	*					74		Vertical
14640.00	*					74		Vertical
4880.00	40.23	31.85	8.67	32.12	48.63	74	-25.37	Horizontal
7320.00	31.92	36.37	11.72	31.89	48.12	74	-25.88	Horizontal
9760.00	32	38.35	14.25	31.62	52.98	74	-21.02	Horizontal
12200.00	*					74		Horizontal
14640.00	*					74		Horizontal

Middle AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.00	25.09	31.85	8.67	32.12	33.49	54	-20.51	Vertical
7320.00	20.02	36.37	11.72	31.89	36.22	54	-17.78	Vertical
9760.00	16.11	38.35	14.25	31.62	37.09	54	-16.91	Vertical
12200.00	*					54		Vertical
14640.00	*					54		Vertical
4880.00	27.38	31.85	8.67	32.12	35.78	54	-18.22	Horizontal
7320.00	20.85	36.37	11.72	31.89	37.05	54	-16.95	Horizontal
9760.00	19.97	38.35	14.25	31.62	40.95	54	-13.05	Horizontal
12200.00	*					54		Horizontal
14640.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

High Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	33.05	31.93	8.73	32.16	41.55	74	-32.45	Vertical
7440.00	31.87	36.59	11.79	31.78	48.47	74	-25.53	Vertical
9920.00	32.26	38.81	14.38	31.88	53.57	74	-20.43	Vertical
12400.00	*					74		Vertical
14880.00	*					74		Vertical
4960.00	37.62	31.93	8.73	32.16	46.12	74	-27.88	Horizontal
7440.00	33.41	36.59	11.79	31.78	50.01	74	-23.99	Horizontal
9920.00	30.99	38.81	14.38	31.88	52.3	74	-21.7	Horizontal
12400.00	*					74		Horizontal
14880.00	*					74		Horizontal

High AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	23.12	31.93	8.73	32.16	31.62	54	-22.38	Vertical
7440.00	17.23	36.59	11.79	31.78	33.83	54	-20.17	Vertical
9920.00	16.35	38.81	14.38	31.88	37.66	54	-16.34	Vertical
12400.00	*					54		Vertical
14880.00	*					54		Vertical
4960.00	31.57	31.93	8.73	32.16	40.07	54	-13.93	Horizontal
7440.00	21.51	36.59	11.79	31.78	38.11	54	-15.89	Horizontal
9920.00	18.73	38.81	14.38	31.88	40.04	54	-13.96	Horizontal
12400.00	*					54		Horizontal
14880.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

(1GHZ~25GHZ)

ANT B

Low CH, Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	34.26	31.78	8.60	32.09	42.55	74	-31.45	Vertical
7206.00	32.25	36.15	11.65	32	48.05	74	-25.95	Vertical
9608.00	33.13	37.95	14.14	31.62	53.6	74	-20.4	Vertical
12010.00	*					74		Vertical
14412.00	*					74		Vertical
4804.00	36.86	31.78	8.60	32.09	45.15	74	-28.85	Horizontal
7206.00	32.05	36.15	11.65	32	47.85	74	-26.15	Horizontal
9608.00	31.18	37.95	14.14	31.62	51.65	74	-22.35	Horizontal
12010.00	*					74		Horizontal
14412.00	*					74		Horizontal

Low CH, AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	26.96	31.78	8.6	32.09	35.25	54	-18.75	Vertical
7206.00	19.1	36.15	11.65	32	34.9	54	-19.1	Vertical
9608.00	17.84	37.95	14.14	31.62	38.31	54	-15.69	Vertical
12010.00	*					54		Vertical
14412.00	*					54		Vertical
4804.00	30.98	31.78	8.6	32.09	39.27	54	-14.73	Horizontal
7206.00	20.92	36.15	11.65	32	36.72	54	-17.28	Horizontal
9608.00	18.03	37.95	14.14	31.62	38.5	54	-15.5	Horizontal
12010.00	*					54		Horizontal
14412.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

Middle Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.00	35.74	31.85	8.67	32.12	44.14	74	-29.86	Vertical
7320.00	29.95	36.37	11.72	31.89	46.15	74	-27.85	Vertical
9760.00	30.02	38.35	14.25	31.62	51	74	-23	Vertical
12200.00	*					74		Vertical
14640.00	*					74		Vertical
4880.00	40.16	31.85	8.67	32.12	48.56	74	-25.44	Horizontal
7320.00	31.85	36.37	11.72	31.89	48.05	74	-25.95	Horizontal
9760.00	31.93	38.35	14.25	31.62	52.91	74	-21.09	Horizontal
12200.00	*					74		Horizontal
14640.00	*					74		Horizontal

Middle AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.00	25.02	31.85	8.67	32.12	33.42	54	-20.58	Vertical
7320.00	19.95	36.37	11.72	31.89	36.15	54	-17.85	Vertical
9760.00	16.04	38.35	14.25	31.62	37.02	54	-16.98	Vertical
12200.00	*					54		Vertical
14640.00	*					54		Vertical
4880.00	27.31	31.85	8.67	32.12	35.71	54	-18.29	Horizontal
7320.00	20.78	36.37	11.72	31.89	36.98	54	-17.02	Horizontal
9760.00	19.9	38.35	14.25	31.62	40.88	54	-13.12	Horizontal
12200.00	*					54		Horizontal
14640.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

High Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	32.98	31.93	8.73	32.16	41.48	74	-32.52	Vertical
7440.00	31.8	36.59	11.79	31.78	48.4	74	-25.6	Vertical
9920.00	32.19	38.81	14.38	31.88	53.5	74	-20.5	Vertical
12400.00	*					74		Vertical
14880.00	*					74		Vertical
4960.00	37.55	31.93	8.73	32.16	46.05	74	-27.95	Horizontal
7440.00	33.34	36.59	11.79	31.78	49.94	74	-24.06	Horizontal
9920.00	30.92	38.81	14.38	31.88	52.23	74	-21.77	Horizontal
12400.00	*					74		Horizontal
14880.00	*					74		Horizontal

High AV

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	23.05	31.93	8.73	32.16	31.55	54	-22.45	Vertical
7440.00	17.16	36.59	11.79	31.78	33.76	54	-20.24	Vertical
9920.00	16.28	38.81	14.38	31.88	37.59	54	-16.41	Vertical
12400.00	*					54		Vertical
14880.00	*					54		Vertical
4960.00	31.5	31.93	8.73	32.16	40	54	-14	Horizontal
7440.00	21.44	36.59	11.79	31.78	38.04	54	-15.96	Horizontal
9920.00	18.66	38.81	14.38	31.88	39.97	54	-14.03	Horizontal
12400.00	*					54		Horizontal
14880.00	*					54		Horizontal

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

5. BAND EDGE TEST

5.1 LIMIT


According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 TEST PROCEDURE

- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
Use the following spectrum analyzer settings:
 - c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

5.3 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

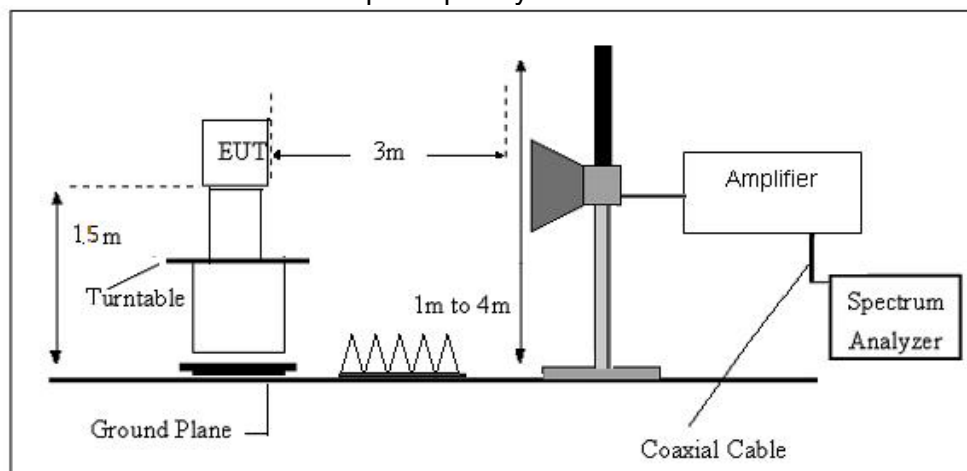

5.4 TEST RESULTS

Low CH (GFSK)

ANT A

Low CH (GFSK)

Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.9	27.61	5.36	30.18	40.69	74	-33.31	Horizontal
2390.00	36.92	27.59	5.38	30.18	39.71	74	-34.29	Horizontal
2310.00	34.93	27.61	5.36	30.18	37.72	74	-36.28	Vertical
2390.00	38.12	27.59	5.38	30.18	40.91	74	-33.09	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	31.84	27.61	5.36	30.18	34.63	54	-19.37	Horizontal
2390.00	26.95	27.59	5.38	30.18	29.74	54	-24.26	Horizontal
2310.00	31.65	27.61	5.36	30.18	34.44	54	-19.56	Vertical
2390.00	29.59	27.59	5.38	30.18	32.38	54	-21.62	Vertical

High CH(GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.85	27.53	5.47	29.93	39.92	74	-34.08	Horizontal
2500.00	38.91	27.55	5.49	29.93	42.02	74	-31.98	Horizontal
2483.50	41.64	27.53	5.47	29.93	44.71	74	-29.29	Vertical
2500.00	38.35	27.55	5.49	29.93	41.46	74	-32.54	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.91	27.53	5.47	29.93	34.98	54	-19.02	Horizontal
2500.00	30.74	27.55	5.49	29.93	33.85	54	-20.15	Horizontal
2483.50	32.98	27.53	5.47	29.93	36.05	54	-17.95	Vertical
2500.00	28.23	27.55	5.49	29.93	31.34	54	-22.66	Vertical

Remark.

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
- 2.The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.
- 3.All restriction band have been tested, and only the worst case is shown in report

ANT B
Low CH (GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.97	27.61	5.36	30.18	40.76	74	-33.24	Horizontal
2390.00	36.99	27.59	5.38	30.18	39.78	74	-34.22	Horizontal
2310.00	35.0	27.61	5.36	30.18	37.79	74	-36.21	Vertical
2390.00	38.19	27.59	5.38	30.18	40.98	74	-33.02	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	31.91	27.61	5.36	30.18	34.7	54	-19.3	Horizontal
2390.00	27.02	27.59	5.38	30.18	29.81	54	-24.19	Horizontal
2310.00	31.72	27.61	5.36	30.18	34.51	54	-19.49	Vertical
2390.00	29.66	27.59	5.38	30.18	32.45	54	-21.55	Vertical

High CH(GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.92	27.53	5.47	29.93	39.99	74	-34.01	Horizontal
2500.00	38.98	27.55	5.49	29.93	42.09	74	-31.91	Horizontal
2483.50	41.71	27.53	5.47	29.93	44.78	74	-29.22	Vertical
2500.00	38.42	27.55	5.49	29.93	41.53	74	-32.47	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.98	27.53	5.47	29.93	35.05	54	-18.95	Horizontal
2500.00	30.81	27.55	5.49	29.93	33.92	54	-20.08	Horizontal
2483.50	33.05	27.53	5.47	29.93	36.12	54	-17.88	Vertical
2500.00	28.3	27.55	5.49	29.93	31.41	54	-22.59	Vertical

Remark.

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
- 2.The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.
- 3.All restriction band have been tested, and only the worst case is shown in report

6. 20 DB BANDWIDTH TEST


6.1 LIMIT

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

6.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a
- known signal from an external generator
 - Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
 - Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


6.3 TEST SETUP

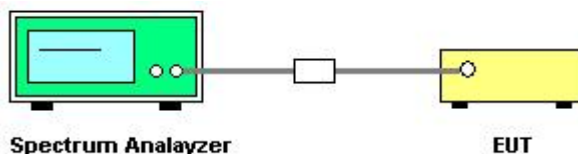

6.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 3.7V
ANT	A		

Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	2.348	2.0143	PASS
2440 MHz	2.341	2.0009	PASS
2480 MHz	2.340	2.0336	PASS

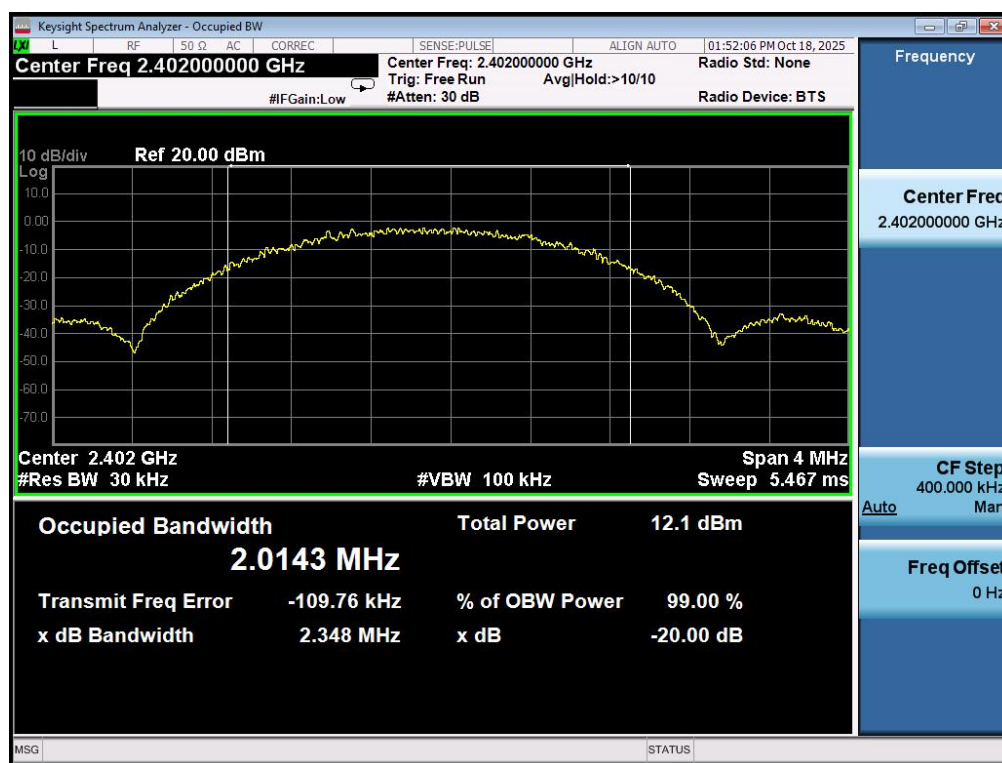



Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 3.7V
ANT	B		

Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	2.090	2.0539	PASS
2440 MHz	2.094	2.0581	PASS
2480 MHz	2.094	2.0616	PASS





7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The antennas used for this product are Copper tube antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.34dBi.

*****END OF THE REPORT*****