Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Model Name	2.4 GHz ANT	
Center Frequency	2402 MHz 2441 MHz 2480 MHz	2.34 dBi 2.07dBi 1.45 dBi
MAX. GAIN	2.34 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	

Antenna Photo & Length (mm)

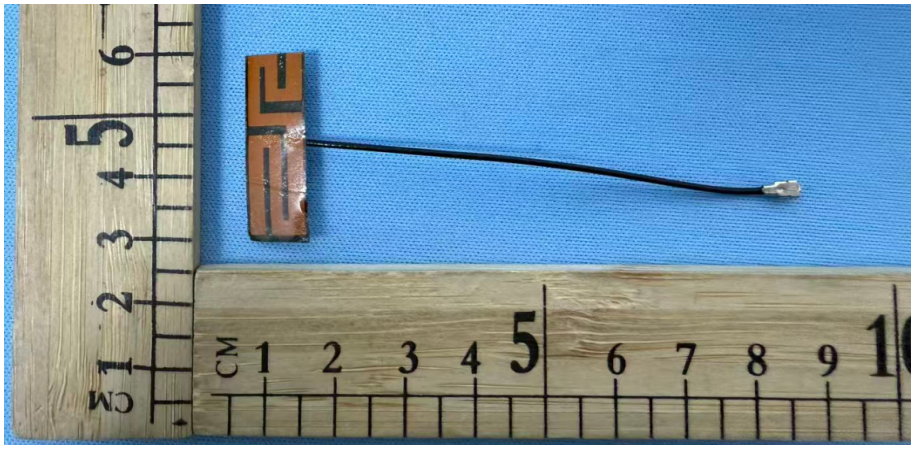

Manufacturer:	Shenzhen V-Link Technology CO., LTD.
Address of Manufacturer:	Room 1803, BaiRuiDa Building, Bantian Sub-district, LongGang District, Shenzhen,China

1. Main antenna : 2402 MHz

1.1 Horizontal

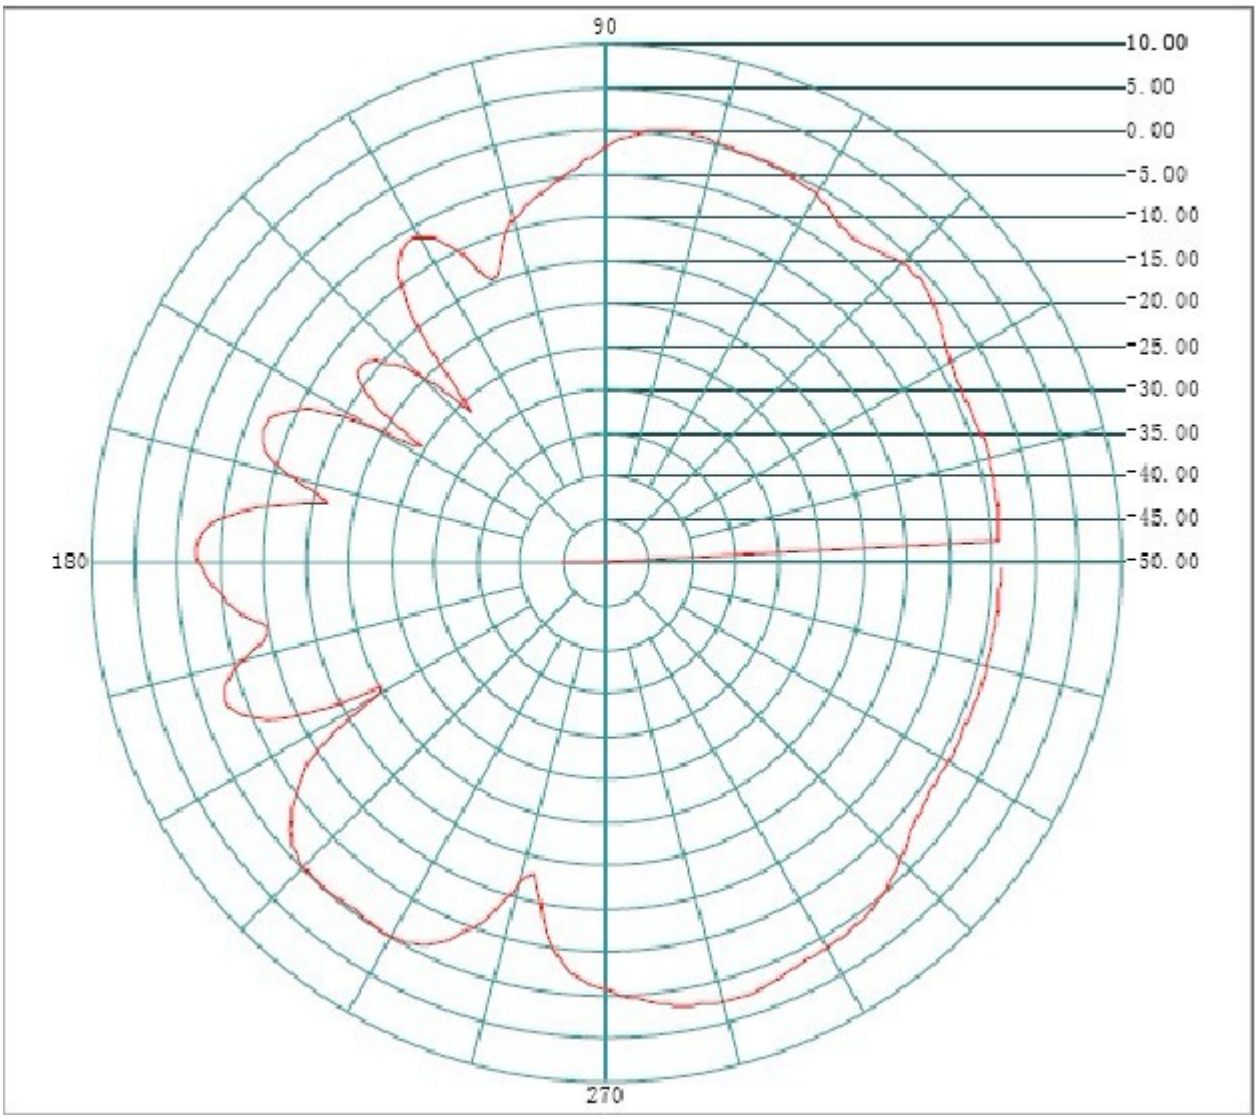

Frequency(MHZ): **2402** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **2.34**

Average Gain(dBi) : **-2.48**

Minimum Gain(dBi): **-55.18**

1.2 Vertical

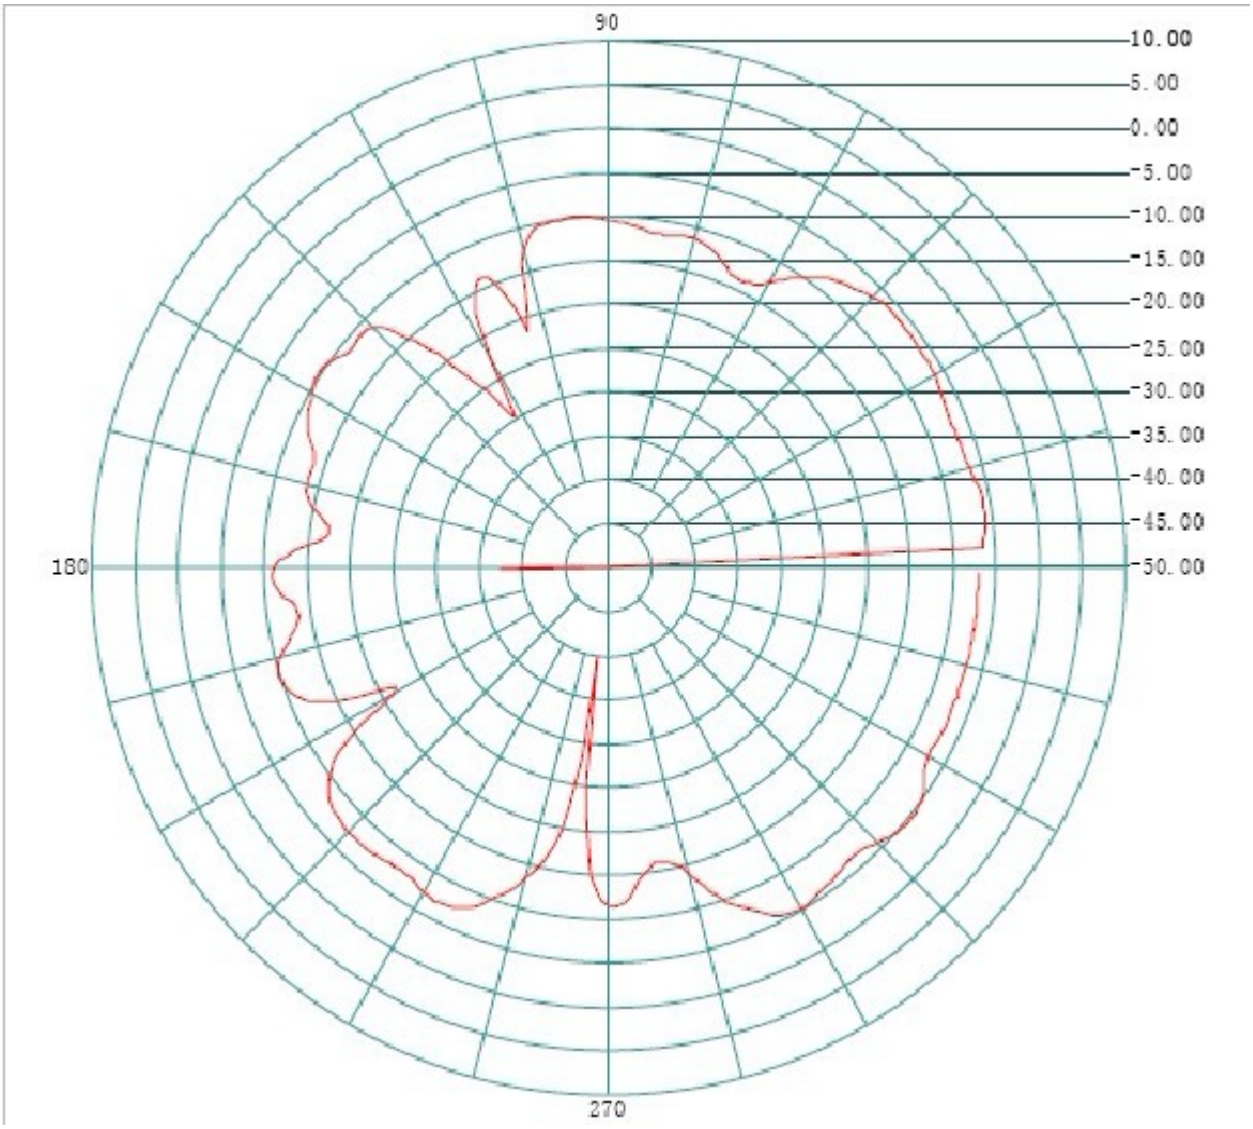

Frequency(MHZ): **2402** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**

2. Main antenna : 2441 MHz

2.1 Horizontal

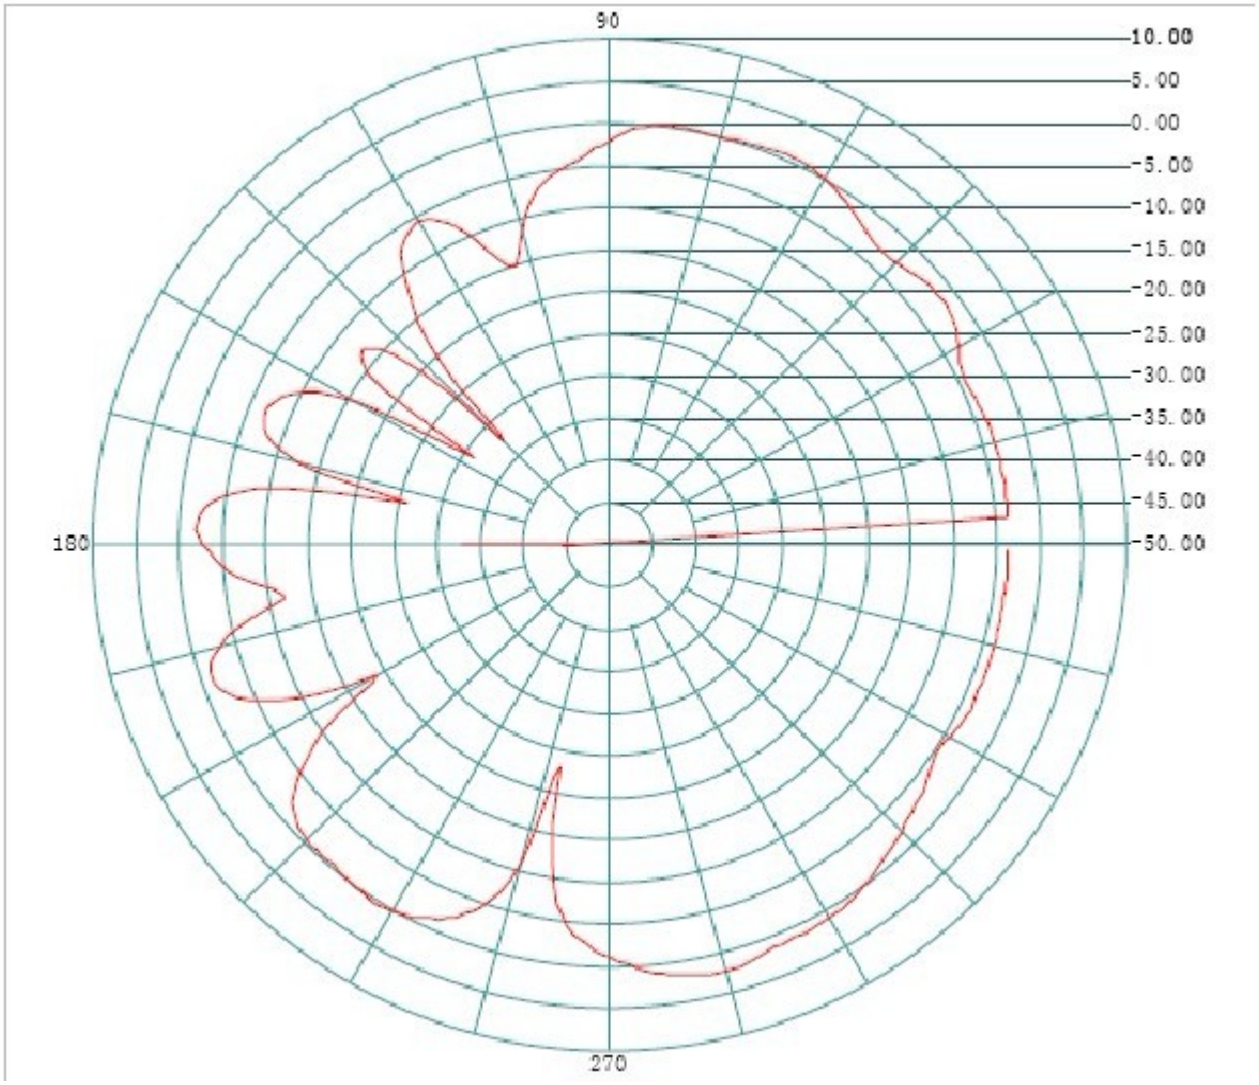

Frequency(MHZ): **2441** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): 2.07

Average Gain(dBi) : **-2.54**

Minimum Gain(dBi): **-66.98**

2.2 Vertical

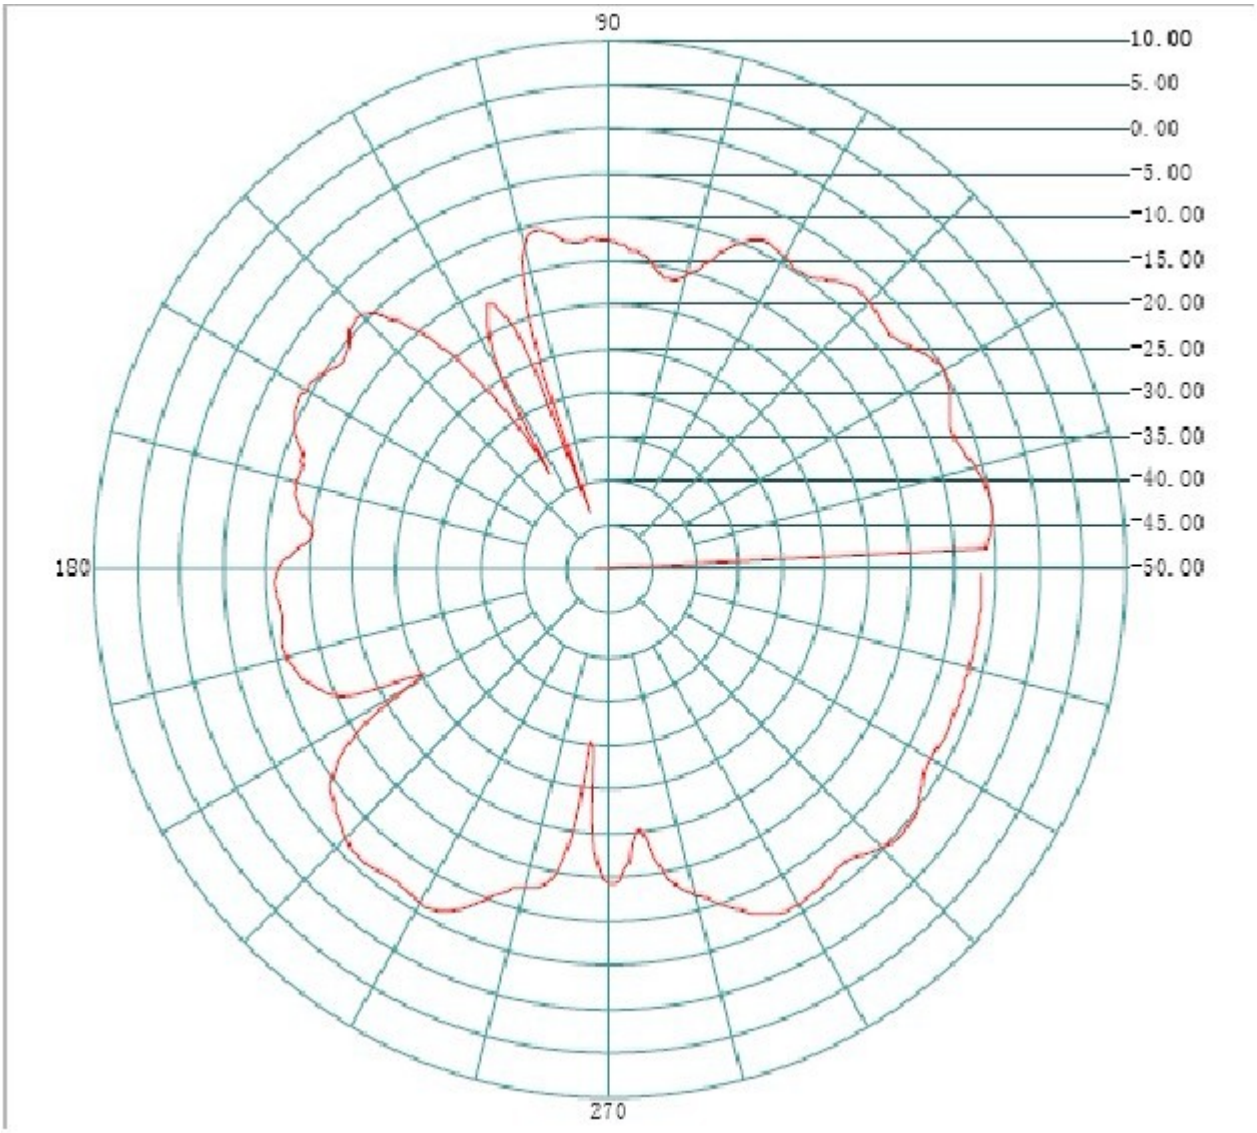

Frequency(MHZ): **2441** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.29**

Average Gain(dBi) : **-8.81**

Minimum Gain(dBi): **-51.4**

2. Main antenna : 2480 MHz

2.1 Horizontal

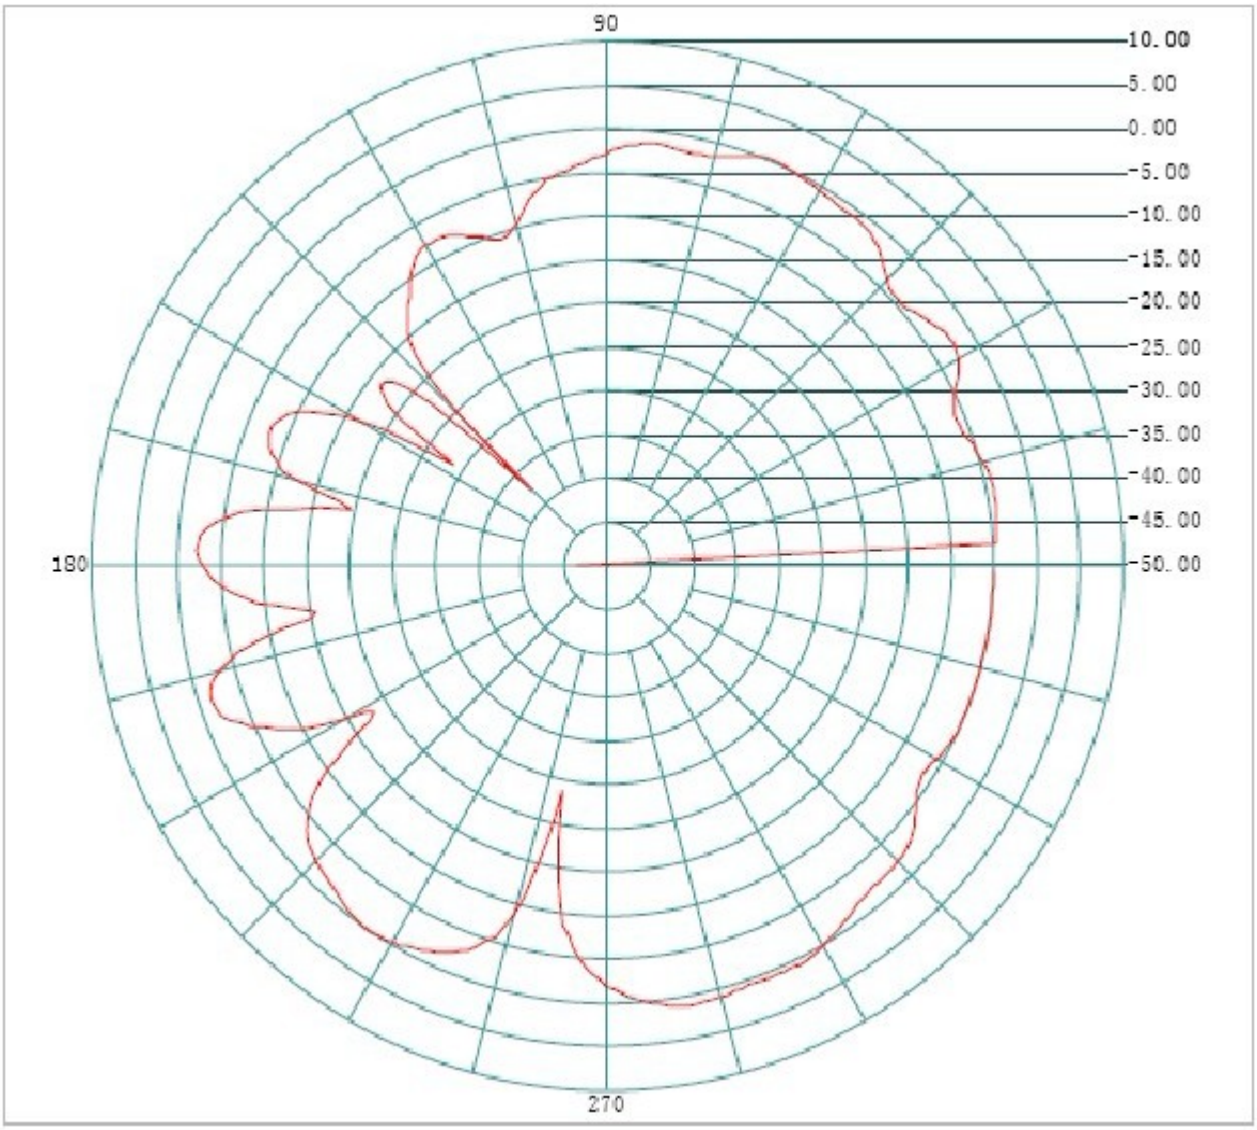

Frequency(MHZ): **2480** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **1.45**

Average Gain(dBi) : **-3.34**

Minimum Gain(dBi): **-53.4**

2.2 Vertical

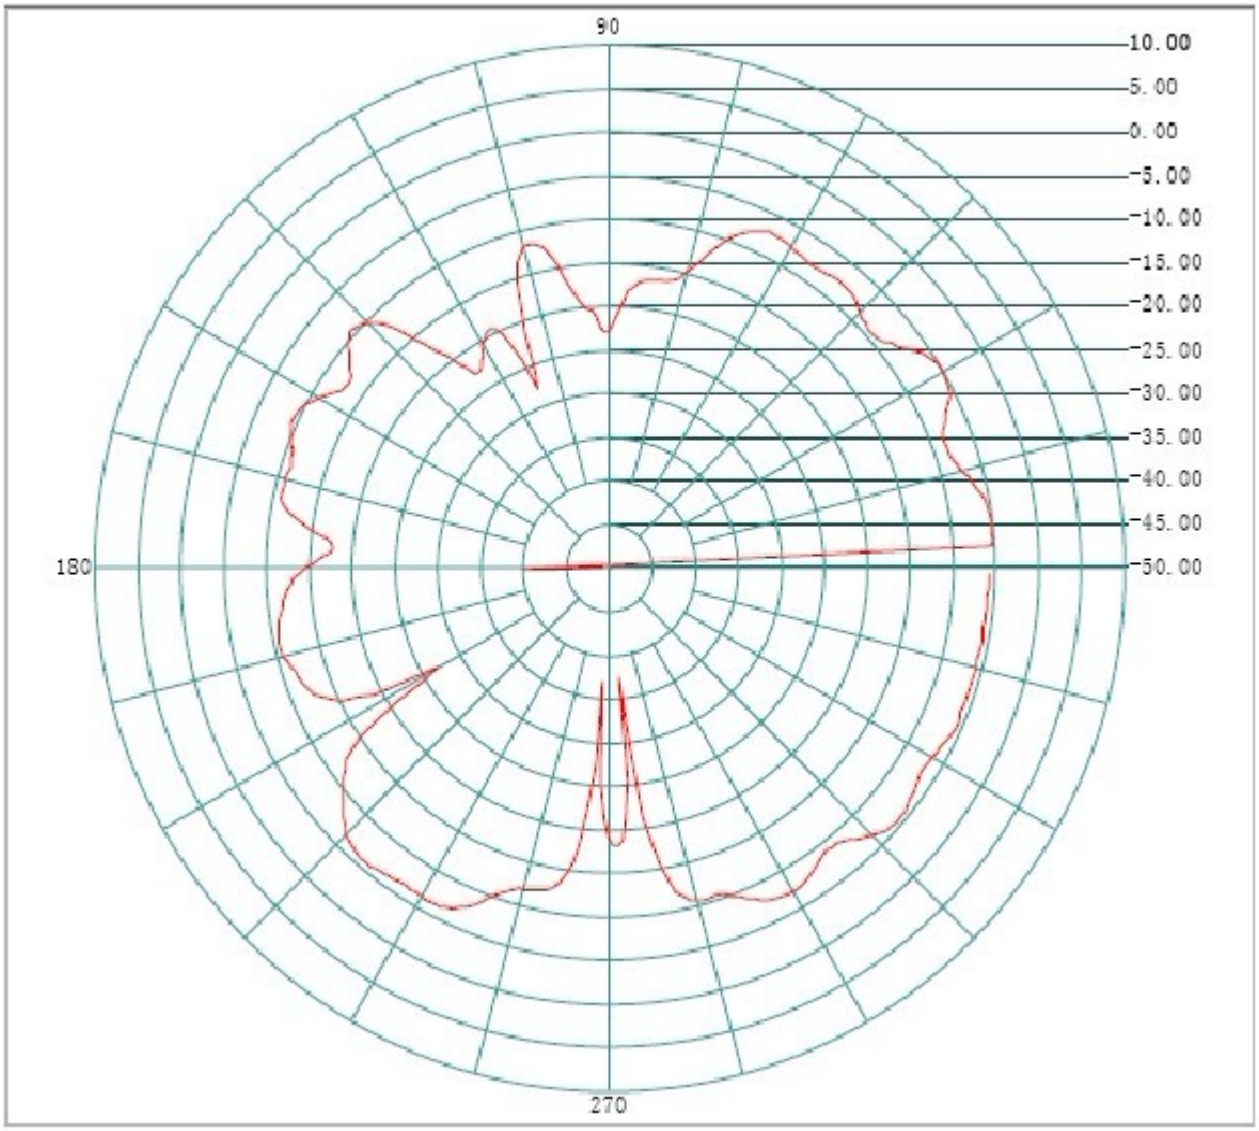

Frequency(MHZ): **2480** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.95**

Average Gain(dBi) : **-9.06**

Minimum Gain(dBi): **-60.00**