





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,603.438	56.17	68.20	12.03	18.18	V	357.8	1.00
12	5,746.875	109.61			18.75	V	278	1.00
13	5,995.875	56.73	68.20	11.47	19.15	V	1	1.00

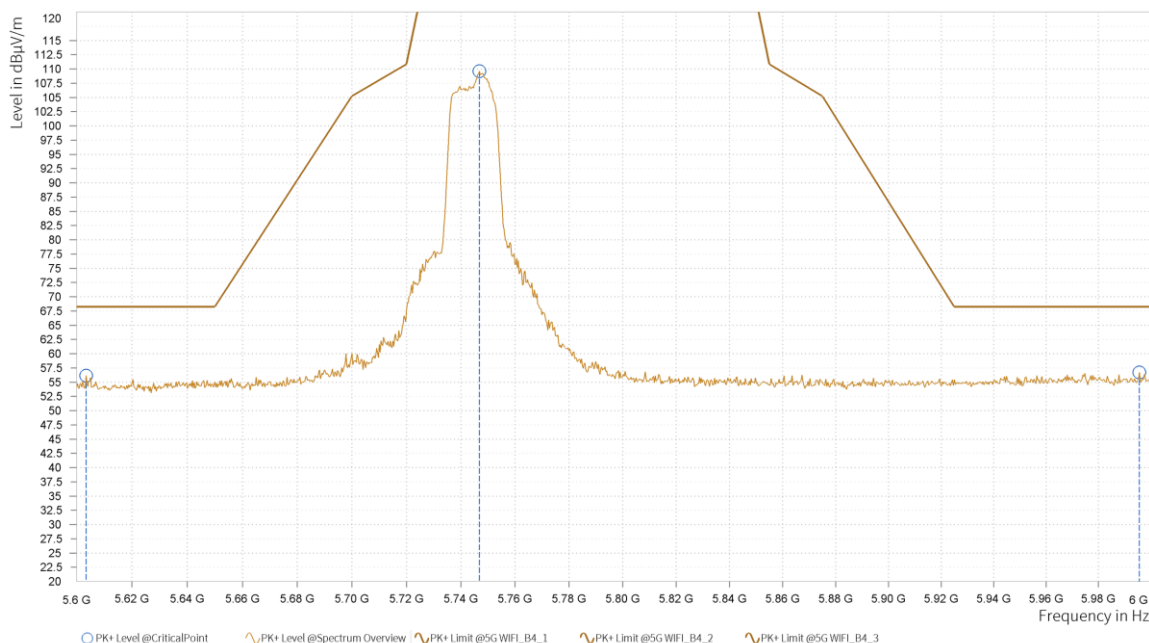

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5745MHz: Fundamental frequency.

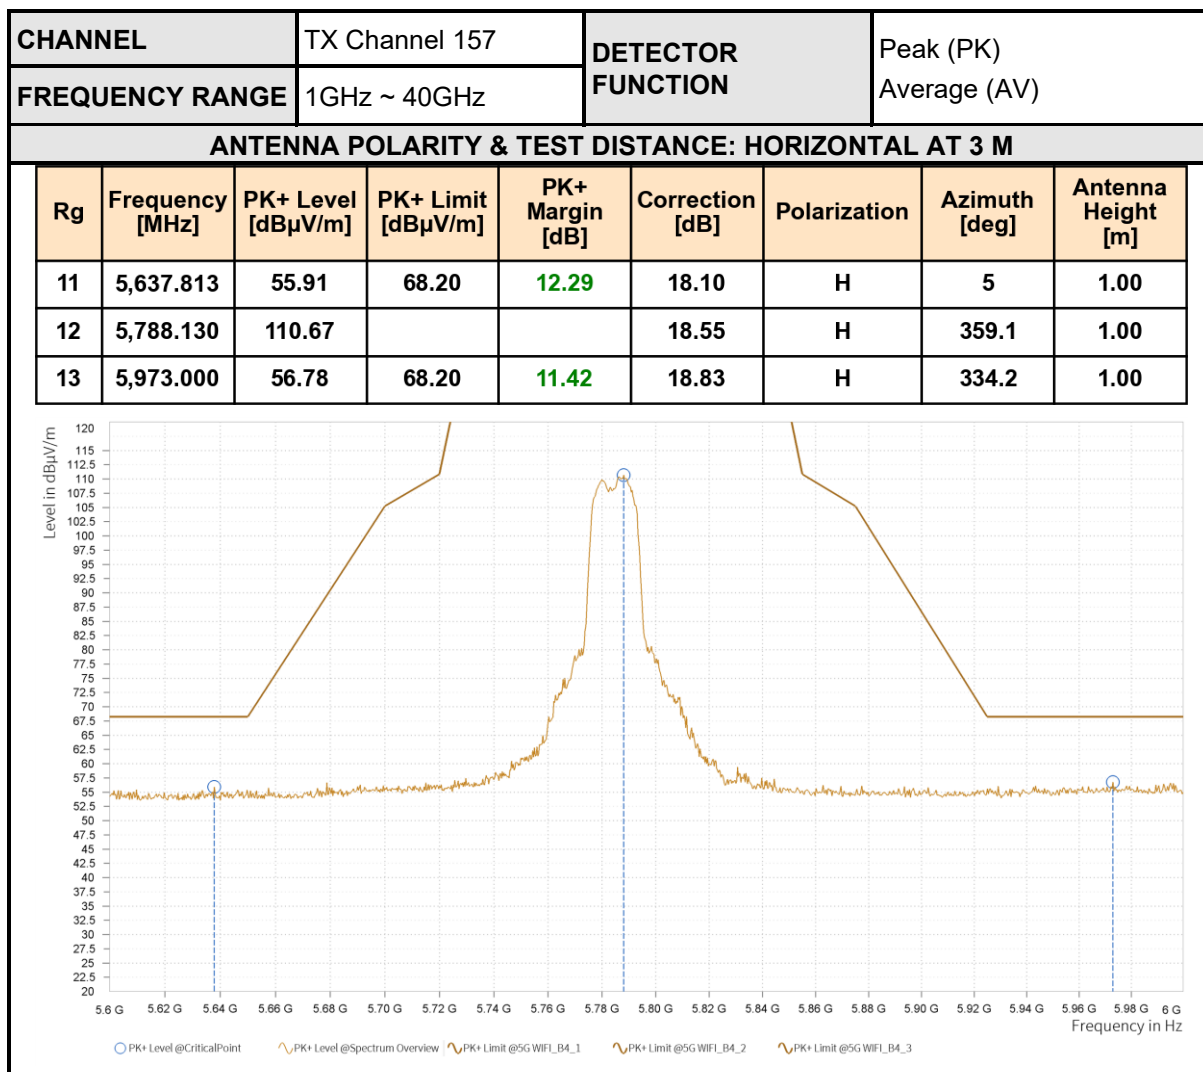




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,649.688	55.99	68.20	12.21	18.20	V	358.2	1.00
12	5,786.880	109.23			18.55	V	1	1.00
13	5,955.000	56.94	68.20	11.26	18.64	V	184.8	1.00

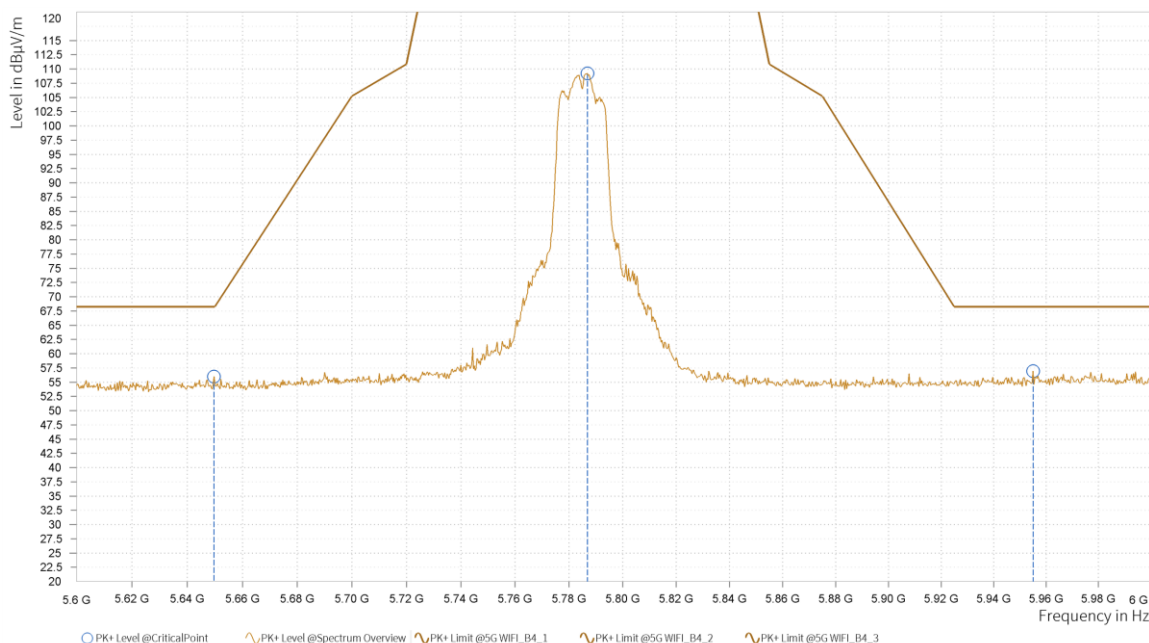


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5785MHz: Fundamental frequency.

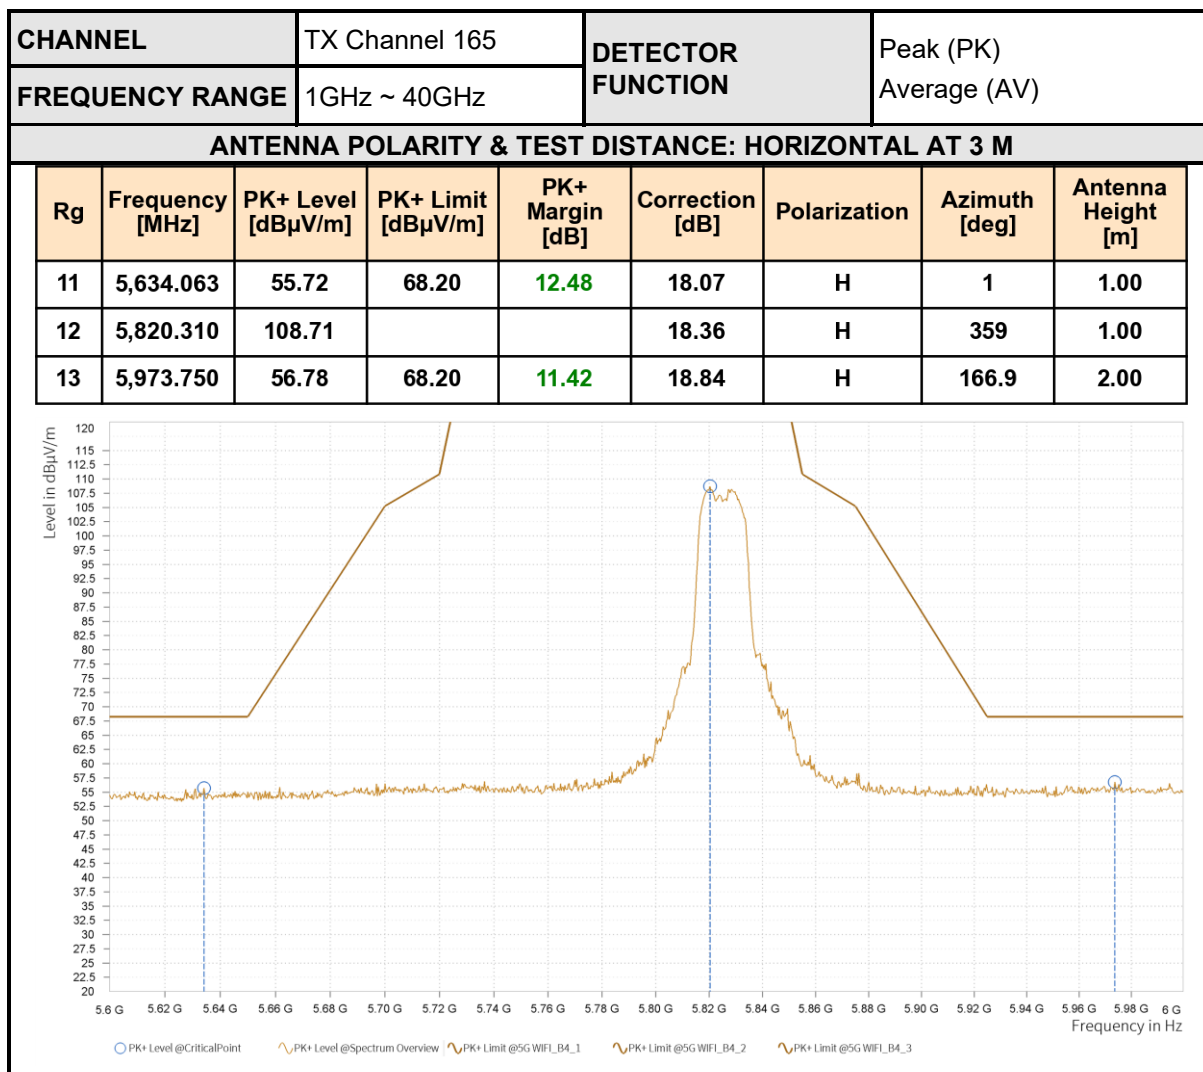

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,605.938	55.34	68.20	12.86	18.15	V	294.8	1.00
12	5,826.563	106.93			18.31	V	1	1.00
13	5,973.000	57.14	68.20	11.06	18.83	V	358.6	1.00

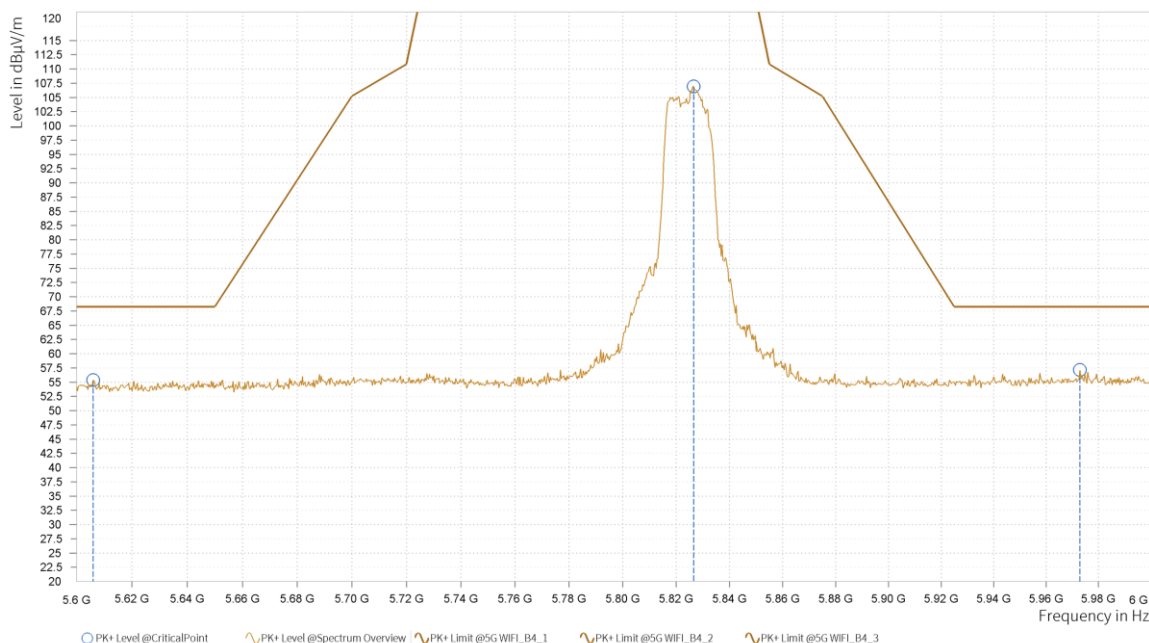**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5825MHz: Fundamental frequency.




802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,649.375	58.61	68.20	9.59	18.20	H	5	1.00
11	5,758.130	108.40			18.69	H	1	1.00
12	5,978.625	56.82	68.20	11.38	18.91	H	100	2.00

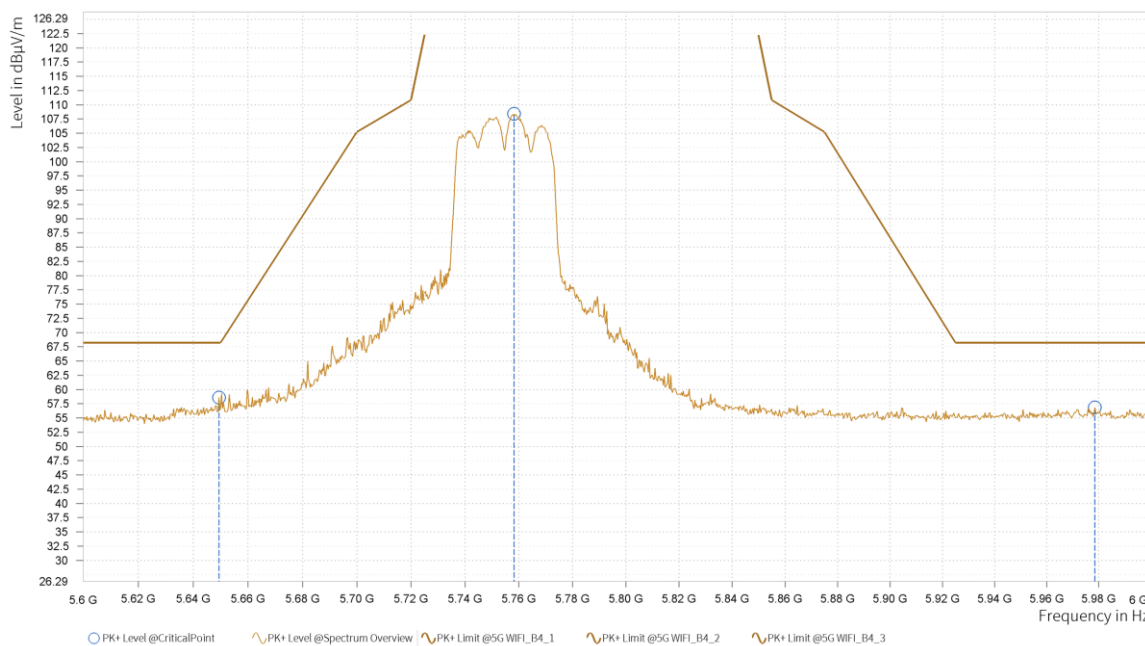




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,648.750	56.65	68.20	11.55	18.20	V	279.8	1.00
11	5,752.500	107.12			18.72	V	307.3	1.00
12	5,964.000	56.92	68.20	11.28	18.71	V	334	1.00

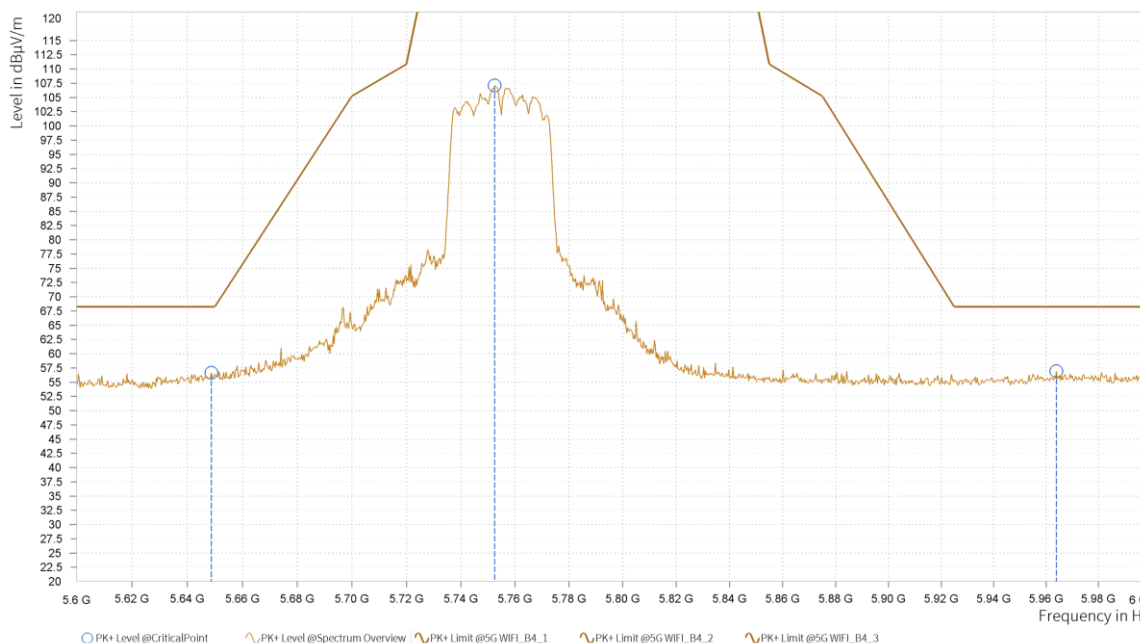


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5755MHz: Fundamental frequency.

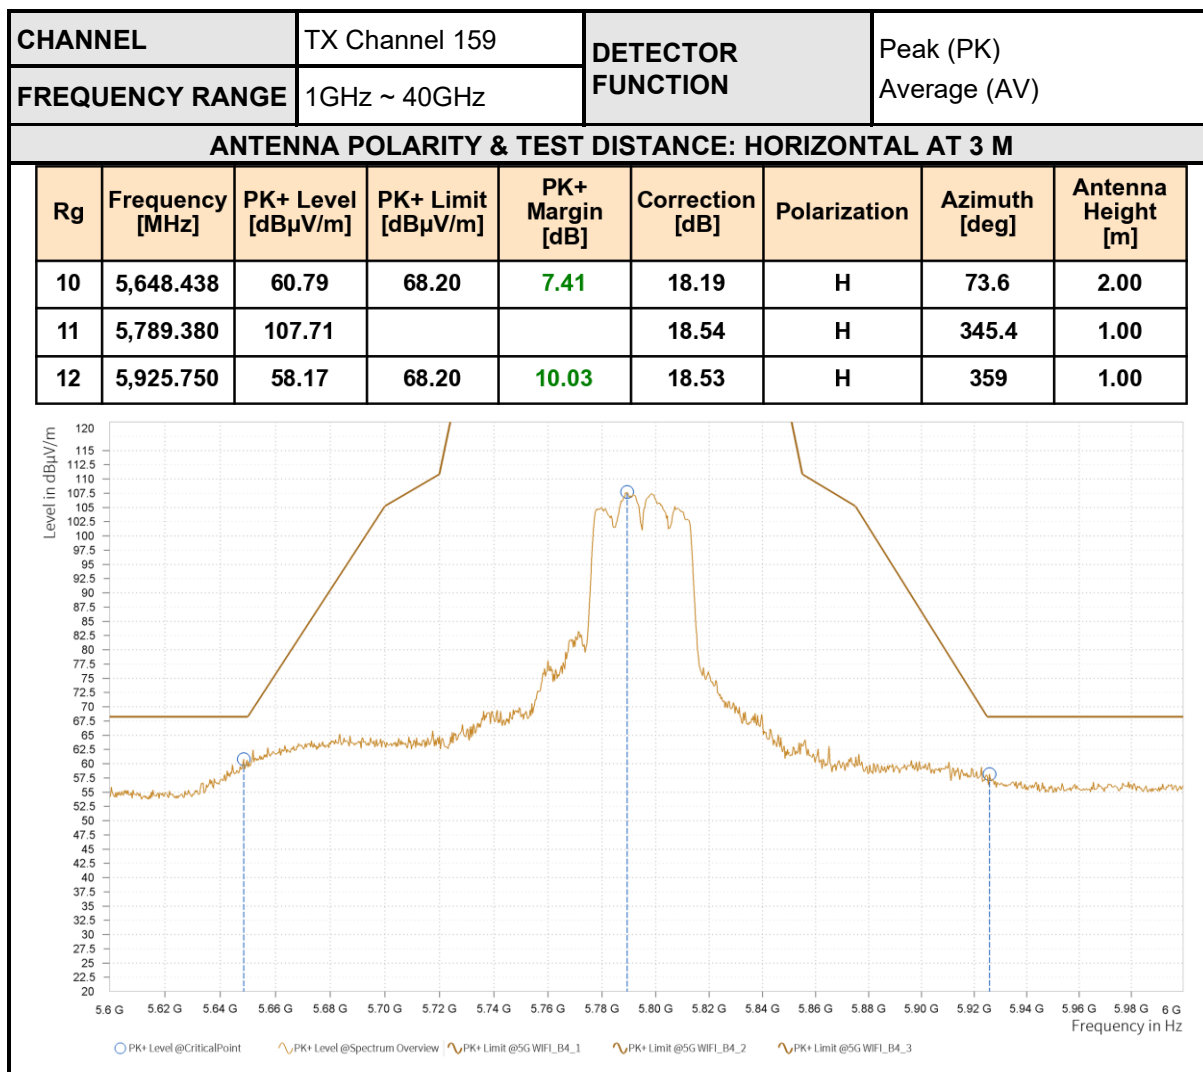

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,602.500	60.26	68.20	7.94	18.20	V	1	1.00
11	5,797.500	106.36			18.50	V	146.6	1.00
12	5,928.750	57.46	68.20	10.74	18.54	V	1	1.00

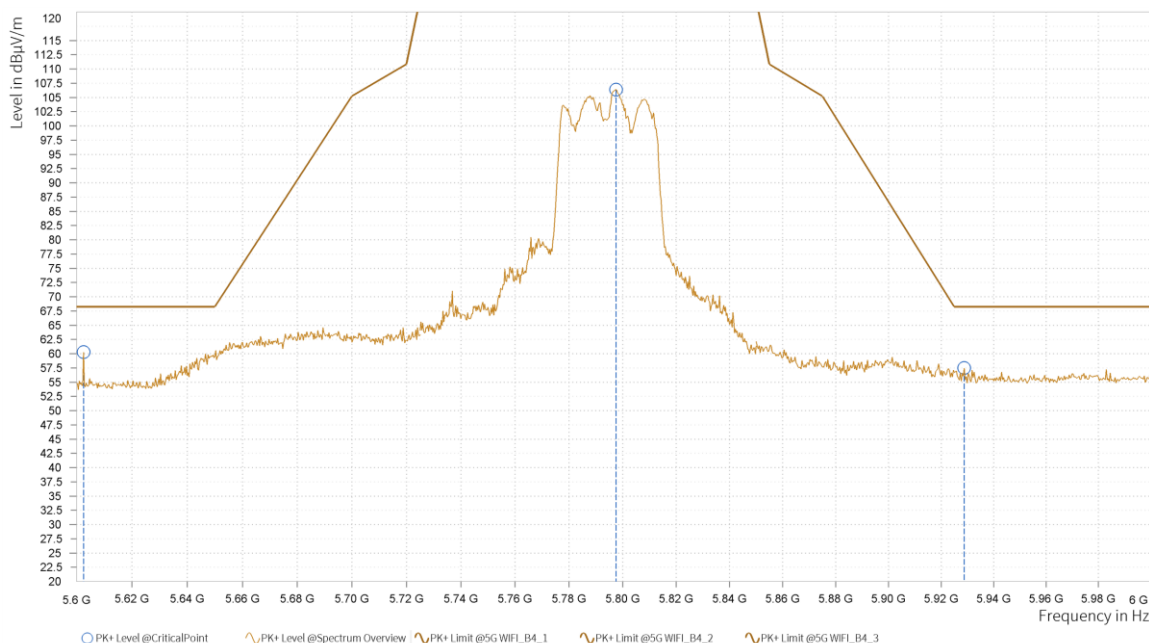**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5795MHz: Fundamental frequency.




802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,643.438	55.62	68.20	12.58	18.15	H	1.5	2.00
12	5,743.750	111.34			18.77	H	72.5	2.00
13	5,994.375	57.03	68.20	11.17	19.13	H	1	1.00

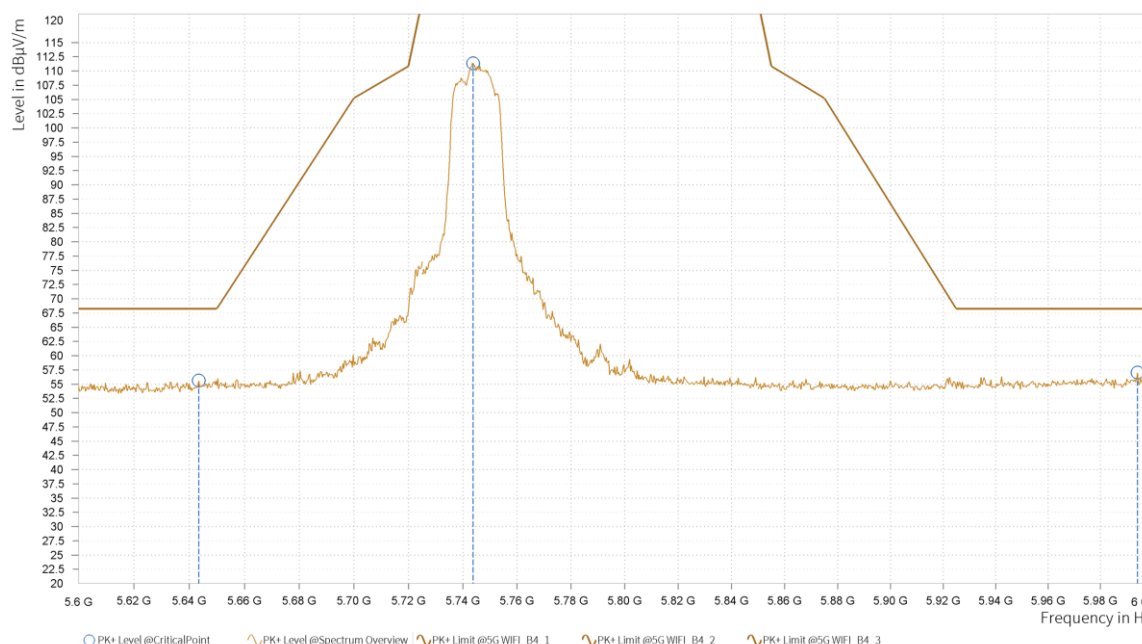




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,645.313	55.78	68.20	12.42	18.17	V	233.8	1.00
12	5,746.250	108.12			18.76	V	1	1.00
13	5,966.625	56.85	68.20	11.35	18.75	V	359.1	1.00

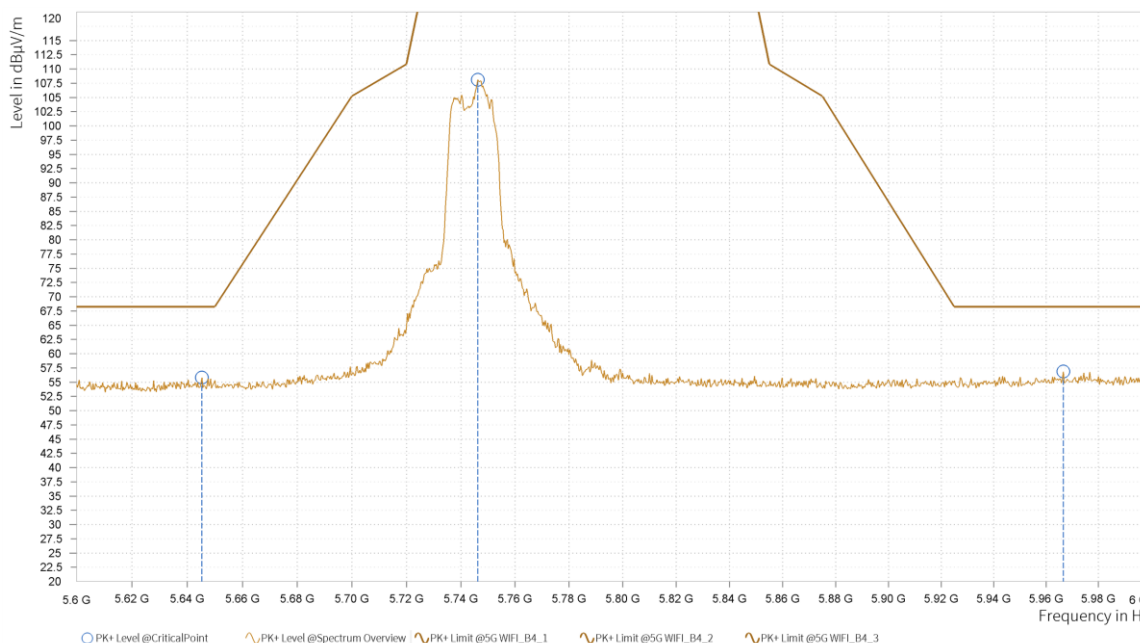

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5745MHz: Fundamental frequency.

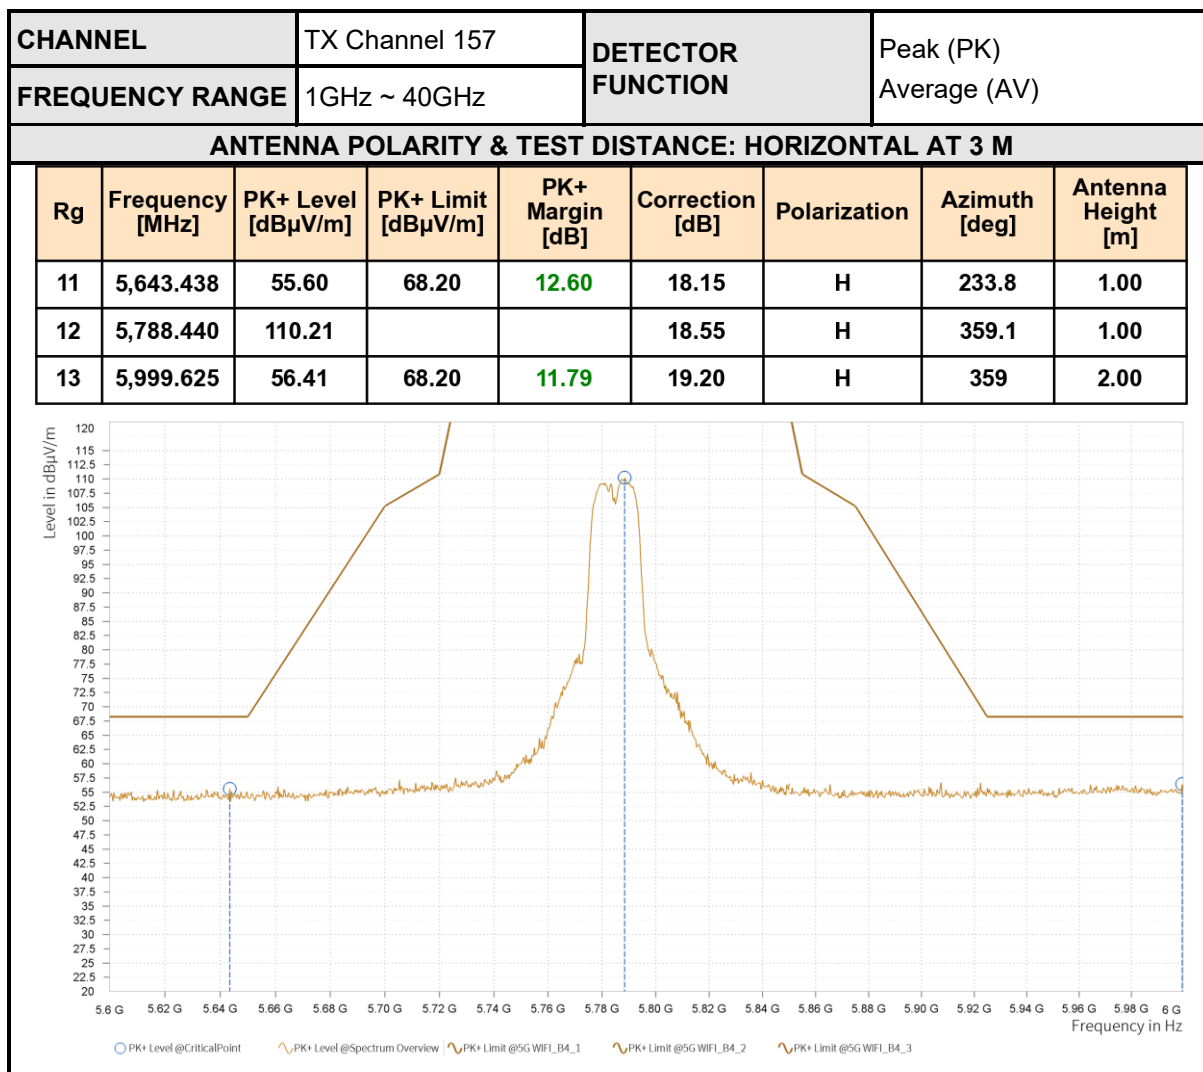




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.563	55.82	68.20	12.38	18.18	V	1	1.00
12	5,786.560	108.30			18.56	V	1	1.00
13	5,961.375	56.51	68.20	11.69	18.68	V	186	1.00

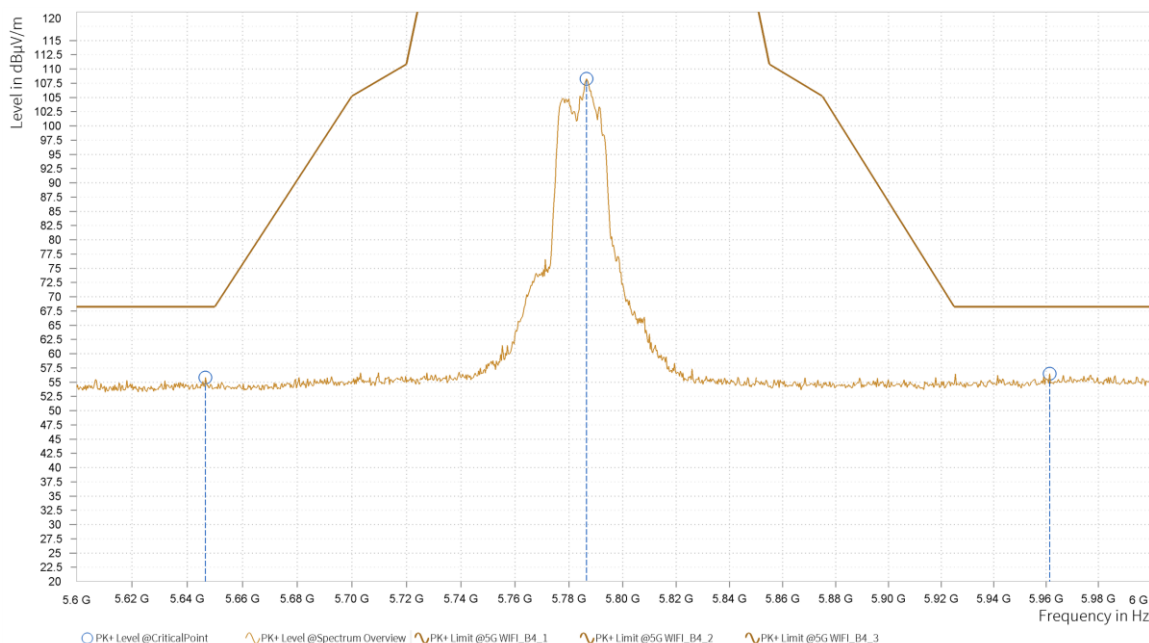


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5785MHz: Fundamental frequency.

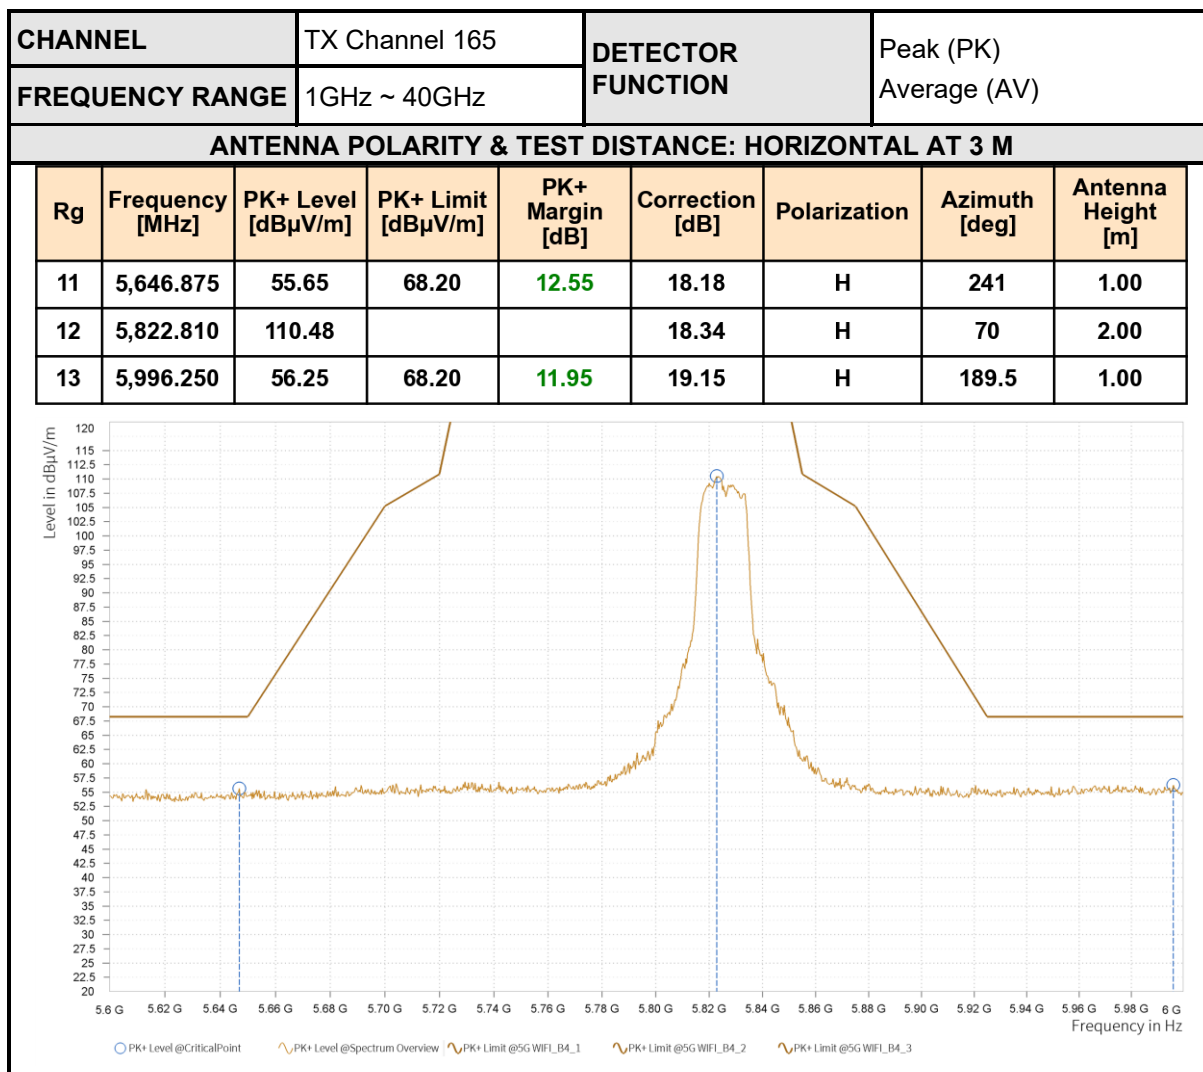

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,621.250	59.70	68.20	8.50	17.95	V	1	1.00
12	5,826.250	104.93			18.32	V	1	1.00
13	5,967.000	56.86	68.20	11.34	18.75	V	359.1	1.00

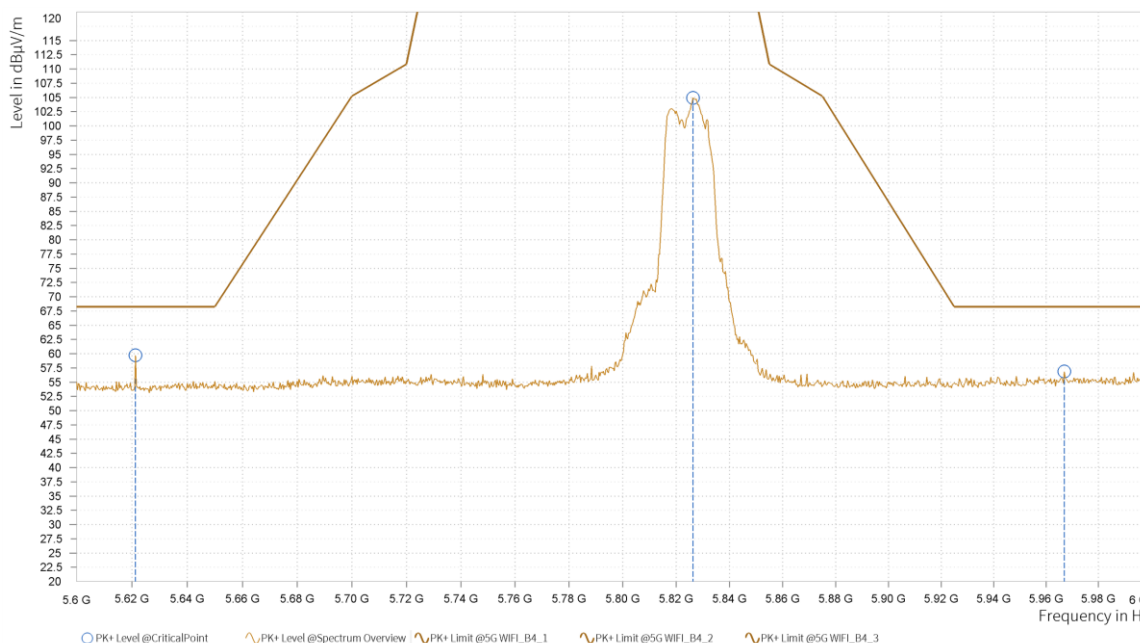**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5825MHz: Fundamental frequency.




802.11ac (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,645.000	57.56	68.20	10.64	18.16	H	4.5	1.00
11	5,757.810	108.36			18.69	H	1	1.00
12	5,994.000	56.90	68.20	11.30	19.12	H	176.6	1.00

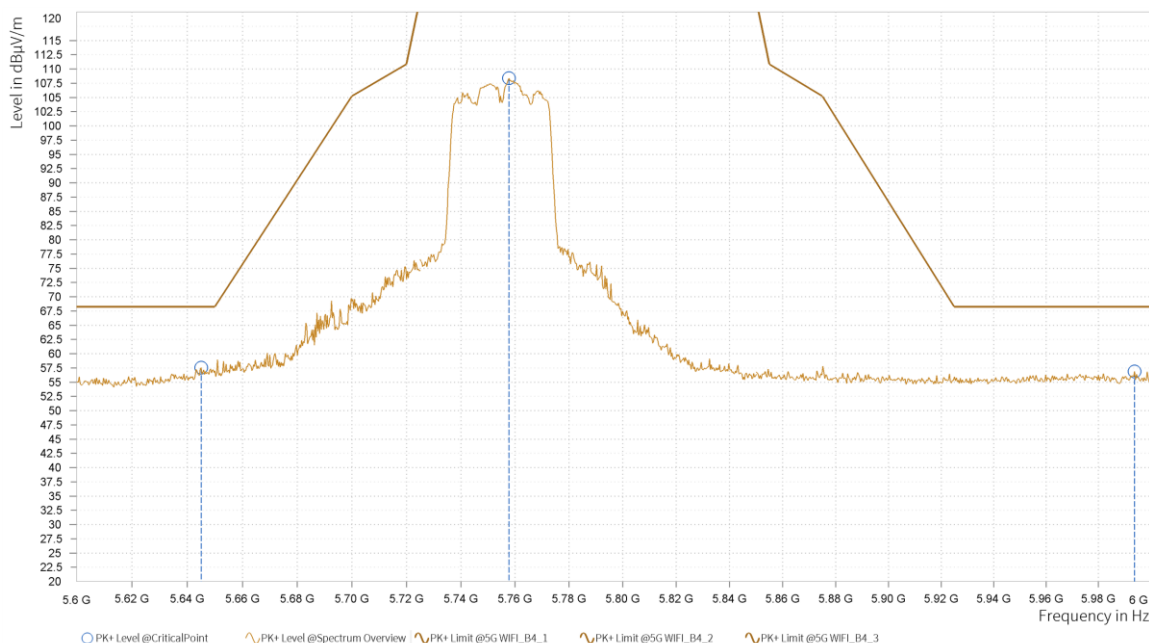




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,644.375	56.43	68.20	11.77	18.16	V	280.4	1.00
11	5,752.500	106.10			18.72	V	307.9	1.00
12	5,992.125	56.65	68.20	11.55	19.09	V	101.3	2.00

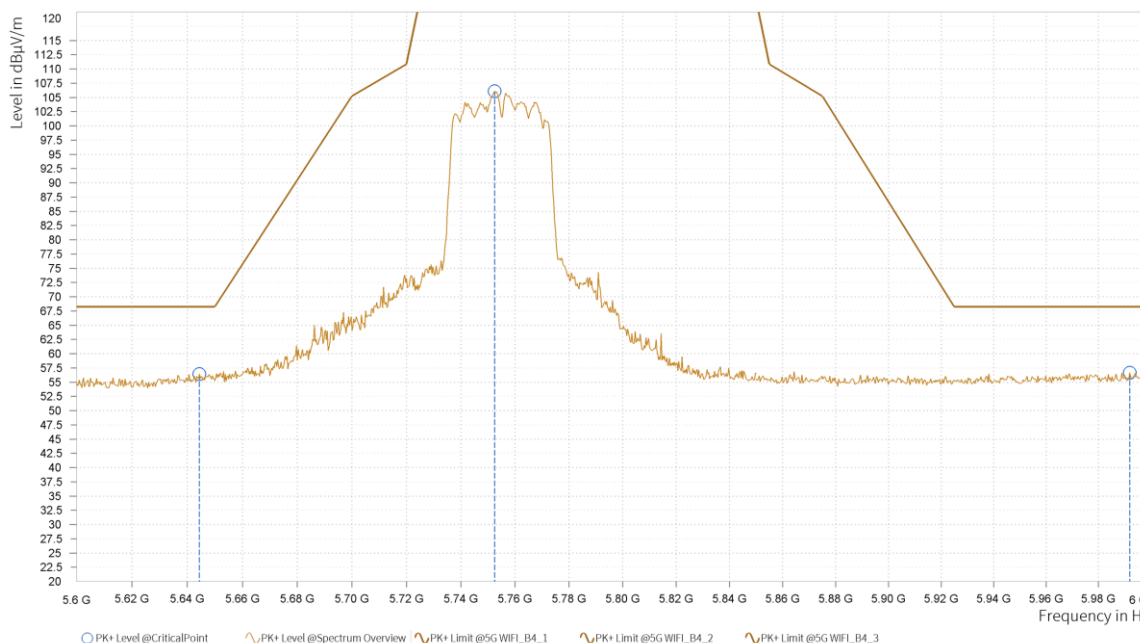


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5755MHz: Fundamental frequency.

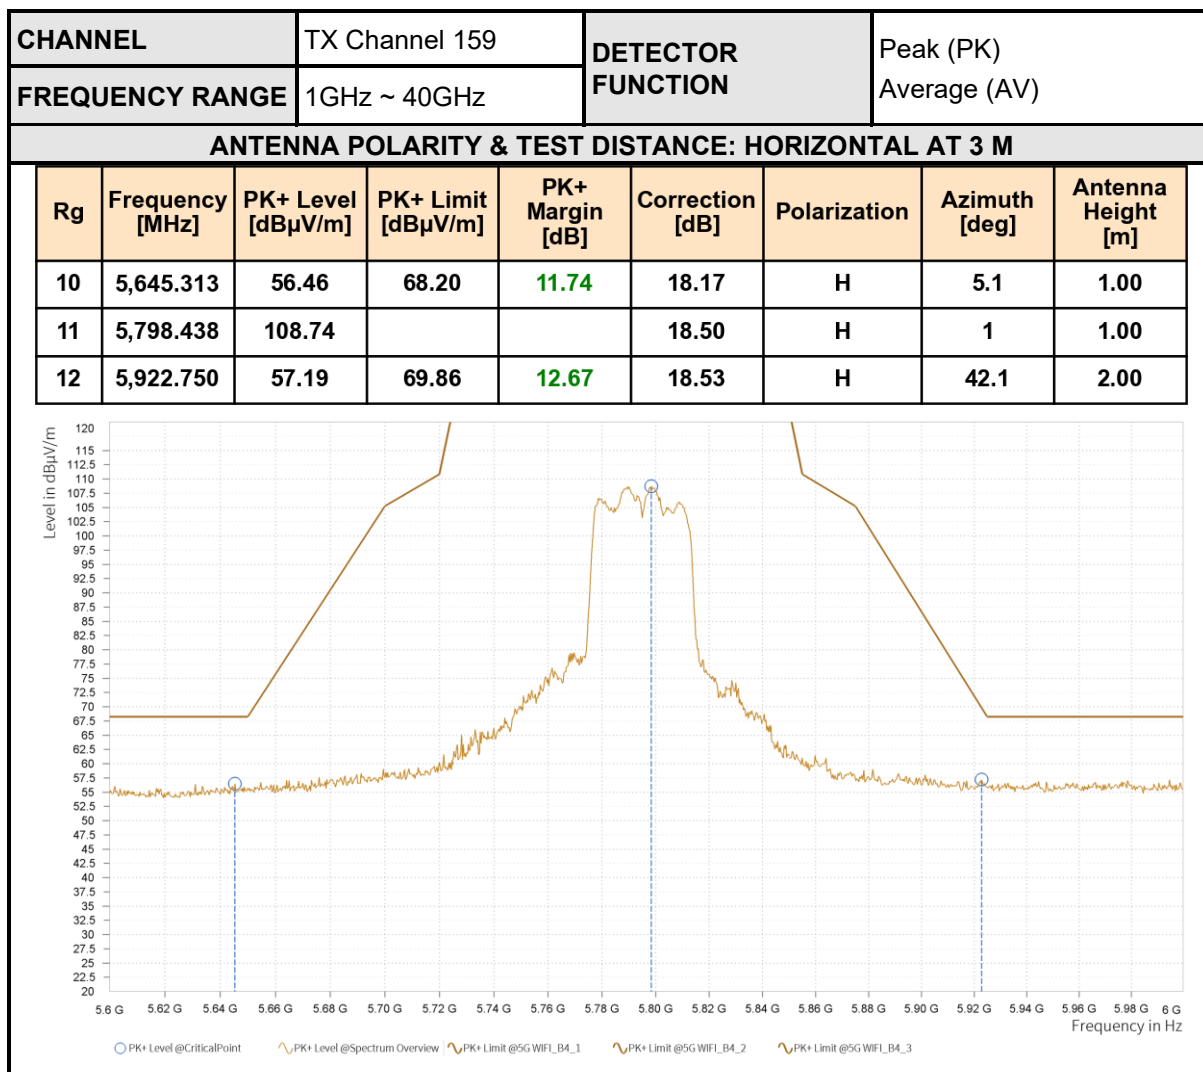

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,645.938	56.03	68.20	12.17	18.17	V	91.7	2.00
11	5,796.560	106.72			18.51	V	1	1.00
12	5,938.500	56.92	68.20	11.28	18.57	V	165.2	1.00

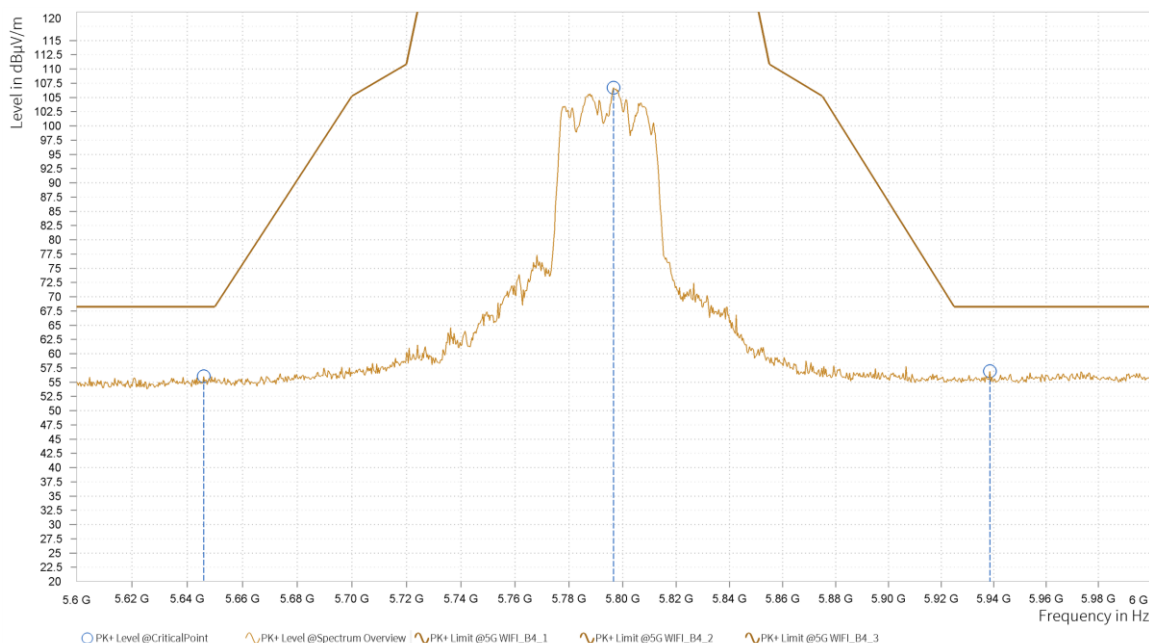**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5795MHz: Fundamental frequency.




802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,648.125	63.15	68.20	5.05	18.19	H	359	2.00
6	5,778.438	105.54			18.60	H	0.9	2.00
7	5,965.125	57.39	68.20	10.81	18.73	H	0.9	2.00

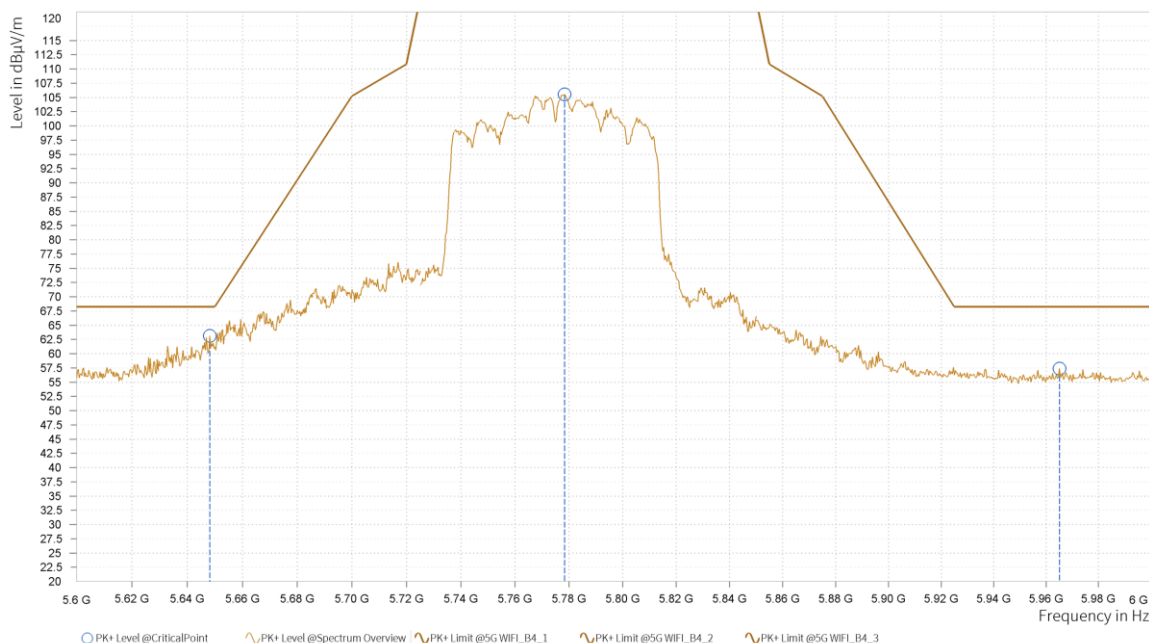



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,648.125	65.19	68.20	3.01	18.19	V	5.1	1.00
6	5,767.190	104.88			18.65	V	280.4	1.00
7	5,991.750	56.97	68.20	11.23	19.09	V	30.6	2.00

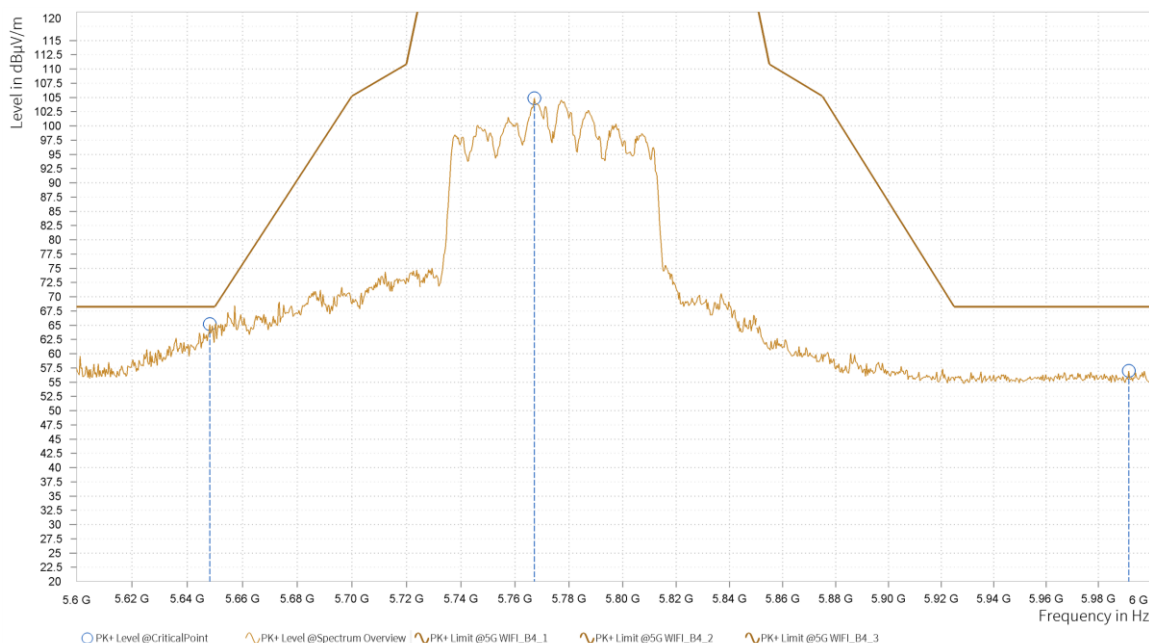

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5775MHz: Fundamental frequency.




802.11AX (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,648.125	55.83	68.20	12.37	18.19	H	359	2.00
12	5,743.440	111.74			18.78	H	77.2	2.00
13	5,937.375	56.48	68.20	11.72	18.57	H	203.8	1.00

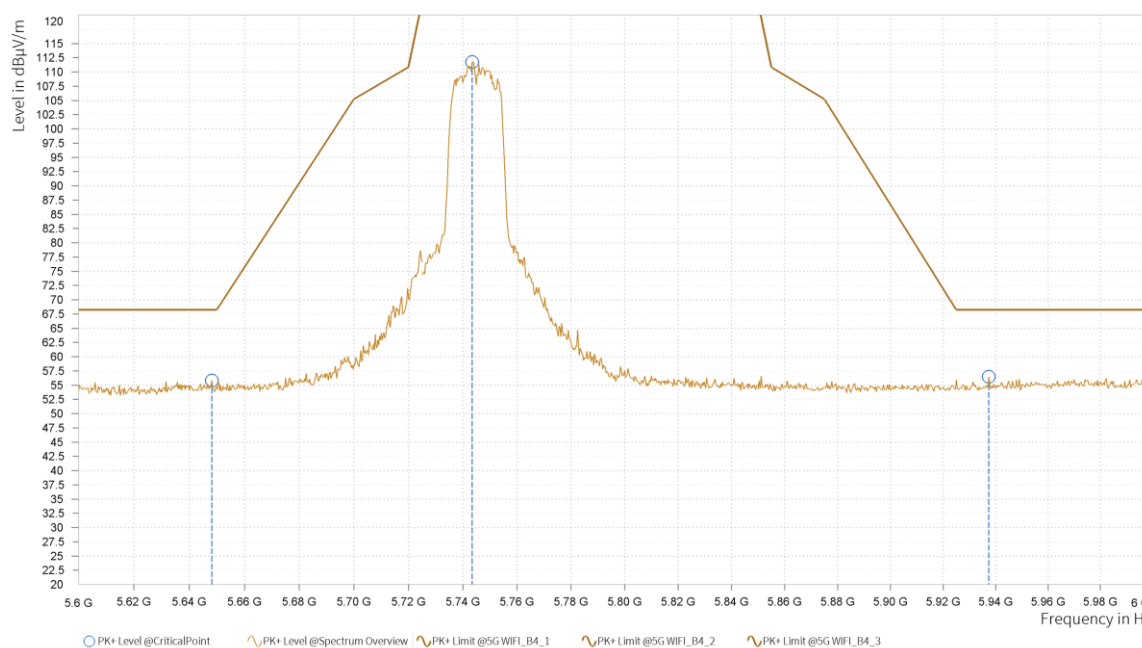




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,647.500	55.41	68.20	12.79	18.19	V	359	2.00
12	5,745.940	110.44			18.76	V	1	1.00
13	5,953.875	56.95	68.20	11.25	18.63	V	1	1.00

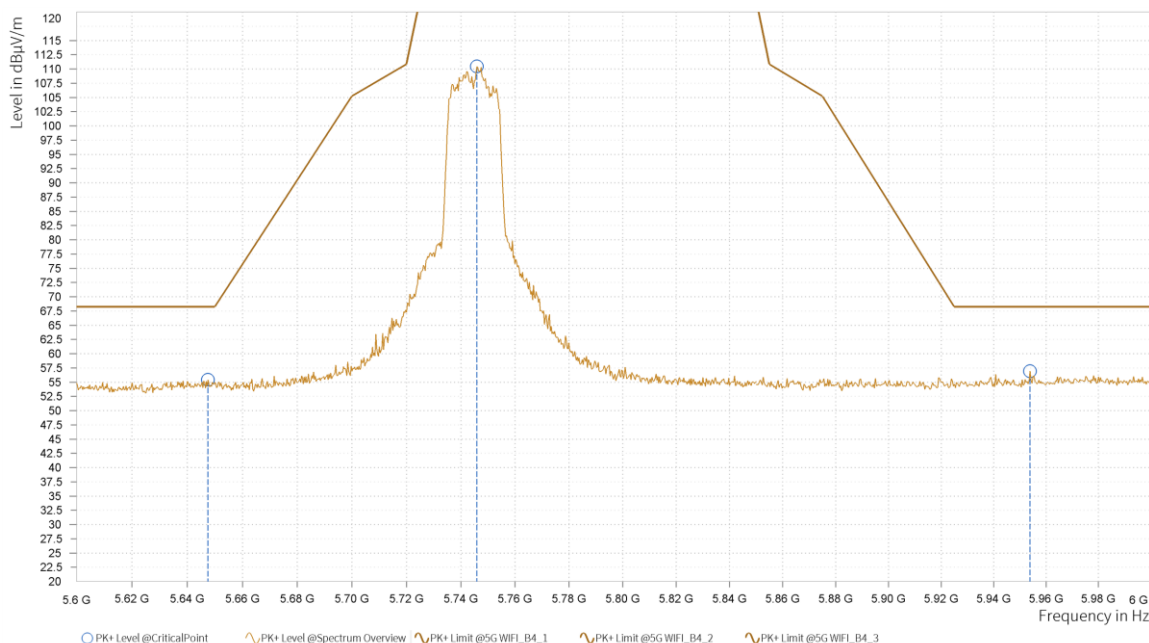

REMARKS:


1. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
2. Margin value = Limit value- Emission level.
3. 5745MHz: Fundamental frequency.

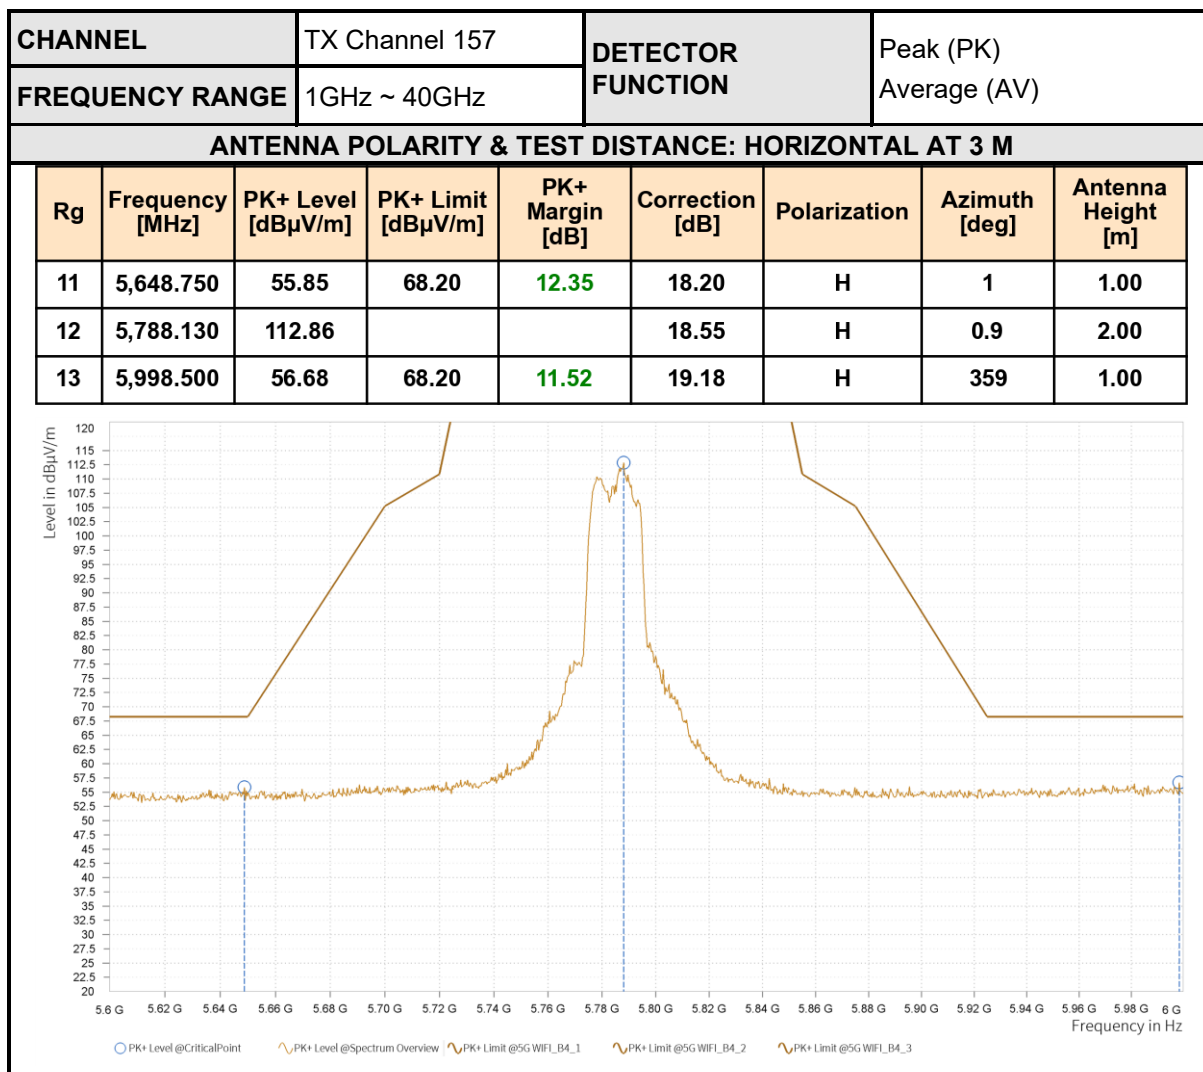




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,642.813	55.41	68.20	12.79	18.14	V	358.5	1.00
12	5,785.938	111.26			18.56	V	1	1.00
13	5,995.125	56.45	68.20	11.75	19.14	V	184.8	1.00

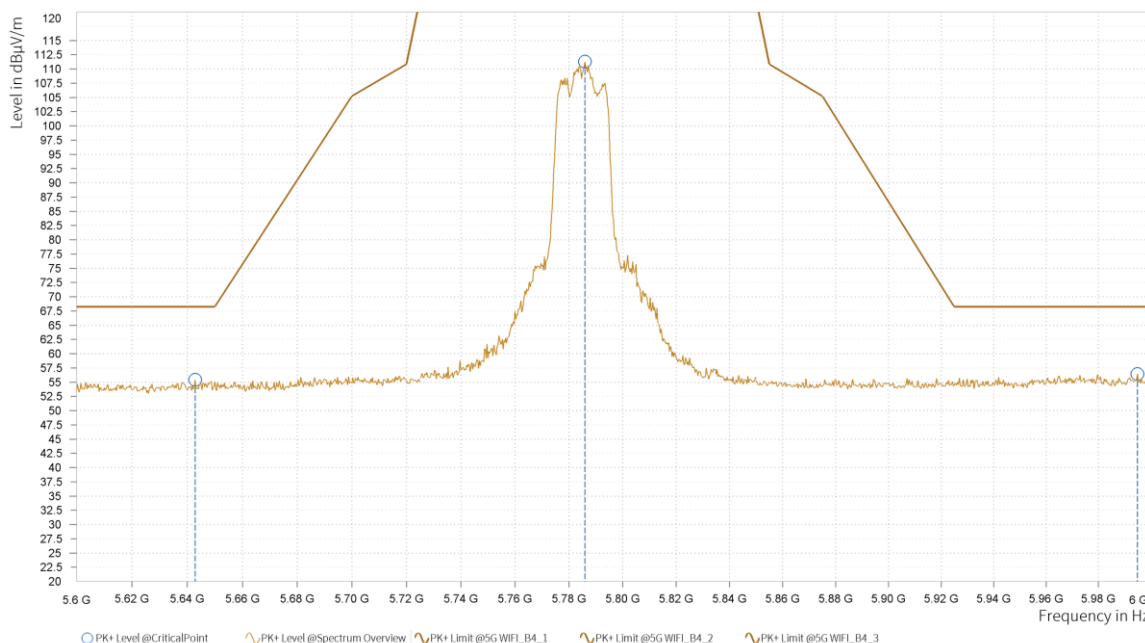

REMARKS:


1. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
2. Margin value = Limit value- Emission level.
3. 5785MHz: Fundamental frequency.

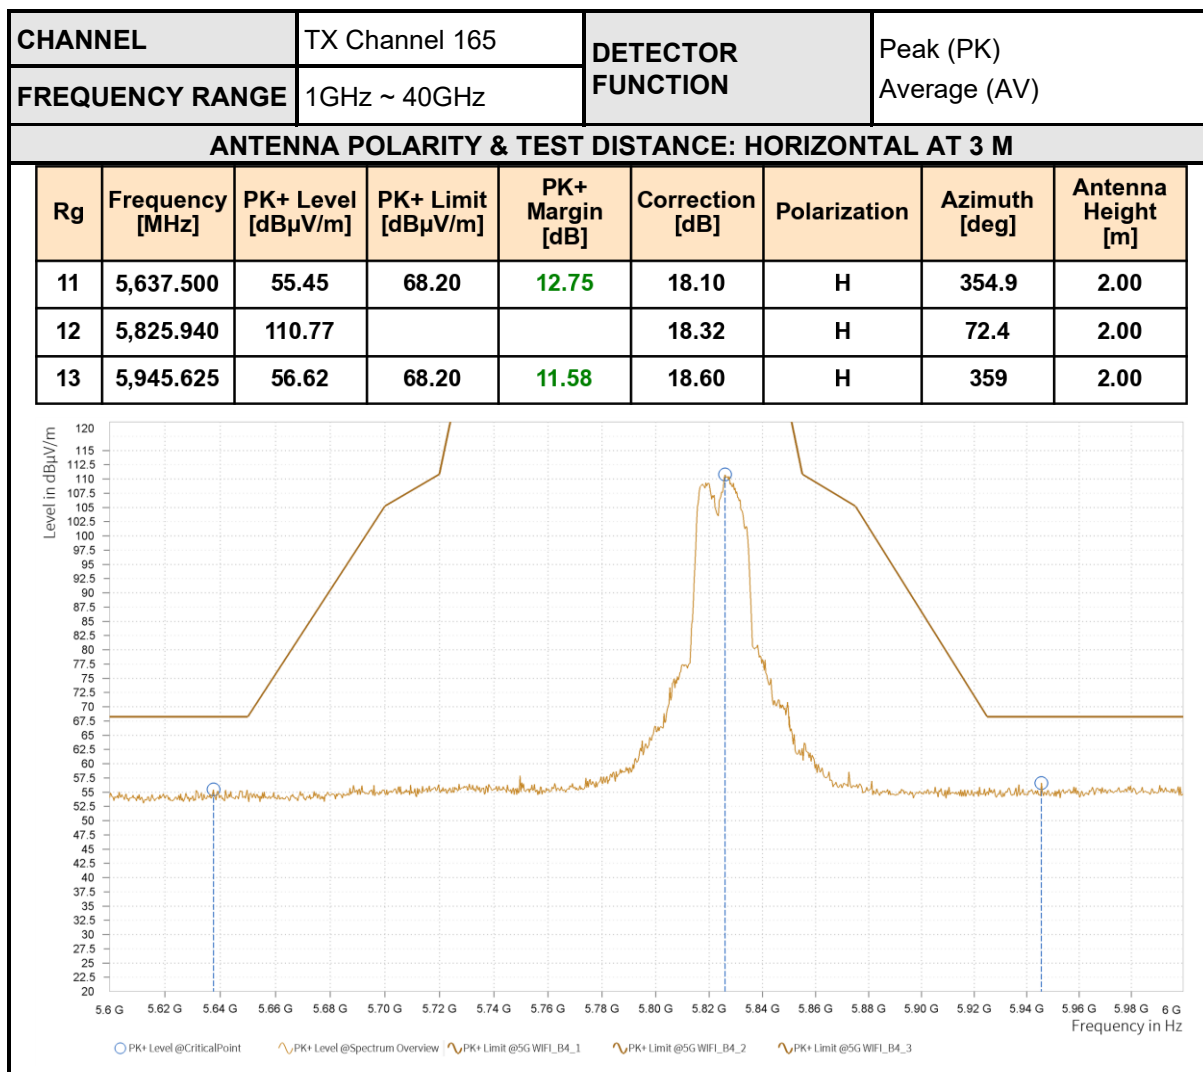



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,642.813	55.33	68.20	12.87	18.14	V	221.9	1.00
12	5,826.250	110.05			18.32	V	1	1.00
13	5,974.125	56.37	68.20	11.83	18.85	V	184.8	2.00

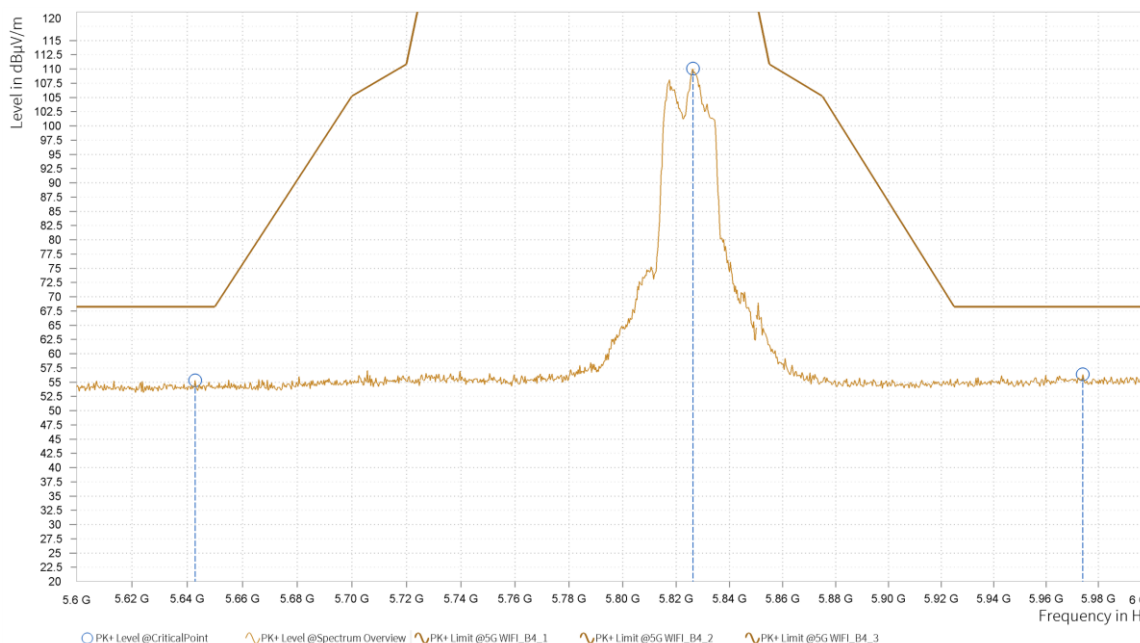

REMARKS:

1. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
2. Margin value = Limit value- Emission level.
3. 5825MHz: Fundamental frequency.



802.11AX (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,648.438	56.72	68.20	11.48	18.19	H	359	1.00
11	5,758.130	109.39			18.69	H	1	1.00
12	5,994.750	56.99	68.20	11.21	19.13	H	262.3	2.00

