

Copyright Information

Copyright © 2021 by SHENZHEN SMARTSAFE TECH CO.,LTD. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of SMARTSAFE.

Neither SMARTSAFE nor its affiliates shall be liable to the purchaser of this unit or third parties for damages, losses, costs, or expenses incurred by purchaser or third parties as a result of: Accident, misuse, or abuse of this unit, or unauthorized modifications, repairs, or alterations to this unit, or failure to strictly comply with SMARTSAFE operating and maintenance instructions. SMARTSAFE shall not be liable for any damages or problems arising from the use of any options or any consumable products other than those designated as Original SMARTSAFE Products or SMARTSAFE Approved Products by SMARTSAFE.

All information, specifications and illustrations in this manual are based on the latest information available at the time of printing. SMARTSAFE reserves the right to make changes at any time without prior written or oral notice.

Trademark Information

SmartSafe is a registered trademark of SHENZHEN SMARTSAFE TECH CO.,LTD. in China and other countries. All other SMARTSAFE trademarks, service marks, domain names, logos, and company names referred to in this manual are either trademarks, registered trademarks, service marks, domain names, logos, company names of SMARTSAFE or are otherwise the property of SMARTSAFE or its affiliates. In countries where any of the SMARTSAFE trademarks, service marks, domain names, logos and company names are not registered, SMARTSAFE claims other rights associated with unregistered trademarks, service marks, domain names, logos, and company names. Other products or company names referred to in this manual may be trademarks of their respective owners. You may not use any trademark, service mark, domain name, logo, or company name of SMARTSAFE or any third party without permission from the owner of the applicable trademark, service mark, domain name, logo, or company name. You may contact SMARTSAFE by visiting the website at www.newsmartsafe.com, or writing to SHENZHEN SMARTSAFE TECH CO.,LTD., 3310, Building 11, Tianan Cloud Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China, to request written permission to use Materials on this manual for purposes or for all other questions relating to this manual.

Safety Warnings

Please read all safety warnings and operating information carefully. To avoid personal injury, property loss or accidental damage to the product caused by improper operation, please pay attention to the following points when using this product:


- Always conduct vehicle detection in a safe environment.
- Never operate the detection device while driving a vehicle to avoid distraction and thus cause a car accident.
- Before starting the engine, the handbrake should be pulled, especially the front wheel should be protected, and the gear shift lever should be placed in **Neutral** (manual transmission) or **P** gear (automatic transmission), so as to avoid starting the engine and causing the vehicle to rush out and hurt people.
- The exhaust gas from the engine contains a variety of toxic compounds (such as hydrocarbons, carbon monoxide, nitrogen oxides, etc.), which can cause slow reaction and even serious personal injury or death. The vehicle under test should be parked in a well-ventilated place during operation.
- Use extreme caution when working around ignition coils, distributor caps, ignition lines and ignition plugs. These components generate dangerous voltages when the engine is running.
- Do not look directly at the laser beam of the device, and it is recommended to wear ANSI compliant goggles.
- Keep safety tips and warning labels on the device clean and legible.
- Keep the detection device dry and clean, away from gasoline, water and grease. If necessary, clean the surface of the device with a clean cloth coated with a mild detergent.
- Use only authorized and qualified parts for device repair and maintenance.
- All internal maintenance of the detection device must be carried out by an authorized maintenance organization or authorized technicians. Attempts to disassemble or modify the device will void the warranty.
- The safety information described herein covers all situations of which our company is aware. We cannot know, predict, or recommend all possible hazards. The operator must ensure that the maintenance operation performed under any circumstances will not cause harm to personal safety.

Table of Contents

1. Packing List	1
2. Product Introduction	1
2.1 Overview	1
2.2 TTM113 Main Unit	2
2.3 Technical Parameters	2
3. First Use.....	3
3.1 Charge	3
3.2 Startup	3
3.3 Main Interface	4
4. Tread Detection	5
5. Check Settings	10
6. System Settings	11
6.1 Network Connection	11
6.2 Bluetooth	12
6.3 Calibration	13
6.4 Brightness Adjustment	14
6.5 Update	14
6.6 Sleep Mode	15
6.7 Automatic Shutdown	15
6.8 Language Settings	16
6.9 Restore to Factory Settings	17
6.10 About	17
7. Data Query	18
Warranty.....	19

1. Packing List

The product configuration is different for different markets. For details, please consult the local dealer or check the packing list distributed with the unit.

No.	Accessory name	Picture for Reference	Quantity
1	Main unit		1
2	USB cable (Type-C)		1
3	Calibration platform		1
4	User manual	-	1


2. Product Introduction

2.1 Overview


TTM113 tire tread depth examiner is a device developed by SmartSafe for vehicle tire tread detection and wear analysis. The device can scan multiple grooves at a time to accurately and quickly detect tire wear. The tool can be used alone or in conjunction with the detection device to view and print detailed tire tread detection reports.

Warning: This tool is a Class II laser product. Avoid direct eye exposure to the laser. Failure to follow the warning may result in serious injury.

2.2 TTM113 Main Unit

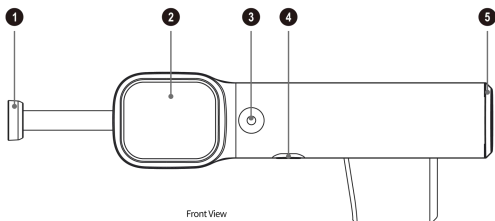

- 1 - Magnetic head 2 - Touch screen 3 - Power button/measurement button
4 -Type-C charging port 5 - Battery compartment

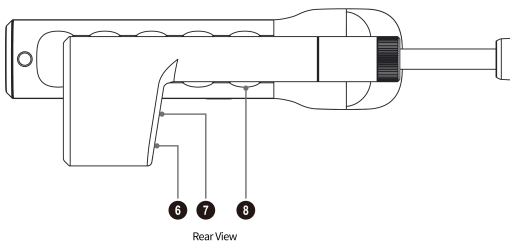

- 6 - Laser window 7 - Camera window 8 - Handle

2.3 Technical Parameters

No.	Parameter Name	Parameter Description
1	Processor	4-core A53
2	Memory	2G DDR & 8G Flash
3	Screen	1.7-inch LCD touch screen, with a resolution of 240*280

4	Wireless communication	Wi-Fi (support 2.4GHz)
		Bluetooth
5	Charging/data interface	Type-C
6	Camera	2 million pixels, 30fps
7	Battery	3.7V, 3,000mAh
8	Operating temperature	0 - 45°C
9	Storage temperature	-20 - 60°C
10	Size	70×97×225 mm

3. First Use

3.1 Charge


Plug the charging cable into the Type-C port of the main unit to charge it. The battery identification on the main unit screen displays , indicating that it is charging; the battery identification on the main unit screen displays , indicating that charging is complete.

3.2 Startup

3.2.1 Startup

Press and hold the power button on the device until the screen lights up, the device enters the startup screen, and then enters the warning page. Click **Enter** to go to the main interface.

*Note: Check the box before **No more tips** and click **Enter**. You can skip the prompt page and enter the main interface directly after the next startup.*




3.2.2 Shutdown

Press and hold the power button on the device until a shutdown prompt dialog box pops up on the screen. Click **Shutdown** to turn off the device or click **Restart** to restart the device.

3.3 Main Interface


The main interface of the TTM113 main unit mainly includes the following function modules:



Function module	Functional description
Tread Detection	Used to detect the depth of vehicle tire grooves.
Data Query	Used to query and share the tire tread detection report.
Check Settings	Used to set detection parameters.
System settings	Used for system settings, updates, factory settings restoration, and device calibration.


4. Tread Detection

1. Click **Tread Detection** on the main interface to enter the following prompt interface.




2. Read the detection method prompted on the screen and click **Enter** to go to the tire tread detection interface.

*Note: Check the box before **No more tips** and click **Enter** to skip the prompt page and directly enter the detection interface the next time you click **Tread Detection**.*




3. The system starts the detection from the left front wheel of the vehicle by default, but you can also manually select any tire for detection. After clicking on the tire icon, attach the magnetic head of the device to the tread of the corresponding tire, and press the measurement button on the device to start the detection. At this time, a scanning animation is displayed on the icon corresponding to the current tire, and a green laser is emitted in the laser window of the device.

*Note: The system defaults to 4-wheel detection mode. If you need to switch to the 6-wheel detection mode, you can click **Check Settings** on the main interface and modify the quantity of tires.*




4. After completing the current tire detection, the scanning cursor automatically jumps to the next tire icon in a counterclockwise direction. After all tire tests are completed in turn, the tire icon will identify the tire detection results in different colors.



Icon color	Description
Gray	Indicates a tire that has not been detected.
Green	Indicates that the detected tire wear degree is within the normal range, and its groove depth is greater than or equal to the safe value.

Yellow	Indicates that the detected tire wear degree is within the warning range, and the groove depth is greater than the safe value but less than the normal value, it is recommended to replace the tire.
Red	Indicates that the detected tire is seriously worn and the groove depth is less than or equal to the dangerous value, and the tire needs to be replaced immediately.
Groove depth value	Displays the minimum groove depth of this tire.



If the detection fails, the following pop-up window will pop up on the screen. Please confirm that the magnetic head of the device fits the tread of the tire and press the measurement button again to measure again.



5. After all tires are detected, swipe the screen to the left to view the current detection report.


Display item	Description
Tire Tread Data	Display the tire tread data for each tire, including each groove depth data. Green indicates normal depth, yellow indicates warning depth, and red indicates dangerous depth.
Braking Distance	Predict the braking distance of the detected vehicle under limited road conditions and vehicle speeds and

	compares it with the ideal braking distance.
Tire wear	Display the wear status of currently detected vehicle wheels.
Maintenance & Repair Recommendations	Based on the current vehicle detection data, maintenance proposal will be given on whether tires need to be replaced and four-wheel alignment performed.

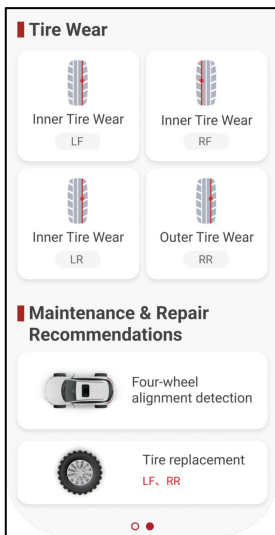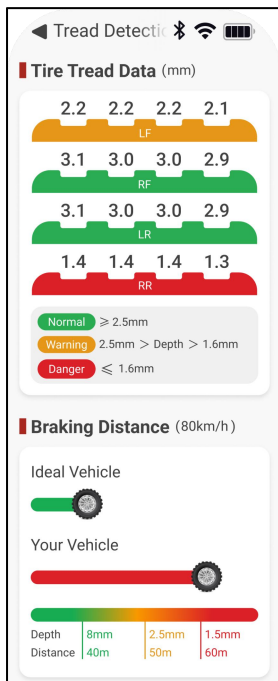

5. Check Settings

Click **Check Settings** on the main interface to enter the following interface:

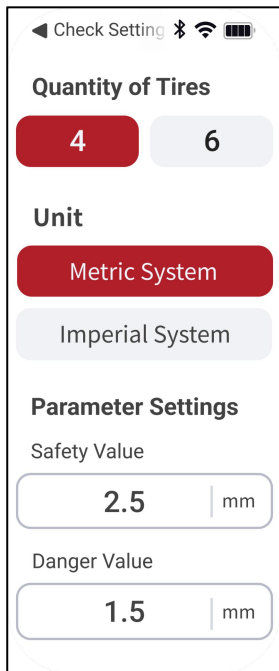


Setting Item	Description
Quantity of Tires	Switch the detection mode to 4-wheel or 6-wheel according to the tire quantity of the vehicle to be detected, and click on the corresponding value.

Unit	Switch the display unit of test results to metric system or imperial system as required.
Parameter Settings	Set safe and dangerous values as needed.


6. System Settings

Click **Settings** on the main interface to enter the following interface. Swipe up the screen to view more setting items.

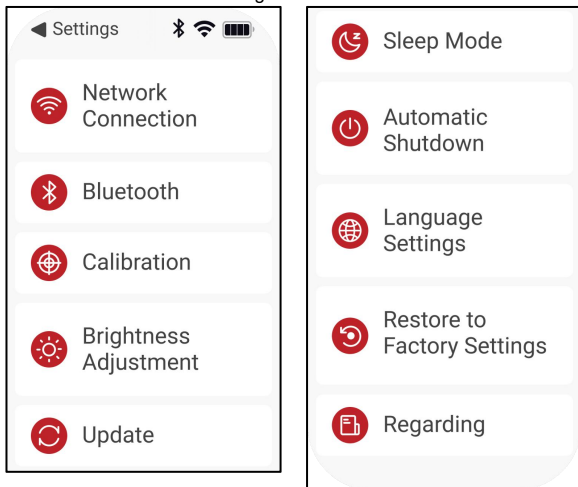

6.1 Network Connection


This item is used to set the wireless network connection of the device. Please follow the steps below to set it up:

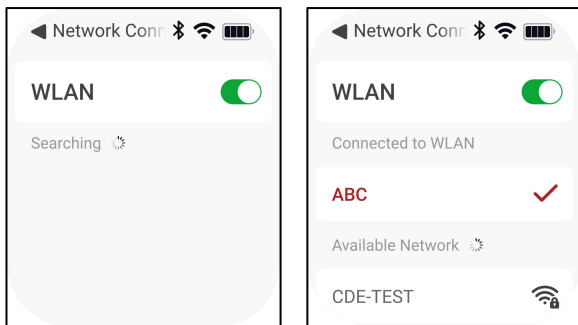

- 1) Click **Network Connection** on the system settings interface, then click or slide the WLAN switch to turn it on, and the device will start automatically scanning available wireless networks.
- 2) Select the network you want to connect to:
 - If you select an open network, you can directly connect to it.
 - If you select an encrypted network, you will need to enter an access password before you can connect.
- 3) When the network name you are trying to connect to appears in red and a “✓” appears after it, it means the connection is successful.

6.2 Bluetooth


It is used to set up Bluetooth communication connection. Click **Bluetooth** on the system settings interface, then turn on the Bluetooth switch, and the detector can be paired with other detection devices for data transmission.



6.3 Calibration


It is used to perform device calibration.

- 1) Click **Calibration** on the system settings interface, and follow the on-screen prompts to correctly place the detector on the Calibration platform so that the magnetic head of the detector fits the magnetic area on the Calibration platform.
- 2) Press the measurement button on the device to start calibration.




- 3) After calibration is completed, click **Confirm** to return to the main system

settings interface.

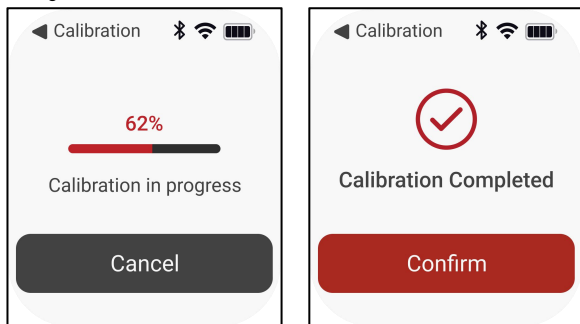


6.4 Brightness Adjustment

It is used to adjust screen brightness.




6.5 Update

It is used for application and system upgrades.



6.6 Sleep Mode


It is used to set the waiting time for the system to start sleep mode.

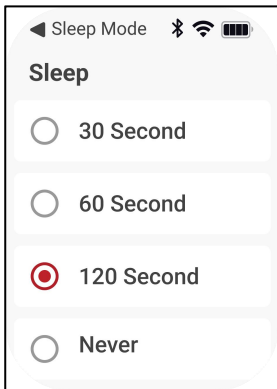

6.7 Automatic Shutdown


It is used to set the waiting time for the device to automatically shut down

when there is no operation.

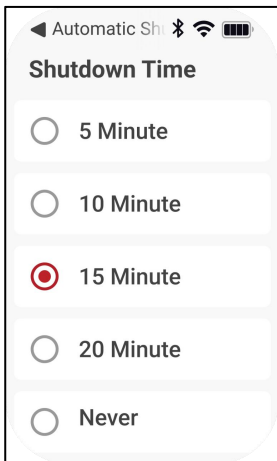


6.8 Language Settings

It is used to switch system language.




6.9 Restore to Factory Settings

It is used to initialize the device. Restoring the device to factory settings will delete all personal data, please proceed with caution.

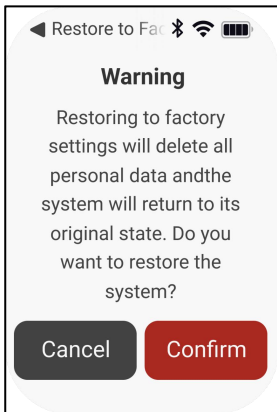


6.10 About

It is used to view the device model, system version and application version.





7. Data Query

This function module is used to view and share detection reports. Click **Data Query** on the main interface to view the latest detection report.



Swipe up the screen to the bottom, click the **Share** button to generate a QR code, and scan the QR code to share the detection report.



Warranty

This WARRANTY applies only to customers and dealers who have purchased SmartSafe products through normal procedures.

Within one year from the date of delivery, SmartSafe Company shall guarantee the defects of its electronic products caused by materials or processes. Damage of the equipment or components caused by abuse, unauthorized modification, use for purposes other than the design of the product, or failure to operate in the way specified in the instruction shall not be covered by this warranty.

Disclaimer

The warranty mentioned above may supersede any other warranty.

Order notification

The replaceable parts and optional parts can be ordered directly from the dealers authorized by SmartSafe. Please specify when ordering:

- Quantity ordered
- Part number
- Part name

Customer Service Center

If the equipment needs to be repaired, please send the equipment to SmartSafe, together with the purchase invoice and problem description. If the equipment is within the scope of the warranty, SmartSafe offer free maintenance; If the equipment is outside the scope of the warranty, SmartSafe will charge for maintenance and return freight.

Address of SmartSafe Company:

3F Building B, Qiao'an Technology Industrial Park, Guanlan, Longhua New District, Shenzhen, Guangdong, China. Postcode: 518110

Statement: The Company reserves the right to change the product design and specifications without prior notice. The appearance and color of the object may be different from that shown in the instruction manual. The object shall prevail. We have tried our best to make all the descriptions in the book accurate, but there are still some inaccuracies. If you have any doubt, please contact the distributor or after-sales service center. The company will not assume any consequences caused by misunderstanding.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in 0mm exposure condition, compliance with exposure requirements.