



FCC Part 15, Subpart B, Class B

ARTIKA FOR LIVING INC

LED Luminaire

Test Model: PDT-CAC

Additional Model No.: PDT-CAC-XXXXXX

("XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))

Prepared for	: ARTIKA FOR LIVING INC
Address	: 1756 50th avenue, Lachine, Qc, Canada H8T 2V5
Prepared by	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel	: (+86)755-82591330
Fax	: (+86)755-82591332
Web	: www.LCS-cert.com
Mail	: webmaster@LCS-cert.com
Date of receipt of test sample	: March 07, 2022
Number of tested samples	: 2
Sample No.	: 220301138A
Serial number	: Prototype
Date of Test	: March 07, 2022 ~ March 10, 2022
Date of Report	: March 11, 2022



Scan code to check authenticity



FCC Part 15, Subpart B, Class B
FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Report Reference No. : LCS220301138AE

Date Of Issue : March 11, 2022

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Testing Location/ Procedure..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name..... : **ARTIKA FOR LIVING INC**

Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Test Specification

Standard : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **LED Luminaire**

Test Model : PDT-CAC

Trade Mark : ARTIKA

Ratings : Input: AC 120V, 60Hz, 15W

Result : **Positive**

Compiled by:

Vera Deng/ Administrator

Supervised by:

Jin Wang/ Technique principal

Approved by:

Gavin Liang/ Manager



FCC -- TEST REPORT

Test Report No. : LCS220301138AE	<u>March 11, 2022</u> Date of issue
---	--

Test Model	: PDT-CAC
EUT.....	: LED Luminaire
Applicant.....	: ARTIKA FOR LIVING INC
Address.....	: 1756 50th avenue, Lachine, Qc, Canada H8T 2V5
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: RISING-SUN LIGHTING Co.,Ltd
Address.....	: “San Shi Liu Lang” Industrial Area, Shilong Village Group, Langxin Village, Danzao Town, Nanhai District, Foshan Guangdong 528216 China
Telephone.....	: /
Fax.....	: /
Factory.....	: RISING-SUN LIGHTING Co.,Ltd
Address.....	: “San Shi Liu Lang” Industrial Area, Shilong Village Group, Langxin Village, Danzao Town, Nanhai District, Foshan Guangdong 528216 China
Telephone.....	: /
Fax.....	: /

Test Result according to the standards on page 6:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Revision History

Revision	Issue Date	Revision Content	Revised By
000	March 11, 2022	Initial Issue	Gavin Liang



TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results.....	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.2. Support Equipment List.....	7
2.3. Description of Test Facility.....	7
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT.....	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT.....	17
5. EXTERIOR PHOTOGRAPHS OF THE EUT.....	17
6. INTERIOR PHOTOGRAPHS OF THE EUT	17



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode	Lighting	Record
***Note: All test modes were tested, but we only recorded the worst case in this report.		



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : LED Luminaire

Trade Mark : ARTIKA

Test Model : PDT-CAC

Additional Model : PDT-CAC-XXXXXX("XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Power Supply : Input: AC 120V, 60Hz, 15W

Highest internal frequency (Fx) : $F_x \leq 108 \text{ MHz}$

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.	

2.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--

2.3. Description of Test Facility

Site Description
EMC Lab. : NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.



2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (Ulab)	Expanded Uncertainty (Ucisp)
Conducted Emission	Level accuracy (9kHz to 150kHz)	± 2.63 dB	± 3.8 dB
	(150kHz to 30MHz)	± 2.35 dB	± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2021-06-08	2022-06-08
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2021-06-08	2022-06-08
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2021-06-08	2022-06-08
4	EMI Test Software	EZ	EZ EMC	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2021-06-08	2022-06-08
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2021-06-08	2022-06-08
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

3.1.2. Block Diagram of Test Setup

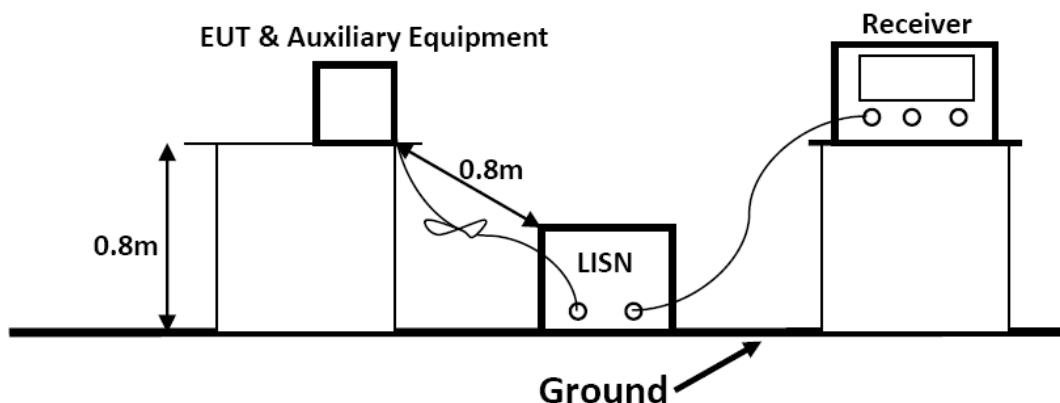

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dBμV)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.



3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Lighting and measure it.

3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated


3.1.7. Test Results

PASS.

The test result please refer to the next page.




Test Model	PDT-CAC	Test Mode	Lighting
Environmental Conditions	23.9℃, 53% RH	Test Engineer	Monkey Li
Pol	Line	Test Voltage	AC 120V/60Hz

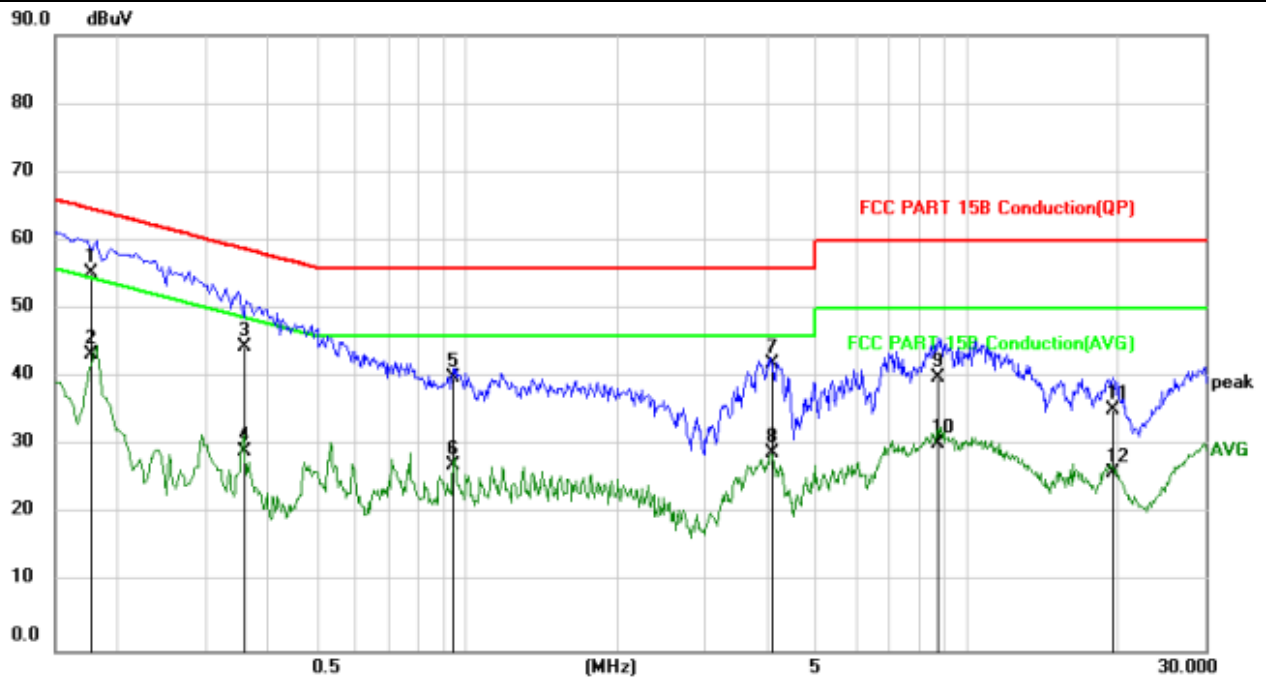

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1776	45.04	10.23	55.27	64.60	-9.33	QP	
2		0.1776	33.10	10.23	43.33	54.60	-11.27	AVG	
3		0.3586	34.15	10.20	44.35	58.76	-14.41	QP	
4		0.3586	18.95	10.20	29.15	48.76	-19.61	AVG	
5		0.9425	29.75	10.20	39.95	56.00	-16.05	QP	
6		0.9425	16.91	10.20	27.11	46.00	-18.89	AVG	
7		4.0814	31.70	10.20	41.90	56.00	-14.10	QP	
8		4.0814	18.80	10.20	29.00	46.00	-17.00	AVG	
9		8.7226	29.79	10.20	39.99	60.00	-20.01	QP	
10		8.7226	19.96	10.20	30.16	50.00	-19.84	AVG	
11		19.5813	24.95	10.20	35.15	60.00	-24.85	QP	
12		19.5813	15.70	10.20	25.90	50.00	-24.10	AVG	



Test Model	PDT-CAC	Test Mode	Lighting
Environmental Conditions	23.9°C, 53% RH	Test Engineer	Monkey Li
Pol	Neutral	Test Voltage	AC 120V/60Hz

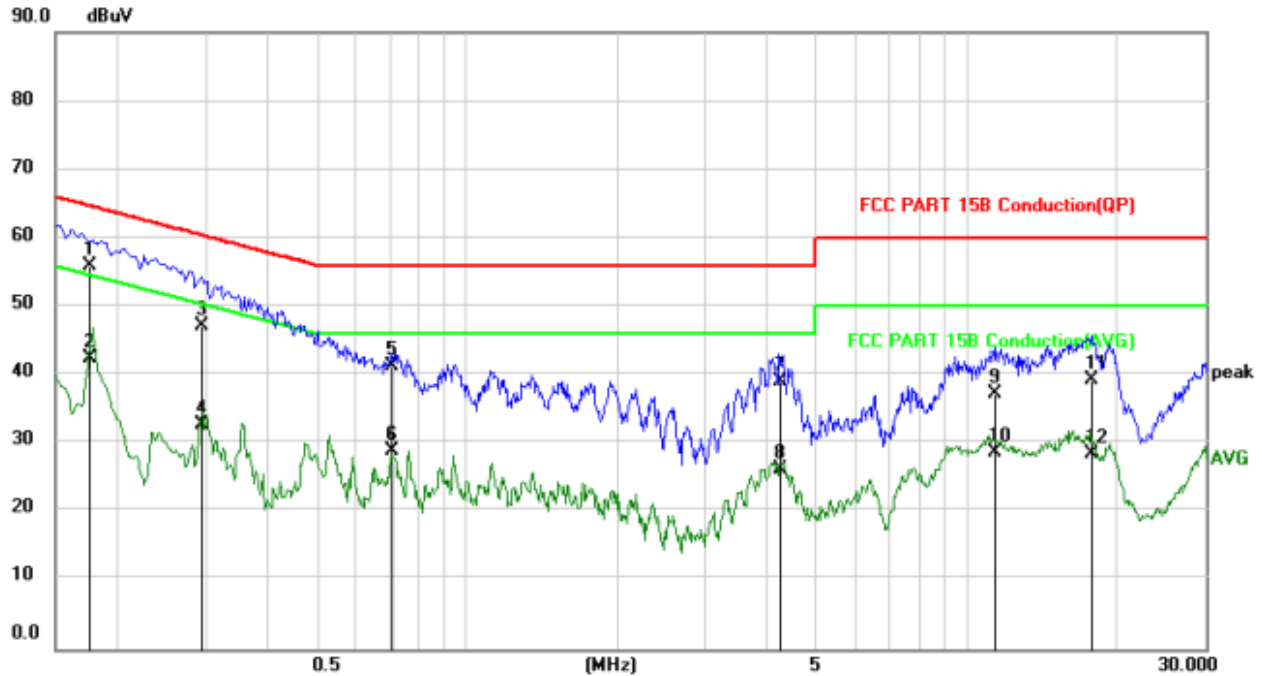

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1756	45.60	10.23	55.83	64.69	-8.86	QP	
2		0.1756	32.25	10.23	42.48	54.69	-12.21	AVG	
3		0.2932	36.85	10.20	47.05	60.43	-13.38	QP	
4		0.2932	22.60	10.20	32.80	50.43	-17.63	AVG	
5		0.7060	31.19	10.20	41.39	56.00	-14.61	QP	
6		0.7060	18.67	10.20	28.87	46.00	-17.13	AVG	
7		4.2477	28.88	10.20	39.08	56.00	-16.92	QP	
8		4.2477	16.03	10.20	26.23	46.00	-19.77	AVG	
9		11.3418	27.00	10.20	37.20	60.00	-22.80	QP	
10		11.3418	18.43	10.20	28.63	50.00	-21.37	AVG	
11		17.7549	29.09	10.20	39.29	60.00	-20.71	QP	
12		17.7549	18.26	10.20	28.46	50.00	-21.54	AVG	

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin=Reading level + Correct - Limit




3.2. Radiated emission Measurement

3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2021-06-08	2022-06-08
3	Spectrum Analyzer	Agilent	N9020A	MY49100699	2021-06-08	2022-06-08
4	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2019-06-23	2022-06-23
5	Horn Antenna	ETS-LINDGREN	3115	00034771	2019-06-23	2022-06-23
6	EMI Test Software	EZ	EZ EMC	N/A	/	/
7	Positioning Controller	MF	BK8807-4A-2T	2016-0808-008	/	/

3.2.2. Block Diagram of Test Setup

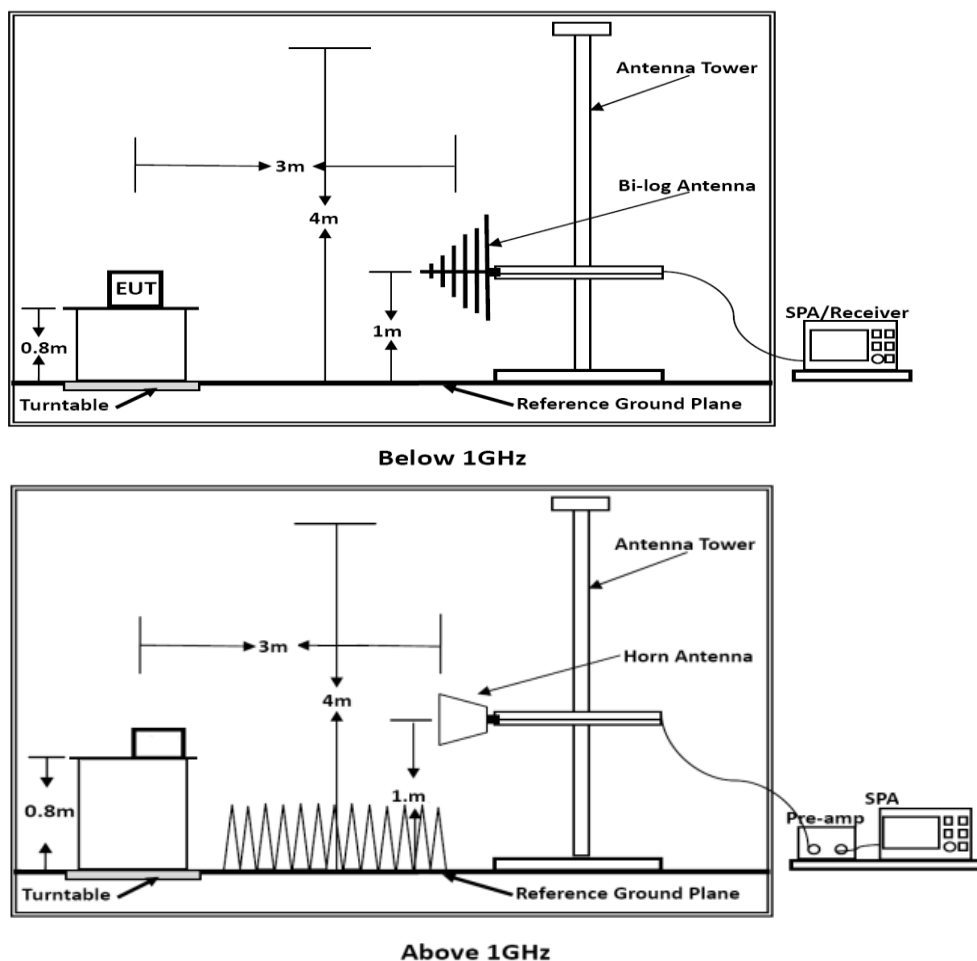



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	3	74	54

***Note: The lower limit applies at the transition frequency.

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Lighting and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.

The frequency range from 30MHz to 1000MHz is checked.

3.2.7. Radiated Emission Noise Measurement Result

PASS.

The scanning waveforms please refer to the next page.




Test Model	PDT-CAC	Test Mode	Lighting
Environmental Conditions	24.2℃, 50% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	31.6896	18.33	10.70	29.03	40.00	-10.97	QP
2		55.7802	12.75	12.63	25.38	40.00	-14.62	QP
3		72.5916	13.74	10.70	24.44	40.00	-15.56	QP
4		134.9135	16.07	11.20	27.27	43.50	-16.23	QP
5		175.4977	11.71	10.96	22.67	43.50	-20.83	QP
6		235.3001	12.45	10.55	23.00	46.00	-23.00	QP



Test Model	PDT-CAC	Test Mode	Lighting
Environmental Conditions	24.2°C, 50% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Monkey Li	Test Voltage	AC 120V/60Hz

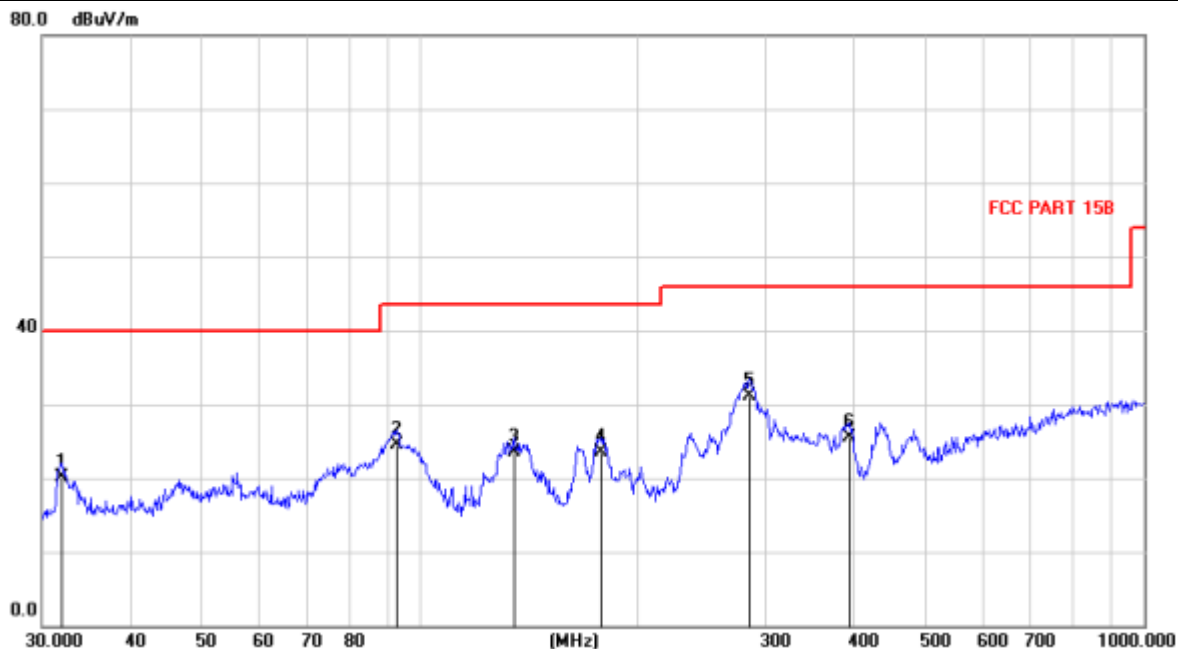

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		32.0528	7.56	12.64	20.20	40.00	-19.80	QP
2		92.9501	13.36	11.16	24.52	43.50	-18.98	QP
3		134.8544	14.48	9.10	23.58	43.50	-19.92	QP
4		177.5869	12.92	10.64	23.56	43.50	-19.94	QP
5	*	285.3517	17.90	13.13	31.03	46.00	-14.97	QP
6		391.9232	10.24	15.35	25.59	46.00	-20.41	QP

Note: Pre-Scan all mode, Thus record worse case mode result in this report.



4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

5. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----