


TEST REPORT

Applicant: E&S International Enterprises, Inc.
Address: 7801 Hayvenhurst Avenue, Van Nuys, California
91406, United States
Equipment Type: 10.1" FHD Tablet
Model Name: RATM21036 (refer to section 2.3)
Brand Name: N/A
FCC ID: 2AYPE-RATM21036
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Mar. 11, 2024
Test Date: Mar. 16, 2024 - Apr. 01, 2024
Date of Issue: Apr. 16, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 16, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	9
4.4	Measurement Uncertainty	10
4.5	Description of Test Setup	10
4.6	Measurement Results Explanation Example	13
5	TEST ITEMS	14
5.1	Antenna Requirements	14
5.2	Frequency Hopping Systems	15
5.3	Number of Hopping Frequencies	17
5.4	Peak Output Power	18
5.5	Occupied Bandwidth	19

5.6	Carrier Frequency Separation	20
5.7	Time of Occupancy (Dwell time)	21
5.8	Conducted Spurious Emission & Authorized-band band-edge	23
5.9	Conducted Emission	24
5.10	Radiated Spurious Emission	25
5.11	Band Edge (Restricted-band band-edge).....	27
ANNEX A	TEST RESULT	28
A.1	Number of Hopping Frequency	28
A.2	Peak Output Power	29
A.3	20 dB and 99% bandwidth	32
A.4	Hopping Frequency Separation.....	37
A.5	Average Time of Occupancy	38
A.6	Conducted Spurious Emissions & Authorized-band band-edge	41
A.7	Conducted Emissions.....	48
A.8	Radiated Spurious Emission	50
A.9	Band Edge (Restricted-band band-edge).....	64
ANNEX B	TEST SETUP PHOTOS	68
ANNEX C	EUT EXTERNAL PHOTOS	68
ANNEX D	EUT INTERNAL PHOTOS	68

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406, United States

2.2 Manufacturer Information

Manufacturer	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406, United States

2.3 General Description for Equipment under Test (EUT)

EUT Name	10.1" FHD Tablet
Model Name Under Test	RATM21036
Series Model Name	16QF7, RATM21036-*****, RATM21036F-*****, RATM21036K-*****(The "*" in model name can be 0 to 9, A to Z, a to z, "-" or blank)
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in shell color and model name. (this information provided by the applicant)
Hardware Version	M863YCW
Software Version	Android 14
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/2A/2C/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC Antenna
Antenna Gain	1.78 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.9	Pass	Note ²

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	48% to 61%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+21.6℃ to +24.6℃
Working Voltage of the EUT	NV (Normal Voltage)	3.80 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2023.05.16	2024.05.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2023.07.25	2024.07.24
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2023.09.05	2024.09.04
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2021.05.20	2024.05.19
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2022.02.19	2024.08.15
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2023.09.05	2024.09.04
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2023.09.05	2024.09.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2024.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Amplifier	COM-MV	ZT30-1000M	B2018054558	2023.12.05	2024.12.04
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8℃
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

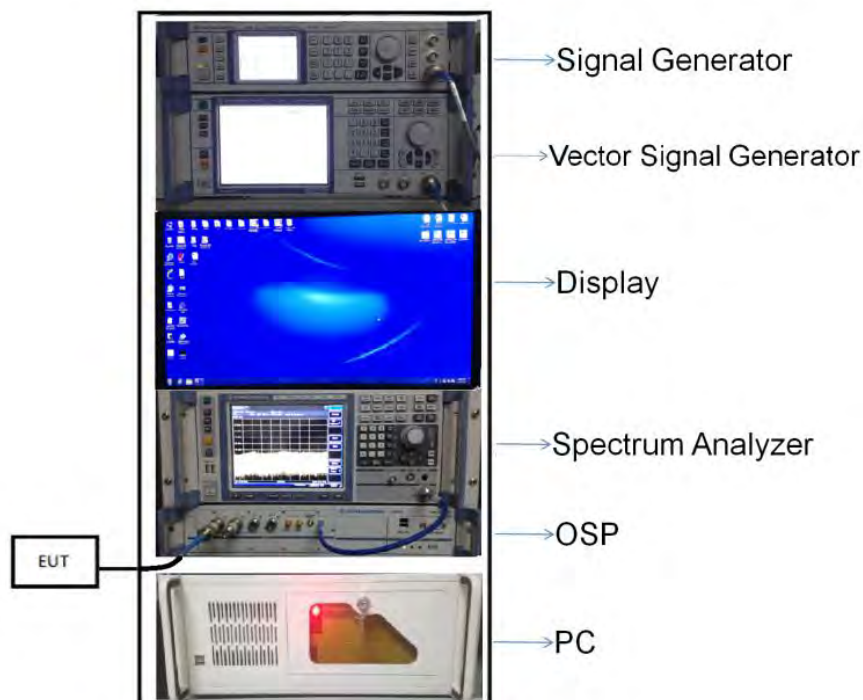


(Diagram 1)

4.5.2 For AC Power Supply Port Test

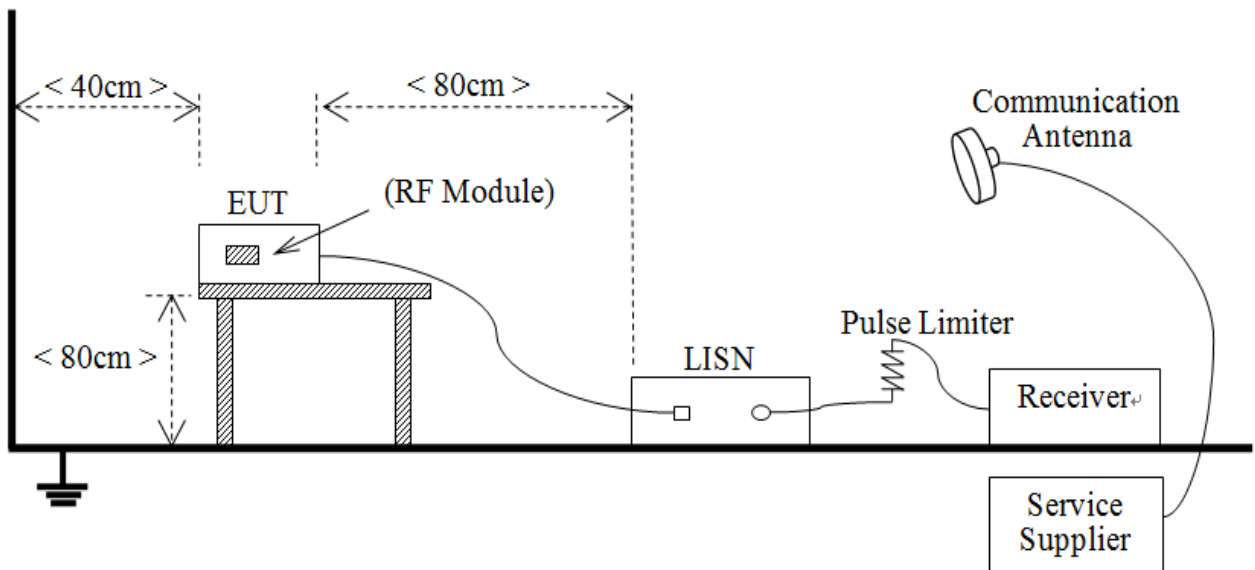


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

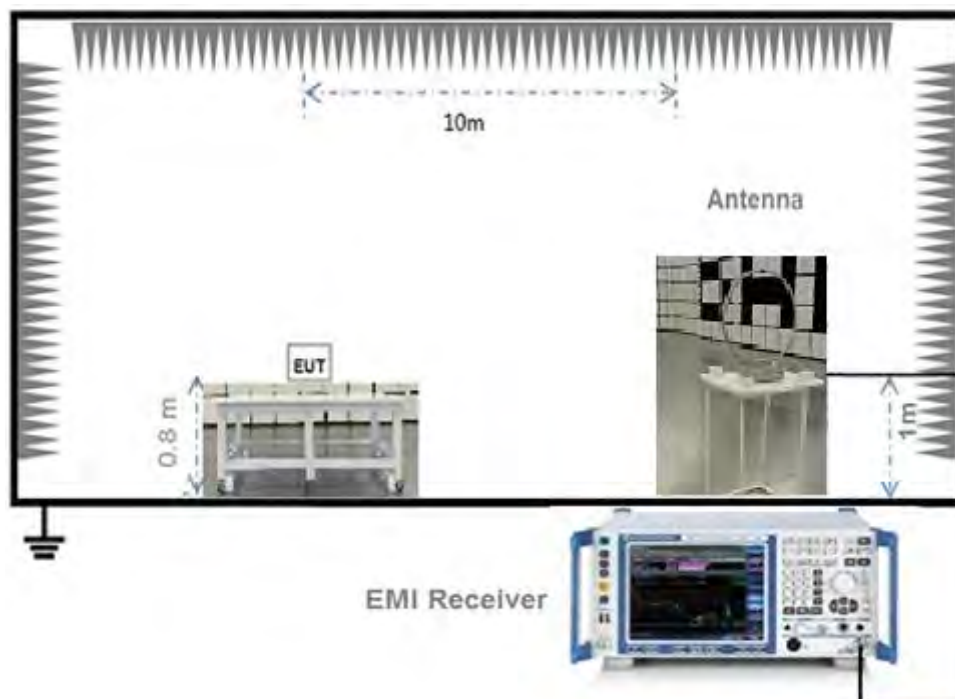


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

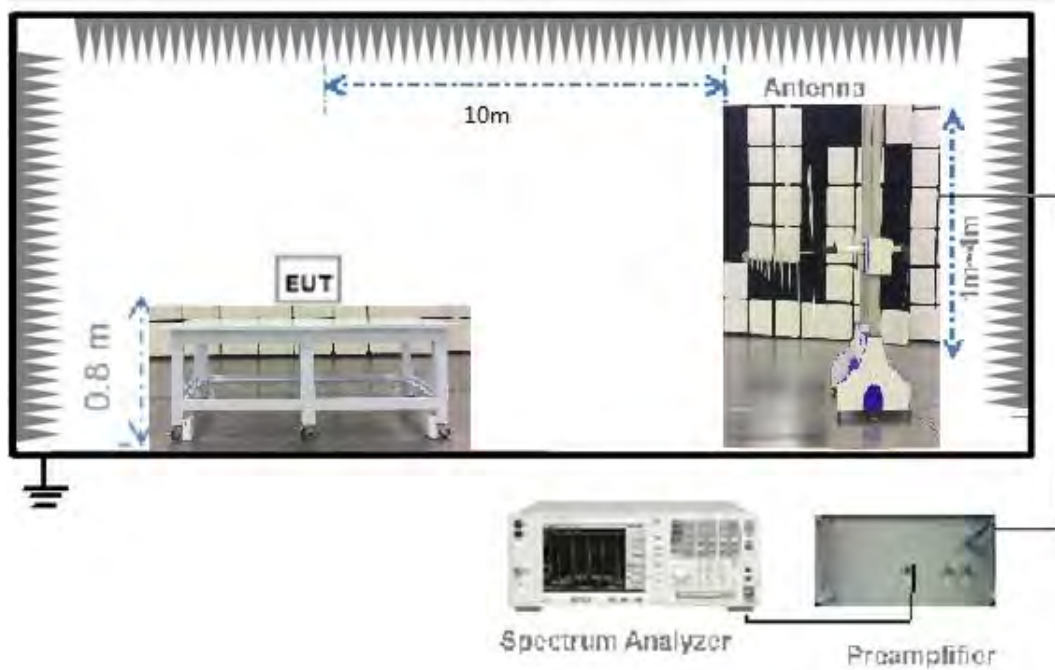

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

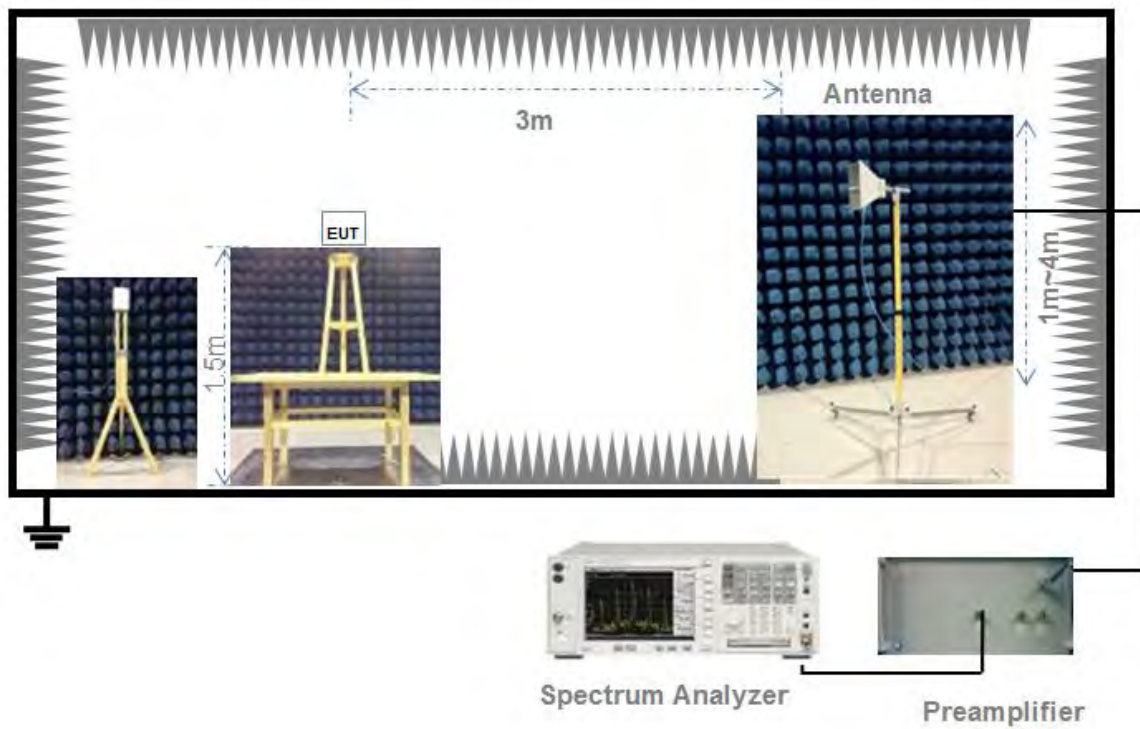

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents



3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots

GFSK 2.4 GHz ~ 2.4415 GHz

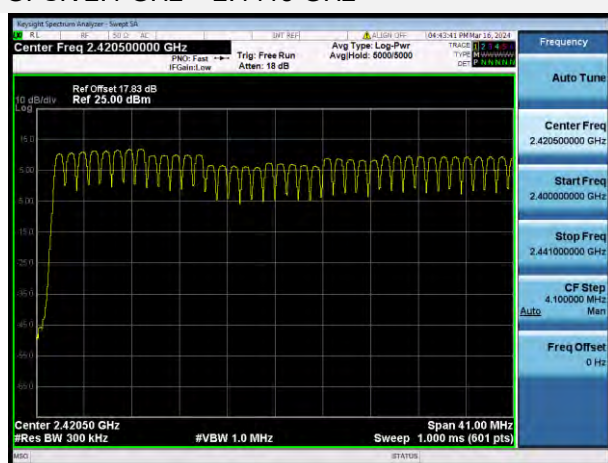


GFSK 2.4415 GHz ~ 2.4835 GHz

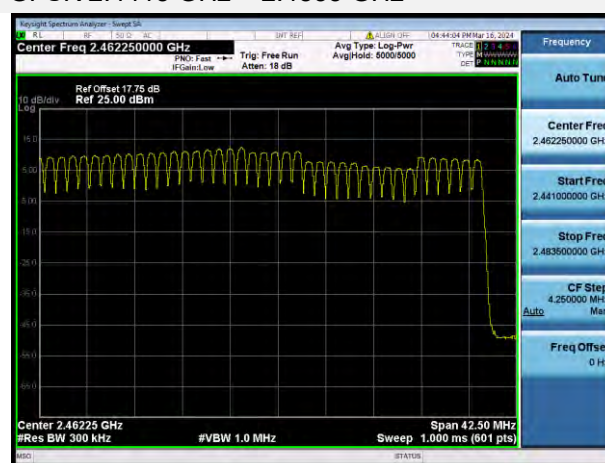

8-DPSK 2.4 GHz ~ 2.4415 GHz



8-DPSK 2.4415 GHz ~ 2.4835 GHz

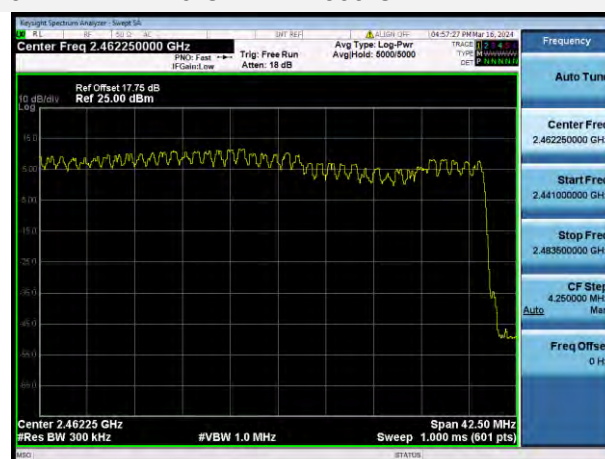


A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	10.75	11.89	10.81	12.04	10.80	12.02	21	125	Pass
Middle	9.82	9.60	9.88	9.72	9.85	9.65			Pass
High	8.80	7.59	8.06	6.40	8.00	6.32			Pass

Test Plots

GFSK LOW CHANNEL

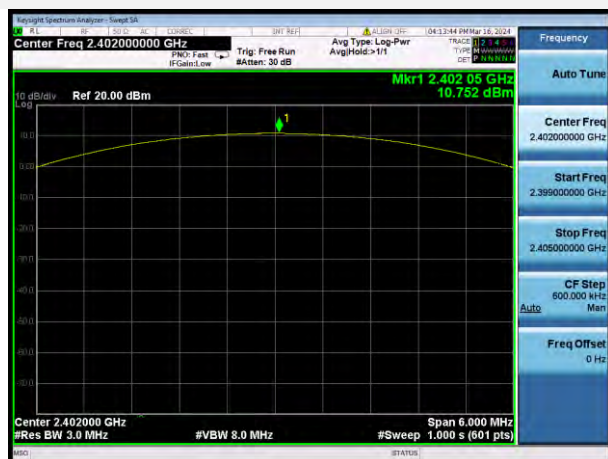


GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL


$\pi/4$ -DQPSK HIGH CHANNEL

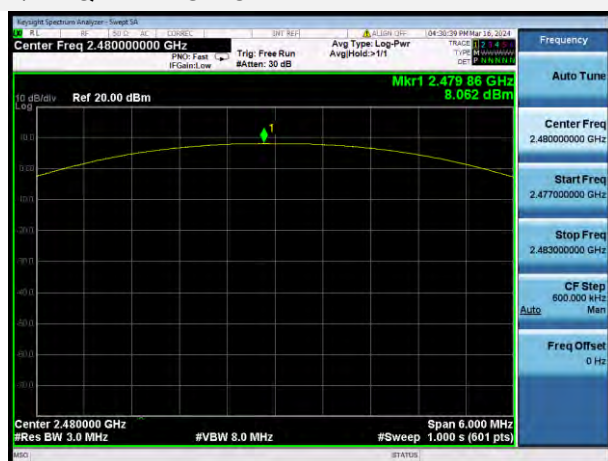

8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL

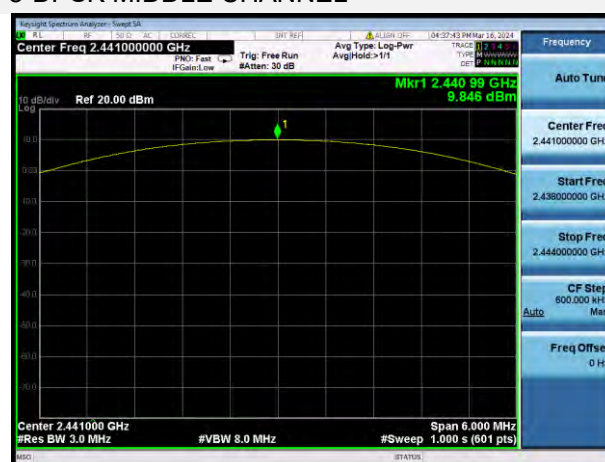

8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.925000	0.775250
Middle	0.875000	0.776890
High	0.870000	0.760440
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.285000	1.162400
Middle	1.285000	1.168500
High	1.265000	1.146300
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.280000	1.173900
Middle	1.280000	1.175400
High	1.260000	1.149700

Test Plots

20 dB Bandwidth

GFSK LOW CHANNEL

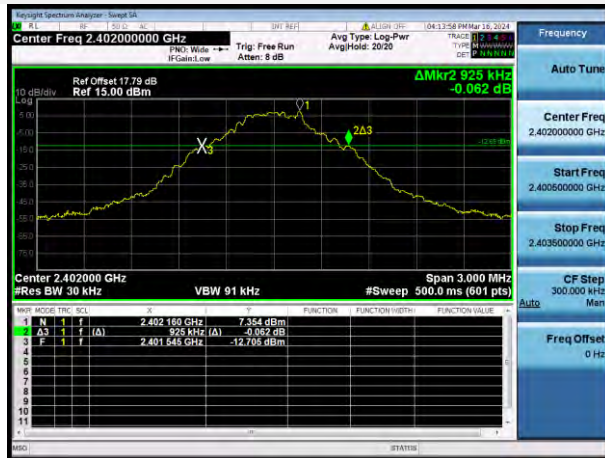

GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL

$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL




8-DPSK HIGH CHANNEL




99% Bandwidth




GFSK LOW CHANNEL

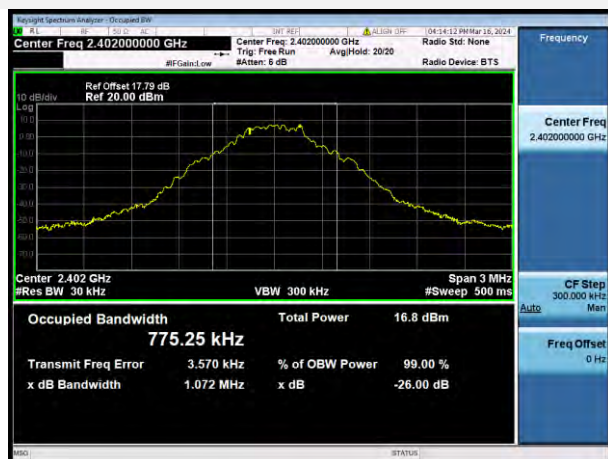


GFSK MIDDLE CHANNEL

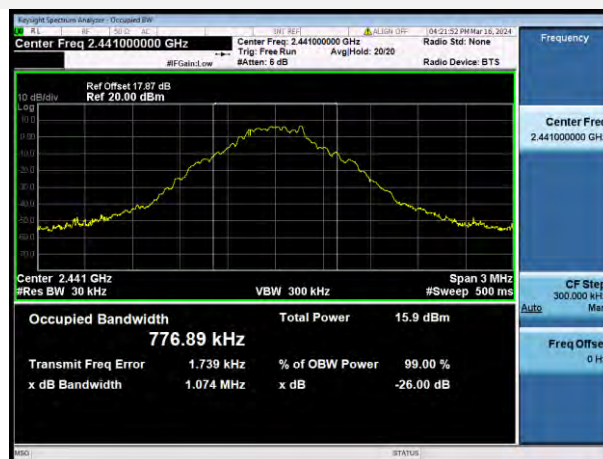


GFSK HIGH CHANNEL

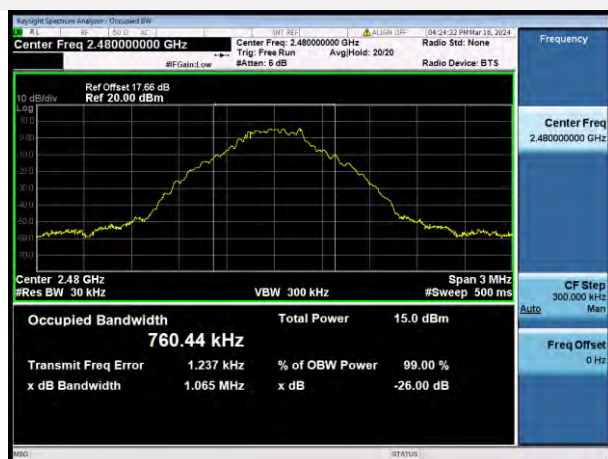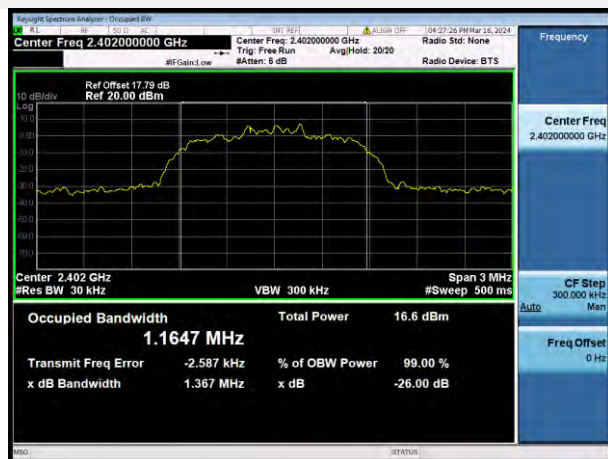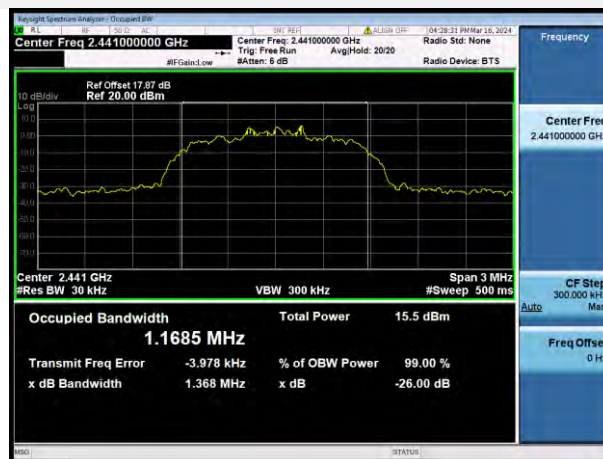 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL


$\pi/4$ -DQPSK HIGH CHANNEL

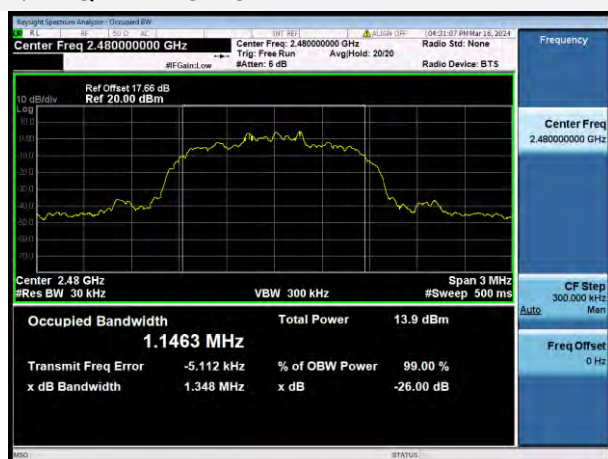


8-DPSK LOW CHANNEL

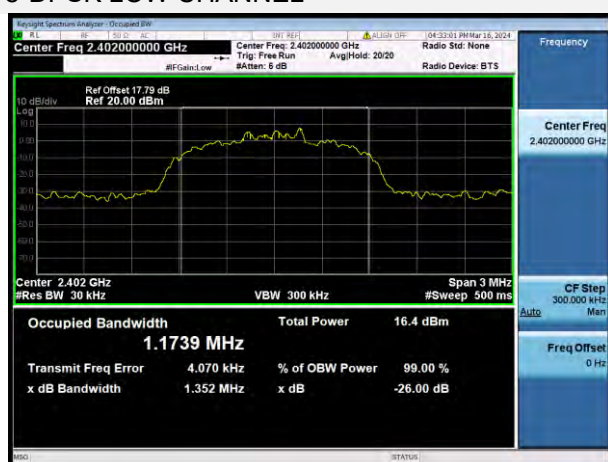

8-DPSK MIDDLE CHANNEL

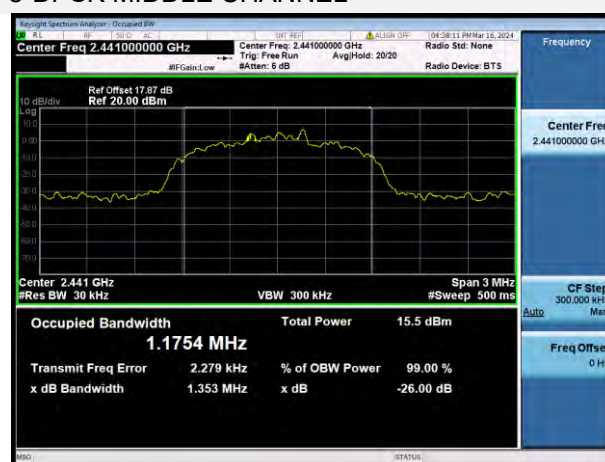

8-DPSK HIGH CHANNEL

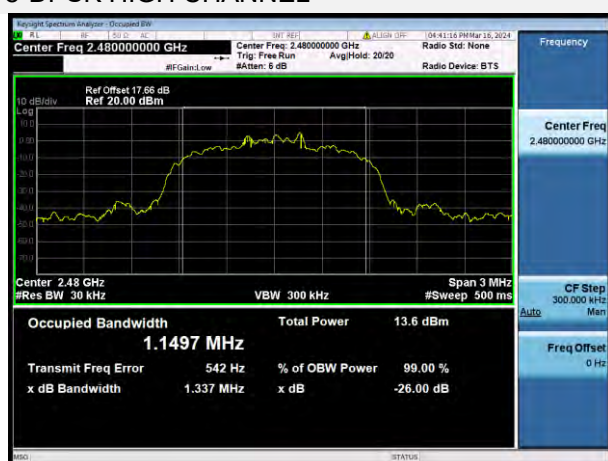


A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.010	0.617	Pass
8-DPSK	1.000	0.853	Pass

Test Plots

GFSK

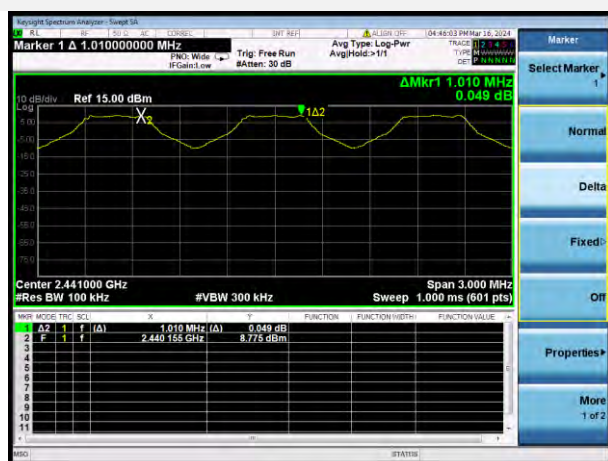

8-DPSK

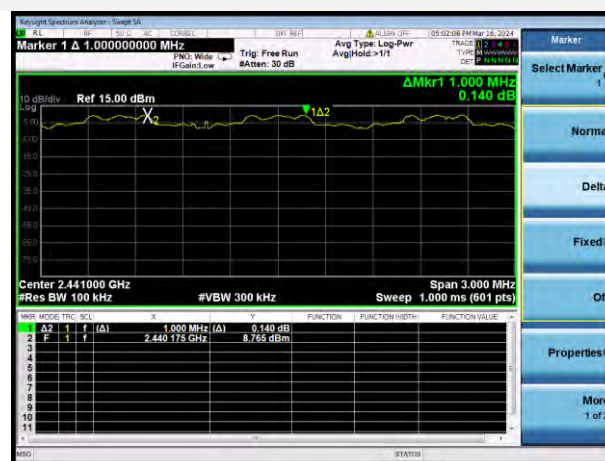


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37760	120.832	0.4	Pass
DH 3	1.63100	260.960	0.4	Pass
DH 5	2.88000	307.200	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
3DH 1	0.38400	122.880	0.4	Pass
3DH 3	1.63800	262.080	0.4	Pass
3DH 5	2.88000	307.200	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37600	60.160	0.4	Pass
DH 3	1.63100	130.480	0.4	Pass
DH 5	2.88000	153.600	0.4	Pass

Test Plots


GFSK DH1

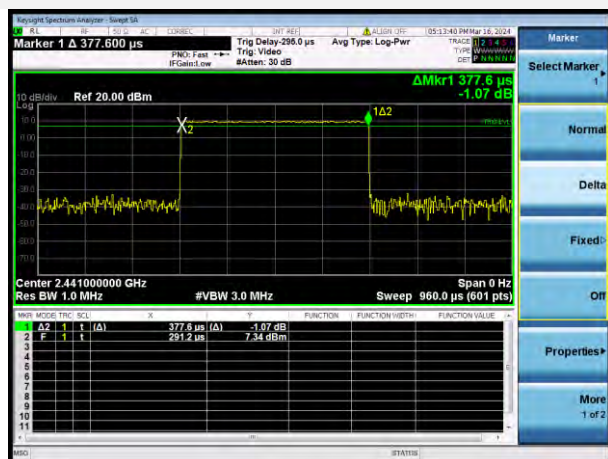


GFSK DH3

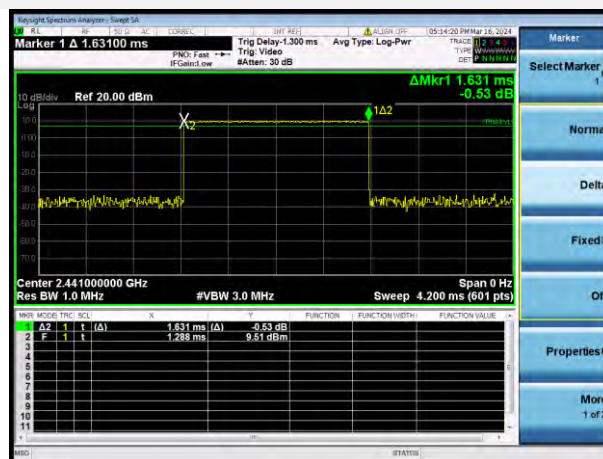


GFSK DH5

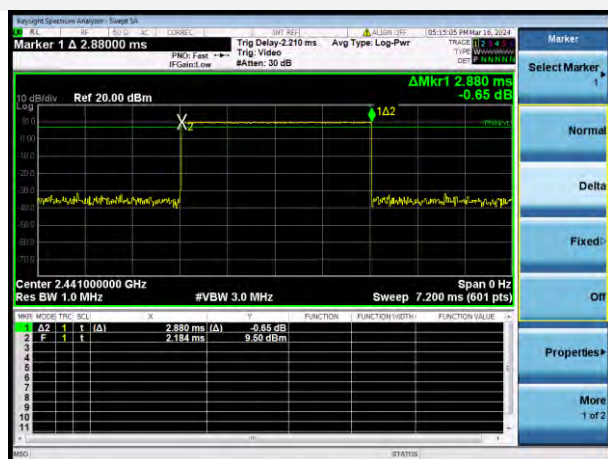

8-DPSK 3DH1

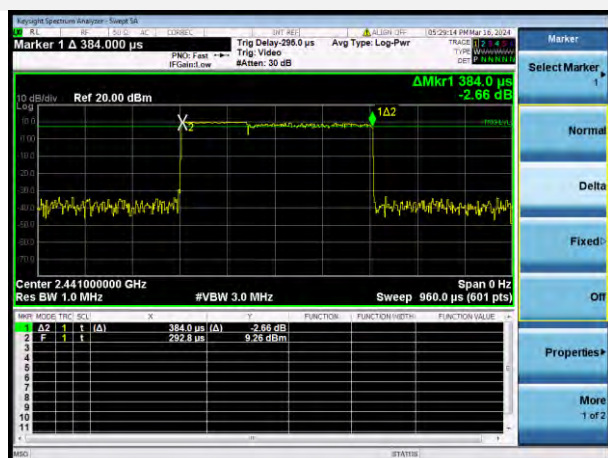

8-DPSK 3DH3

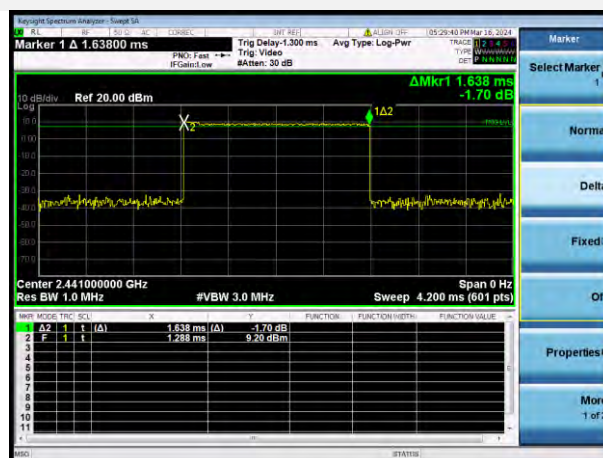

The screenshot displays a Keysight Spectrum Analyzer interface. The main display shows a signal spectrum with a peak at 2.441 GHz. A green marker labeled '1.62' is positioned at the peak, with a value of -1.65 dB. The center frequency is 2.441000000 GHz, and the resolution bandwidth (Res BW) is 1.0 MHz. The video bandwidth (VBW) is 3.0 MHz, and the sweep rate is 7.200 ms (601 pts). The span is 0 Hz. The display is set to Log Pwr (Average Type) and has a reference level of 20.00 dBm. The frequency range is from 2.439 to 2.443 GHz. The signal is identified as 'Marker 1' at 2.89000 ms. The interface includes various control panels on the right for Marker, Normal, Delta, Fixed, and other settings. A table at the bottom shows measurement data for the selected marker.

MNTR MODE	TRIG	ΔCL	X	Y	FUNCTION	FUNCTION (HDTN)	FUNCTION VALUE
1	XZ	1	1	2.880 ms (A)	-1.65 dB		
2	F	1	1	2.187 ms	9.62 dBm		
3							
4							
5							
6							
7							
8							
9							
10							
11							

KeySight Spectrums analyzer - Range: 500 MHz

Marker 1 Δ 376.000 μ s

Trig Delay: 296.0 μ s Avg Type: Log-Pwr

PMW: Fast IF Gain: 0.0 dB

03/27/20 19:04:18.204

TRACE 1 2 1 A 2

TYPE: Waveform

20.0 dBm

10 dBm Ref 20.00 dBm

1A2

Δ Mkr1 376.0 μ s

0.07 dB

Center 2.441000000 GHz

Span 0 Hz

Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 960.0 μ s (601 pts)

MARKER	FREQ	LEVEL	FUNCTION	FUNCTION METHOD	FUNCTION VALUE
1	376.0 μ s (A)	-29.1 dB			
2	376.0 μ s (A)	0.07 dB			

Keysight Spectrum Analyzer - Setup SA

File Edit View Window Help

CONSOLE: [X] **ANALYST** [X] 10/29/2014 09:16:24

Marker 1 **Δ** 1.63100 ms

Trig Delay: 1.300 ms Avg Type: Log-Pwr

PKC: Fast IF Gate: on

Trig: Video

Traces: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

Ref 20.00 dBm

ΔMkr

[illegible]


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.10	9.92	-10.08	Pass
Middle	-23.27	9.00	-11.00	Pass
High	-23.80	7.99	-12.01	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-24.30	10.01	-9.99	Pass
Middle	-23.17	9.04	-10.96	Pass
High	-23.29	7.50	-12.50	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-22.90	11.47	-8.53	Pass
8-DPSK	-23.60	10.65	-9.35	Pass

Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

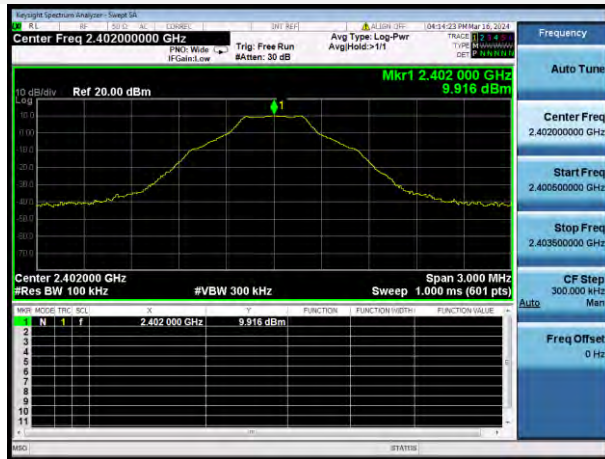


GFSK LOW CHANNEL, BAND EDGE




GFSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

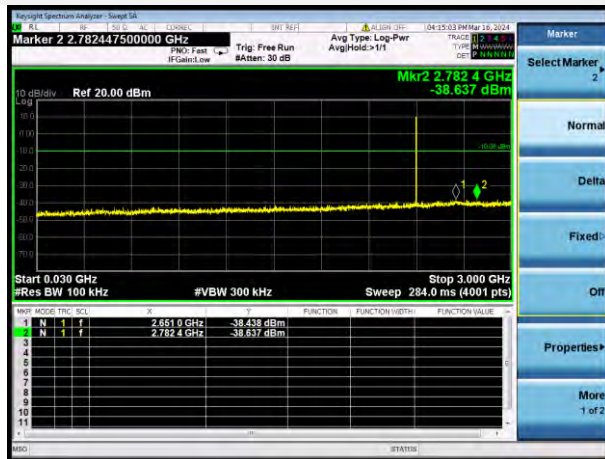


GFSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

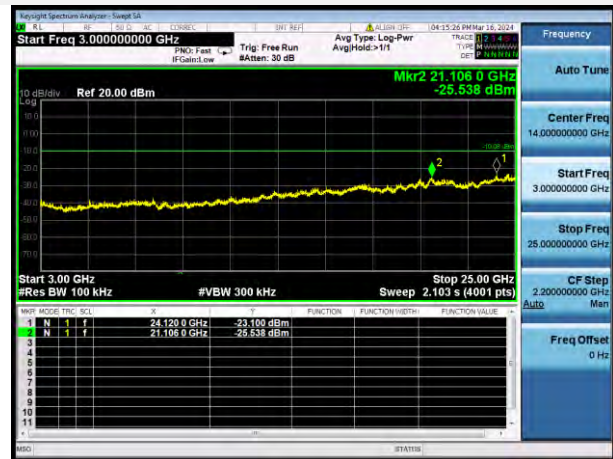


GFSK MIDDLE CHANNEL, CARRIER LEVEL

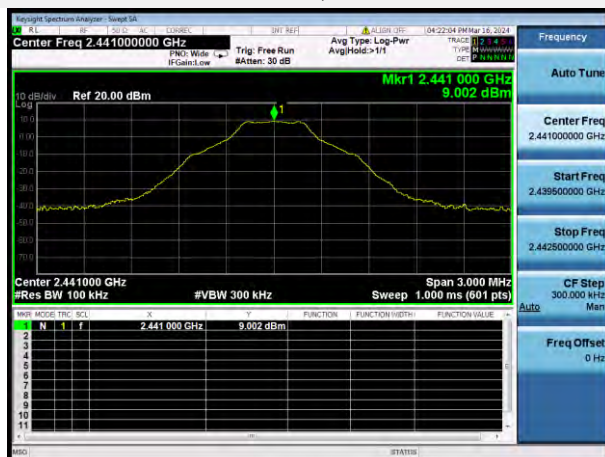


GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

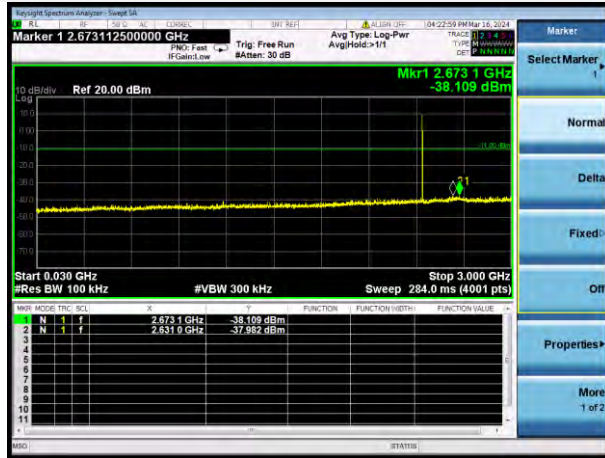


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

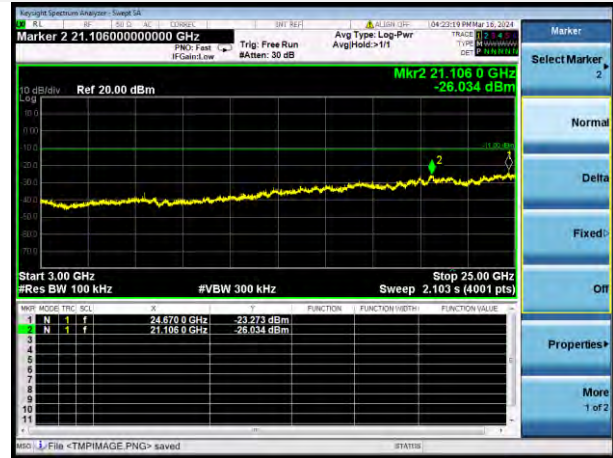


GFSK HIGH CHANNEL, CARRIER LEVEL

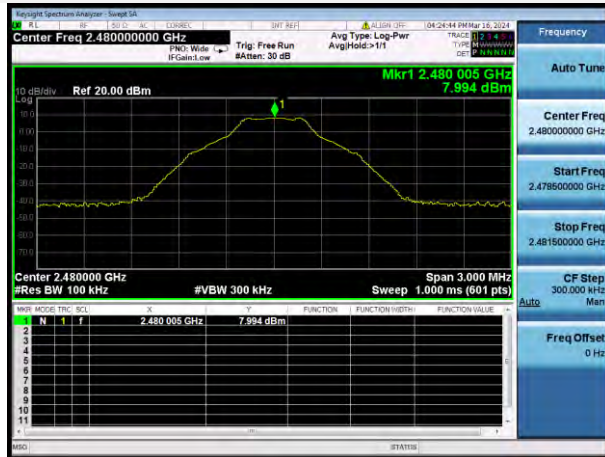


GFSK HIGH CHANNEL, BAND EDGE

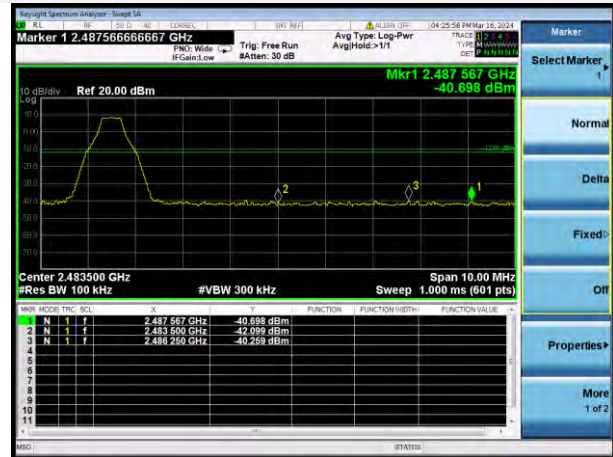


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

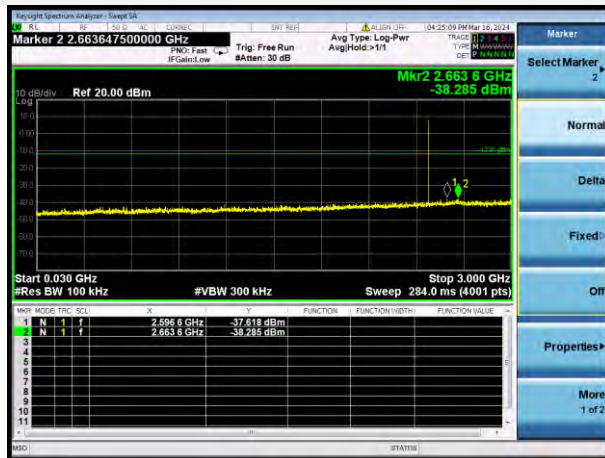


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

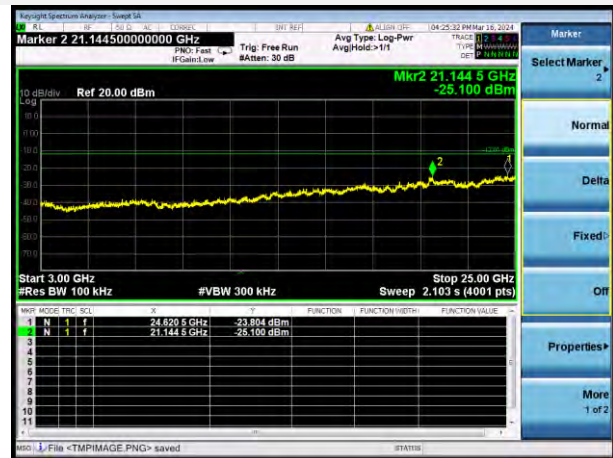

8-DPSK LOW CHANNEL, CARRIER LEVEL

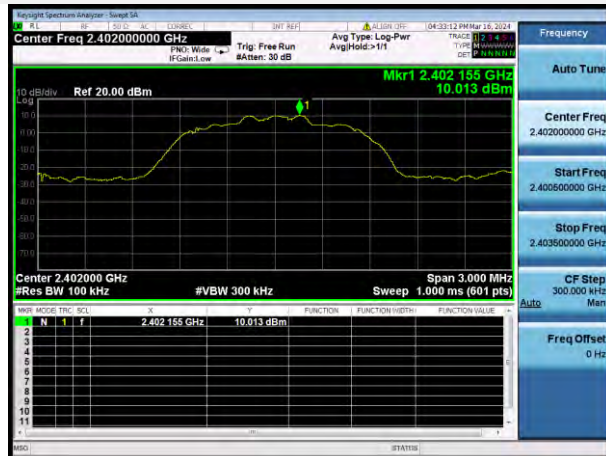


8-DPSK LOW CHANNEL, BAND EDGE

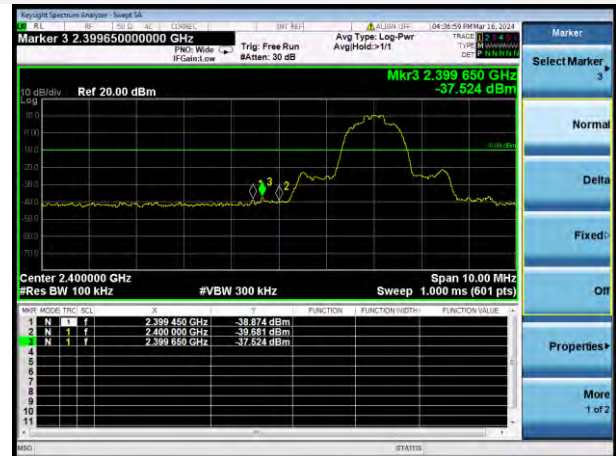


8-DPSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

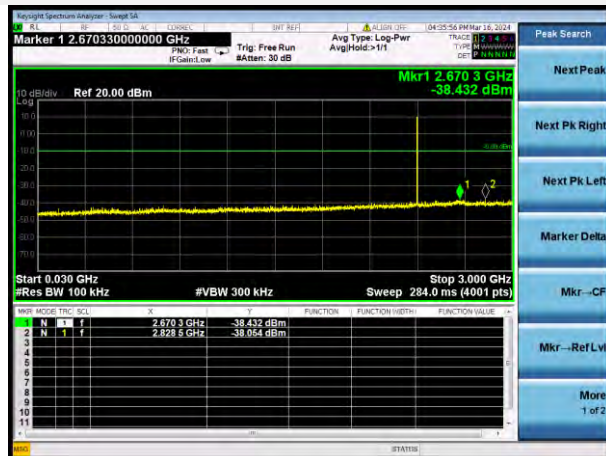


8-DPSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

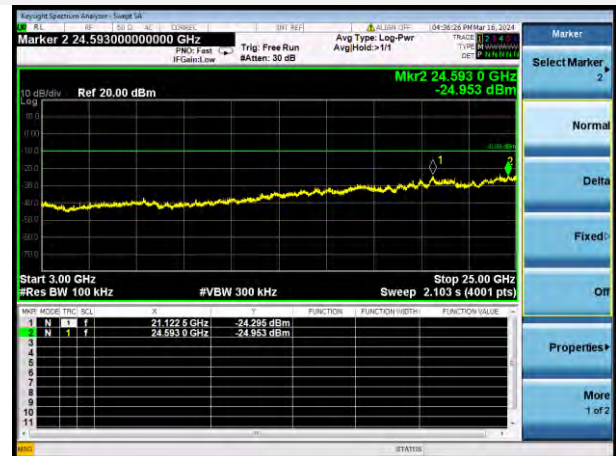


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

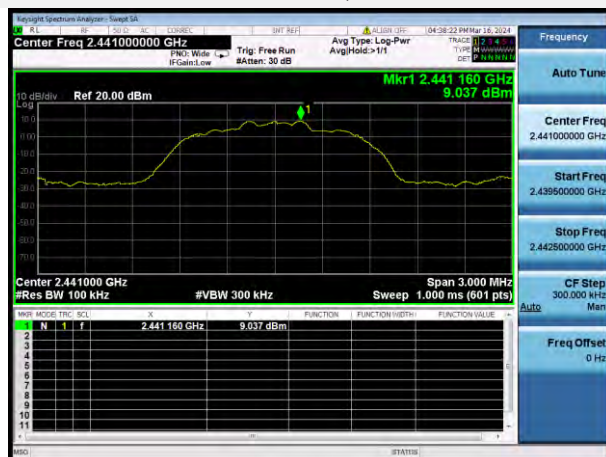


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

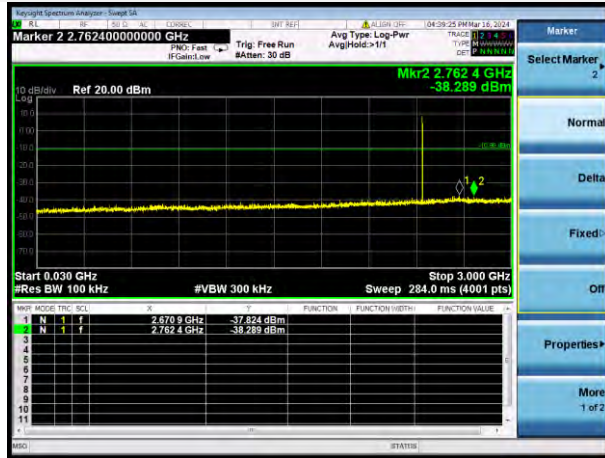


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

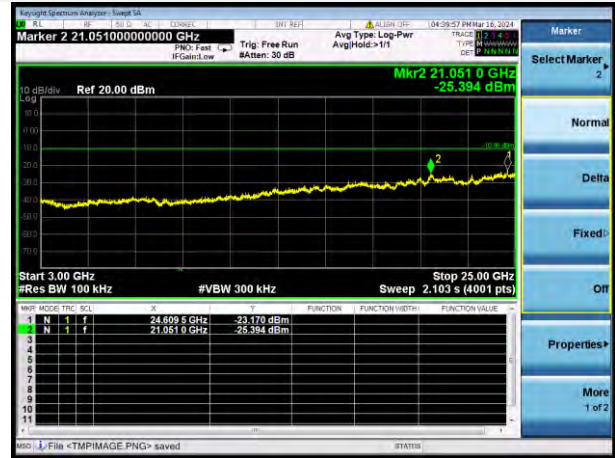


8-DPSK HIGH CHANNEL, CARRIER LEVEL

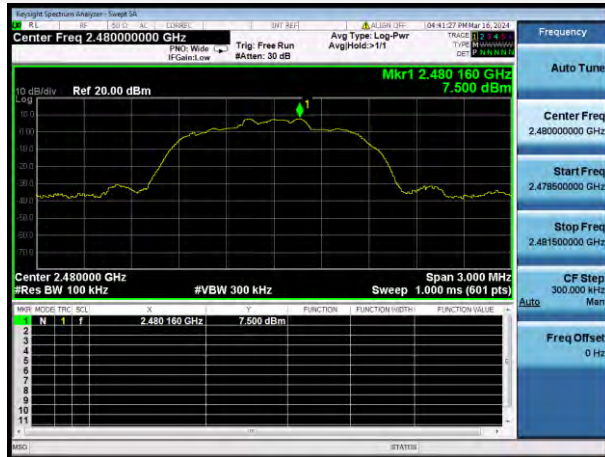


8-DPSK HIGH CHANNEL, BAND EDGE

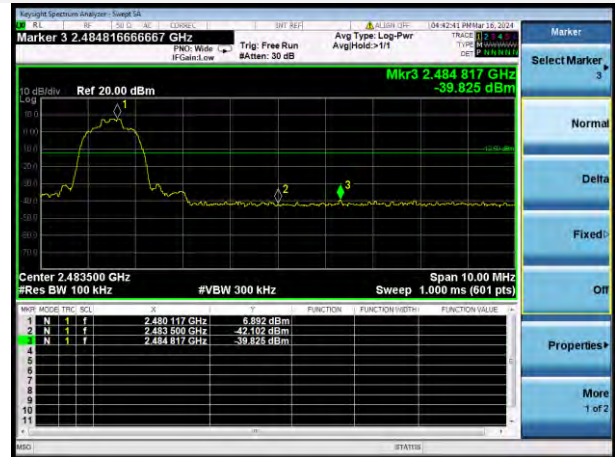


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

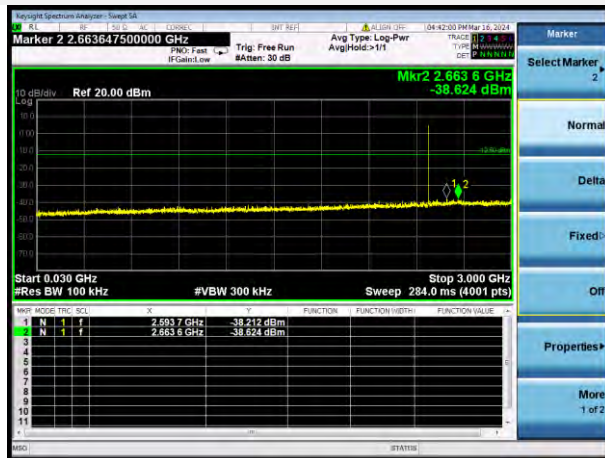


8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

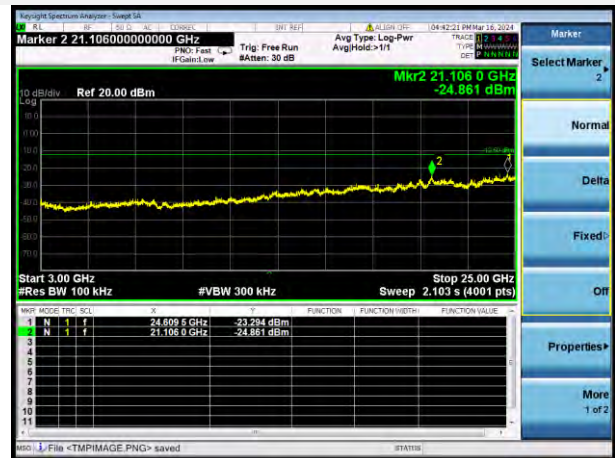



GFSK HOPPING, CARRIER LEVEL

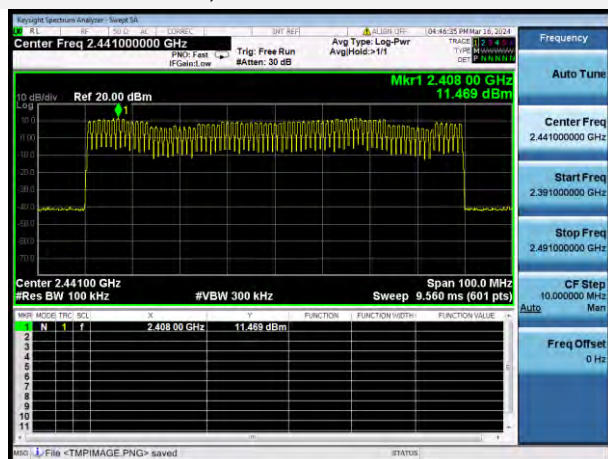


GFSK HOPPING BAND EDGE (LOW)

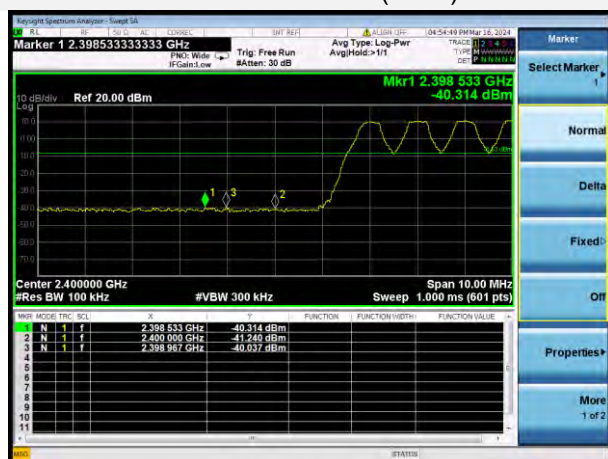


GFSK HOPPING BAND EDGE (HIGH)

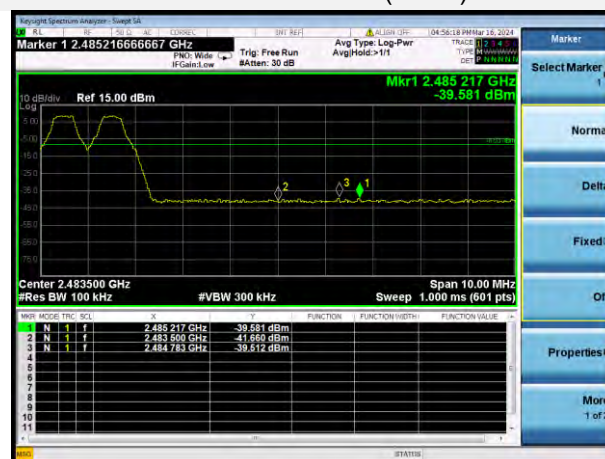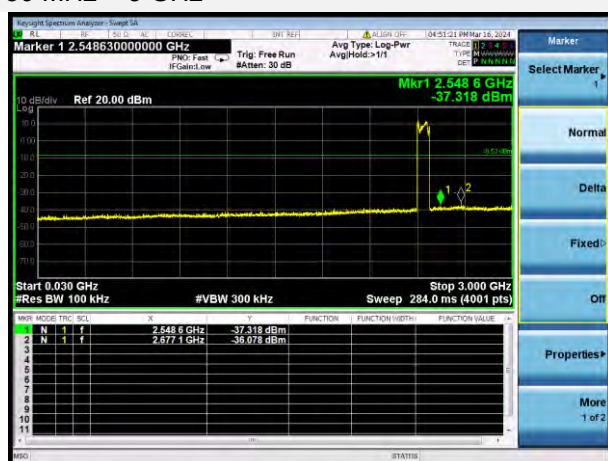GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz


8-DPSK HOPPING, CARRIER LEVEL

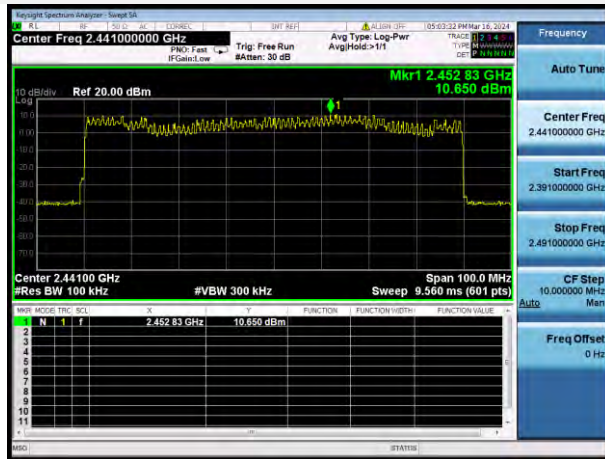

8-DPSK Hopping BAND EDGE (LOW)

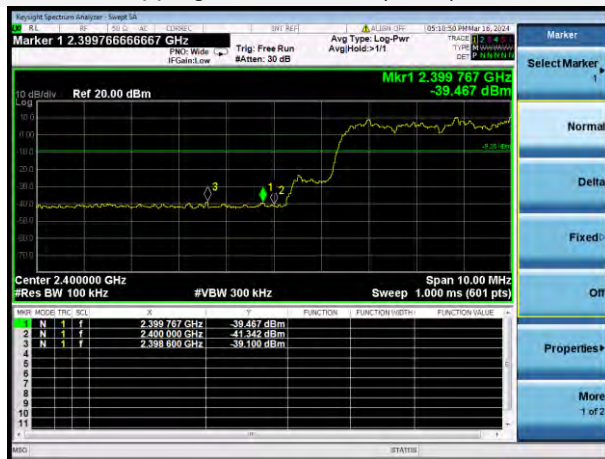

8-DPSK Hopping BAND EDGE (HIGH)

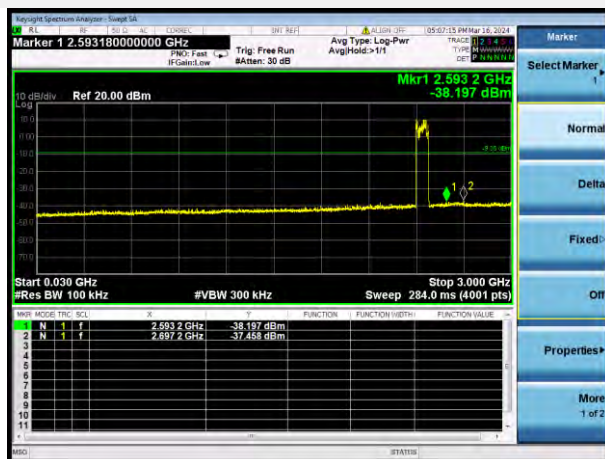8-DPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz8-DPSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

A.7 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

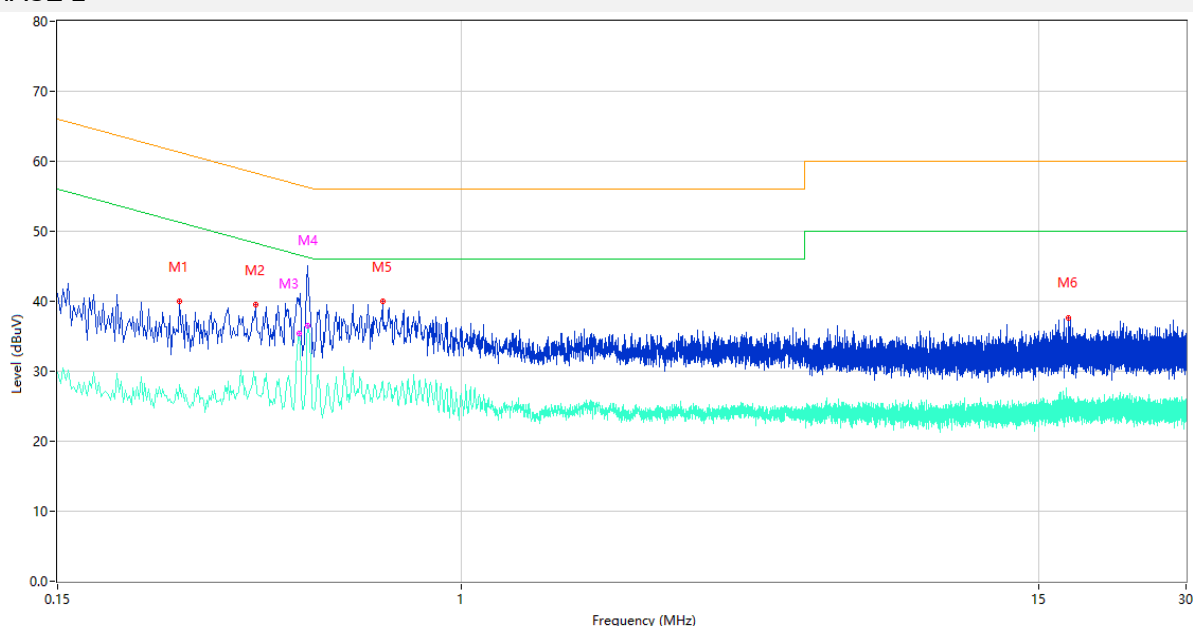

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.266	39.96	9.76	61.24	21.28	Peak	L	Pass
1**	0.266	28.08	9.76	51.24	23.16	AV	L	Pass
2	0.380	39.52	10.64	58.28	18.76	Peak	L	Pass
2**	0.380	29.24	10.64	48.28	19.04	AV	L	Pass
3	0.466	39.49	10.01	56.58	17.09	Peak	L	Pass
3**	0.466	35.34	10.01	46.58	11.24	AV	L	Pass
4	0.486	45.15	9.99	56.24	11.09	Peak	L	Pass
4**	0.486	36.56	9.99	46.24	9.68	AV	L	Pass
5	0.690	39.97	10.57	56.00	16.03	Peak	L	Pass
5**	0.690	28.51	10.57	46.00	17.49	AV	L	Pass
6	17.296	37.65	10.62	60.00	22.35	Peak	L	Pass
6**	17.296	23.62	10.62	50.00	26.38	AV	L	Pass

PHASE N

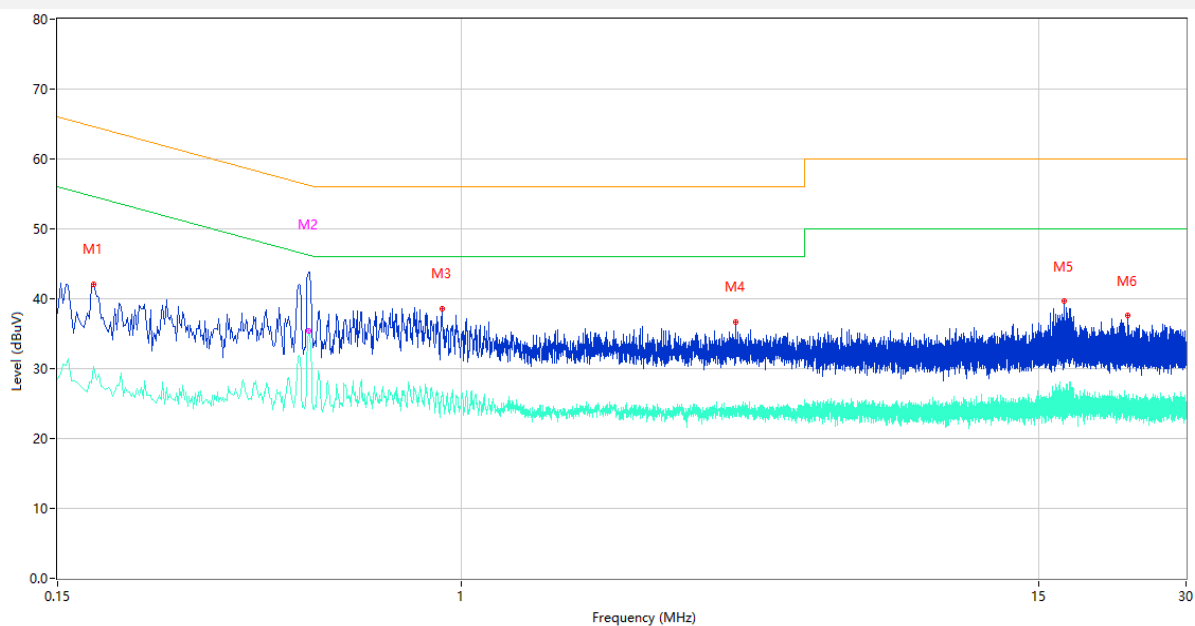

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.178	42.09	9.78	64.58	22.49	Peak	N	Pass
1**	0.178	30.33	9.78	54.58	24.25	AV	N	Pass
2	0.488	43.87	9.99	56.20	12.33	Peak	N	Pass
2**	0.488	35.47	9.99	46.20	10.73	AV	N	Pass
3	0.912	38.61	10.15	56.00	17.39	Peak	N	Pass
3**	0.912	26.59	10.15	46.00	19.41	AV	N	Pass
4	3.616	36.68	10.38	56.00	19.32	Peak	N	Pass
4**	3.616	23.56	10.38	46.00	22.44	AV	N	Pass
5	16.954	39.66	10.68	60.00	20.34	Peak	N	Pass
5**	16.954	25.86	10.68	50.00	24.14	AV	N	Pass
6	22.854	37.59	10.78	60.00	22.41	Peak	N	Pass
6**	22.854	24.08	10.78	50.00	25.92	AV	N	Pass

A.8 Radiated Spurious Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

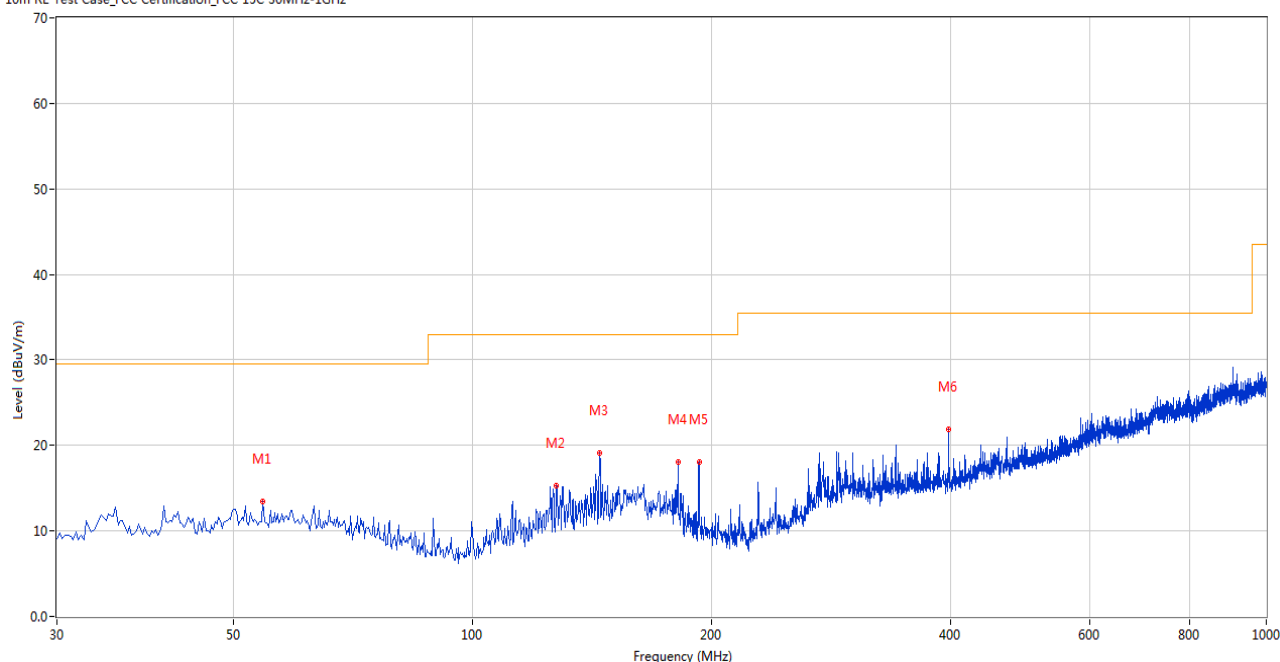

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	54.486	13.50	-26.17	29.5	16.00	Peak	7.00	100	Horizontal	Pass
2	127.703	15.35	-27.52	33.0	17.65	Peak	298.00	100	Horizontal	Pass
3	144.674	19.07	-25.96	33.0	13.93	Peak	140.00	200	Horizontal	Pass
4	181.525	18.01	-27.51	33.0	14.99	Peak	360.00	200	Horizontal	Pass
5	193.162	18.03	-28.71	33.0	14.97	Peak	106.00	200	Horizontal	Pass
6	398.023	21.91	-22.23	35.5	13.59	Peak	332.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

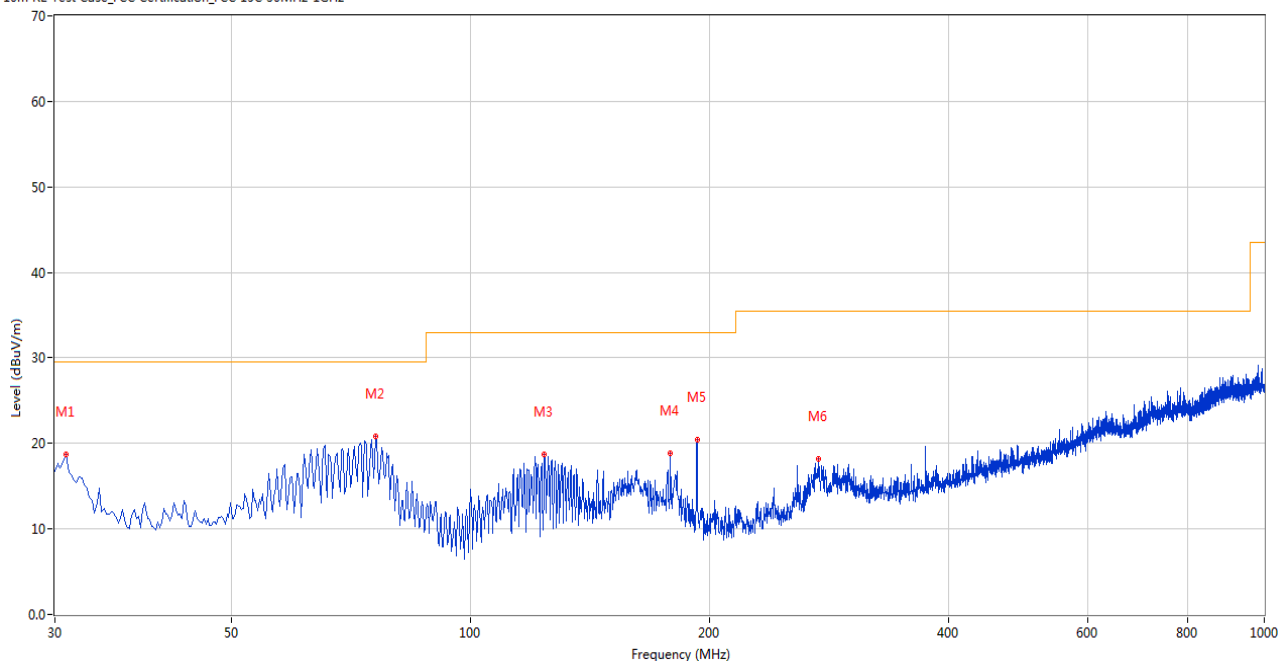


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.970	18.68	-27.94	29.5	10.82	Peak	360.00	200	Vertical	Pass
2	76.063	20.77	-29.35	29.5	8.73	Peak	13.00	200	Vertical	Pass
3	124.066	18.73	-27.93	33.0	14.27	Peak	50.00	100	Vertical	Pass
4	178.858	18.88	-27.11	33.0	14.12	Peak	261.00	100	Vertical	Pass
5	193.162	20.41	-28.71	33.0	12.59	Peak	301.00	100	Vertical	Pass
6	274.621	18.17	-25.89	35.5	17.33	Peak	103.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

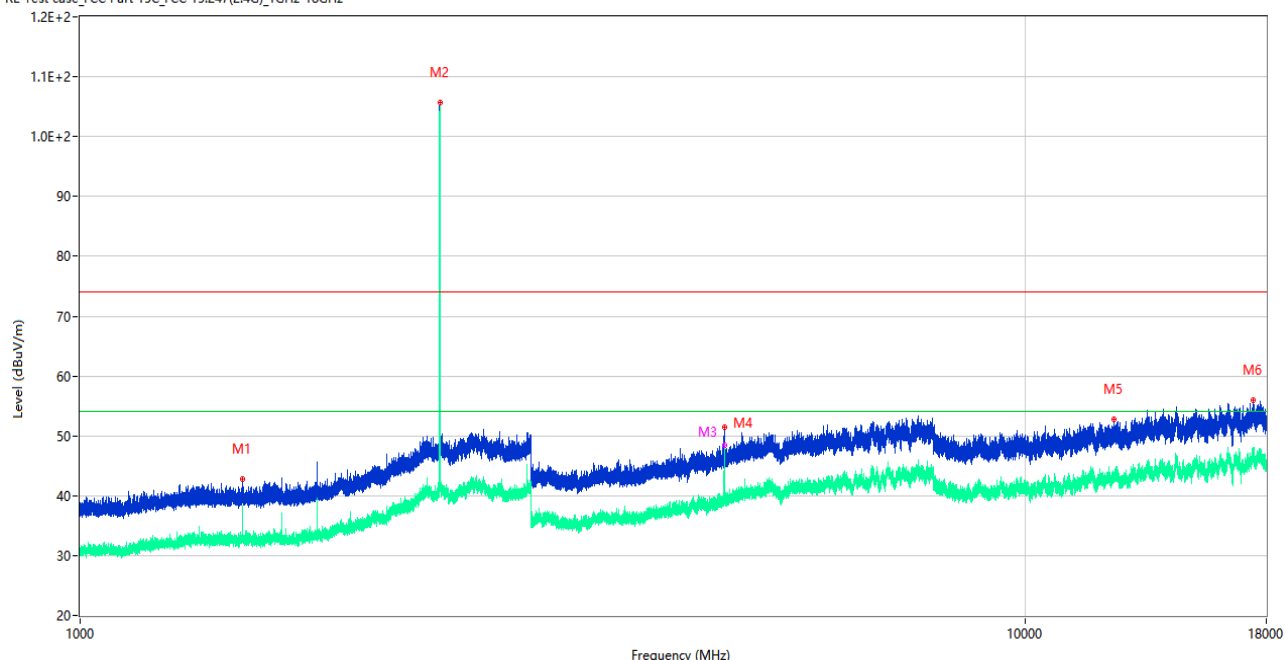

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.500	42.80	-16.89	74.0	31.20	Peak	188.00	400	Horizontal	Pass
1**	1484.500	35.68	-16.89	54.0	18.32	AV	188.00	400	Horizontal	Pass
2	2402.000	105.68	-10.61	74.0	-31.68	Peak	160.00	200	Horizontal	N/A
2**	2402.000	104.99	-10.61	54.0	-50.99	AV	160.00	200	Horizontal	N/A
3	4804.000	50.82	-3.32	74.0	23.18	Peak	83.00	200	Horizontal	Pass
3**	4804.000	48.43	-3.32	54.0	5.57	AV	83.00	200	Horizontal	Pass
4	4804.250	51.47	-3.21	74.0	22.53	Peak	105.00	100	Horizontal	Pass
4**	4804.250	47.57	-3.21	54.0	6.43	AV	105.00	100	Horizontal	Pass
5	12405.151	52.79	1.10	74.0	21.21	Peak	160.00	400	Horizontal	Pass
5**	12405.151	43.40	1.10	54.0	10.60	AV	160.00	400	Horizontal	Pass
6	17452.687	56.01	5.52	74.0	17.99	Peak	317.00	300	Horizontal	Pass
6**	17452.687	47.22	5.52	54.0	6.78	AV	317.00	300	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

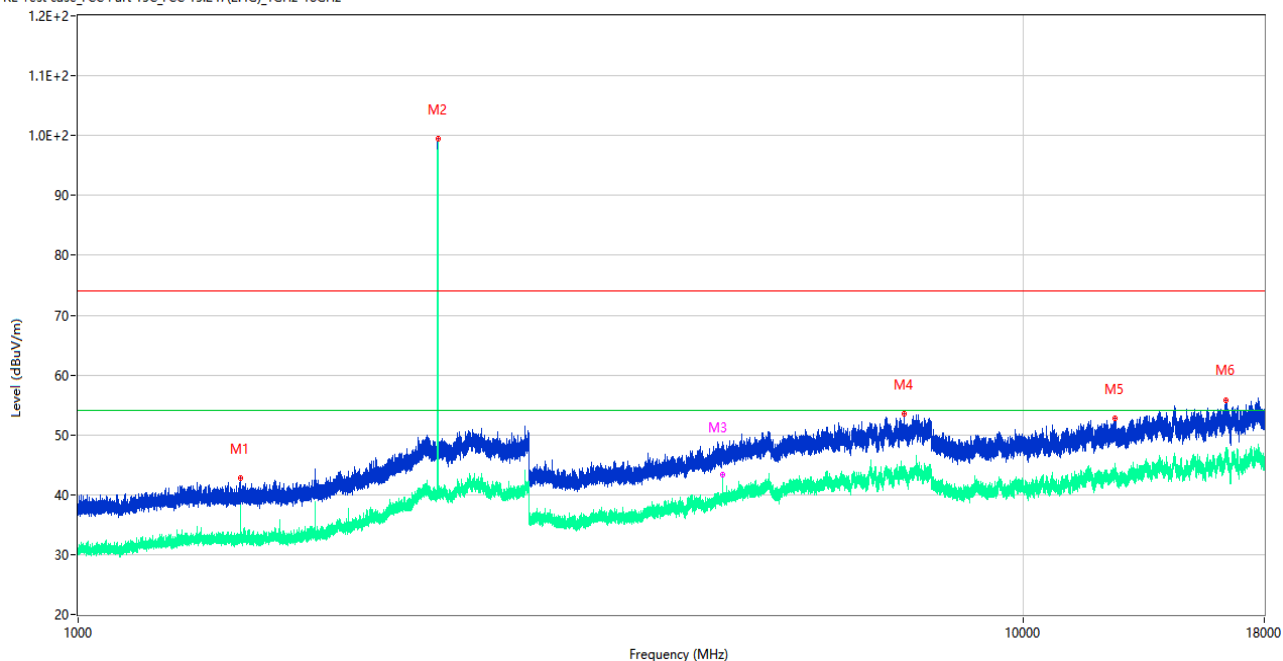

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.900	42.70	-17.09	74.0	31.30	Peak	184.00	400	Vertical	Pass
1**	1484.900	37.85	-17.09	54.0	16.15	AV	184.00	400	Vertical	Pass
2	2402.000	99.45	-10.61	74.0	-25.45	Peak	113.00	200	Vertical	N/A
2**	2402.000	98.96	-10.61	54.0	-44.96	AV	113.00	200	Vertical	N/A
3	4804.500	48.40	-3.20	74.0	25.60	Peak	0.00	200	Vertical	Pass
3**	4804.500	43.28	-3.20	54.0	10.72	AV	0.00	200	Vertical	Pass
4	7487.250	53.44	1.19	74.0	20.56	Peak	56.00	200	Vertical	Pass
4**	7487.250	44.12	1.19	54.0	9.88	AV	56.00	200	Vertical	Pass
5	12502.525	52.70	1.42	74.0	21.30	Peak	333.00	400	Vertical	Pass
5**	12502.525	43.44	1.42	54.0	10.56	AV	333.00	400	Vertical	Pass
6	16379.588	55.79	2.39	74.0	18.21	Peak	329.00	400	Vertical	Pass
6**	16379.588	46.28	2.39	54.0	7.72	AV	329.00	400	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

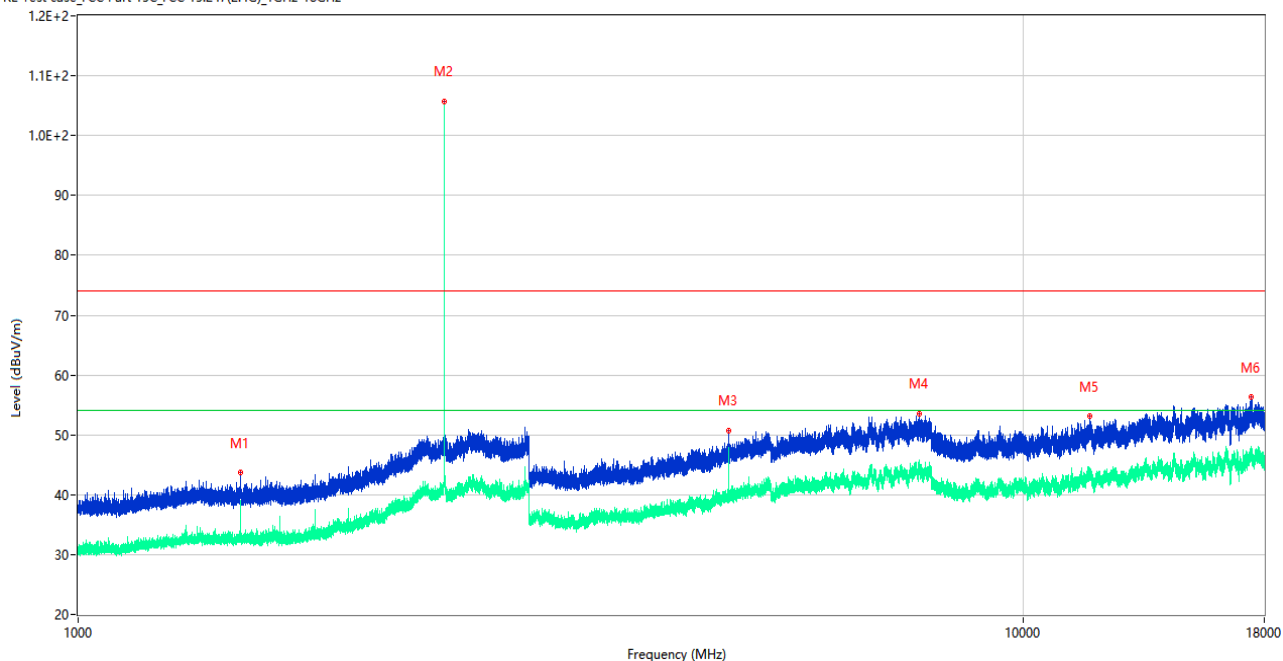

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.800	43.64	-16.98	74.0	30.36	Peak	97.00	100	Horizontal	Pass
1**	1484.800	39.04	-16.98	54.0	14.96	AV	97.00	100	Horizontal	Pass
2	2441.000	105.71	-9.79	74.0	-31.71	Peak	351.00	150	Horizontal	N/A
2**	2441.000	105.09	-9.79	54.0	-51.09	AV	351.00	150	Horizontal	N/A
3	4882.250	50.75	-3.72	74.0	23.25	Peak	72.00	200	Horizontal	Pass
3**	4882.250	47.87	-3.72	54.0	6.13	AV	72.00	200	Horizontal	Pass
4	7757.000	53.57	1.47	74.0	20.43	Peak	0.00	400	Horizontal	Pass
4**	7757.000	45.25	1.47	54.0	8.75	AV	0.00	400	Horizontal	Pass
5	11770.075	53.11	-0.18	74.0	20.89	Peak	360.00	200	Horizontal	Pass
5**	11770.075	43.31	-0.18	54.0	10.69	AV	360.00	200	Horizontal	Pass
6	17435.099	56.28	5.53	74.0	17.72	Peak	165.00	100	Horizontal	Pass
6**	17435.099	46.75	5.53	54.0	7.25	AV	165.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

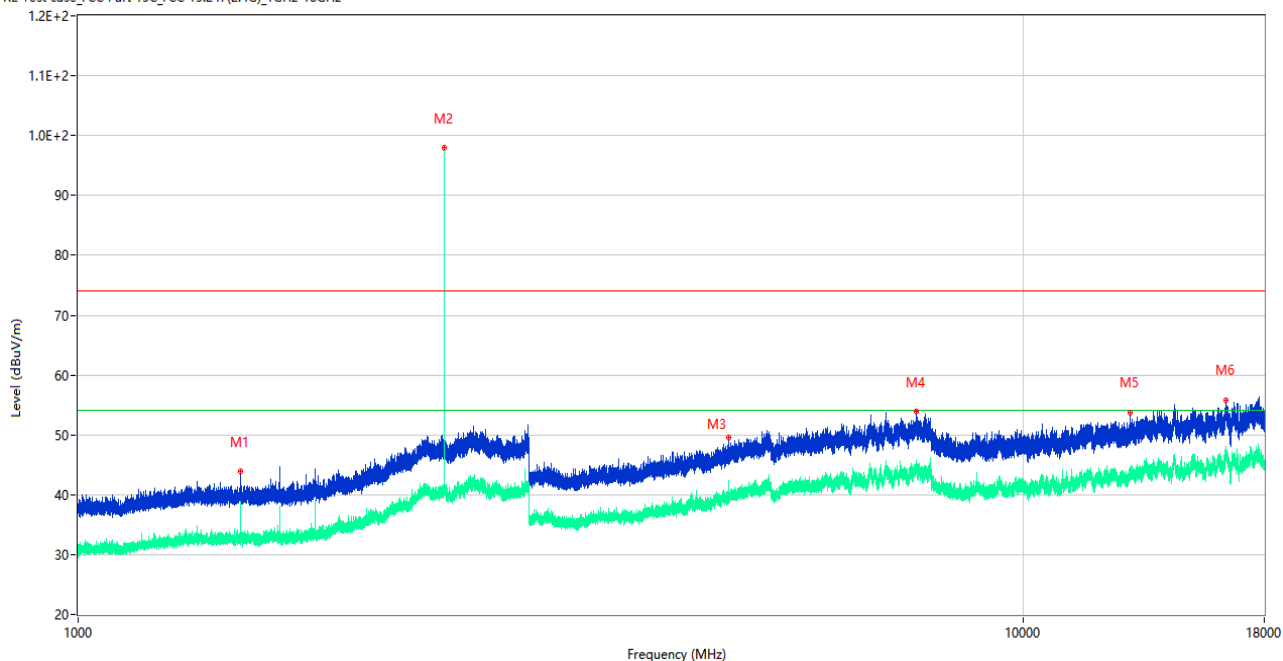

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.000	43.88	-17.20	74.0	30.12	Peak	123.00	100	Vertical	Pass
1**	1485.000	38.91	-17.20	54.0	15.09	AV	123.00	100	Vertical	Pass
2	2441.000	97.90	-9.79	74.0	-23.90	Peak	123.00	150	Vertical	N/A
2**	2441.000	97.28	-9.79	54.0	-43.28	AV	123.00	150	Vertical	N/A
3	4882.250	49.58	-3.72	74.0	24.42	Peak	258.00	150	Vertical	Pass
3**	4882.250	42.28	-3.72	54.0	11.72	AV	258.00	150	Vertical	Pass
4	7714.750	53.84	1.62	74.0	20.16	Peak	162.00	400	Vertical	Pass
4**	7714.750	44.00	1.62	54.0	10.00	AV	162.00	400	Vertical	Pass
5	12986.776	53.76	1.92	74.0	20.24	Peak	221.00	100	Vertical	Pass
5**	12986.776	42.43	1.92	54.0	11.57	AV	221.00	100	Vertical	Pass
6	16401.113	55.84	3.15	74.0	18.16	Peak	131.00	400	Vertical	Pass
6**	16401.113	47.84	3.15	54.0	6.16	AV	131.00	400	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

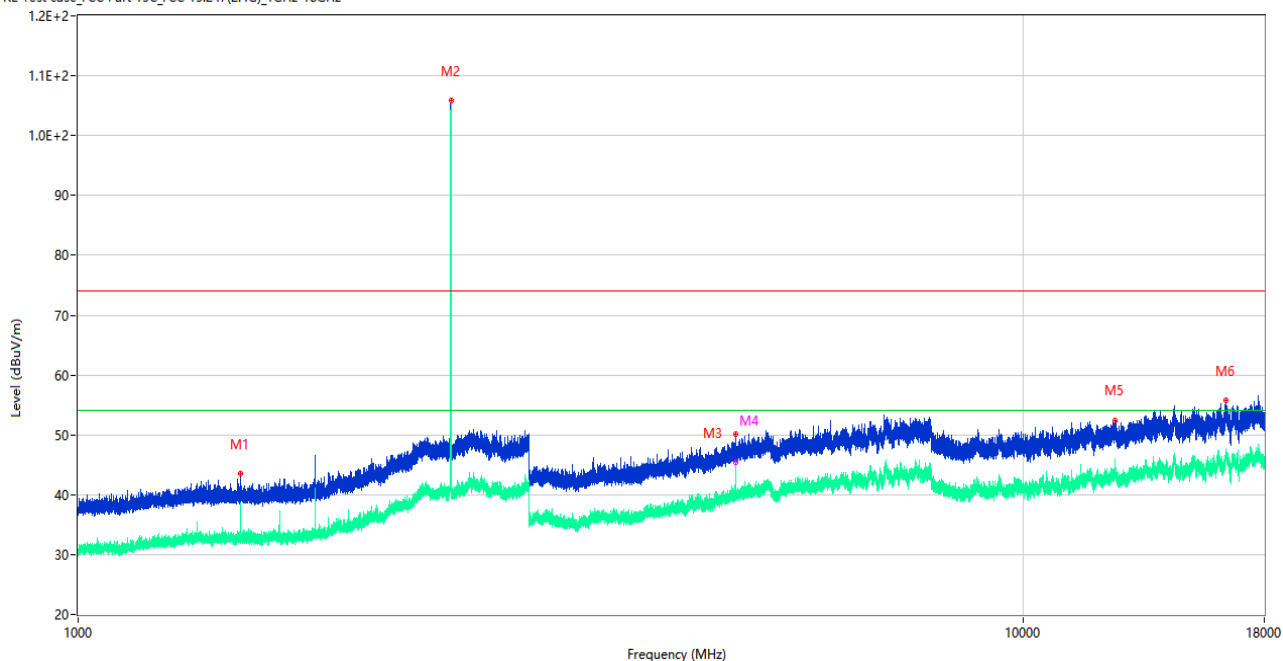

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.600	43.46	-16.91	74.0	30.54	Peak	0.00	400	Horizontal	Pass
1**	1484.600	37.58	-16.91	54.0	16.42	AV	0.00	400	Horizontal	Pass
2	2480.000	105.83	-11.11	74.0	-31.83	Peak	360.00	100	Horizontal	N/A
2**	2480.000	105.34	-11.11	54.0	-51.34	AV	360.00	100	Horizontal	N/A
3	4960.000	50.13	-3.53	74.0	23.87	Peak	36.00	150	Horizontal	Pass
3**	4960.000	44.57	-3.53	54.0	9.43	AV	36.00	150	Horizontal	Pass
4	4960.500	49.37	-3.57	74.0	24.63	Peak	36.00	150	Horizontal	Pass
4**	4960.500	45.35	-3.57	54.0	8.65	AV	36.00	150	Horizontal	Pass
5	12518.674	52.43	1.33	74.0	21.57	Peak	94.00	400	Horizontal	Pass
5**	12518.674	46.06	1.33	54.0	7.94	AV	94.00	400	Horizontal	Pass
6	16402.688	55.71	3.13	74.0	18.29	Peak	0.00	100	Horizontal	Pass
6**	16402.688	46.53	3.13	54.0	7.47	AV	0.00	100	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

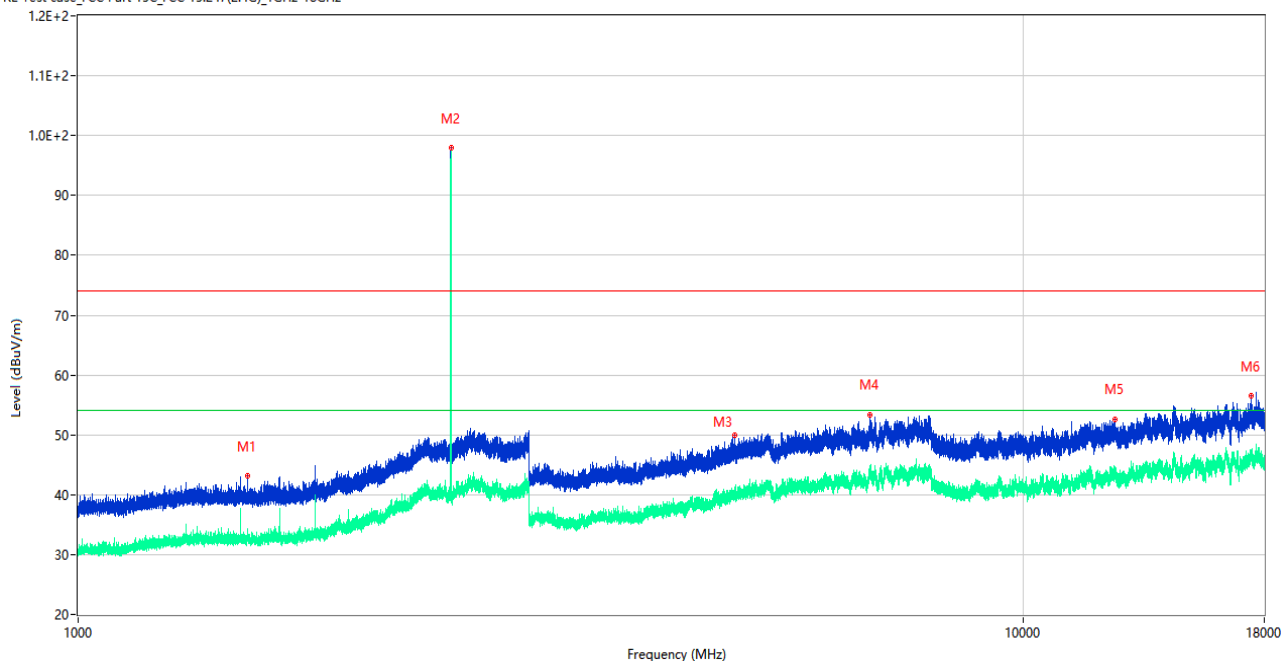

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1512.100	43.11	-16.49	74.0	30.89	Peak	27.00	100	Vertical	Pass
1**	1512.100	33.00	-16.49	54.0	21.00	AV	27.00	100	Vertical	Pass
2	2480.000	97.95	-11.11	74.0	-23.95	Peak	115.00	200	Vertical	N/A
2**	2480.000	97.76	-11.11	54.0	-43.76	AV	115.00	200	Vertical	N/A
3	4956.250	49.95	-3.76	74.0	24.05	Peak	104.00	200	Vertical	Pass
3**	4956.250	39.71	-3.76	54.0	14.29	AV	104.00	200	Vertical	Pass
4	6889.250	53.34	0.41	74.0	20.66	Peak	31.00	400	Vertical	Pass
4**	6889.250	44.92	0.41	54.0	9.08	AV	31.00	400	Vertical	Pass
5	12508.463	52.58	1.39	74.0	21.42	Peak	102.00	300	Vertical	Pass
5**	12508.463	43.08	1.39	54.0	10.92	AV	102.00	300	Vertical	Pass
6	17435.363	56.51	5.53	74.0	17.49	Peak	113.00	400	Vertical	Pass
6**	17435.363	46.18	5.53	54.0	7.82	AV	113.00	400	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

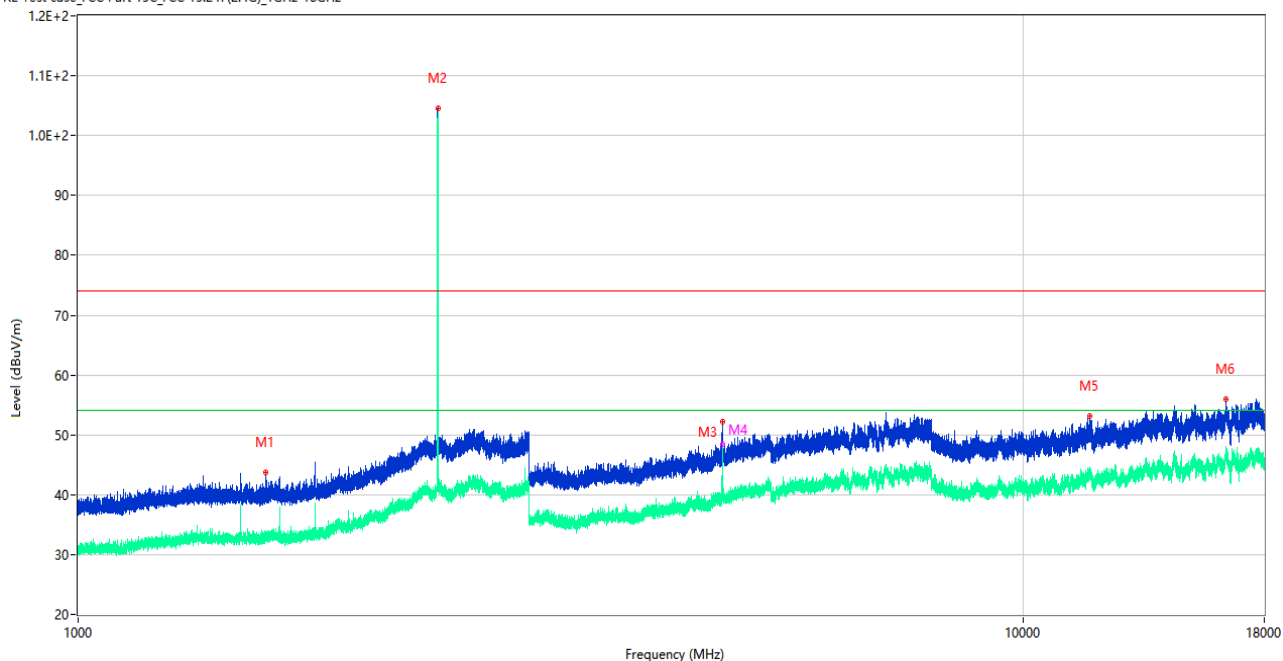

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1580.100	43.76	-17.14	74.0	30.24	Peak	246.00	100	Horizontal	Pass
1**	1580.100	32.72	-17.14	54.0	21.28	AV	246.00	100	Horizontal	Pass
2	2402.000	104.63	-10.61	74.0	-30.63	Peak	360.00	200	Horizontal	N/A
2**	2402.000	104.07	-10.61	54.0	-50.07	AV	360.00	200	Horizontal	N/A
3	4804.250	52.17	-3.21	74.0	21.83	Peak	92.00	200	Horizontal	Pass
3**	4804.250	47.56	-3.21	54.0	6.44	AV	92.00	200	Horizontal	Pass
4	4804.500	50.58	-3.20	74.0	23.42	Peak	92.00	150	Horizontal	Pass
4**	4804.500	48.45	-3.20	54.0	5.55	AV	92.00	150	Horizontal	Pass
5	11751.788	53.19	-0.19	74.0	20.81	Peak	91.00	100	Horizontal	Pass
5**	11751.788	43.75	-0.19	54.0	10.25	AV	91.00	100	Horizontal	Pass
6	16405.838	55.98	3.09	74.0	18.02	Peak	0.00	100	Horizontal	Pass
6**	16405.838	46.49	3.09	54.0	7.51	AV	0.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

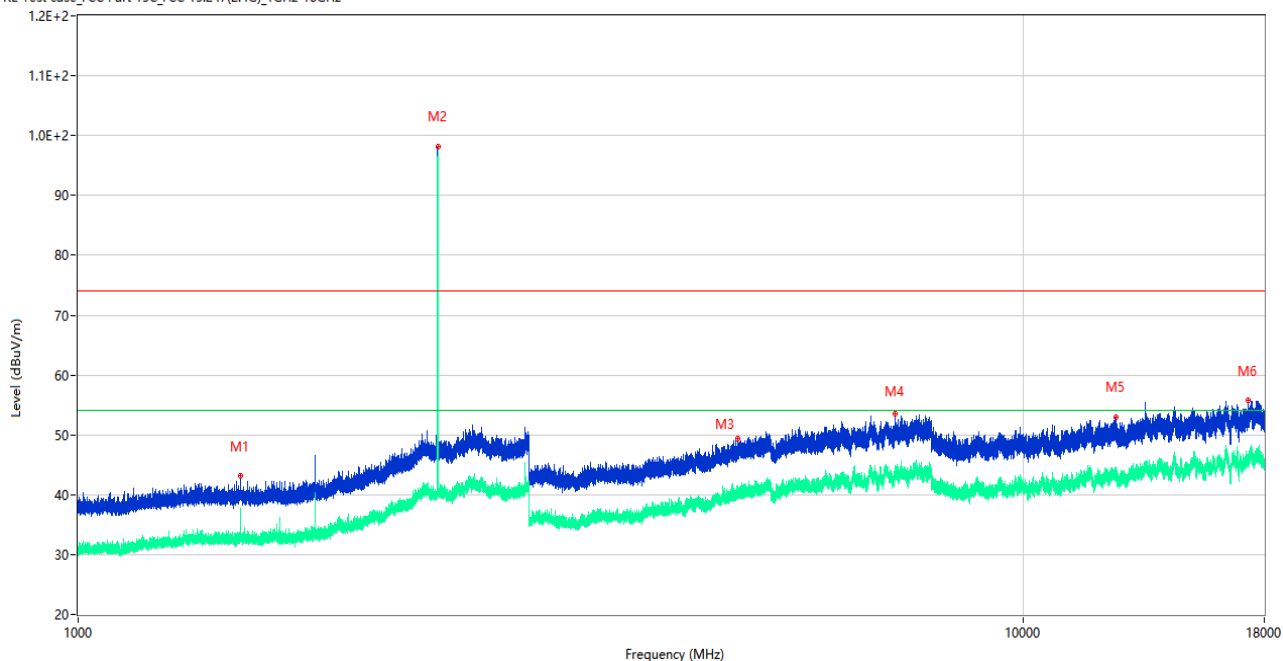

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.000	43.13	-17.20	74.0	30.87	Peak	229.00	100	Vertical	Pass
1**	1485.000	37.74	-17.20	54.0	16.26	AV	229.00	100	Vertical	Pass
2	2402.100	98.24	-10.60	74.0	-24.24	Peak	111.00	200	Vertical	N/A
2**	2402.100	97.79	-10.60	54.0	-43.79	AV	111.00	200	Vertical	N/A
3	4987.500	49.35	-3.18	74.0	24.65	Peak	277.00	200	Vertical	Pass
3**	4987.500	39.47	-3.18	54.0	14.53	AV	277.00	200	Vertical	Pass
4	7317.250	53.43	0.64	74.0	20.57	Peak	331.00	300	Vertical	Pass
4**	7317.250	43.97	0.64	54.0	10.03	AV	331.00	300	Vertical	Pass
5	12543.612	52.96	1.19	74.0	21.04	Peak	251.00	400	Vertical	Pass
5**	12543.612	43.31	1.19	54.0	10.69	AV	251.00	400	Vertical	Pass
6	17314.875	55.70	2.77	74.0	18.30	Peak	136.00	200	Vertical	Pass
6**	17314.875	45.92	2.77	54.0	8.08	AV	136.00	200	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

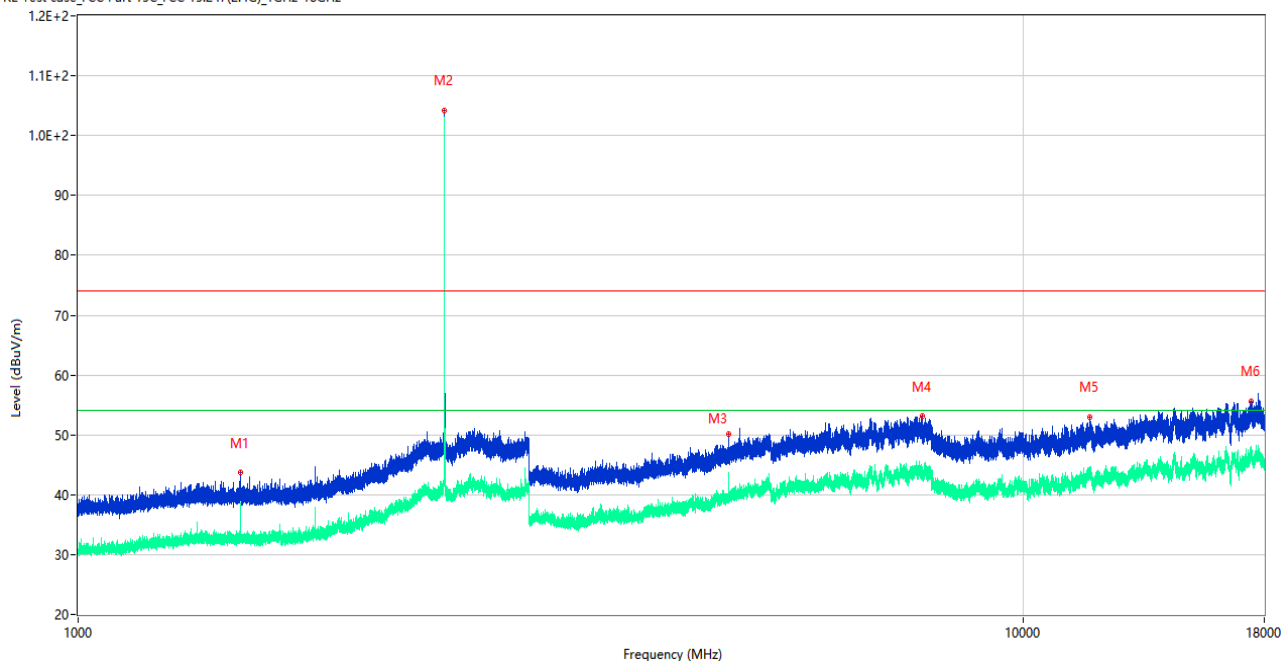

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.100	43.65	-17.31	74.0	30.35	Peak	352.00	100	Horizontal	Pass
1**	1485.100	37.86	-17.31	54.0	16.14	AV	352.00	100	Horizontal	Pass
2	2441.000	104.26	-9.79	74.0	-30.26	Peak	360.00	200	Horizontal	N/A
2**	2441.000	103.08	-9.79	54.0	-49.08	AV	360.00	200	Horizontal	N/A
3	4882.500	50.06	-3.69	74.0	23.94	Peak	34.00	100	Horizontal	Pass
3**	4882.500	43.78	-3.69	54.0	10.22	AV	34.00	100	Horizontal	Pass
4	7817.000	53.10	1.06	74.0	20.90	Peak	34.00	300	Horizontal	Pass
4**	7817.000	43.29	1.06	54.0	10.71	AV	34.00	300	Horizontal	Pass
5	11765.325	52.97	-0.18	74.0	21.03	Peak	304.00	400	Horizontal	Pass
5**	11765.325	42.71	-0.18	54.0	11.29	AV	304.00	400	Horizontal	Pass
6	17449.538	55.65	5.57	74.0	18.35	Peak	360.00	400	Horizontal	Pass
6**	17449.538	46.52	5.57	54.0	7.48	AV	360.00	400	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

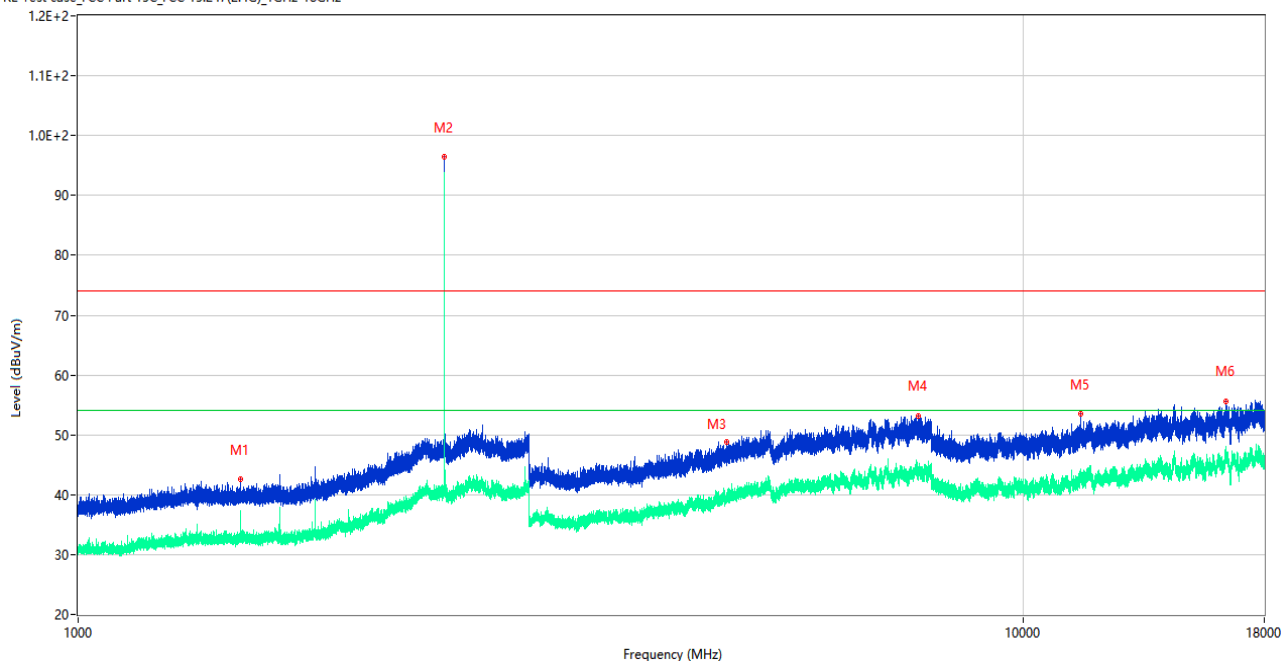

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.700	42.56	-16.94	74.0	31.44	Peak	57.00	100	Vertical	Pass
1**	1484.700	35.82	-16.94	54.0	18.18	AV	57.00	100	Vertical	Pass
2	2440.800	96.43	-9.79	74.0	-22.43	Peak	128.00	150	Vertical	N/A
2**	2440.800	93.47	-9.79	54.0	-39.47	AV	128.00	150	Vertical	N/A
3	4862.000	48.82	-3.37	74.0	25.18	Peak	36.00	200	Vertical	Pass
3**	4862.000	39.70	-3.37	54.0	14.30	AV	36.00	200	Vertical	Pass
4	7744.250	53.19	-0.06	74.0	20.81	Peak	13.00	100	Vertical	Pass
4**	7744.250	43.00	-0.06	54.0	11.00	AV	13.00	100	Vertical	Pass
5	11513.813	53.43	-0.77	74.0	20.57	Peak	177.00	100	Vertical	Pass
5**	11513.813	42.95	-0.77	54.0	11.05	AV	177.00	100	Vertical	Pass
6	16404.262	55.63	3.11	74.0	18.37	Peak	2.00	300	Vertical	Pass
6**	16404.262	46.58	3.11	54.0	7.42	AV	2.00	300	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

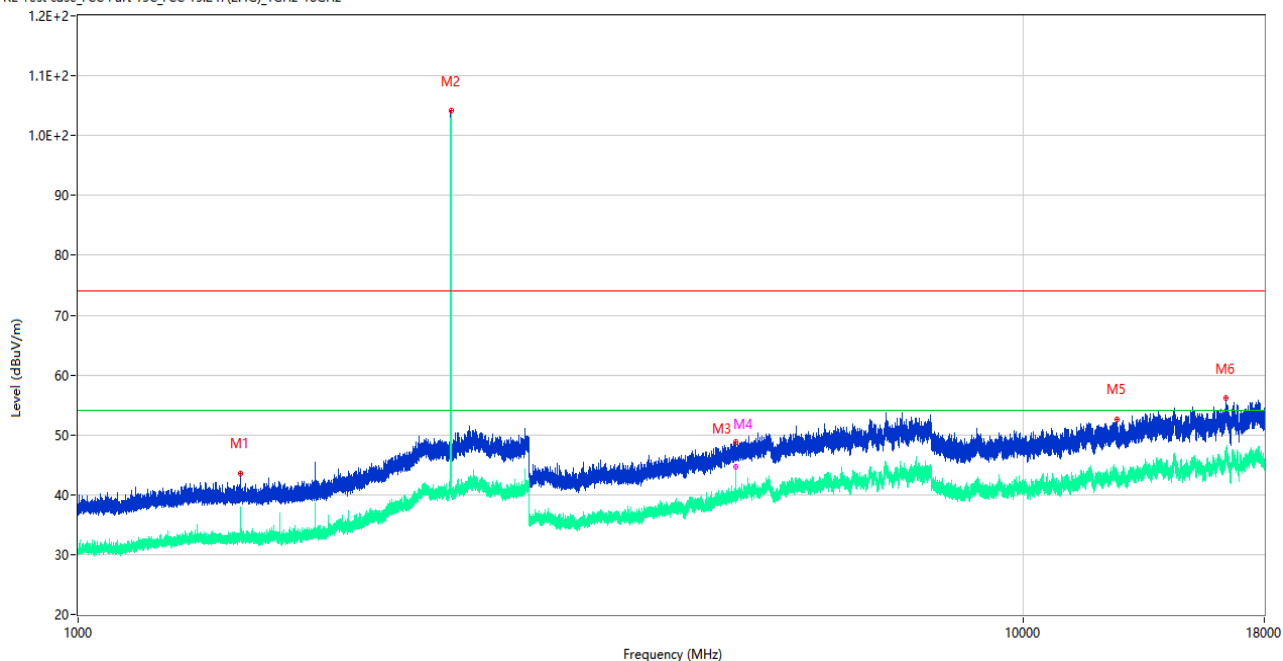

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.200	43.60	-17.41	74.0	30.40	Peak	252.00	400	Horizontal	Pass
1**	1485.200	37.36	-17.41	54.0	16.64	AV	252.00	400	Horizontal	Pass
2	2480.200	104.16	-11.20	74.0	-30.16	Peak	354.00	200	Horizontal	N/A
2**	2480.200	103.09	-11.20	54.0	-49.09	AV	354.00	200	Horizontal	N/A
3	4959.750	48.90	-3.51	74.0	25.10	Peak	109.00	150	Horizontal	Pass
3**	4959.750	41.35	-3.51	54.0	12.65	AV	109.00	150	Horizontal	Pass
4	4960.500	48.30	-3.57	74.0	25.70	Peak	62.00	150	Horizontal	Pass
4**	4960.500	44.60	-3.57	54.0	9.40	AV	62.00	150	Horizontal	Pass
5	12564.513	52.63	0.89	74.0	21.37	Peak	302.00	100	Horizontal	Pass
5**	12564.513	43.03	0.89	54.0	10.97	AV	302.00	100	Horizontal	Pass
6	16390.088	56.08	2.79	74.0	17.92	Peak	75.00	200	Horizontal	Pass
6**	16390.088	46.18	2.79	54.0	7.82	AV	75.00	200	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

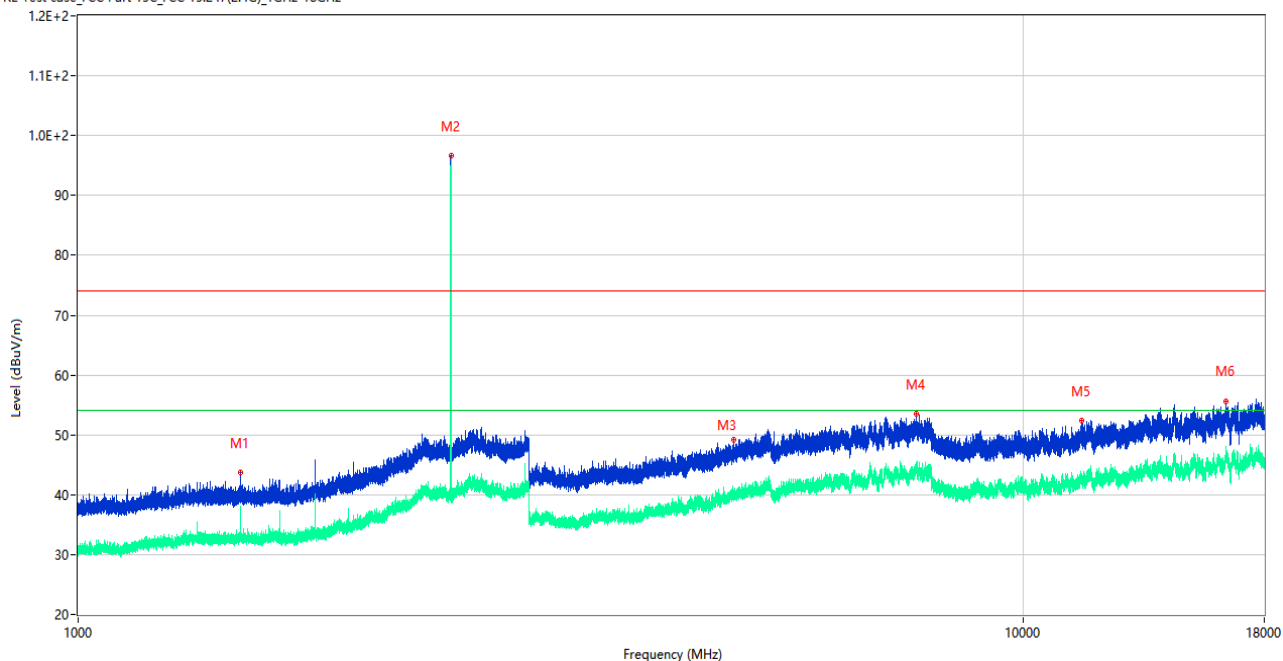

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.900	43.65	-17.09	74.0	30.35	Peak	134.00	100	Vertical	Pass
1**	1484.900	37.31	-17.09	54.0	16.69	AV	134.00	100	Vertical	Pass
2	2479.800	96.59	-11.14	74.0	-22.59	Peak	120.00	100	Vertical	N/A
2**	2479.800	95.13	-11.14	54.0	-41.13	AV	120.00	100	Vertical	N/A
3	4937.000	49.28	-3.64	74.0	24.72	Peak	91.00	200	Vertical	Pass
3**	4937.000	40.70	-3.64	54.0	13.30	AV	91.00	200	Vertical	Pass
4	7705.250	53.51	2.03	74.0	20.49	Peak	302.00	200	Vertical	Pass
4**	7705.250	44.76	2.03	54.0	9.24	AV	302.00	200	Vertical	Pass
5	11536.375	52.38	-1.06	74.0	21.62	Peak	267.00	200	Vertical	Pass
5**	11536.375	42.60	-1.06	54.0	11.40	AV	267.00	200	Vertical	Pass
6	16387.724	55.63	2.70	74.0	18.37	Peak	99.00	200	Vertical	Pass
6**	16387.724	46.86	2.70	54.0	7.14	AV	99.00	200	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data and Plots

GFSK LOW CHANNEL

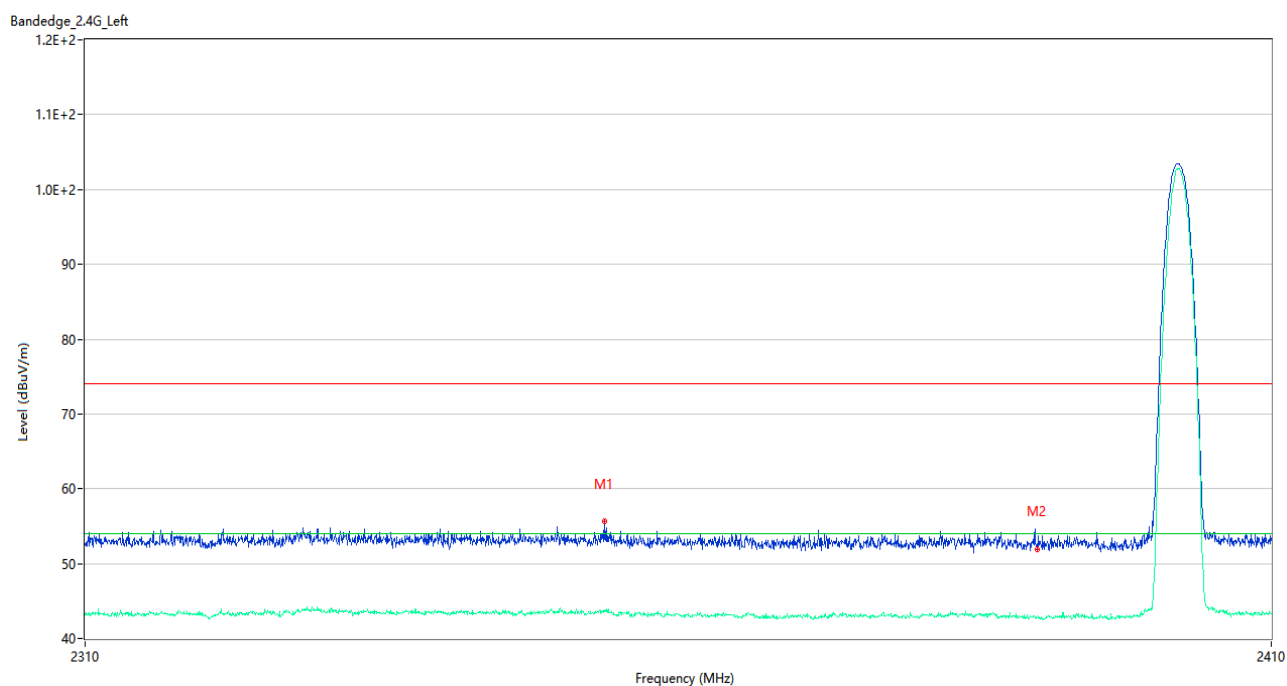


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2353.300	55.62	-0.89	74.0	18.38	Peak	207.00	150	Horizontal	Pass
1**	2353.300	43.79	-0.89	54.0	10.21	AV	207.00	150	Horizontal	Pass
2	2389.950	51.96	-1.82	74.0	22.04	Peak	226.00	100	Horizontal	Pass
2**	2389.950	43.00	-1.82	54.0	11.00	AV	226.00	100	Horizontal	Pass

GFSK HIGH CHANNEL

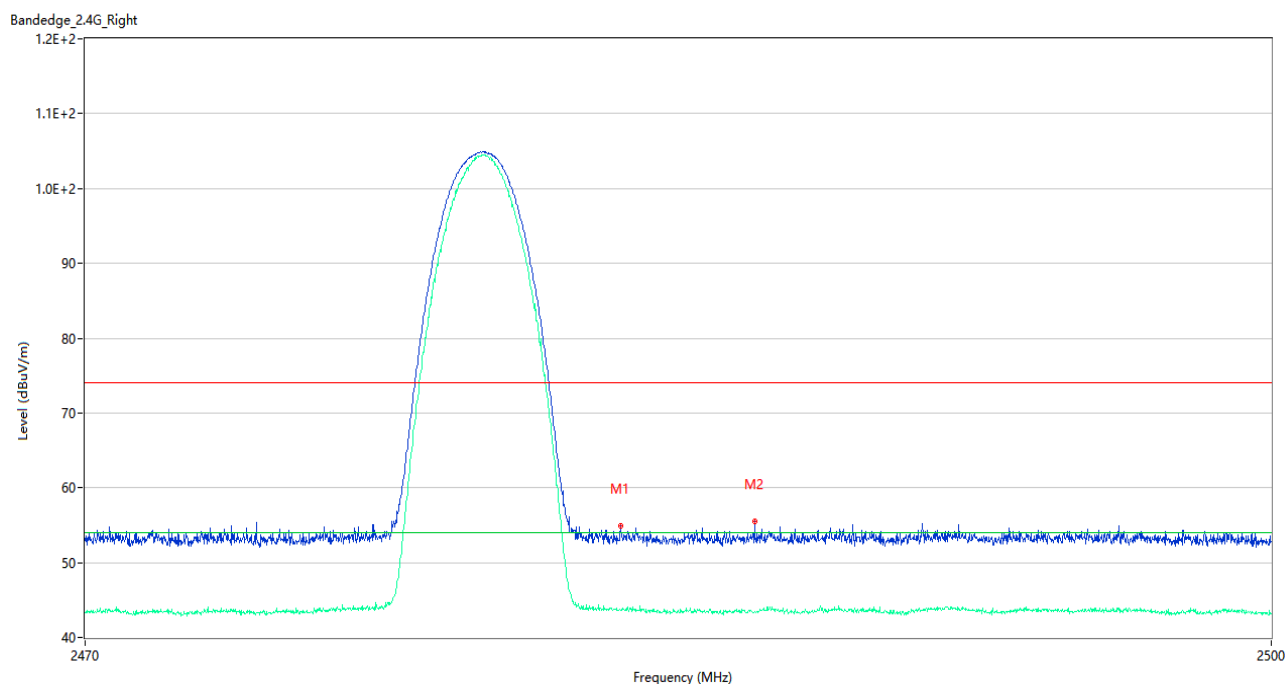


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.96	-1.10	74.0	19.04	Peak	205.00	200	Horizontal	Pass
1**	2483.500	43.66	-1.10	54.0	10.34	AV	205.00	200	Horizontal	Pass
2	2486.890	55.48	-1.15	74.0	18.52	Peak	154.00	200	Horizontal	Pass
2**	2486.890	43.54	-1.15	54.0	10.46	AV	154.00	200	Horizontal	Pass

8-DPSK LOW CHANNEL

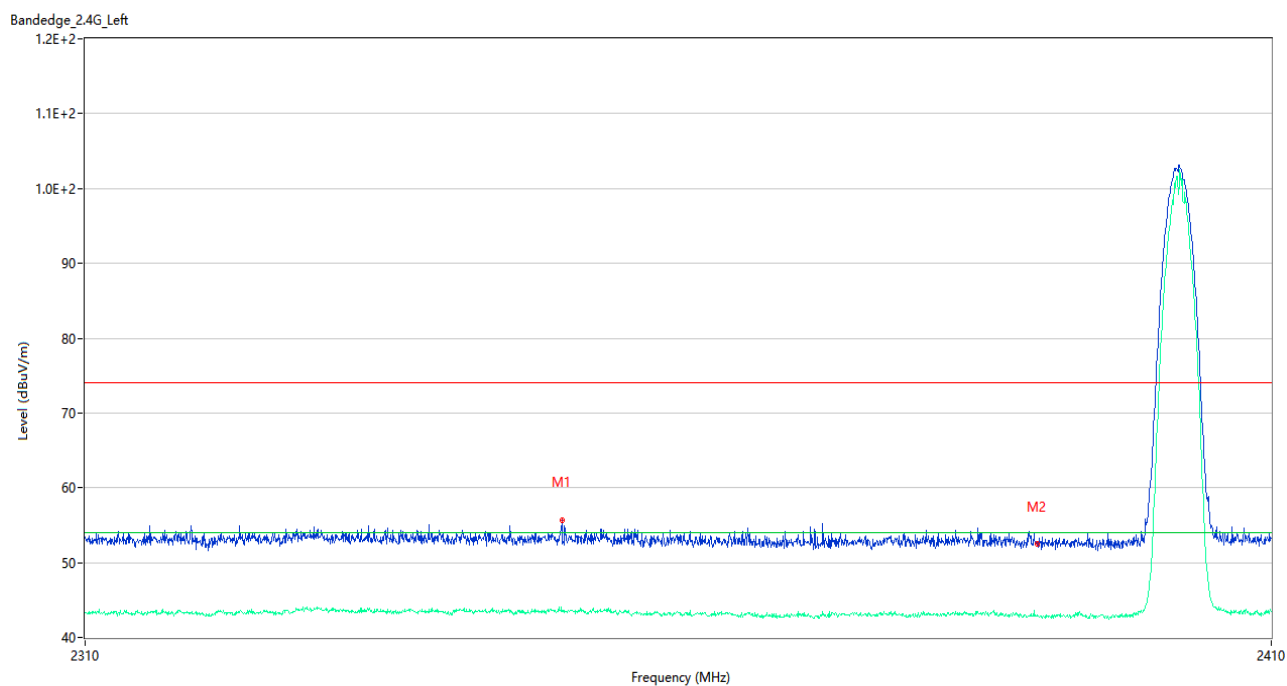

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2349.700	55.73	-0.85	74.0	18.27	Peak	168.00	150	Horizontal	Pass
1**	2349.700	43.50	-0.85	54.0	10.50	AV	168.00	150	Horizontal	Pass
2	2389.950	52.44	-1.82	74.0	21.56	Peak	217.00	200	Horizontal	Pass
2**	2389.950	42.86	-1.82	54.0	11.14	AV	217.00	200	Horizontal	Pass

8-DPSK HIGH CHANNEL

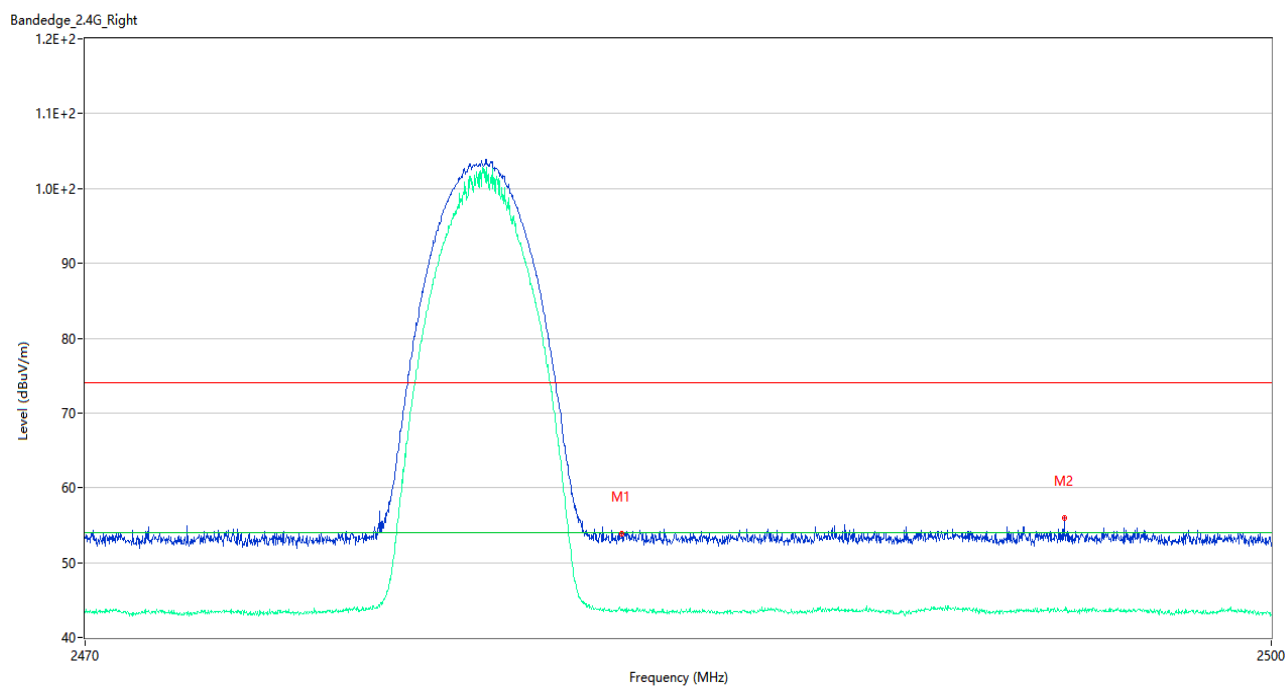

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.530	53.91	-1.10	74.0	20.09	Peak	194.00	200	Horizontal	Pass
1**	2483.530	43.74	-1.10	54.0	10.26	AV	194.00	200	Horizontal	Pass
2	2494.735	55.93	-0.90	74.0	18.07	Peak	55.00	200	Horizontal	Pass
2**	2494.735	43.65	-0.90	54.0	10.35	AV	55.00	200	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2430583-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2430583-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2430583-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--