


G200

USER MANUAL

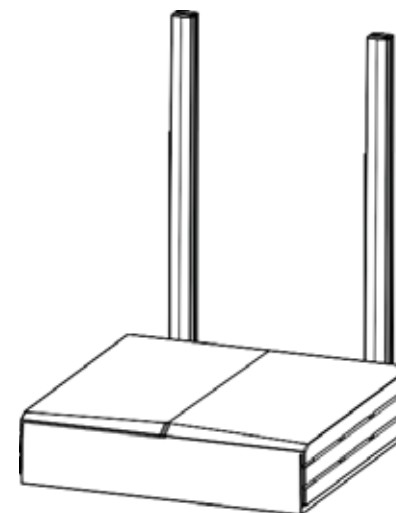

EasyLinkin

Address: Room 15D, 15th Floor, Microsoft Cogo Building,
Gaoxin South 5th Road, Nanshan District, Shenzhen, China
Email: Service@EasyLinkin.com
Tel: +86 0755 2692 5175

EasyLinkin
易联无限

TABLE OF CONTENTS

1. PRODUCT OVERVIEW INTERFACE AND LEDS	3
1.1 Brief Introduction	3
1.2 Features	3
2. INTERFACE AND LEDS	3
2.1 Interface	3
2.2 LED Status Indications	3
3. SPECIFICATION	4
4. CONFIGURATION	4
4.1 Getting Started	4
4.2 Modifying Network Parameters	5
4.3 Modifying LoRa Parameters	7
4.4 Customized Configuration	8
4.5 Timezone Configuration	9
4.6 Restart Gateway	9
5. INSTALLATION	10
5.1 Wall Mounting	10
5.2 Ceiling Mounting	10
NOTES:	10
6. PACKAGE LIST	11
7. FCC STATEMENT	11
8. SUPPORT	11

1. PRODUCT OVERVIEW INTERFACE AND LEDs

1.1 Brief Introduction

G200 Series gateway is a portable indoor gateway and complies with LoRaWAN™ protocol to provide low power, stable and secure wireless connectivity for devices and sensors.

G200 adopts star topology deployment and provide WiFi or Ethernet connection to network server. The solution is used in a wide area of applications such as smart energy, smart cities and agricultural IoT.

G200 meets the network requirements of long-range communications, strong anti-interference ability, high sensitivity and low power for many dispersed nodes to provide a low cost and high reliability indoor IoT solution.




1.2 Features

- **Low Cost**
Compact and portable, easy to install, cost effective for LoRa network deployment.
- **Stable Network**
The legal nodes can move freely within gateway coverage.
When one gateway is abnormal in the multi-gateway network, the node can be accessed through adjacent gateway.
- **Versatile Backhaul Options**
Support Ethernet/WiFi, support switch dynamically.
- **Easy Maintenance**
Support remote troubleshooting and firmware upgrade, support local connection for debugging.

2. INTERFACE AND LEDs

2.1 Interface

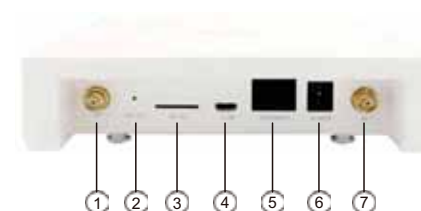

- | | |
|-----------------------------------|---------------------|
| Port 1: LoRa Antenna (SMA-female) | Port 2: RESET |
| Port 3: SIM Card Slot | Port 4: Micro USB |
| Port 5: Ethernet (RJ45) | Port 6: DC12V DC_IN |
| Port 7: WiFi Antenna (SMA-female) | |

NOTE: 1、Port 2 : RESET hole, head into RESET hole with one end of paper clip for 6 seconds, then out. G200 restore factory defaults.

2.2 LED Status Indications

LEDs	Function definition
Flash blue and green every 1 second	• Normal NS connection • Normal data forward
Flash red and blue every 1 second	• Abnormal NS connection • Normal data forward
Flash red and green every 1 second	• Abnormal NS connection • Abnormal data forward
White lights up for 1 minute	Gateway power on, system initialization
Off	Gateway is not powered on

3. SPECIFICATION

LoRa Parameters	
Frequency Band	923MHz
Communication	LoRaWAN, Star Network
Modulation	LoRa
Mode	Half duplex
Sensitivity	-137dBm @SF12/BW 125KHz
Max Transmitter Power	17 dBm (Typical)
Channel & Bandwidth	125KHz/250KHz/500MHz Configurable
Interface	Ethernet/WiFi
Communication Distance	Suburban 5Km, urban 3Km
Physical	
IP Grade	IP30
Size	142mm*142mm*35mm
Color	Off white
Material	PC+ABS
Input Voltage	DC12V(11.0 VDC ~ 14.0 VDC)
Installation	Desktop/Wall mount/Ceiling mount
Operating Temperature	0-60°C
Operating Humidity	0-90%RH
Thermal Methods	Radiator grille
Hardware	
Processor	MIPS24K/500MHz
RAM	
Flash	16MB
WiFi	QCA9513
Security System	
System Encryption	AES128
Remote Management	
Upgrade and Maintenance	Remote monitoring of network status Support remote firmware upgrade, configuration backup and recovery

4. CONFIGURATION


G200 provides a friendly and easy way to configure network parameters and LoRa parameters. After the configuration/modification is completed, you need to click the Save & Apply button at the bottom right of the page to save. After all the configuration/modifications are completed, you need to restart the gateway to take effect.

4.1 Getting Started

Please follow the steps below to log in:

Step 1: Search AP **ELI-G200-XXXXXX**(XXXXXX is the last six hex number of G200 MAC) for G200, click connect, password:easylinkin.

Step 2: If connect is successful, open browser (recommend IE browser) and input IP address:192.168.3.1

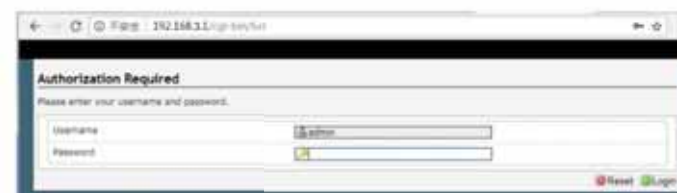


Step 3: After entering login page, input username and password. Then enter the overview page, as shown below.

Username: admin (default)

Password: admin (default)




Status, System, Service, Network, LoRa and Logout tabs are displayed at the top of the page. If you want to change administrator password, please click **System-Administration** then input the new password and click **Save & Apply**.

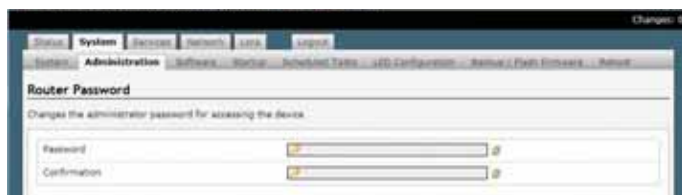

4.2 Modifying Network Parameters

Please follow the below steps to modify network parameters:

Step1: Click **Network-Interface**, then the Ethernet and WiFi configuration can be found in this page.

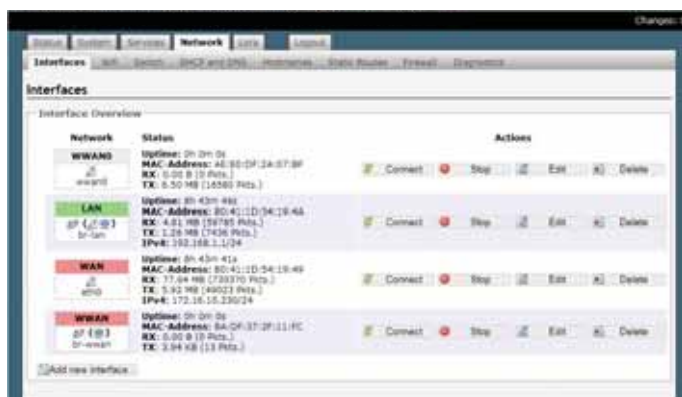


Step 2: Click **WAN-Edit**, the General Setup (Ethernet static IP configuration or DHCP configuration) can be modified. The default configuration is DHCP mode.



Step 3: The **Use gateway metric** needs to be configured to 5 during DHCP configuration.




Step 4: Set up static IP address.

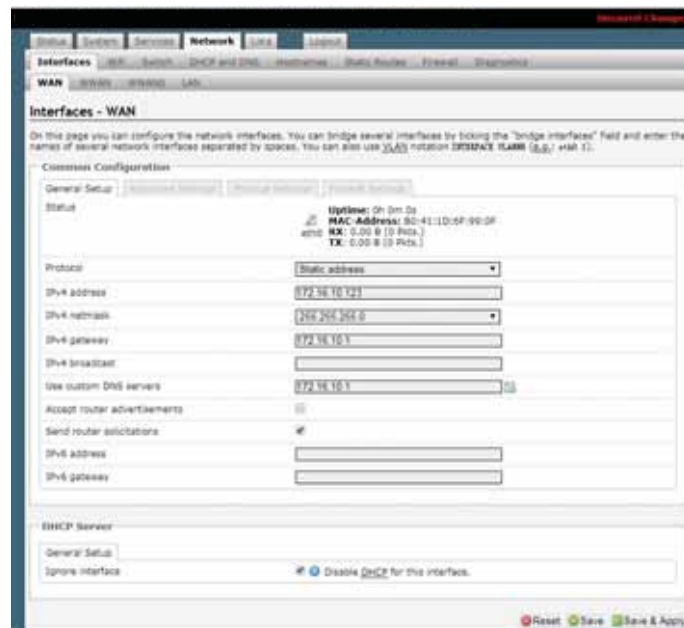

Note: If gateway connect to LinkWAN platform (that is NS from Ali cloud platform) .Set up the following DNS address: 223.5.5.5 or 223.6.6.6

Step 5: Click **Save and Apply**. The configuration is active.


Step 6: Step 4: Click **Network- WiFi** to enter the WiFi configuration page.

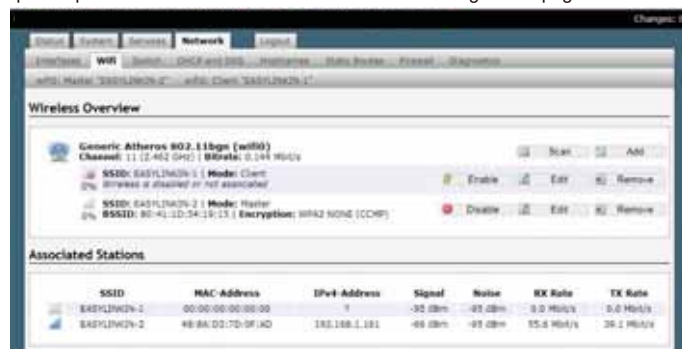


Step 7: Click Edit in the Client mode. The ESSID of the AP will be connected can be set.



Step 8: Click **Wireless Security**, modify key, then click **Save & Apply** waiting for connecting.

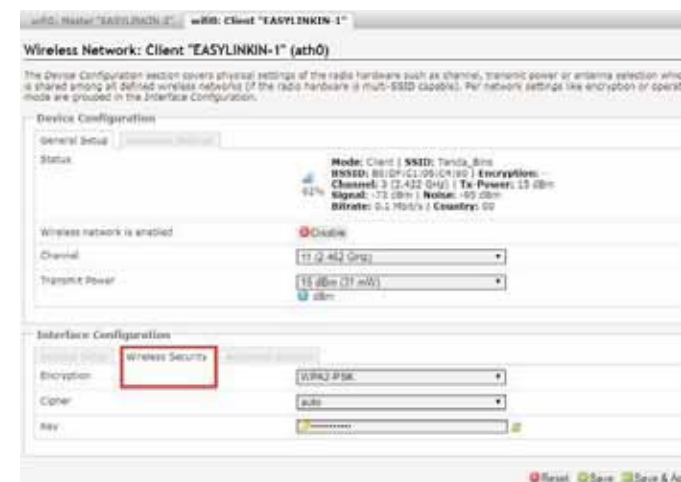

Step 9: If WiFi parameters modification is done, the AP connected and IPV4 address acquired can be displayed in Associated Stations in WiFi page.

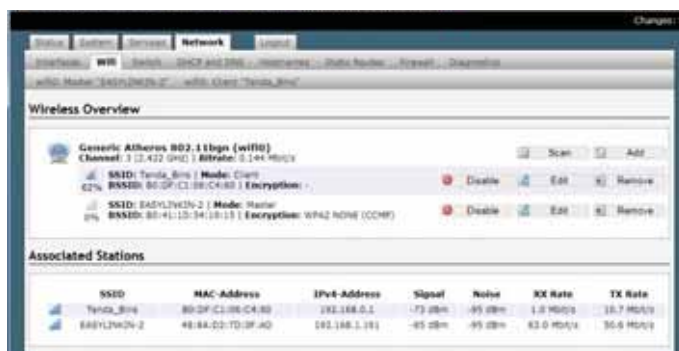


NOTE: The Master mode is only used by technicians, so please do not do any modification under this mode.

4.3 Modifying LoRa Parameters

Please follow the steps below to modify LoRa parameters:

Step 1: Click **LoRa** in overview page and enter LoRa configuration page, which is composed of three parts:Version Configuration, Base Configuration, Radio and NS Server Configuration.

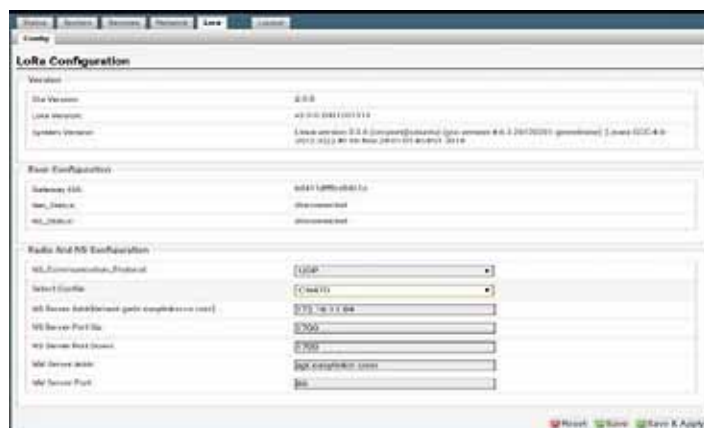


Step 2: Gateway EUI can be shown in Base Configuration.

Step 3: Different LoRa frequency band can be chosen in Radio Configuration.

Step 4: In the radio and NS configuration column, UDP and mqtt communication modes are supported.

In UDP mode, you can select the actual Lora band from the drop-down menu, and configure the NS Server addr (default: 0 gwbr.easylink - ns.com), NS Server Port up(default:1700), NS Server Port down(default:170), NS Server Addr(default: api.easylink.com), and NS Server Port (default:80)

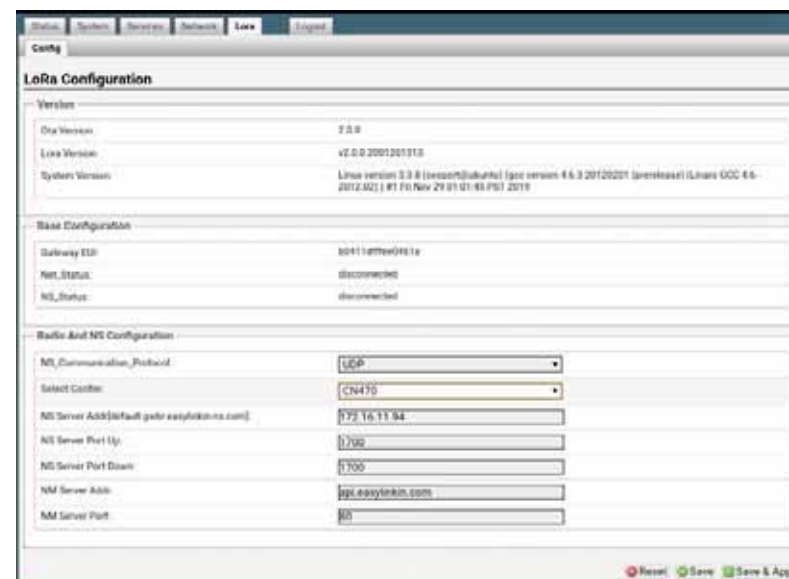

In MQTT mode, you can configure the information of the MQTT proxy server. MQTT protobuf_coding_method is true for protobuf encoding and false for JSON encoding. After configuration, click the save & Apply button the bottom right corner of the page.

LoRa Configuration

Version

OTA Version: 2.0.0

LoRa Version: v2.0.0.2001201313

System Version: Linux version 3.2.0 (jens@ubuntu) (gcc version 4.6.2 20120201 (pre-release)) Ubuntu GCC 4.6-2012.02) #1 Fri Nov 29 01:01:45 PST 2019

Base Configuration

Gateway EUI: 004110ff004051a

Net_Status: disconnected

NS_Status: disconnected

Radio And NS Configuration

NS_Communication_Protocol: MQTT

mqtt_port: 1883

mqtt_user_name: admin

mqtt_password: admin@123

mqtt_host: mqtt.easylinkin.com

mqtt_keepalive_interval_sec: 60000

mqtt_authentication_method: true

Select Profile: CH470

Reset Save Save & Apply

Remarks:

Only UDP mode can configure ns server addr, and mqtt does not have this configuration item;

4.4 Customized Configuration

Step 1: Click **Select File**, select **CUSTOMIZE**, following information pop up .

UDP mode:

LoRa Configuration

Version

OTA Version: 2.0.0

LoRa Version: v2.0.0.2001201313

System Version: Linux version 3.2.0 (jens@ubuntu) (gcc version 4.6.2 20120201 (pre-release)) Ubuntu GCC 4.6-2012.02) #1 Fri Nov 29 01:01:45 PST 2019

Base Configuration

Gateway EUI: 004110ff004051a

Net_Status: disconnected

NS_Status: disconnected

Radio And NS Configuration

NS_Communication_Protocol: UDP

Select Profile: CUSTOMIZE

NS_Server_Addr(default:mqtt.easylinkin.com): 172.16.11.94

NS_Server_Port_Up: 1700

NS_Server_Port_Down: 1700

NS_Server_Addr: mqtt.easylinkin.com

NS_Server_Port: 80

Radio1_Center_Frequency(HZ): 472800000

Channel 0 Offset(HZ): 300000

Channel 1 Offset(HZ): 100000

Channel 2 Offset(HZ): 100000

Channel 3 Offset(HZ): 500000

Radio1_Center_Frequency(HZ): 273400000

Channel 4 Offset(HZ): 300000

Channel 5 Offset(HZ): 100000

Channel 6 Offset(HZ): 100000

Channel 7 Offset(HZ): 500000

Channel 8 LoRa 1st Enable: true

Channel 8 LoRa 1st Offset(HZ): 200000

Channel 8 LoRa 1st Bandwidth(HZ): 50000

Channel 8 LoRa 1st Spread_Factor: 7

Channel 8 Fsk Enable: true

Channel 8 Fsk Offset(HZ): 500000

Keepalive Interval(s): 15

Stat Interval(s): 300

Reset Save Save & Apply

MQTT mode:

Step 2. Set up parameters as needed. For example, keep alive intervals, frequency can be configured.

Step 3. After any modification, do not forget to click Save & Apply button.

4.5 Timezone Configuration

Step 1. Click **System** in overview page and enter System configuration page.

Step 2. Select corresponding time zone as needed. If connect to Ali LinkWAN platform, please choose UTC 0 time zone.

Step 3. After configuration, click Save & apply to make the settings effective.

4.6 Restart Gateway

After all configurations/modifications are completed, select System->Reboot, and click the Perform reboot button to restart the gateway. All configurations/modifications will take effect after the gateway restarts.

5. INSTALLATION

G200 Series gateway has three installation methods:

- Desktop: Put the gateway on a flat surface such as the top of a table. Then adjust antenna direction accordingly, which is suitable for temporary demonstration and debugging.
- Wall mounting: Attach gateway on the wall with the installation kit to mount it using the expansion tube and the adjustable screws.
- Ceiling mounting: Attach gateway on ceiling with installation kit to mount it using expansion tube and adjustable screws.

5.1 Wall Mounting

Install the gateway bracket:

Step 1: Select installation position on wall and mark the locations where the screw holes for the screws will be drilled.

Step 2: Drill holes (Φ5) in the wall and plug in plastic extension pipes (PA4.0*30mm), then place the gateway bracket onto the marked location with holes aligned.

Step 3: Tighten the screw.



Place gateway into bracket:

Step 1: Connect WiFi/LoRa antennas.

Step 2: Connect power adapter, connect the Ethernet cable. When the gateway is power on, check the LED status. Make sure the gateway is working normally.

Step 3: Attach gateway to bracket, make the hook in the gateway align to the bracket grooves, push the gateway upward (in a direction shown with a blue arrow) and lock it to the bracket.




5.2 Ceiling Mounting

Ceiling mounting is almost the same as wall mounting except that the bracket needs to be installed under the ceiling.

NOTES:

- The gateway should be handled gently without violent collisions and drops.
- The gateway should be mounted on a flat and dry surface with little dust and good ventilation. Do not expose the gateway to rain, water leakage and any humidity.

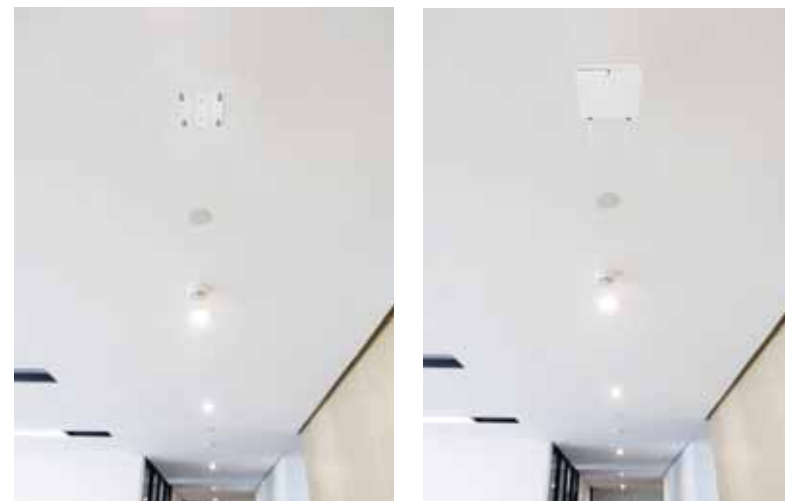

6. PACKAGE LIST

No.	Photo	Name	Quantity(PCS)	Note
1		G200 Gateway	1	
2		Power Adapter	1	FCC/UL/CE/CCC
3		RF Antenna	1	
4		WiFi Antenna	1	
5		Bracket		
6		Product Specification	1	
7		Certificate & Warranty Card	1	

7. FCC STATEMENT

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help important announcement .

RF exposure warning :

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

8. SUPPORT

If you have any question or problem with our gateway, please contact us for support.