

承認書

SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

客 戶 料 號:

CUST P/N:

音 澤 料 號:

FINE P/N:

產 品 型 號:

DESC:

日 期:

DATE:

版 本:

Version:

G43.5*2C*0.07*100P*6.5UH-L15-BJ-W40

Φ 43.5MMX0.75MM

2022/09/01

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE

Manufacturer:

Company: Shenzhen Shuntianyi Electronic Technology Co., Ltd

Address: Building A, No. 2, 1st Road, Shangxue Science and
Technology Park, Bantian, Longgang, Shenzhen


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	G43.5*2C*0.07*100P*6.5UH-L 15-BJ-W40	版本 Rev: A.0	客戶 CUST:	
			客戶料号 CUST P/N:	


一、尺寸 DIMENSION:(mm)

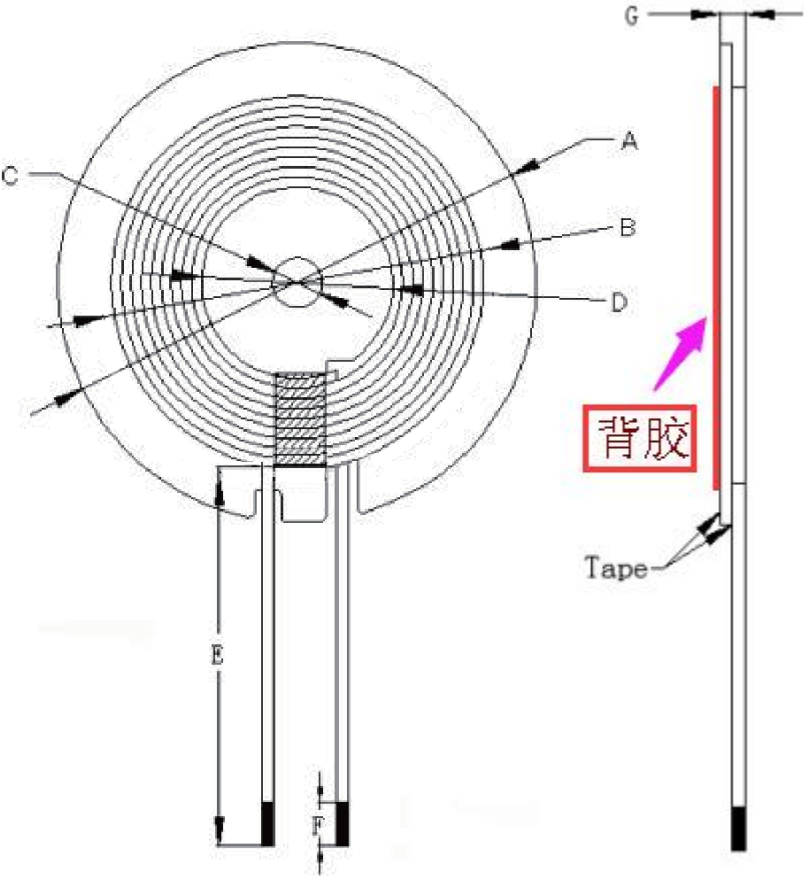

A	43.5±0.5
B	40±1
C	20.5±0.5
D	5.3±0.5
E	15±2
F	5±2
G	2.4
H	
I	
K	

注：
1.交叉出线;
2.线圈贴开槽硬磁片，磁片尺寸 43.5±0.8mm,厚度为 0.75±0.1mm.

二、原理图 SCHEMATIC DIAGRAM:

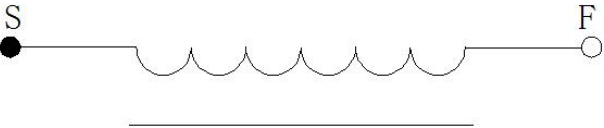

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.07*100P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.7H ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤500m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE