Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Model Name	IBM 2.4 GHz	
Center Frequency	2402 MHz 2441 MHz 2480 MHz	2.34 dBi 2.07dBi 1.45 dBi
MAX. GAIN	2.34 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	3.1cm	

Antenna Photo & Length (mm)

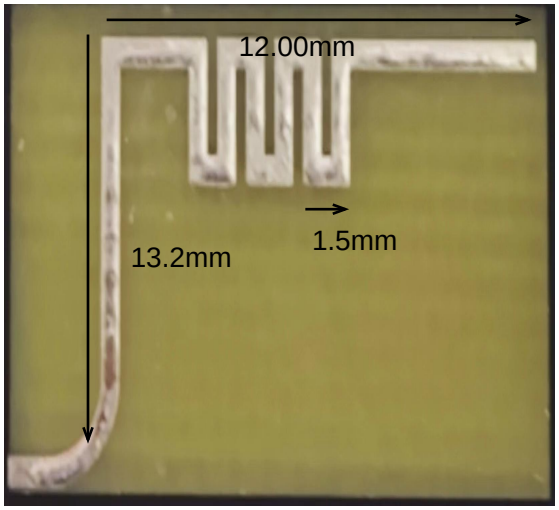

Type:PCB

Manufacture:
Chuanhui (Haifeng)
Circuit Board Co., Ltd.

Trademark:

CHUAN HUI

Test Address	**16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan**
Test Date	**2009-04-14**
Test Instrument	**vector network analyzer - R&S ZVB20**

1. Main antenna : 2402 MHz

1.1 Horizontal

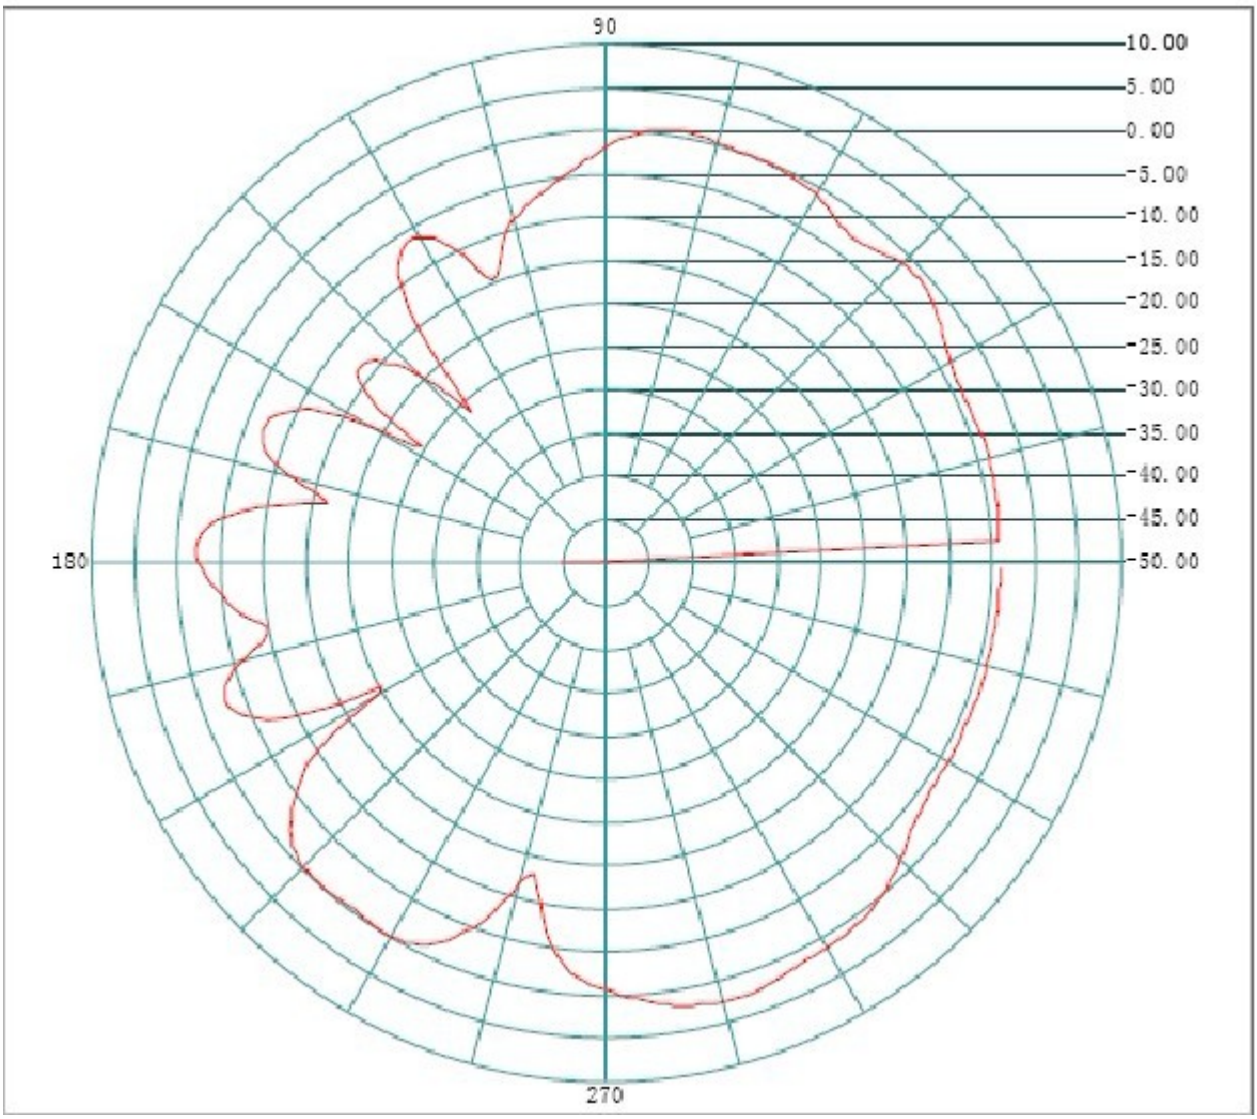

Frequency(MHZ): **2402** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **2.34**

Average Gain(dBi) : **-2.48**

Minimum Gain(dBi): **-55.18**

1.2 Vertical

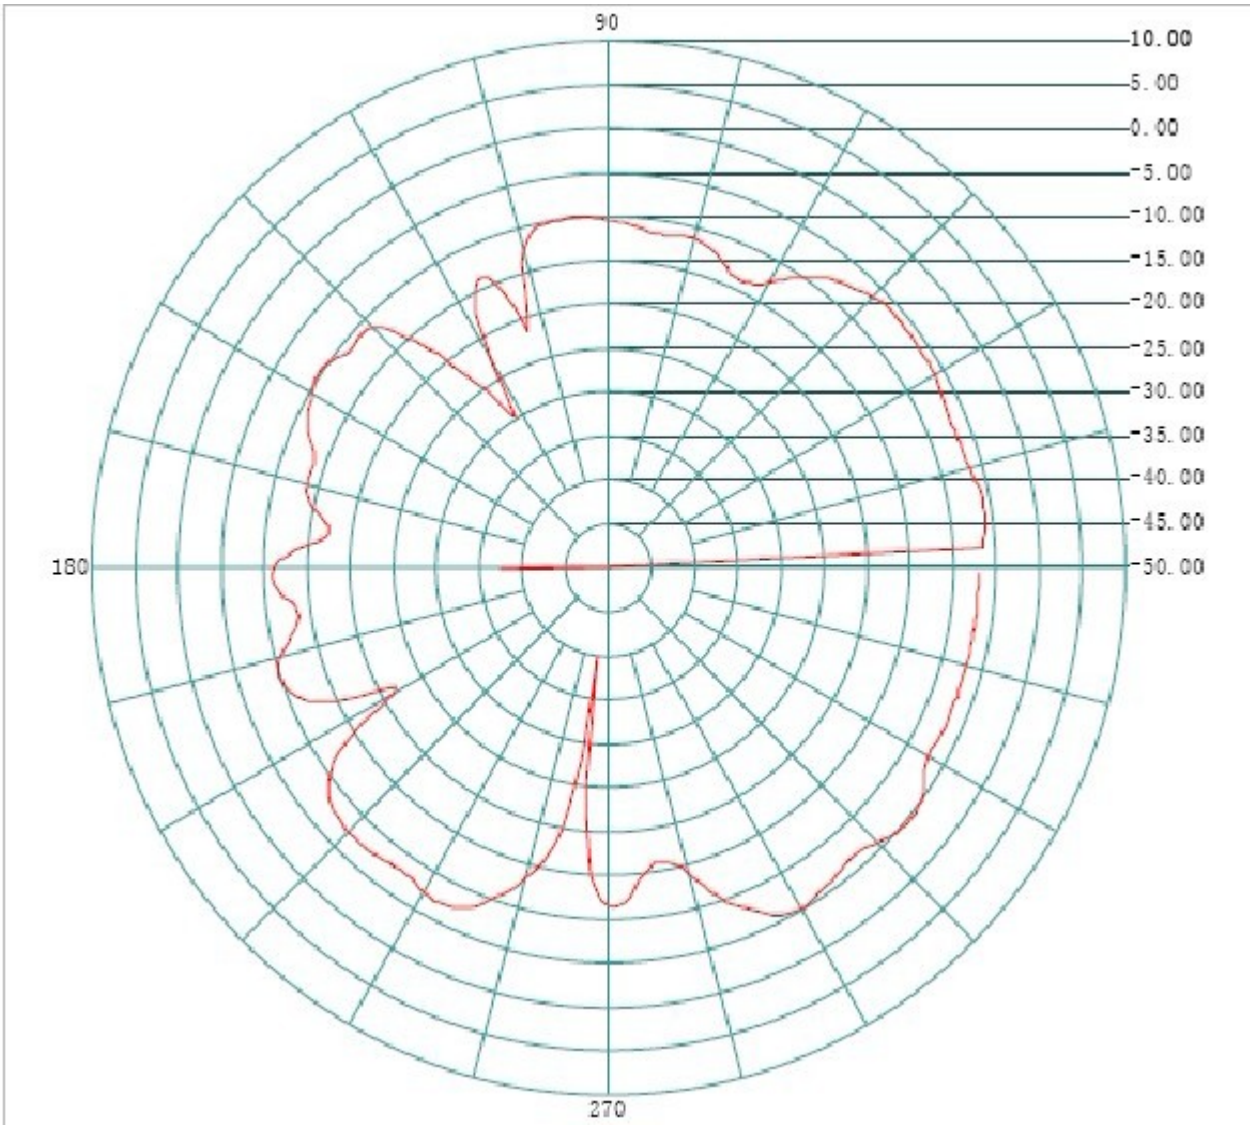

Frequency(MHZ): **2402** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**

2. Main antenna : 2441 MHz

2.1 Horizontal

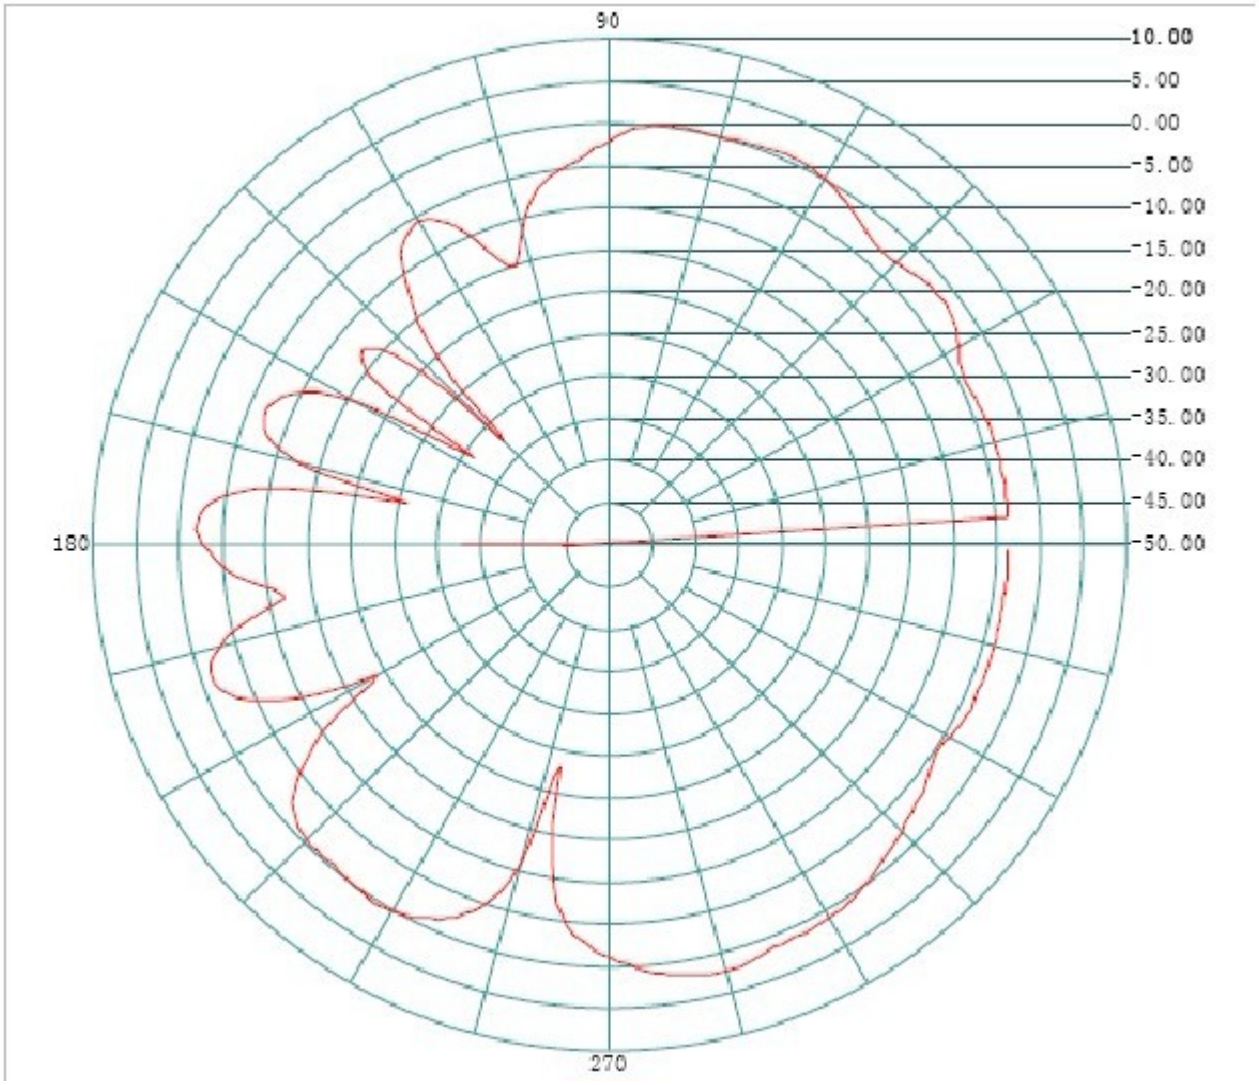

Frequency(MHZ): **2441** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): 2.07

Average Gain(dBi) : **-2.54**

Minimum Gain(dBi): **-66.98**

2.2 Vertical

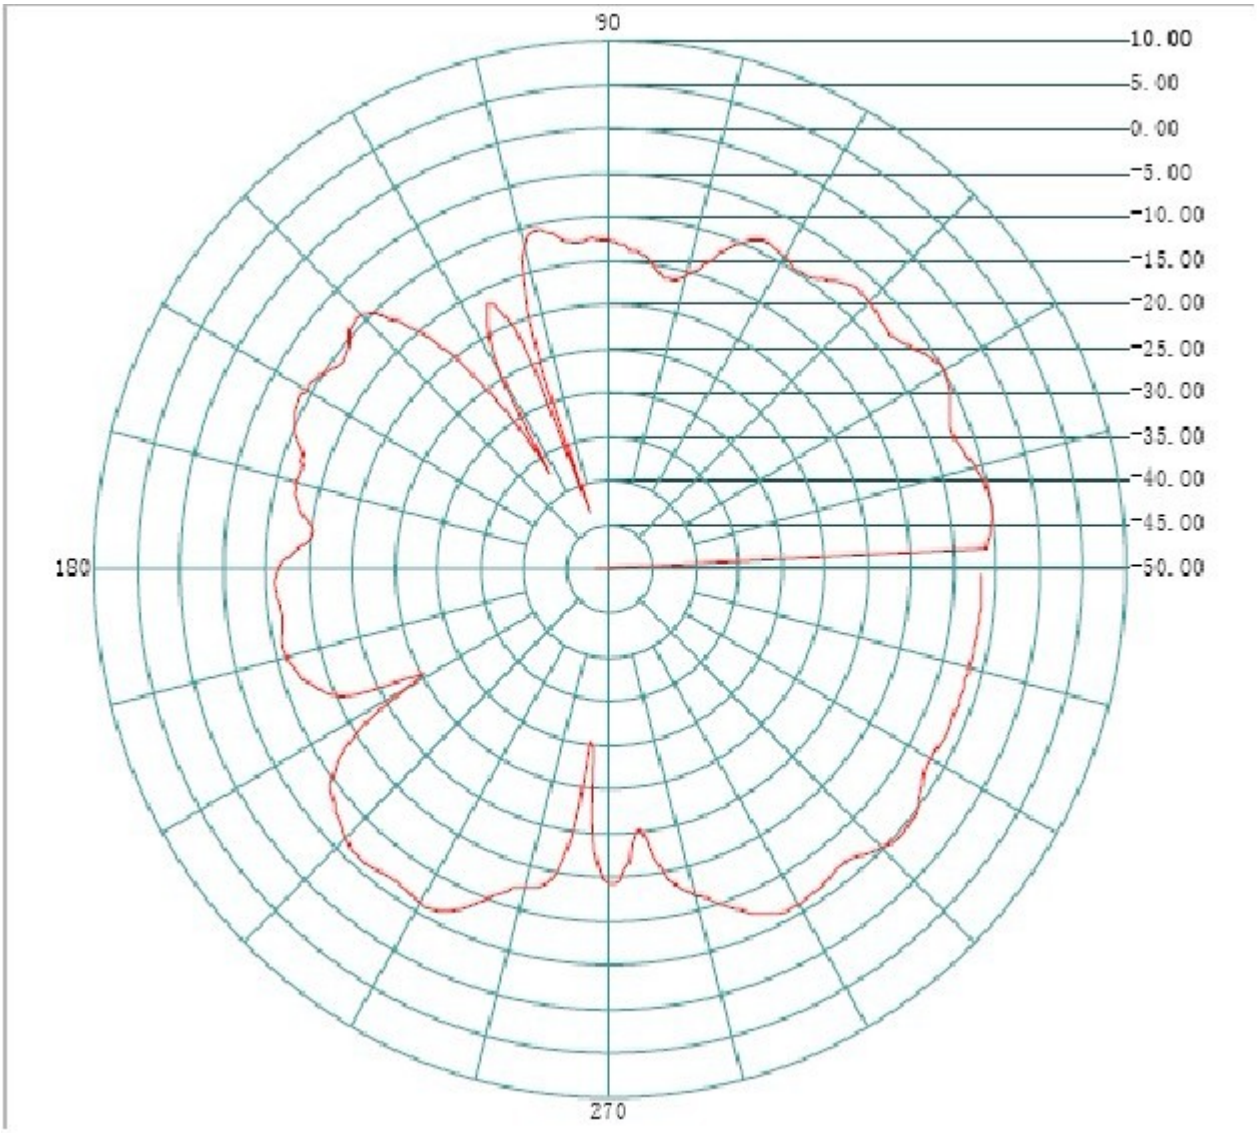

Frequency(MHZ): **2441** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.29**

Average Gain(dBi) : **-8.81**

Minimum Gain(dBi): **-51.4**

2. Main antenna : 2480 MHz

2.1 Horizontal

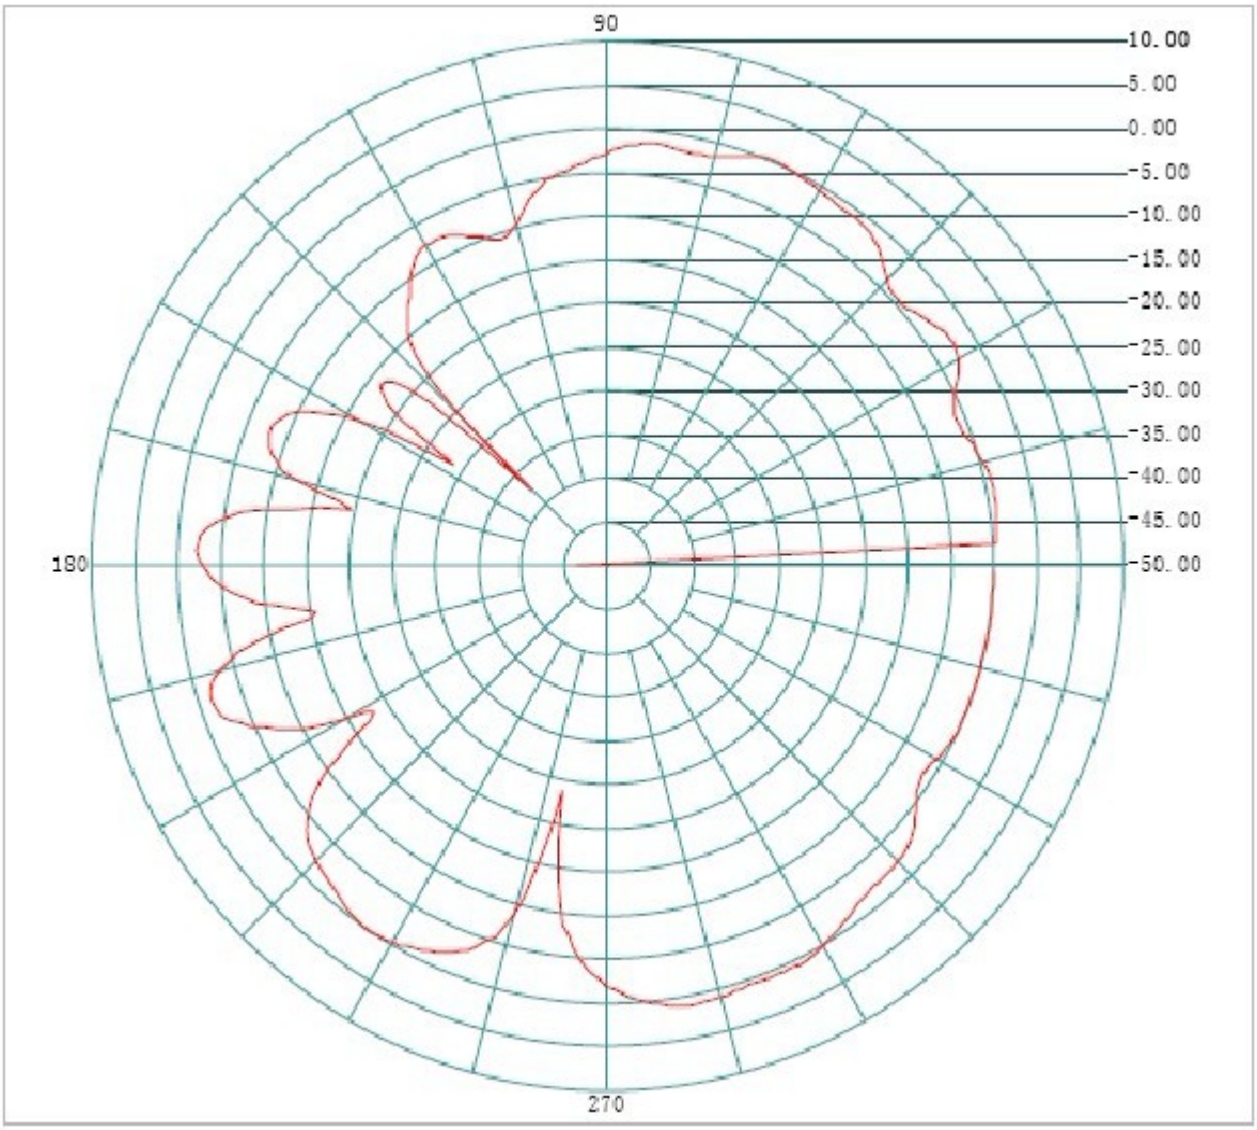

Frequency(MHZ): **2480** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **1.45**

Average Gain(dBi) : **-3.34**

Minimum Gain(dBi): **-53.4**

2.2 Vertical

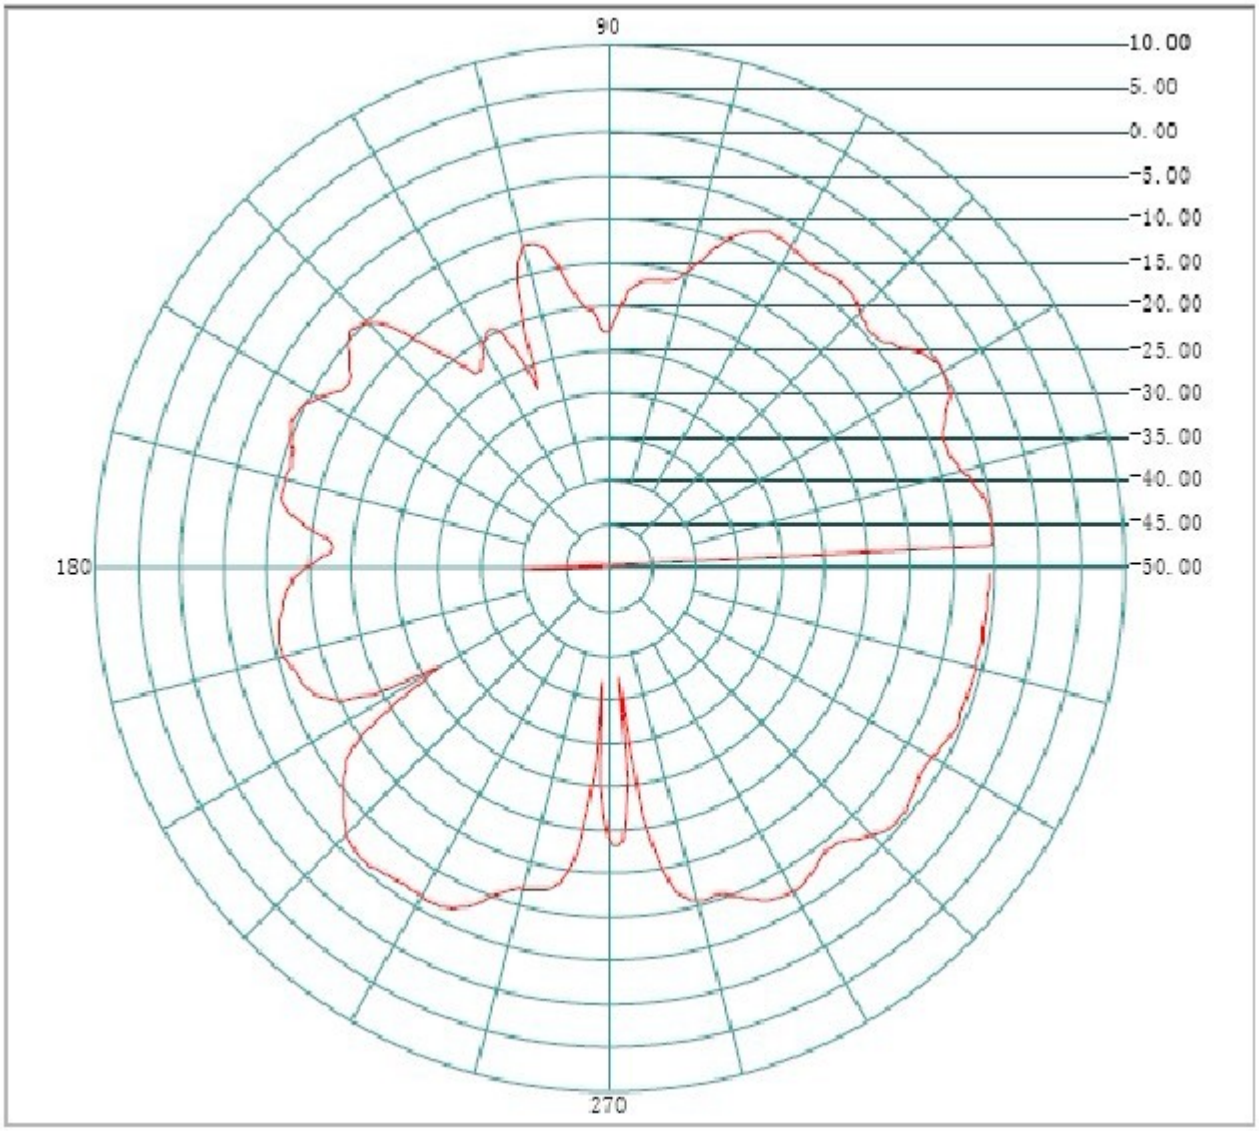

Frequency(MHZ): **2480** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.95**

Average Gain(dBi) : **-9.06**

Minimum Gain(dBi): **-60.00**