

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_20.37.37

EUT Name: Trail Camera

Temp.(°C): 21.1

Model Number: X 4.0

Humidity (%RH): 42

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH6 P=44


Test Site: 966#2

Test Voltage: DC

Test Engineer: Zhang Zhongqiu

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

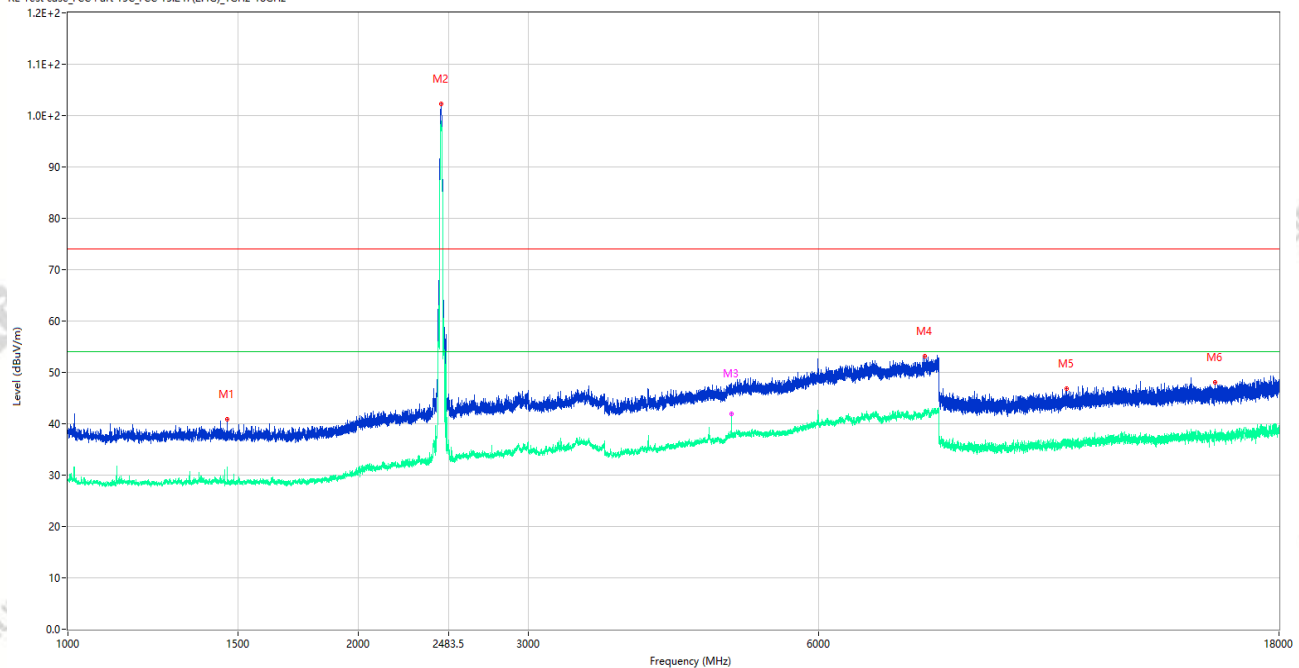

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1462.000        | 40.81            | -16.22      | 74.0           | 33.19       | Peak     | 89.00          | 150         | Vertical | Pass    |
| 1** | 1462.000        | 28.58            | -16.22      | 54.0           | 25.42       | AV       | 89.00          | 150         | Vertical | Pass    |
| 2   | 2437.000        | 102.22           | -12.37      | 74.0           | -28.22      | Peak     | 118.00         | 150         | Vertical | N/A     |
| 2** | 2437.000        | 97.23            | -12.37      | 54.0           | -43.23      | AV       | 118.00         | 150         | Vertical | N/A     |
| 3   | 4874.500        | 47.28            | -2.25       | 74.0           | 26.72       | Peak     | 215.00         | 150         | Vertical | Pass    |
| 3** | 4874.500        | 41.87            | -2.25       | 54.0           | 12.13       | AV       | 215.00         | 150         | Vertical | Pass    |
| 4   | 7732.500        | 53.16            | 1.06        | 74.0           | 20.84       | Peak     | 273.00         | 150         | Vertical | Pass    |
| 4** | 7732.500        | 42.28            | 1.06        | 54.0           | 11.72       | AV       | 273.00         | 150         | Vertical | Pass    |
| 5   | 10846.000       | 46.77            | -3.47       | 74.0           | 27.23       | Peak     | 322.00         | 150         | Vertical | Pass    |
| 5** | 10846.000       | 36.42            | -3.47       | 54.0           | 17.58       | AV       | 322.00         | 150         | Vertical | Pass    |
| 6   | 15442.500       | 48.00            | -1.86       | 74.0           | 26.00       | Peak     | 2.00           | 150         | Vertical | Pass    |
| 6** | 15442.500       | 37.53            | -1.86       | 54.0           | 16.47       | AV       | 2.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_20.41.57

EUT Name: Trail Camera

Temp.(°C): 21.1

Model Number: X 4.0

Humidity (%RH): 42

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4GWIFI 11b CH6 P=44

Test Site: 966#2

Test Voltage: DC

Test Engineer: Zhang Zhongqiu

Remark:

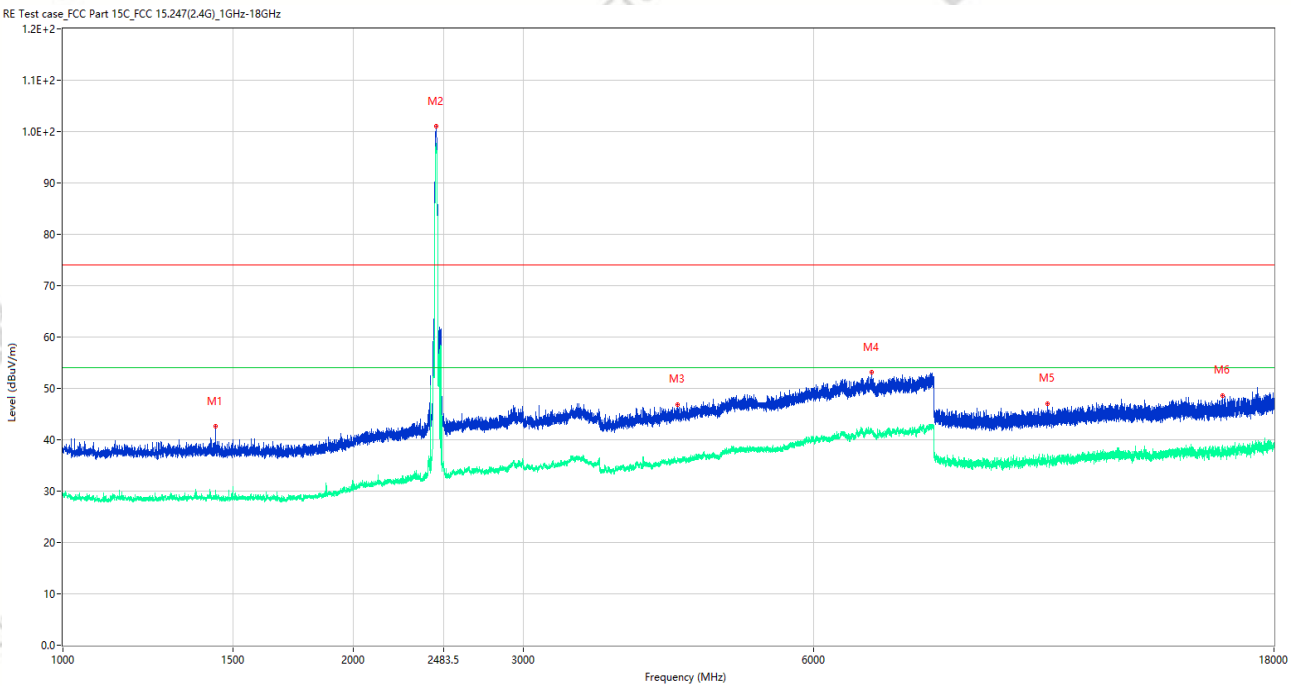

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1439.500        | 42.61            | -15.96      | 74.0           | 31.39       | Peak     | 188.00         | 150         | Horizontal | Pass    |
| 1** | 1439.500        | 28.53            | -15.96      | 54.0           | 25.47       | AV       | 188.00         | 150         | Horizontal | Pass    |
| 2   | 2437.250        | 100.97           | -12.37      | 74.0           | -26.97      | Peak     | 215.00         | 150         | Horizontal | N/A     |
| 2** | 2437.250        | 95.83            | -12.37      | 54.0           | -41.83      | AV       | 215.00         | 150         | Horizontal | N/A     |
| 3   | 4338.000        | 46.93            | -3.11       | 74.0           | 27.07       | Peak     | 74.00          | 150         | Horizontal | Pass    |
| 3** | 4338.000        | 36.16            | -3.11       | 54.0           | 17.84       | AV       | 74.00          | 150         | Horizontal | Pass    |
| 4   | 6891.500        | 53.14            | 0.62        | 74.0           | 20.86       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 4** | 6891.500        | 42.15            | 0.62        | 54.0           | 11.85       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 5   | 10491.500       | 47.09            | -3.34       | 74.0           | 26.91       | Peak     | 66.00          | 150         | Horizontal | Pass    |
| 5** | 10491.500       | 36.01            | -3.34       | 54.0           | 17.99       | AV       | 66.00          | 150         | Horizontal | Pass    |
| 6   | 15934.500       | 48.61            | -2.32       | 74.0           | 25.39       | Peak     | 266.00         | 150         | Horizontal | Pass    |
| 6** | 15934.500       | 37.95            | -2.32       | 54.0           | 16.05       | AV       | 266.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_21.06.04

EUT Name: Trail Camera

Temp.(°C): 21.1

Model Number: X 4.0

Humidity (%RH): 42

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH6 P=58


Test Site: 966#2

Test Voltage: DC

Test Engineer: Zhang Zhongqiu

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

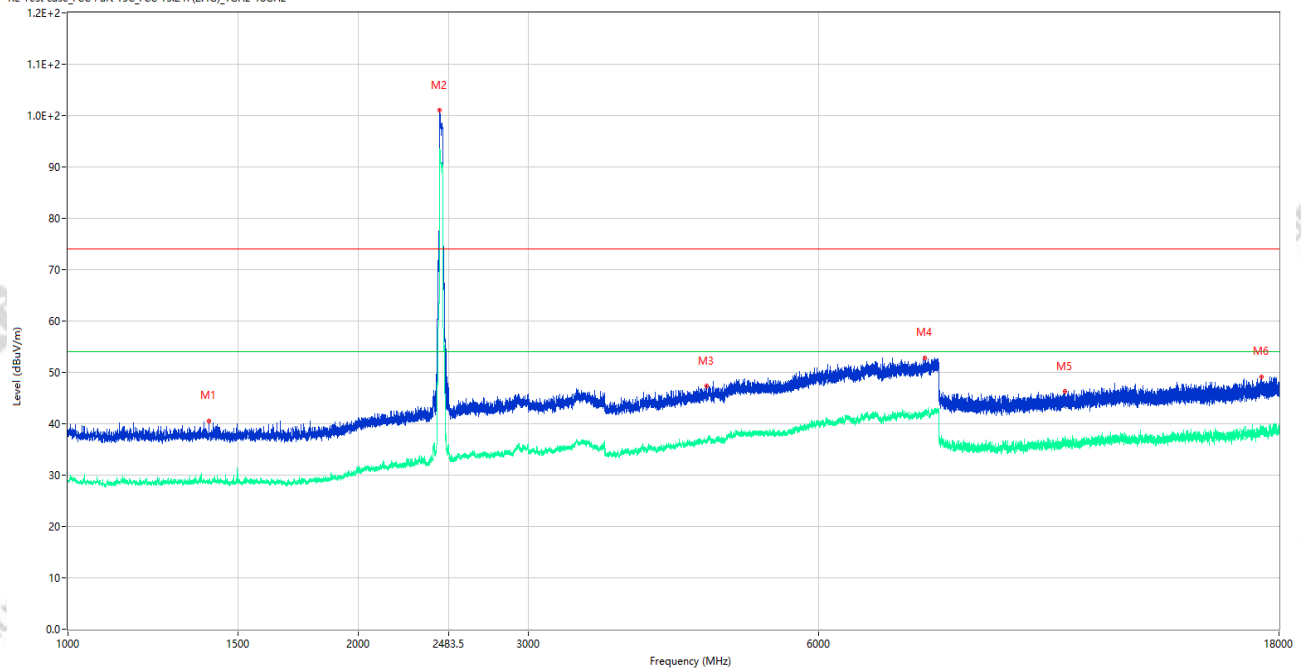


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1400.750        | 40.60            | -15.97      | 74.0           | 33.40       | Peak     | 123.00         | 150         | Vertical | Pass    |
| 1** | 1400.750        | 28.90            | -15.97      | 54.0           | 25.10       | AV       | 123.00         | 150         | Vertical | Pass    |
| 2   | 2429.750        | 100.98           | -12.25      | 74.0           | -26.98      | Peak     | 209.00         | 150         | Vertical | N/A     |
| 2** | 2429.750        | 93.42            | -12.25      | 54.0           | -39.42      | AV       | 209.00         | 150         | Vertical | N/A     |
| 3   | 4592.000        | 47.36            | -3.33       | 74.0           | 26.64       | Peak     | 200.00         | 150         | Vertical | Pass    |
| 3** | 4592.000        | 36.66            | -3.33       | 54.0           | 17.34       | AV       | 200.00         | 150         | Vertical | Pass    |
| 4   | 7730.000        | 52.86            | 0.89        | 74.0           | 21.14       | Peak     | 343.00         | 150         | Vertical | Pass    |
| 4** | 7730.000        | 41.70            | 0.89        | 54.0           | 12.30       | AV       | 343.00         | 150         | Vertical | Pass    |
| 5   | 10808.500       | 46.34            | -3.20       | 74.0           | 27.66       | Peak     | 236.00         | 150         | Vertical | Pass    |
| 5** | 10808.500       | 35.95            | -3.20       | 54.0           | 18.05       | AV       | 236.00         | 150         | Vertical | Pass    |
| 6   | 17271.501       | 49.13            | -1.12       | 74.0           | 24.87       | Peak     | 11.00          | 150         | Vertical | Pass    |
| 6** | 17271.501       | 38.83            | -1.12       | 54.0           | 15.17       | AV       | 11.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_21.10.09

|                |                    |                 |                       |
|----------------|--------------------|-----------------|-----------------------|
| EUT Name:      | Trail Camera       | Temp.(°C):      | 21.1                  |
| Model Number:  | X 4.0              | Humidity (%RH): | 42                    |
| Sample Number: | CC26020123-001-S05 | Pressure(kPa):  | 101                   |
| Test Standard: | 47 CFR Part 15C    | Work Mode:      | 2.4GWIFI 11g CH6 P=58 |
| Test Site:     | 966#2              | Test Voltage:   | DC                    |
| Test Engineer: | Zhang Zhongqiu     | Remark:         |                       |

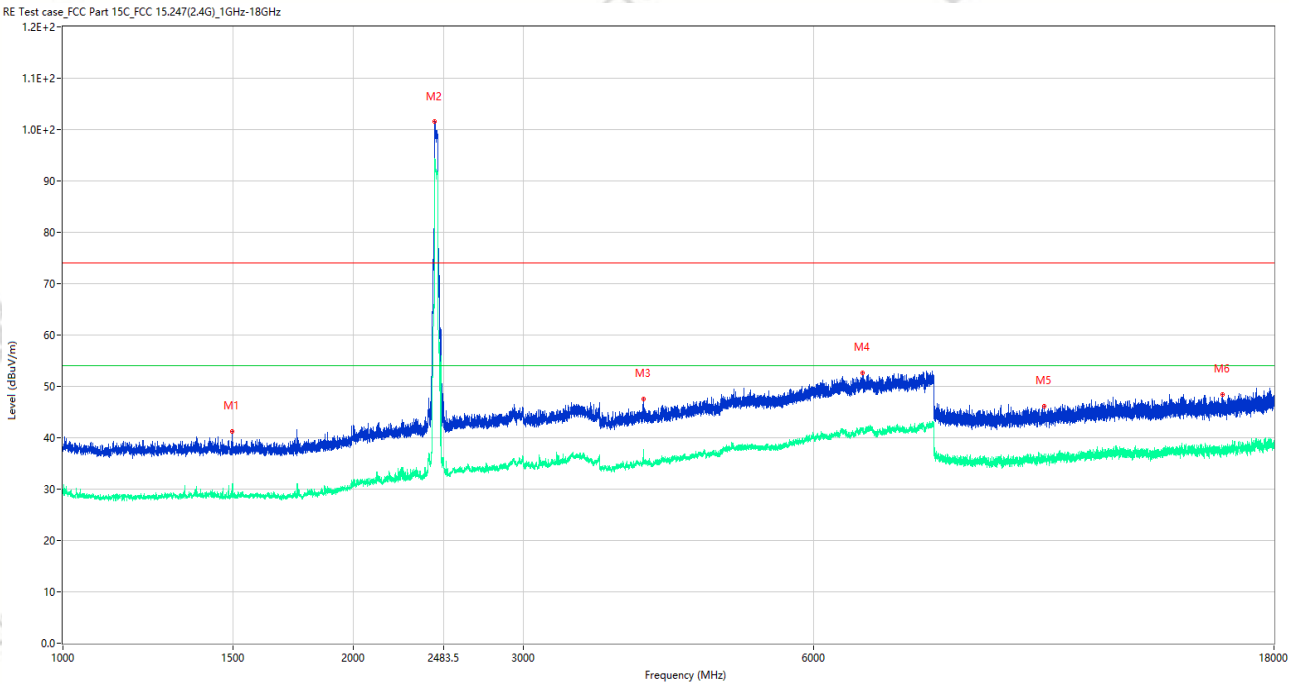


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1499.000        | 41.24            | -16.14      | 74.0           | 32.76       | Peak     | 231.00         | 150         | Horizontal | Pass    |
| 1** | 1499.000        | 30.12            | -16.14      | 54.0           | 23.88       | AV       | 231.00         | 150         | Horizontal | Pass    |
| 2   | 2429.500        | 101.54           | -12.24      | 74.0           | -27.54      | Peak     | 119.00         | 150         | Horizontal | N/A     |
| 2** | 2429.500        | 94.25            | -12.24      | 54.0           | -40.25      | AV       | 119.00         | 150         | Horizontal | N/A     |
| 3   | 3995.500        | 47.62            | -4.82       | 74.0           | 26.38       | Peak     | 78.00          | 150         | Horizontal | Pass    |
| 3** | 3995.500        | 35.38            | -4.82       | 54.0           | 18.62       | AV       | 78.00          | 150         | Horizontal | Pass    |
| 4   | 6744.000        | 52.63            | 0.69        | 74.0           | 21.37       | Peak     | 145.00         | 150         | Horizontal | Pass    |
| 4** | 6744.000        | 41.41            | 0.69        | 54.0           | 12.59       | AV       | 145.00         | 150         | Horizontal | Pass    |
| 5   | 10407.500       | 46.11            | -3.22       | 74.0           | 27.89       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 5** | 10407.500       | 35.91            | -3.22       | 54.0           | 18.09       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 6   | 15935.500       | 48.42            | -2.23       | 74.0           | 25.58       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 6** | 15935.500       | 37.66            | -2.23       | 54.0           | 16.34       | AV       | 0.00           | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-11\_05.54.38

|                |                    |                 |                         |
|----------------|--------------------|-----------------|-------------------------|
| EUT Name:      | Trail Camera       | Temp.(°C):      | 23.2                    |
| Model Number:  | X 4.0              | Humidity (%RH): | 51                      |
| Sample Number: | CC26020123-001-S05 | Pressure(kPa):  | 101                     |
| Test Standard: | 47 CFR Part 15C    | Work Mode:      | 2.4GWIFI 11n20 CH6 P=58 |
| Test Site:     | 966#2              | Test Voltage:   | DC                      |
| Test Engineer: | Liu Yabo           | Remark:         |                         |

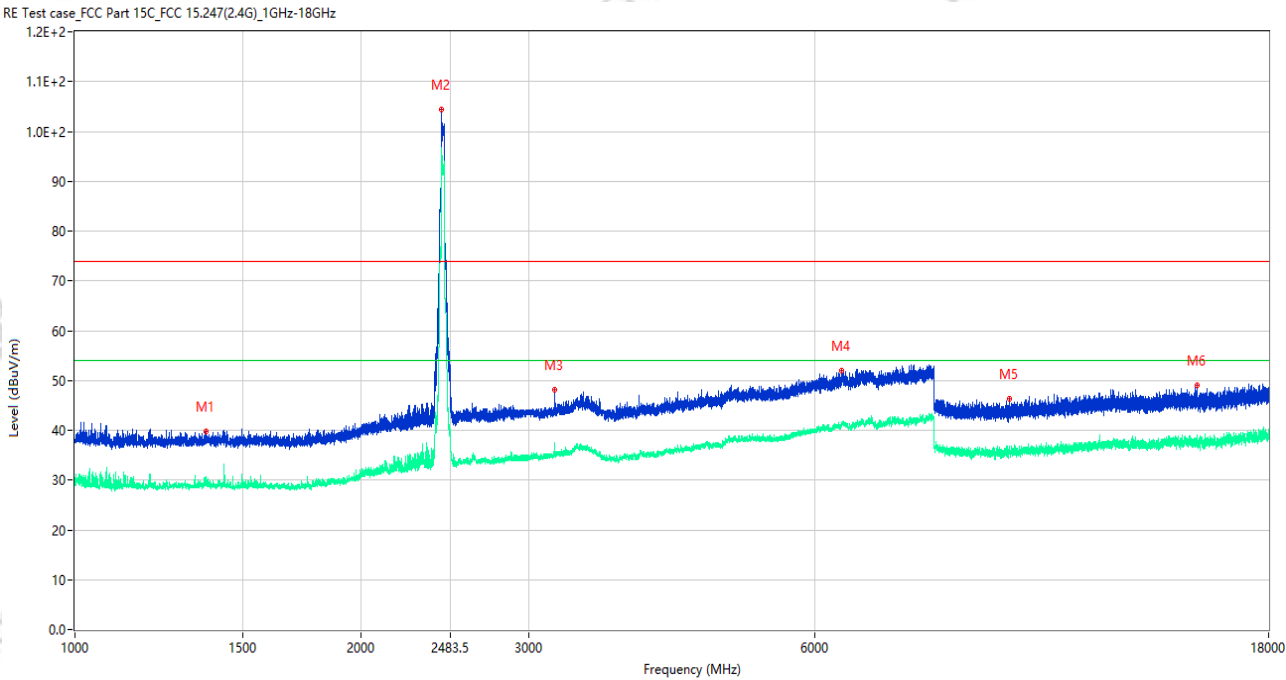

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1372.500        | 39.82            | -15.96      | 74.0           | 34.18       | Peak     | 358.00         | 150         | Vertical | Pass    |
| 1** | 1372.500        | 29.94            | -15.96      | 54.0           | 24.06       | AV       | 358.00         | 150         | Vertical | Pass    |
| 2   | 2430.000        | 104.46           | -12.26      | 74.0           | -30.46      | Peak     | 276.00         | 150         | Vertical | N/A     |
| 2** | 2430.000        | 96.33            | -12.26      | 54.0           | -42.33      | AV       | 276.00         | 150         | Vertical | N/A     |
| 3   | 3196.000        | 48.06            | -7.79       | 74.0           | 25.94       | Peak     | 95.00          | 150         | Vertical | Pass    |
| 3** | 3196.000        | 36.58            | -7.79       | 54.0           | 17.42       | AV       | 95.00          | 150         | Vertical | Pass    |
| 4   | 6397.500        | 51.89            | 0.40        | 74.0           | 22.11       | Peak     | 359.00         | 150         | Vertical | Pass    |
| 4** | 6397.500        | 41.19            | 0.40        | 54.0           | 12.81       | AV       | 359.00         | 150         | Vertical | Pass    |
| 5   | 9614.000        | 46.23            | -3.30       | 74.0           | 27.77       | Peak     | 350.00         | 150         | Vertical | Pass    |
| 5** | 9614.000        | 36.01            | -3.30       | 54.0           | 17.99       | AV       | 350.00         | 150         | Vertical | Pass    |
| 6   | 15133.500       | 49.00            | -2.43       | 74.0           | 25.00       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 6** | 15133.500       | 37.68            | -2.43       | 54.0           | 16.32       | AV       | 360.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-11\_05.57.46

EUT Name: Trail Camera

Temp.(°C): 23.2

Model Number: X 4.0

Humidity (%RH): 51

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n20 CH6 P=58


Test Site: 966#2

Test Voltage: DC

Test Engineer: Liu Yabo

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

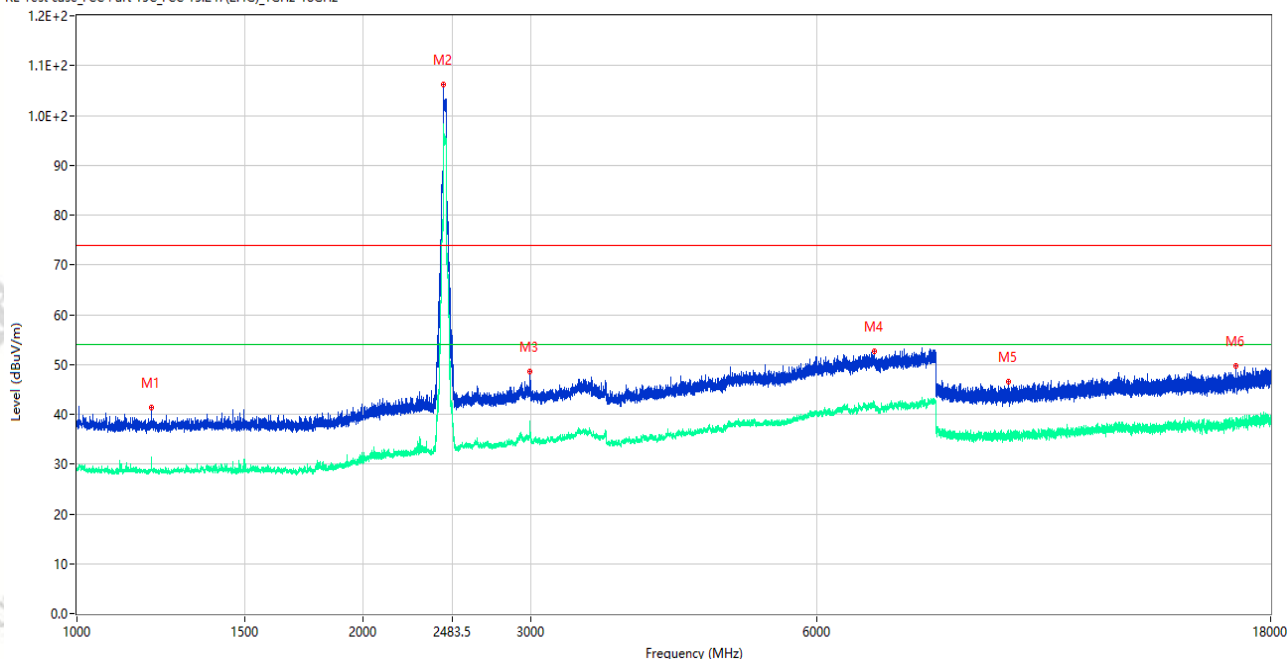

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1198.000        | 41.34            | -15.73      | 74.0           | 32.66       | Peak     | 70.00          | 150         | Horizontal | Pass    |
| 1** | 1198.000        | 31.23            | -15.73      | 54.0           | 22.77       | AV       | 70.00          | 150         | Horizontal | Pass    |
| 2   | 2429.000        | 106.20           | -12.25      | 74.0           | -32.20      | Peak     | 196.00         | 150         | Horizontal | N/A     |
| 2** | 2429.000        | 97.98            | -12.25      | 54.0           | -43.98      | AV       | 196.00         | 150         | Horizontal | N/A     |
| 3   | 2995.750        | 48.48            | -8.85       | 74.0           | 25.52       | Peak     | 51.00          | 150         | Horizontal | Pass    |
| 3** | 2995.750        | 37.59            | -8.85       | 54.0           | 16.41       | AV       | 51.00          | 150         | Horizontal | Pass    |
| 4   | 6903.500        | 52.63            | 0.39        | 74.0           | 21.37       | Peak     | 90.00          | 150         | Horizontal | Pass    |
| 4** | 6903.500        | 41.66            | 0.39        | 54.0           | 12.34       | AV       | 90.00          | 150         | Horizontal | Pass    |
| 5   | 9542.000        | 46.47            | -2.91       | 74.0           | 27.53       | Peak     | 10.00          | 150         | Horizontal | Pass    |
| 5** | 9542.000        | 35.81            | -2.91       | 54.0           | 18.19       | AV       | 10.00          | 150         | Horizontal | Pass    |
| 6   | 16535.500       | 49.71            | -1.67       | 74.0           | 24.29       | Peak     | 38.00          | 150         | Horizontal | Pass    |
| 6** | 16535.500       | 38.18            | -1.67       | 54.0           | 15.82       | AV       | 38.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-11\_06.06.22

EUT Name: Trail Camera

Temp.(°C): 23.2

Model Number: X 4.0

Humidity (%RH): 51

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n40 CH6 P=48


Test Site: 966#2

Test Voltage: DC

Test Engineer: Liu Yabo

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz  
1.2E+2

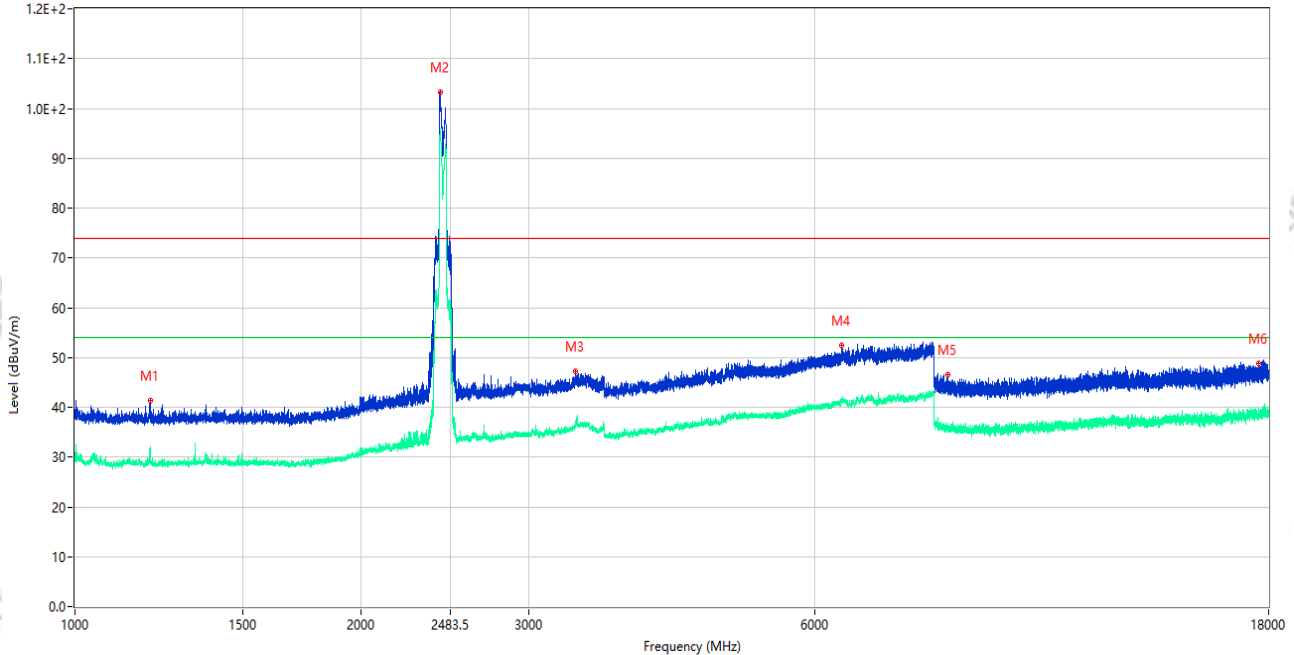

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1199.250        | 41.36            | -15.75      | 74.0           | 32.64       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 1** | 1199.250        | 31.85            | -15.75      | 54.0           | 22.15       | AV       | 0.00           | 150         | Vertical | Pass    |
| 2   | 2421.500        | 103.23           | -12.34      | 74.0           | -29.23      | Peak     | 303.00         | 150         | Vertical | N/A     |
| 2** | 2421.500        | 95.68            | -12.34      | 54.0           | -41.68      | AV       | 303.00         | 150         | Vertical | N/A     |
| 3   | 3359.000        | 47.29            | -5.94       | 74.0           | 26.71       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 3** | 3359.000        | 36.30            | -5.94       | 54.0           | 17.70       | AV       | 360.00         | 150         | Vertical | Pass    |
| 4   | 6393.500        | 52.37            | 0.23        | 74.0           | 21.63       | Peak     | 349.00         | 150         | Vertical | Pass    |
| 4** | 6393.500        | 41.05            | 0.23        | 54.0           | 12.95       | AV       | 349.00         | 150         | Vertical | Pass    |
| 5   | 8284.500        | 46.50            | -4.70       | 74.0           | 27.50       | Peak     | 123.00         | 150         | Vertical | Pass    |
| 5** | 8284.500        | 35.51            | -4.70       | 54.0           | 18.49       | AV       | 123.00         | 150         | Vertical | Pass    |
| 6   | 17590.999       | 48.78            | 0.67        | 74.0           | 25.22       | Peak     | 210.00         | 150         | Vertical | Pass    |
| 6** | 17590.999       | 39.39            | 0.67        | 54.0           | 14.61       | AV       | 210.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-11\_06.03.06

EUT Name: Trail Camera

Temp.(°C): 23.2

Model Number: X 4.0

Humidity (%RH): 51

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n40 CH6 P=48


Test Site: 966#2

Test Voltage: DC

Test Engineer: Liu Yabo

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

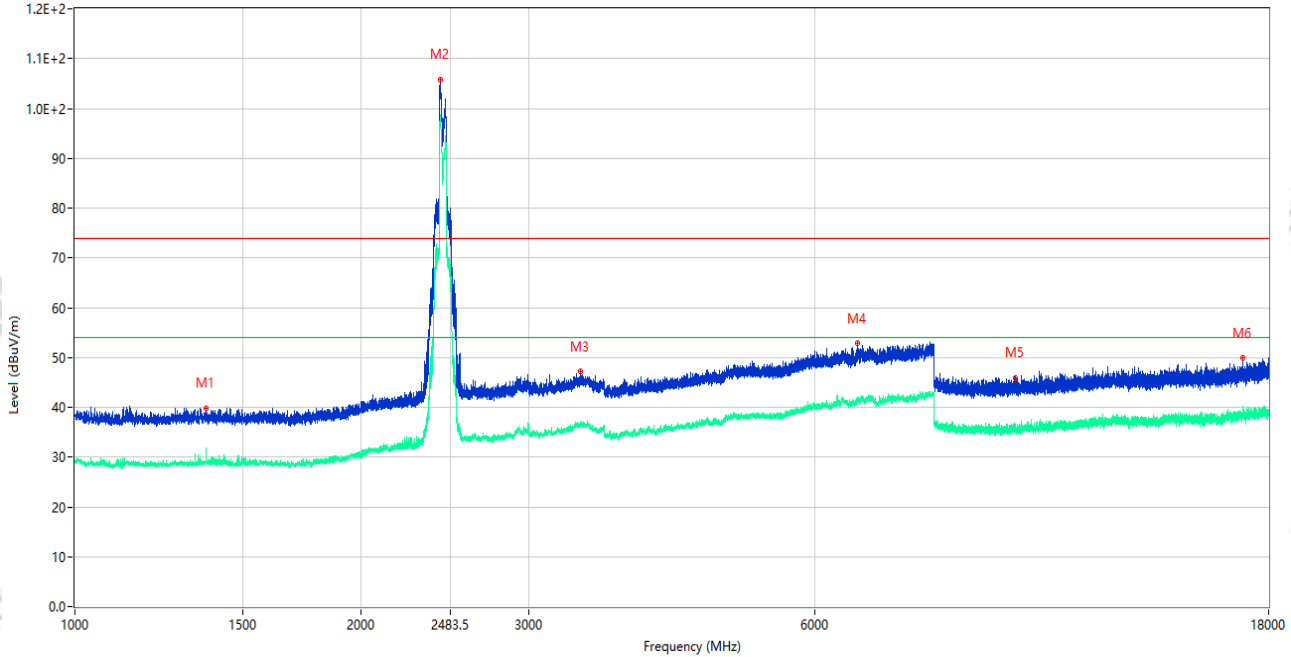

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1373.500        | 39.87            | -15.98      | 74.0           | 34.13       | Peak     | 351.00         | 150         | Horizontal | Pass    |
| 1** | 1373.500        | 30.18            | -15.98      | 54.0           | 23.82       | AV       | 351.00         | 150         | Horizontal | Pass    |
| 2   | 2421.750        | 105.87           | -12.33      | 74.0           | -31.87      | Peak     | 196.00         | 150         | Horizontal | N/A     |
| 2** | 2421.750        | 98.32            | -12.33      | 54.0           | -44.32      | AV       | 196.00         | 150         | Horizontal | N/A     |
| 3   | 3404.500        | 47.14            | -5.48       | 74.0           | 26.86       | Peak     | 145.00         | 150         | Horizontal | Pass    |
| 3** | 3404.500        | 36.56            | -5.48       | 54.0           | 17.44       | AV       | 145.00         | 150         | Horizontal | Pass    |
| 4   | 6651.000        | 52.78            | 0.18        | 74.0           | 21.22       | Peak     | 359.00         | 150         | Horizontal | Pass    |
| 4** | 6651.000        | 41.32            | 0.18        | 54.0           | 12.68       | AV       | 359.00         | 150         | Horizontal | Pass    |
| 5   | 9747.500        | 45.98            | -3.81       | 74.0           | 28.02       | Peak     | 235.00         | 150         | Horizontal | Pass    |
| 5** | 9747.500        | 35.58            | -3.81       | 54.0           | 18.42       | AV       | 235.00         | 150         | Horizontal | Pass    |
| 6   | 16894.500       | 49.85            | -0.51       | 74.0           | 24.15       | Peak     | 322.00         | 150         | Horizontal | Pass    |
| 6** | 16894.500       | 38.46            | -0.51       | 54.0           | 15.54       | AV       | 322.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_21.26.29

EUT Name: Trail Camera

Temp.(°C): 21.1

Model Number: X 4.0

Humidity (%RH): 42

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH1 P=44


Test Site: 966#2

Test Voltage: DC

Test Engineer: Zhang Zhongqiu

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_30MHz-1GHz

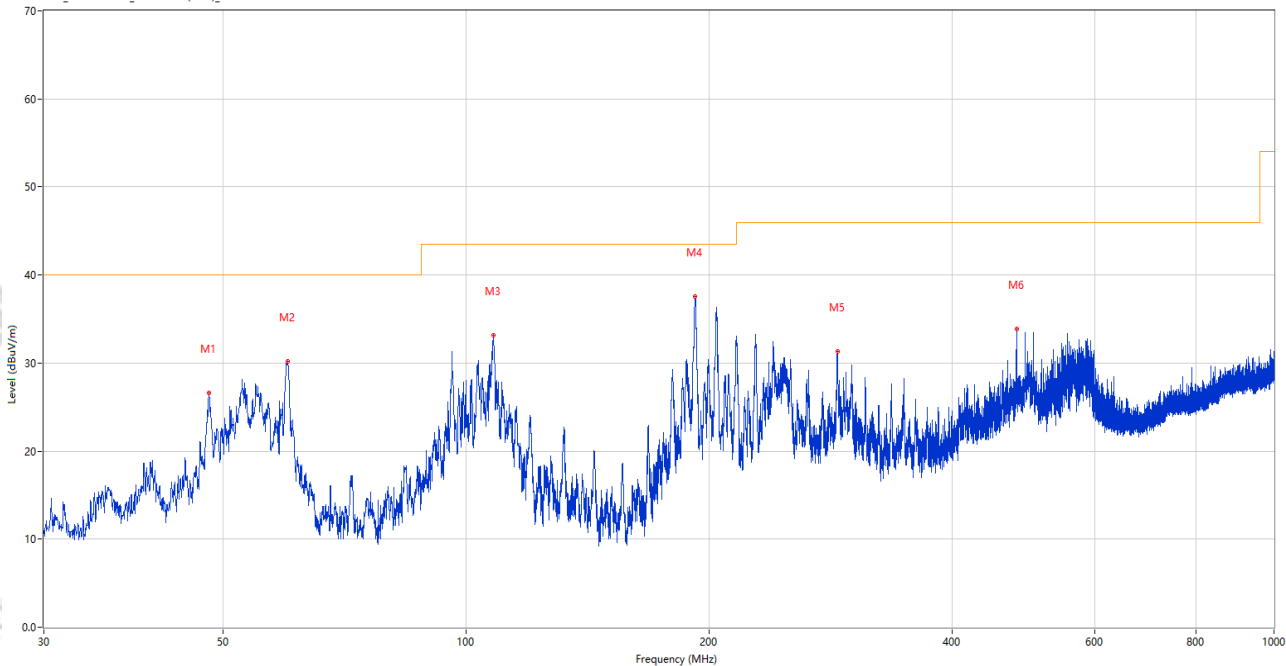

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 48.042          | 26.58            | -24.53      | 40.0           | 13.42       | Peak     | 302.00         | 100         | Vertical | Pass    |
| 2   | 60.167          | 30.22            | -26.07      | 40.0           | 9.78        | Peak     | 277.00         | 100         | Vertical | Pass    |
| 3   | 108.085         | 33.19            | -26.48      | 43.5           | 10.31       | Peak     | 1.00           | 100         | Vertical | Pass    |
| 4   | 191.942         | 37.53            | -25.99      | 43.5           | 5.97        | Peak     | 23.00          | 200         | Vertical | Pass    |
| 5   | 287.971         | 31.35            | -23.23      | 46.0           | 14.65       | Peak     | 261.00         | 200         | Vertical | Pass    |
| 6   | 479.983         | 33.87            | -18.70      | 46.0           | 12.13       | Peak     | 1.00           | 100         | Vertical | Pass    |

## Test Result

Project Number: P-CC26020166

Test Time: 2026-03-10\_21.22.56

EUT Name: Trail Camera

Temp.(°C): 21.1

Model Number: X 4.0

Humidity (%RH): 42

Sample Number: CC26020123-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH1 P=44


Test Site: 966#2

Test Voltage: DC

Test Engineer: Zhang Zhongqiu

Remark:

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_30MHz-1GHz

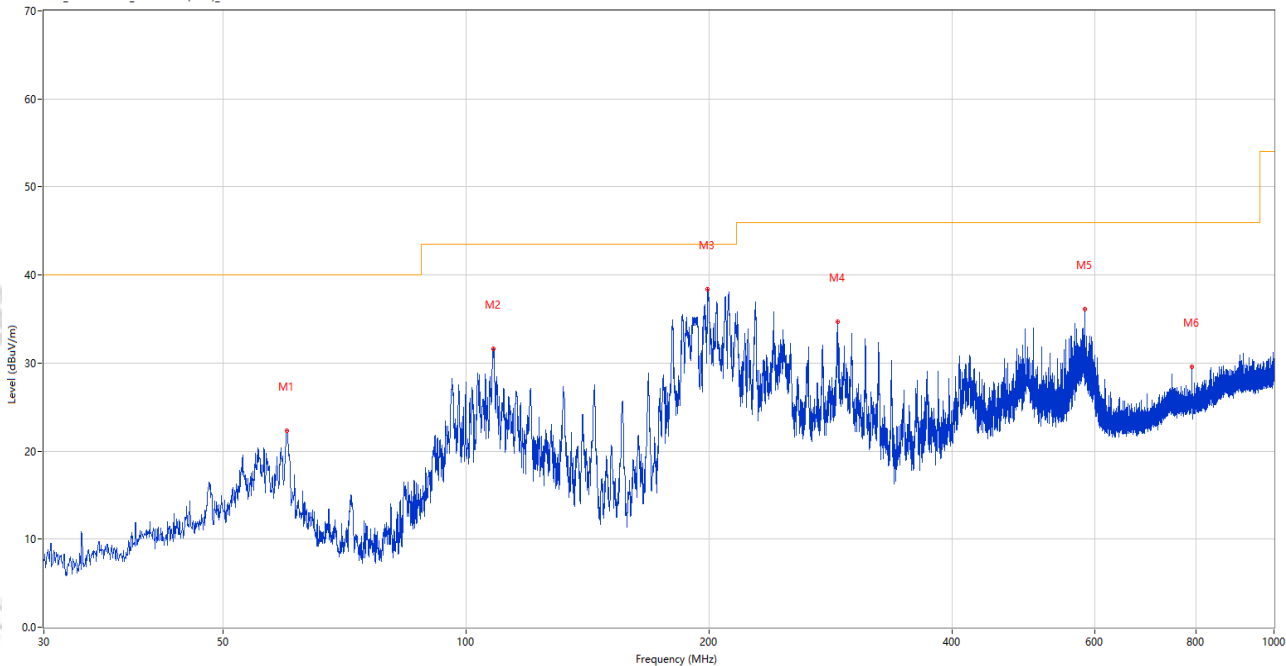

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 59.925          | 22.32            | -26.01      | 40.0           | 17.68       | Peak     | 0.00           | 200         | Horizontal | Pass    |
| 2   | 108.085         | 31.65            | -26.48      | 43.5           | 11.85       | Peak     | 99.00          | 200         | Horizontal | Pass    |
| 3   | 198.877         | 38.33            | -25.70      | 43.5           | 5.17        | Peak     | 87.00          | 100         | Horizontal | Pass    |
| 4   | 288.020         | 34.73            | -23.22      | 46.0           | 11.27       | Peak     | 133.00         | 100         | Horizontal | Pass    |
| 5   | 582.997         | 36.10            | -15.83      | 46.0           | 9.90        | Peak     | 111.00         | 200         | Horizontal | Pass    |
| 6   | 792.032         | 29.60            | -11.99      | 46.0           | 16.40       | Peak     | 87.00          | 200         | Horizontal | Pass    |