

TEST REPORT

Report No.	CISRR26041434901
Project No.	CISR260414349
FCC ID	2BCMP-A18
Applicant	Ausek Limited
Address	No.4 Building, Jianjin Business Park, Donghuan second Road, Longhua District, Shenzhen, China
Manufacturer	Ausek Limited
Address	No.4 Building, Jianjin Business Park, Donghuan second Road, Longhua District, Shenzhen, China
Product Name	Repeater
Trade mark	-
Model/Type reference	A18
Listed Model(s)	A20
Standard	47 CFR Part 15.247
Date of sample receipt	April 14, 2026
Test date	April 14, 2026 to June 4, 2026
Issue date	June 4, 2026
Test result	Complied

Morgan Tan

Reviewed by: Morgan Tan



Approved by: Hans Hu

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. STANDARD AND APPLICABLE TEST METHODS	3
2. REPORT VERSION	3
3. TEST DESCRIPTION	4
4. SUMMARY	5
4.1. Product Description *	5
4.2. Radio Specification Description *	5
4.3. Modification of EUT	5
4.4. Deviation from standards	5
4.5. Testing Site	6
5. TEST CONFIGURATION	7
5.1. Test frequency list	7
5.2. Descriptions of test mode	7
5.3. Test sample information	7
5.4. Environmental conditions	7
5.5. Statement of the measurement uncertainty	7
5.6. Equipment Used during the Test	8
6. TEST RESULTS	10
6.1. Evaluation Results (Evaluation)	10
6.1.1. Antenna Requirement	10
6.2. Radio Spectrum Matter Test Results (RF)	11
6.2.1. Conducted Emission at AC power line	11
6.2.2. 6dB Bandwidth	15
6.2.3. Maximum Conducted Output Power	16
6.2.4. Power Spectral Density	17
6.2.5. Conducted band edge and spurious emission	18
6.2.6. Radiated band edge emission	19
6.2.7. Radiated Spurious Emission (below 1GHz)	25
6.2.8. Radiated Spurious Emission (Above 1GHz)	29
7. APPENDIX REPORT	37
7.1. Conducted Output Power	37
7.2. Power Spectral Density	42
7.3. 6dB Bandwidth	47
7.4. Duty Cycle	52
7.5. Conducted Out Of Band Emission	57

1. STANDARD AND APPLICABLE TEST METHODS

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. REPORT VERSION

Version No.	Issue date	Description
00	June 4, 2026	Original

3. TEST DESCRIPTION

No.	Test Item	Standard Requirement	Result
1	Antenna Requirement	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR 15.207(a)	Pass
3	6dB Bandwidth	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR 15.247(e)	Pass
6	Conducted band edge and spurious emission	47 CFR 15.247(d)	Pass
7	Radiated band edge emission	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated Spurious Emission (below 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated Spurious Emission (Above 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass

Note:

- The measurement uncertainty is not included in the test result.

4. SUMMARY

4.1. Product Description *

Main unit information:	
Product Name:	Repeater
Trade mark:	-
Model No.:	A18
Listed Model(s):	A20
Model difference:	All models are same as the samples except model name and shell colour, they have the same structure/circuit.
Power supply:	AC100~240V-50/60Hz 0.1A
Hardware version:	-
Software version:	-

4.2. Radio Specification Description *

Modulation type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g/n(HT20)/n(HT40): OFDM(BPSK, QPSK, 16QAM, 64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz
Channel number:	802.11b/g/n(HT20): 11 Channels; 802.11n(HT40): 7 Channels
Channel separation:	5MHz
Antenna type:	External Antenna
Antenna gain:	5.21dBi

Note:

- 1) *: As the above information is provided by the applicant, all relevant results and conclusions of this report are based solely on such information. Bangce lab shall not be liable for the authenticity, integrity, and resulting outcomes of the information, and/or the validity of the conclusions herein.
- 2) Operation frequency list as follow:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

4.3. Modification of EUT

No modifications are made to the EUT during all test items.

4.4. Deviation from standards

None

4.5. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
Contact information	Tel: 86-755-2319 6848, email: service@cis-cn.net Website: http://www.cis-cn.net/
FCC registration number	736346
FCC designation number	CN1372

5. TEST CONFIGURATION

5.1. Test frequency list

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

5.2. Descriptions of test mode

No	Test mode	Description
Mode1	802.11b mode	Keep the EUT in 802.11b transmitting mode at lowest, middle and highest channel.
Mode2	802.11g mode	Keep the EUT in 802.11g transmitting mode at lowest, middle and highest channel.
Mode3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode at lowest, middle and highest channel.
Mode4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode at lowest, middle and highest channel.
Mode5	Link mode	Keep the EUT in WiFi linking mode with AE.

5.3. Test sample information

Type	Sample No.
Engineer sample	CISR260414349-S01
Normal sample	CISR260414349-S02

5.4. Environmental conditions

Type	Requirement
Temperature:	15~35°C
Relative Humidity:	25~75%
Air Pressure:	860~1060mbar

5.5. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Conducted Emission at AC power line (150kHz ~ 30MHz)	3.52dB
2	Bandwidth	0.19%
3	Conducted output power	1.38dB
4	Power spectral density	1.39dB
5	Conducted spurious emission	1.40dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

5.6. Equipment Used during the Test

Conducted Emission at AC power line

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	8*4*3 Shielding room	SKET	8m*4m*3m	CIS-EE012	2024-09-02	2027-09-01
2	EMI Test Receiver	ROHDE&SCHWARZ	ESPI7	CIS-EE043	2026-01-06	2027-01-05
3	LISN	SCHWARZBECK	NSLK 8127	CIS-EE044	2026-01-06	2027-01-05
4	LISN-AE	ETS	3810/2NM	CIS-EE075	2026-01-06	2027-01-05
5	RF Cable	SKET	-	CIS-EE071	2026-01-06	2027-01-05
6	Power Strip	BULL	GNIN-413	CIS-EE087	2026-01-06	2027-01-05
7	Test software	FARAD	EZ-CON	CIS-EE095	/	/
8	Thermohygrometer	DeLi	8866	CIS-EE069	2026-01-06	2027-01-05

Emissions in non-restricted frequency bands

6dB Bandwidth

Maximum Conducted Output Power

Power Spectral Density

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	Spectrum analyzer	ROHDE&SCHWARZ	FSV-40N	CIS-EE076	2026-01-06	2027-01-05
2	Notch Filter Assembly	WCS	SMU-1003	CIS-EE093	2026-01-06	2027-01-05
3	Vector Signal Generator	Agilent	N5182A	CIS-RE012	2026-01-06	2027-01-05
4	Analog Signal Generator	Agilent	N5181A	CIS-RE013	2026-01-06	2027-01-05
5	Test software	WCS	WCN-Regulator y	CIS-EE103	/	/

Band edge emissions (Radiated)

Emissions in frequency bands (below 1GHz)

Emissions in frequency bands (above 1GHz)

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
2	Spectrum analyzer	Agilent	N9020A	MY50530263	2026-01-06	2027-01-05
3	Spectrum analyzer	R&S	FSV-40N	102130	2026-01-06	2027-01-05
4	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2026-01-06	2029-01-05

5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2026-01-06	2029-01-05
6	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2026-01-06	2029-01-05
7	RF Cable	Tonscend	Cable 1	/	2026-01-06	2027-01-05
8	RF Cable	Tonscend	Cable 2	/	2026-01-06	2027-01-05
9	RF Cable	SKET	Cable 3	/	2026-01-06	2027-01-05
10	L.I.S.N.#1	Schwarzbeck	NSLK8127	/	2026-01-06	2027-01-05
11	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2026-01-06	2027-01-05
12	Horn Antenna	SCHWARZBECK	BBHA9170	1130	2026-01-06	2029-01-05
13	Preamplifier	Tonscend	TAP18040048	AP21C806126	2026-01-06	2027-01-05
14	Variable-frequency power source	Pinhong	PH1110	/	2026-01-06	2027-01-05
15	6dB Attenuator	SKET	DC-6G	/	2026-01-06	2027-01-05
16	Antenna tower	SKT	Bk-4AT-BS	AT2021040101-V1	2026-01-06	2027-01-05

6. TEST RESULTS

6.1. Evaluation Results (Evaluation)

6.1.1. Antenna Requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

6.1.1.1. Test Result

Pass

6.1.1.2. Conclusion:

The EUT antenna is External Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

6.2. Radio Spectrum Matter Test Results (RF)


6.2.1. Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2020 section 6.2		
Procedure:	1>. The EUT was setup according to ANSI C63.10 requirements. 2>. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. 3>. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. 4>. The peripheral devices are also connected to the main power through a LISN. (Refer to the block diagram of the test setup and photographs) 5>. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. 6>. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. 7>. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz. 8>. During the above scans, the emissions were maximized by cable manipulation.		

6.2.1.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.5 °C	Humidity:	56.1 %	Atmospheric Pressure:	101.9 kPa
Pre test mode:	Mode5				
Final test mode:	Mode5				

6.2.1.2. Test Setup Diagram

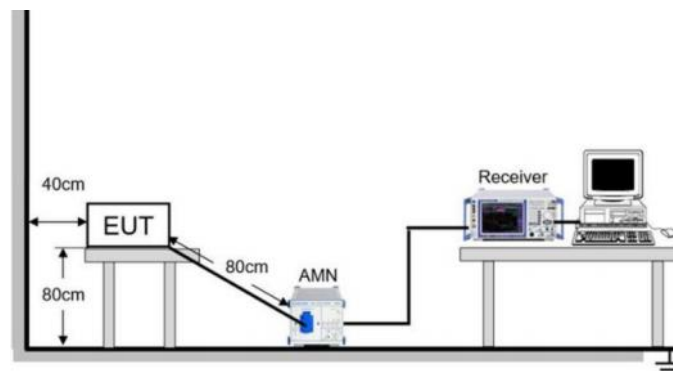


6.2.1.3. Test Result

Pass


6.2.1.4. Test Data

Mode5 / Line: Line

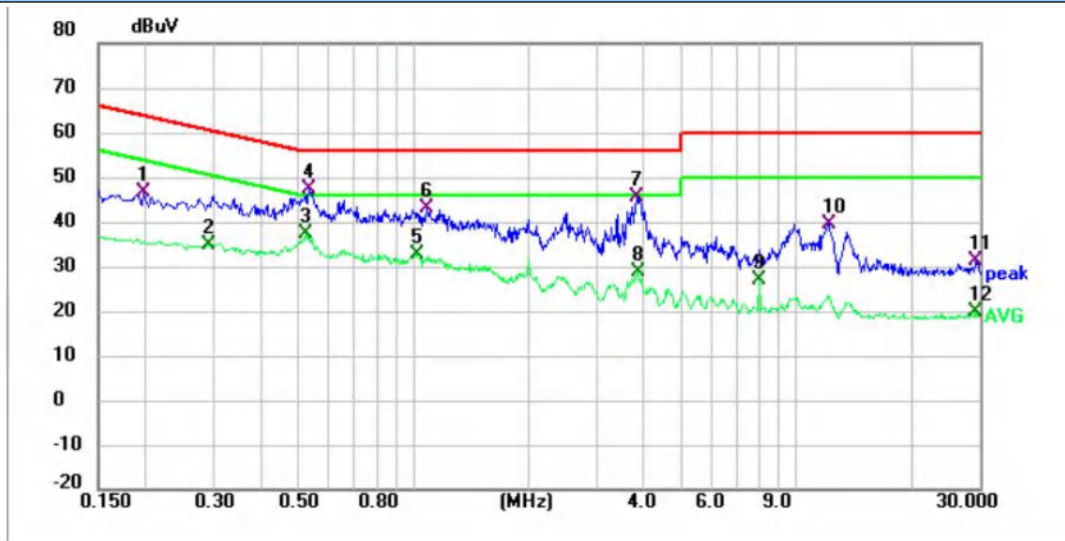

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1980	36.49	10.17	46.66	63.69	17.03	QP
2	0.2900	24.74	10.14	34.88	50.52	15.64	AVG
3 *	0.5220	27.32	10.16	37.48	46.00	8.52	AVG
4	0.5340	37.14	10.16	47.30	56.00	8.70	QP
5	1.0260	22.52	10.19	32.71	46.00	13.29	AVG
6	1.0820	32.96	10.19	43.15	56.00	12.85	QP
7	3.8340	35.22	10.34	45.56	56.00	10.44	QP
8	3.8460	18.31	10.34	28.65	46.00	17.35	AVG
9	8.0020	16.62	10.35	26.97	50.00	23.03	AVG
10	12.1620	29.04	10.46	39.50	60.00	20.50	QP
11	29.5220	20.24	10.87	31.11	60.00	28.89	QP
12	29.5220	8.84	10.87	19.71	50.00	30.29	AVG

Mode5 / Line: Neutral

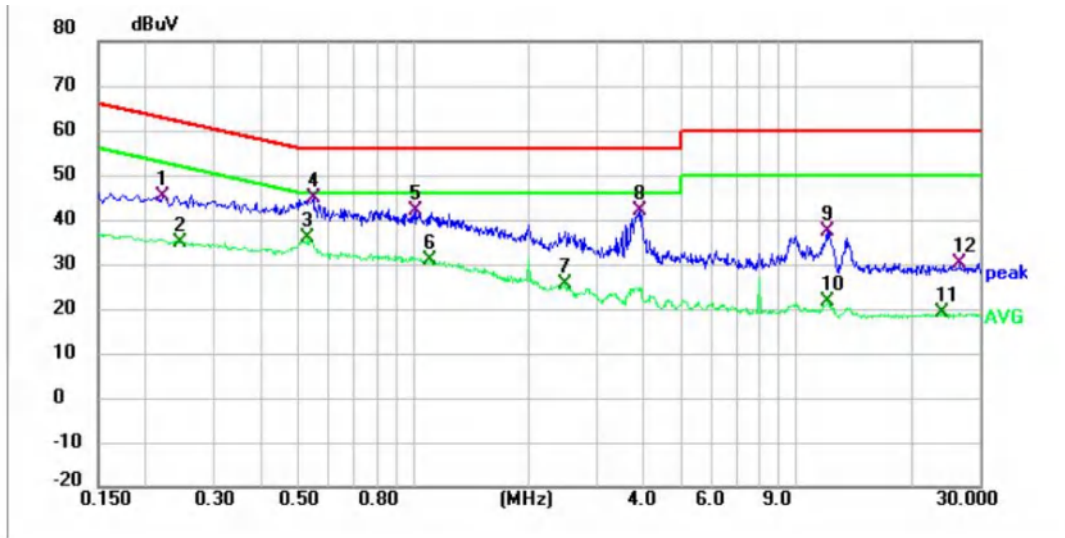

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2220	35.17	10.14	45.31	62.74	17.43	QP
2	0.2455	24.80	10.14	34.94	51.91	16.97	AVG
3 *	0.5299	25.81	10.12	35.93	46.00	10.07	AVG
4	0.5460	34.60	10.12	44.72	56.00	11.28	QP
5	1.0140	31.75	10.16	41.91	56.00	14.09	QP
6	1.1100	20.73	10.16	30.89	46.00	15.11	AVG
7	2.4940	15.25	10.26	25.51	46.00	20.49	AVG
8	3.8820	31.55	10.32	41.87	56.00	14.13	QP
9	12.0580	27.04	10.44	37.48	60.00	22.52	QP
10	12.0980	11.28	10.44	21.72	50.00	28.28	AVG
11	24.0020	8.20	10.97	19.17	50.00	30.83	AVG
12	26.7580	19.19	10.90	30.09	60.00	29.91	QP

Note:

1>. Level = Reading +Factor (Voltage Division Coefficient + Cable Loss + Attenuator Factor)

2>. Margin = Limit - Level

6.2.2. 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.2.1. E.U.T. Operation

Operating Environment:					
Temperature:	23.2 °C	Humidity:	55.7 %	Atmospheric Pressure:	102.5 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.2.2. Test Setup Diagram



6.2.2.3. Test Result

Pass

6.2.2.4. Test Data

Please Refer to Appendix for Details.

6.2.3. Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

6.2.3.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.7 °C	Humidity:	56.5 %	Atmospheric Pressure:	102.5 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.3.2. Test Setup Diagram



6.2.3.3. Test Result

Pass

6.2.3.4. Test Data

Please Refer to Appendix for Details.

6.2.4. Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10
Procedure:	ANSI C63.10-2020+Cor 1-2023, section 11.10, Maximum power spectral density level in the fundamental emission

6.2.4.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.9 °C	Humidity:	55.1 %	Atmospheric Pressure:	102.5 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.4.2. Test Setup Diagram



6.2.4.3. Test Result

Pass

6.2.4.4. Test Data

Please Refer to Appendix for Details.

6.2.5. Conducted band edge and spurious emission

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.2.5.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.2 °C	Humidity:	55.7 %	Atmospheric Pressure:	102.5 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.5.2. Test Setup Diagram



6.2.5.3. Test Result

Pass

6.2.5.4. Test Data

Please Refer to Appendix for Details.


6.2.6. Radiated band edge emission

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10		
Procedure:	1>. EUT was setup and tested according to ANSI C63.10 . 2>. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. 4>. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement. 5>. Use the following spectrum analyzer settings: a) Span shall wide enough to fully capture the emission being measured b) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF), Average level = Peak level + DCCF		

6.2.6.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.2 °C	Humidity:	55.1 %	Atmospheric Pressure:	101.9 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.2.6.2. Test Setup Diagram

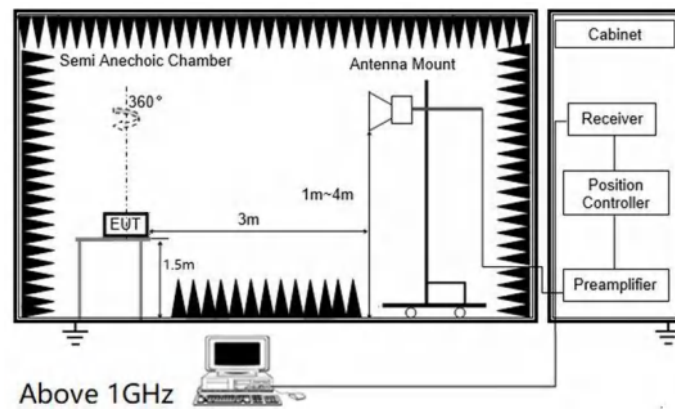


6.2.6.3. Test Result

Pass


6.2.6.4. Test Data

Mode1 / Polarization: Horizontal / CH: L

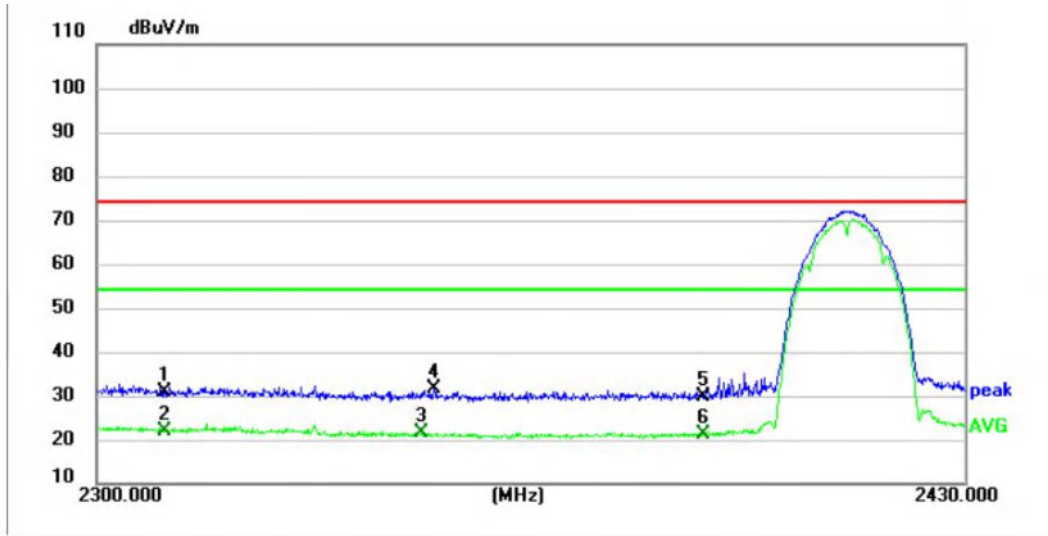


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	48.28	-17.52	30.76	74.00	43.24	peak
2 *	2310.0000	39.59	-17.52	22.07	54.00	31.93	AVG
3	2347.8919	39.21	-17.46	21.75	54.00	32.25	AVG
4	2349.8160	49.05	-17.46	31.59	74.00	42.41	peak
5	2390.0000	47.27	-17.32	29.95	74.00	44.05	peak
6	2390.0000	38.59	-17.32	21.27	54.00	32.73	AVG

Mode1 / Polarization: Vertical / CH: L

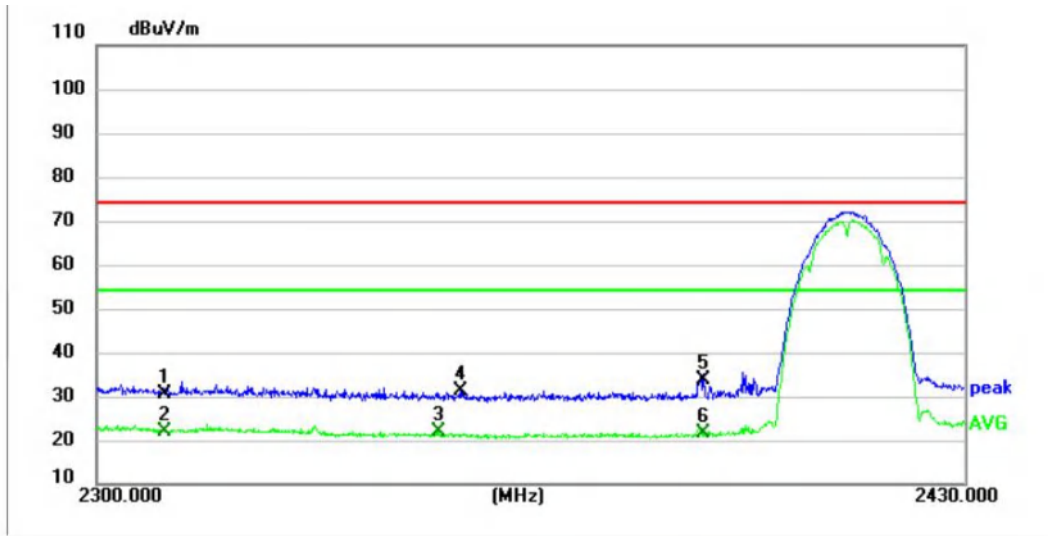


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	47.94	-17.52	30.42	74.00	43.58	peak
2 *	2310.0000	39.53	-17.52	22.01	54.00	31.99	AVG
3	2350.5830	39.33	-17.46	21.87	54.00	32.13	AVG
4	2353.7810	48.76	-17.44	31.32	74.00	42.68	peak
5	2390.0000	51.13	-17.32	33.81	74.00	40.19	peak
6	2390.0000	38.93	-17.32	21.61	54.00	32.39	AVG

Mode1 / Polarization: Horizontal / CH: H

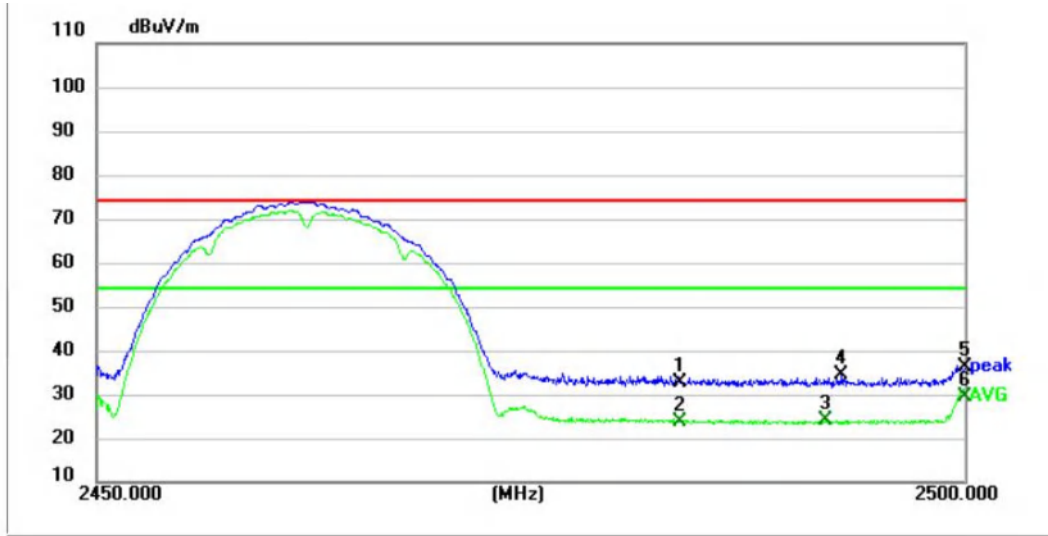

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	49.63	-17.03	32.60	74.00	41.40	peak
2	2483.5000	40.94	-17.03	23.91	54.00	30.09	AVG
3	2491.9400	41.22	-16.98	24.24	54.00	29.76	AVG
4	2492.9150	51.51	-16.98	34.53	74.00	39.47	peak
5	2500.0000	53.19	-16.94	36.25	74.00	37.75	peak
6 *	2500.0000	46.51	-16.94	29.57	54.00	24.43	AVG

Mode1 / Polarization: Vertical / CH: H

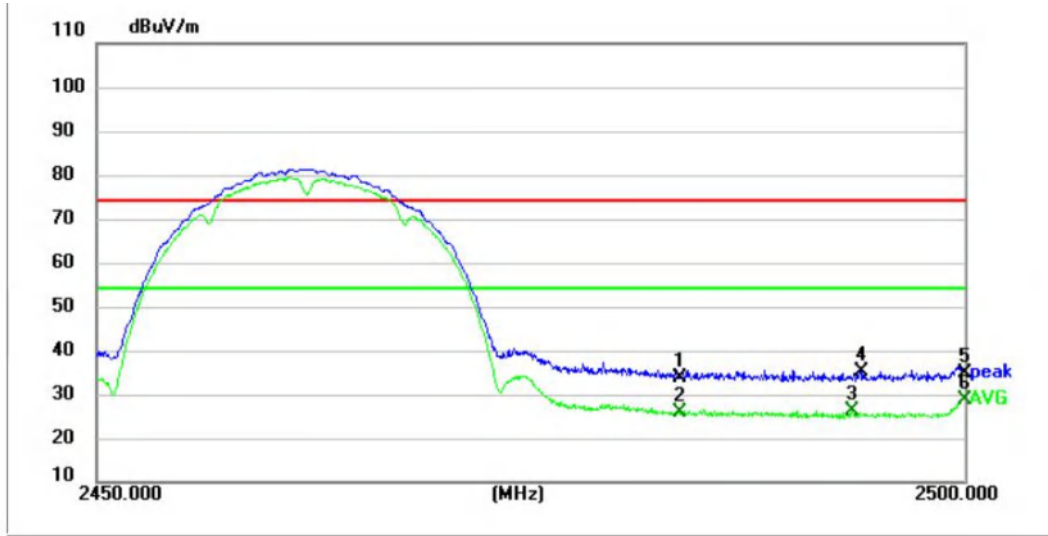

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	50.72	-17.03	33.69	74.00	40.31	peak
2	2483.5000	43.05	-17.03	26.02	54.00	27.98	AVG
3	2493.5049	43.22	-16.98	26.24	54.00	27.76	AVG
4	2494.0350	52.29	-16.97	35.32	74.00	38.68	peak
5	2500.0000	51.92	-16.94	34.98	74.00	39.02	peak
6 *	2500.0000	45.80	-16.94	28.86	54.00	25.14	AVG


6.2.7. Radiated Spurious Emission (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.5.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.		

6.2.7.1. E.U.T. Operation

Operating Environment:					
Temperature:	23.2 °C	Humidity:	55 %	Atmospheric Pressure:	101.9 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.2.7.2. Test Setup Diagram

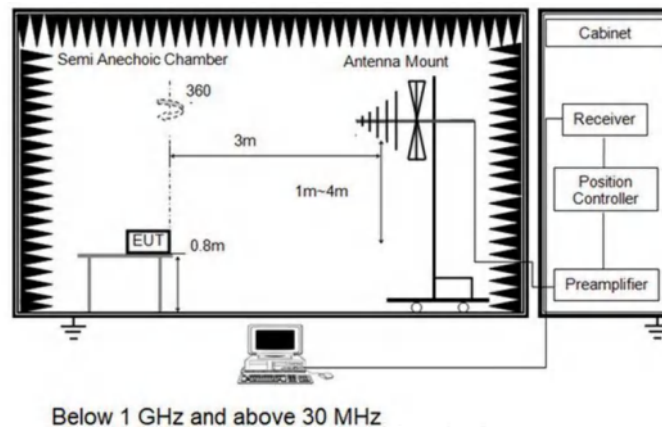


6.2.7.3. Test Result

Pass

6.2.7.4. Test Data

Mode1 / Polarization: Horizontal / CH: L

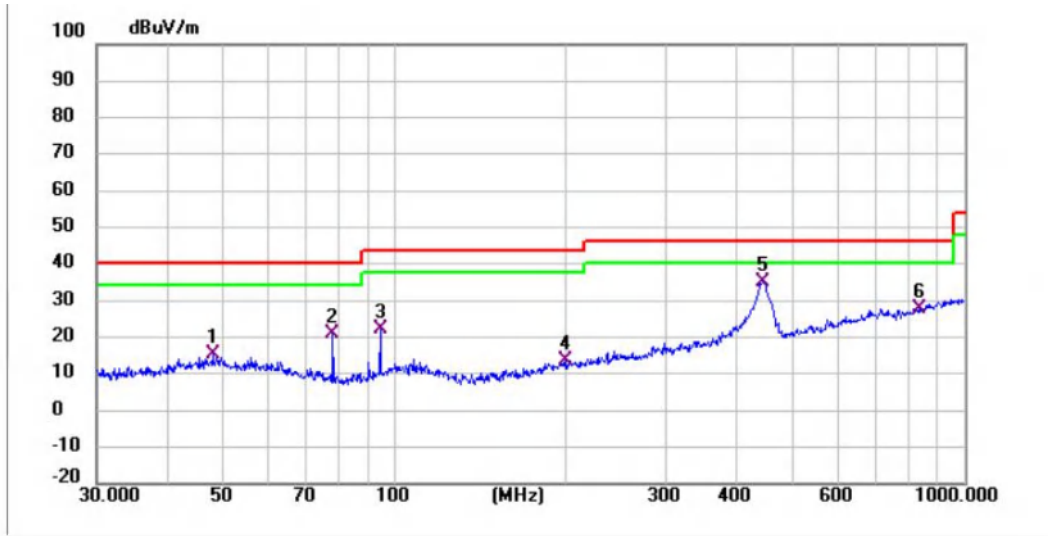

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.9940	44.44	-29.21	15.23	40.00	24.77	QP
2	77.8653	55.24	-34.52	20.72	40.00	19.28	QP
3	94.4283	54.80	-32.38	22.42	43.50	21.08	QP
4	199.9855	43.41	-29.86	13.55	43.50	29.95	QP
5 *	443.2942	58.78	-23.66	35.12	46.00	10.88	QP
6	836.2443	43.89	-16.15	27.74	46.00	18.26	QP

Mode1 / Polarization: Vertical / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.2078	51.48	-29.63	21.85	40.00	18.15	QP
2	76.7808	56.23	-34.27	21.96	40.00	18.04	QP
3	147.4036	50.01	-33.69	16.32	43.50	27.18	QP
4	209.3130	44.31	-29.68	14.63	43.50	28.87	QP
5 *	441.7425	57.30	-23.74	33.56	46.00	12.44	QP
6	893.8566	44.43	-14.89	29.54	46.00	16.46	QP

Note:

1>. For 9 kHz ~ 30 MHz Measurement

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

2>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

3>. Margin = Limit – Level


6.2.8. Radiated Spurious Emission (Above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.5.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) Set RBW=1MHz, VBW=3MHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF) Average level = Peak level + DCCF		

6.2.8.1. E.U.T. Operation

Operating Environment:					
Temperature:	23.4 °C	Humidity:	56.4 %	Atmospheric Pressure:	101.9 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.2.8.2. Test Setup Diagram

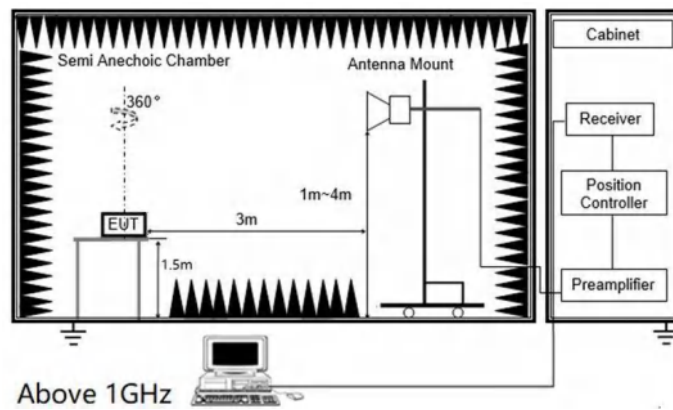


6.2.8.3. Test Result

Pass


6.2.8.4. Test Data

Mode1 / Polarization: Horizontal / CH: L

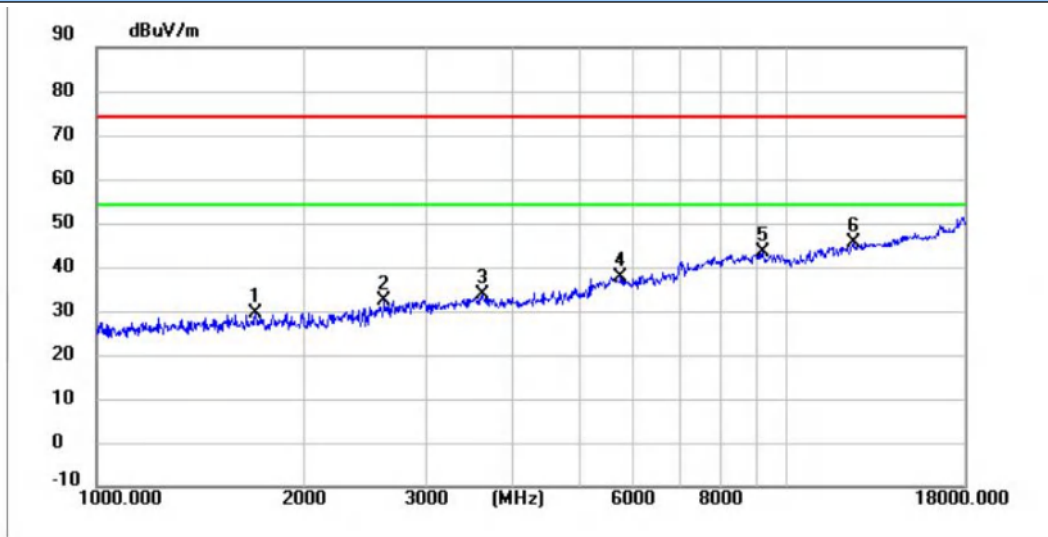


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1702.1000	49.55	-20.07	29.48	74.00	44.52	peak
2	2611.6000	48.45	-16.13	32.32	74.00	41.68	peak
3	3628.2000	46.94	-13.31	33.63	74.00	40.37	peak
4	5743.0000	43.86	-6.20	37.66	74.00	36.34	peak
5	9216.1000	34.14	9.09	43.23	74.00	30.77	peak
6 *	12449.5000	30.55	14.94	45.49	74.00	28.51	peak

Mode1 / Polarization: Vertical / CH: L

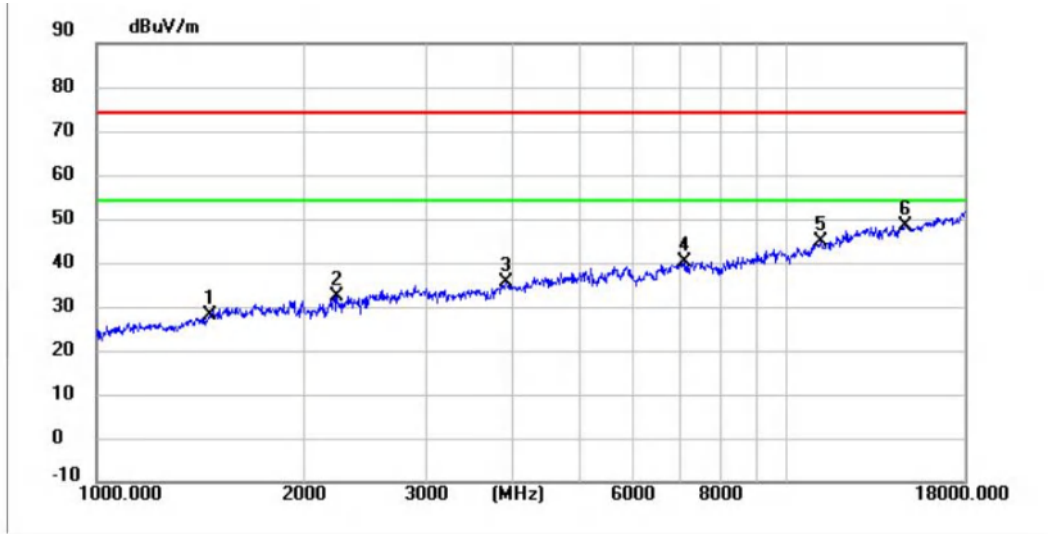


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1459.0000	48.96	-20.81	28.15	74.00	45.85	peak
2	2232.5000	50.12	-17.72	32.40	74.00	41.60	peak
3	3913.8000	47.95	-12.54	35.41	74.00	38.59	peak
4	7080.9000	36.05	3.96	40.01	74.00	33.99	peak
5	11201.7000	31.09	13.66	44.75	74.00	29.25	peak
6 *	14790.4000	30.51	18.05	48.56	74.00	25.44	peak

Mode1 / Polarization: Horizontal / CH: M

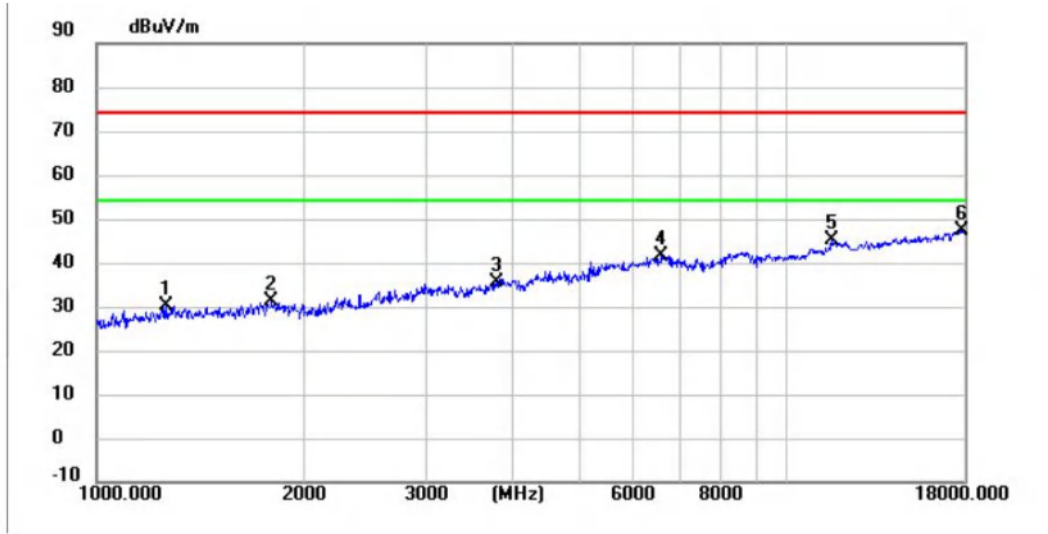


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1261.8000	51.37	-21.35	30.02	74.00	43.98	peak
2	1793.9000	50.74	-19.54	31.20	74.00	42.80	peak
3	3796.5000	48.51	-12.90	35.61	74.00	38.39	peak
4	6574.3000	41.85	-0.15	41.70	74.00	32.30	peak
5	11592.7000	31.08	14.02	45.10	74.00	28.90	peak
6 *	17911.6000	23.91	23.48	47.39	74.00	26.61	peak

Mode1 / Polarization: Vertical / CH: M

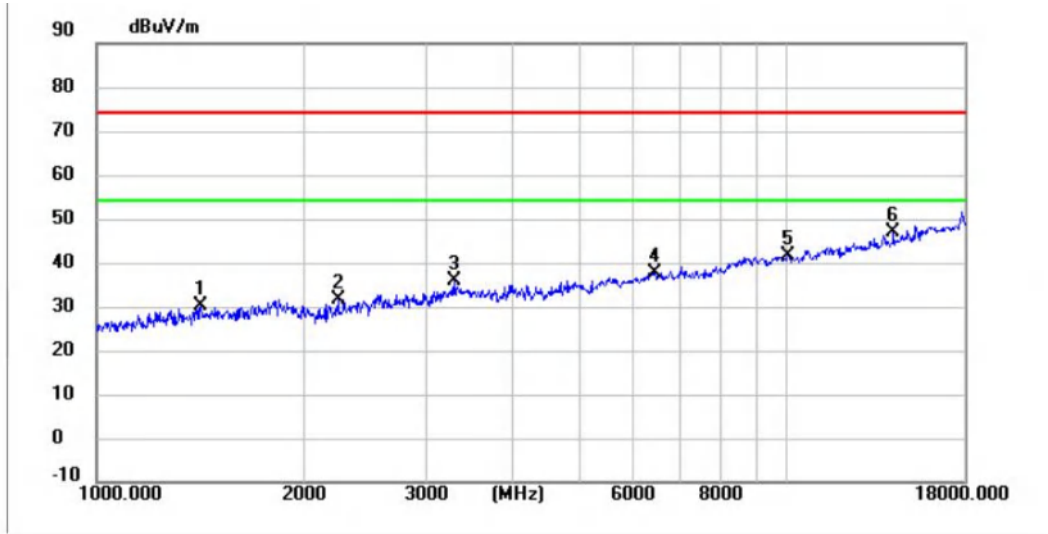


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1418.2000	51.12	-21.01	30.11	74.00	43.89	peak
2	2237.6000	49.45	-17.72	31.73	74.00	42.27	peak
3	3291.6000	49.74	-13.94	35.80	74.00	38.20	peak
4	6424.7000	39.43	-1.58	37.85	74.00	36.15	peak
5	10035.5000	30.54	11.04	41.58	74.00	32.42	peak
6 *	14241.3000	28.24	18.57	46.81	74.00	27.19	peak

Mode1 / Polarization: Horizontal / CH: H

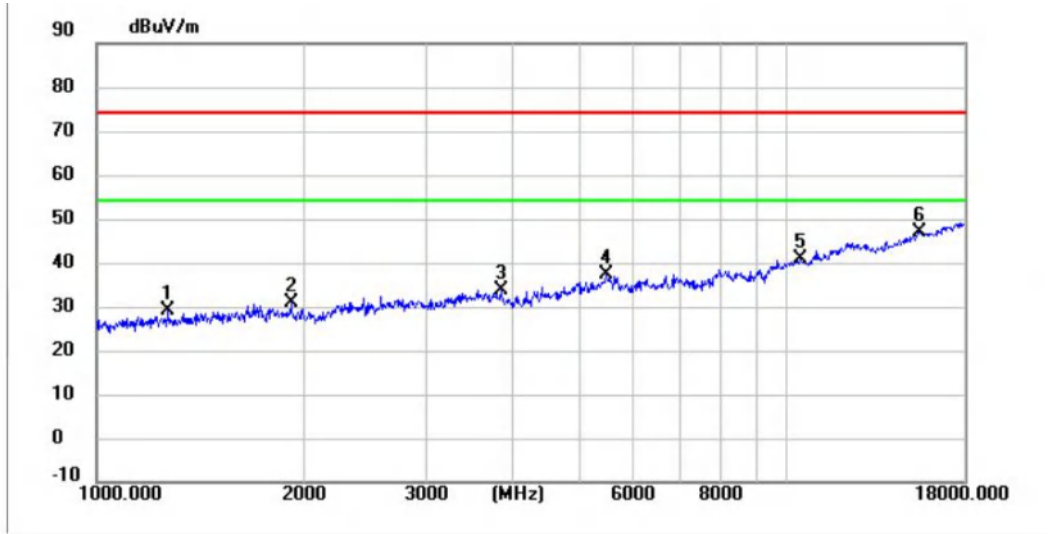

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1272.0000	50.51	-21.33	29.18	74.00	44.82	peak
2	1914.6000	50.22	-19.21	31.01	74.00	42.99	peak
3	3850.9000	46.54	-12.70	33.84	74.00	40.16	peak
4	5479.5000	44.06	-6.89	37.17	74.00	36.83	peak
5	10477.5000	28.79	11.93	40.72	74.00	33.28	peak
6 *	15504.4000	29.71	17.30	47.01	74.00	26.99	peak

Mode1 / Polarization: Vertical / CH: H

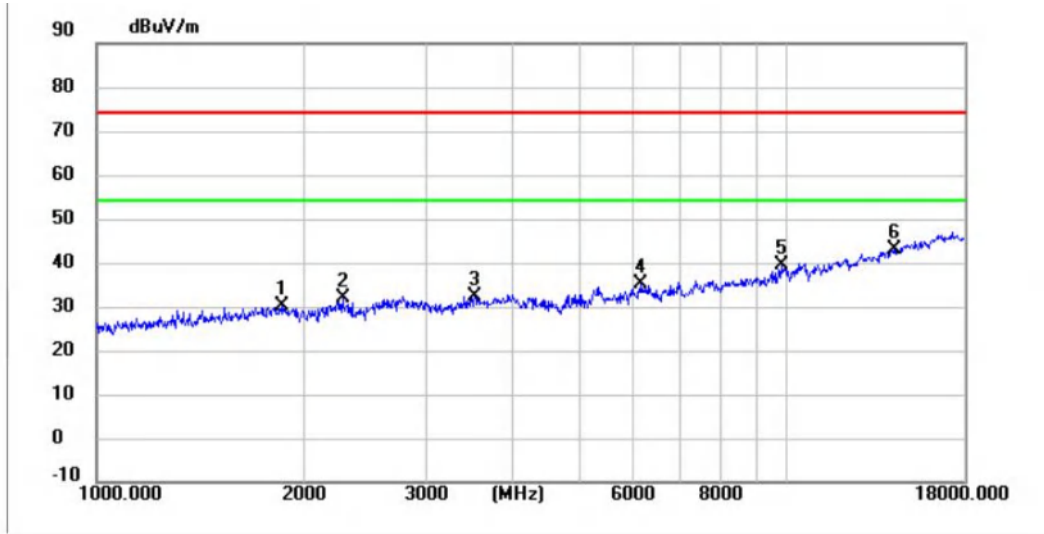

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1856.8000	49.64	-19.40	30.24	74.00	43.76	peak
2	2278.4000	49.45	-17.59	31.86	74.00	42.14	peak
3	3534.7000	46.10	-13.63	32.47	74.00	41.53	peak
4	6159.5000	39.51	-4.32	35.19	74.00	38.81	peak
5	9794.1000	28.75	10.60	39.35	74.00	34.65	peak
6 *	14243.0000	24.46	18.56	43.02	74.00	30.98	peak

Note:

1>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

2>. Margin = Limit – Level

3>. Average measurement was not performed if peak level is lower than average limit (54dBuV/m) above 1GHz.

7. APPENDIX REPORT

7.1. Conducted Output Power



Test Result

Ant0:

Conducted Output Power



Mode	Channel	Ant. 0 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	11.48	11.48	≤30	PASS
	6	11.04	11.04	≤30	PASS
	11	11.06	11.06	≤30	PASS
IEEE 802.11g	1	16.31	16.31	≤30	PASS
	6	11.79	11.79	≤30	PASS
	11	11.94	11.94	≤30	PASS
IEEE 802.11n_20	1	11.72	11.72	≤30	PASS
	6	11.95	11.95	≤30	PASS
	11	12.13	12.13	≤30	PASS
IEEE 802.11n_40	3	12.75	12.75	≤30	PASS
	6	12.21	12.21	≤30	PASS
	9	11.42	11.42	≤30	PASS

Test Graphs

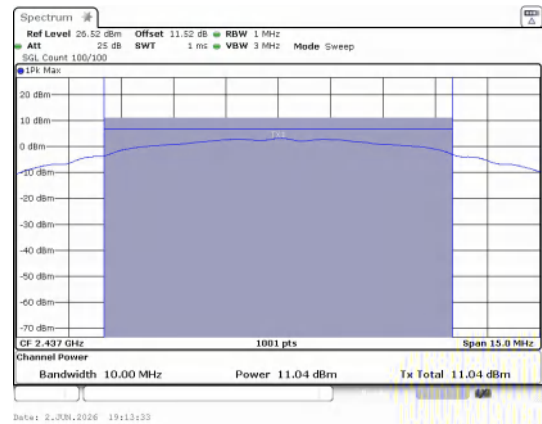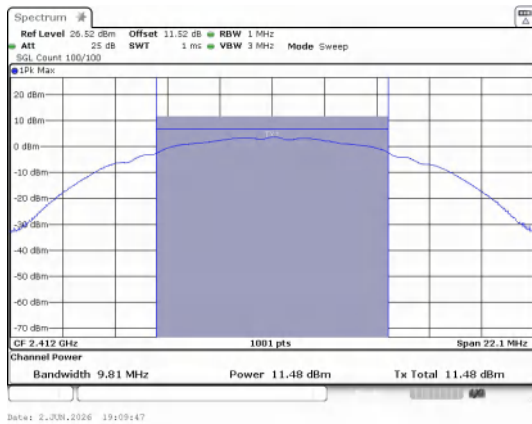







Conducted Output Power
IEEE 802.11b_Channel 1_Antenna 0


Conducted Output Power
IEEE 802.11b_Channel 6_Antenna 0

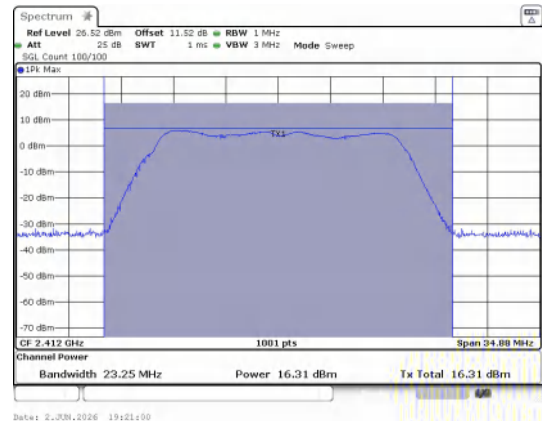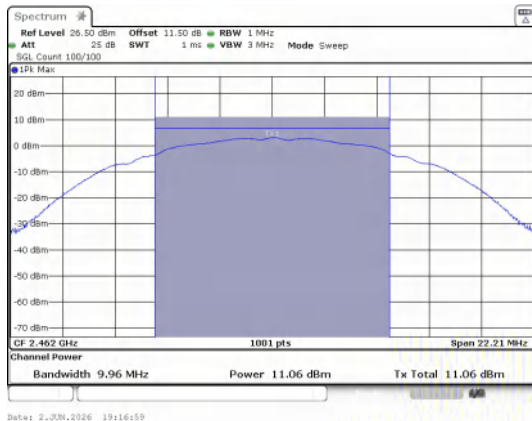


Conducted Output Power
IEEE 802.11b_Channel 11_Antenna 0

Conducted Output Power
IEEE 802.11g_Channel 1_Antenna 0

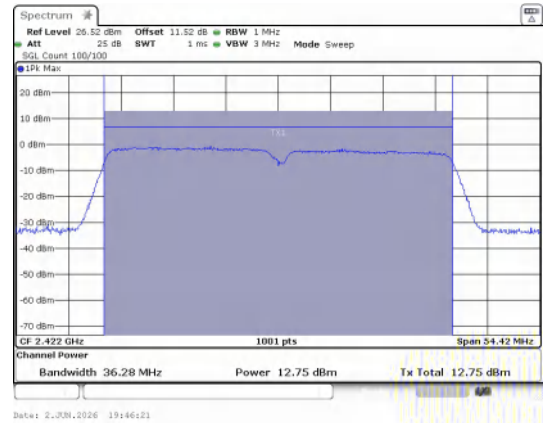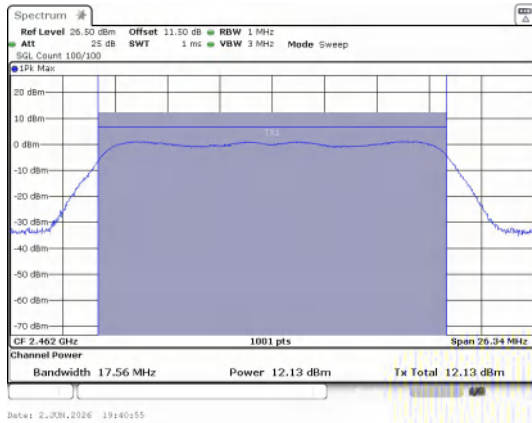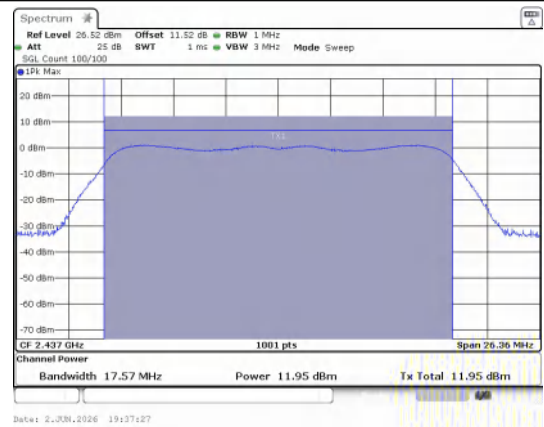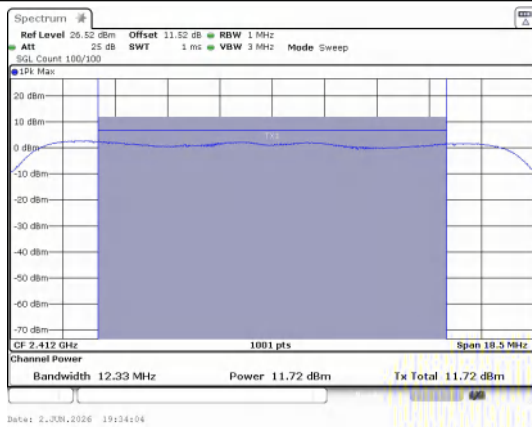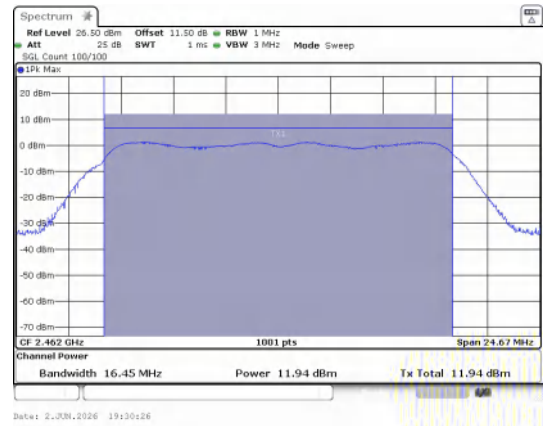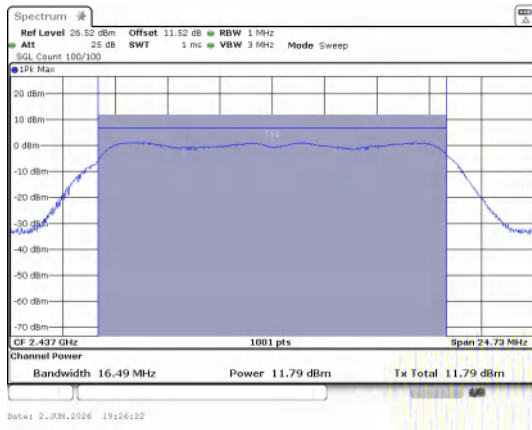

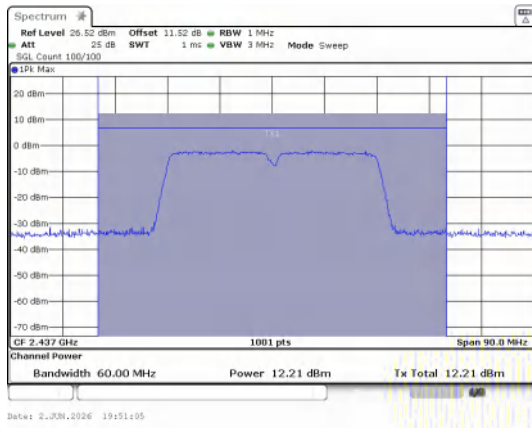

Conducted Output Power
IEEE 802.11n_40_Channel 6_Antenna 0

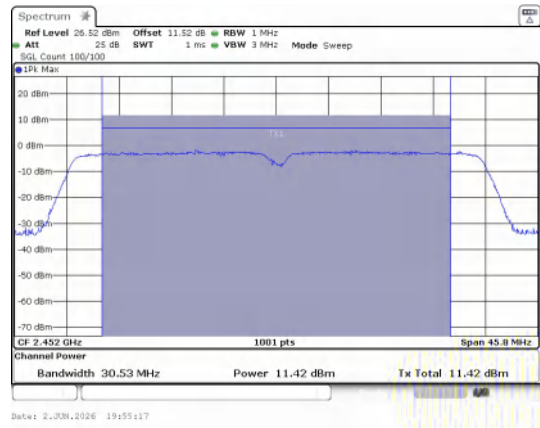


Conducted Output Power
IEEE 802.11n_40_Channel 9_Antenna 0


Ant1:

Mode	Channel	Ant. 0 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	11.44	11.44	≤30	PASS
	6	11.78	11.78	≤30	PASS
	11	11.75	11.75	≤30	PASS
IEEE 802.11g	1	13.57	13.57	≤30	PASS
	6	12.24	12.24	≤30	PASS
	11	12.29	12.29	≤30	PASS
IEEE 802.11n_20	1	13.68	13.68	≤30	PASS
	6	12.33	12.33	≤30	PASS
	11	12.36	12.36	≤30	PASS
IEEE 802.11n_40	3	13.29	13.29	≤30	PASS
	6	10.95	10.95	≤30	PASS
	9	14.01	14.01	≤30	PASS






Test Graphs

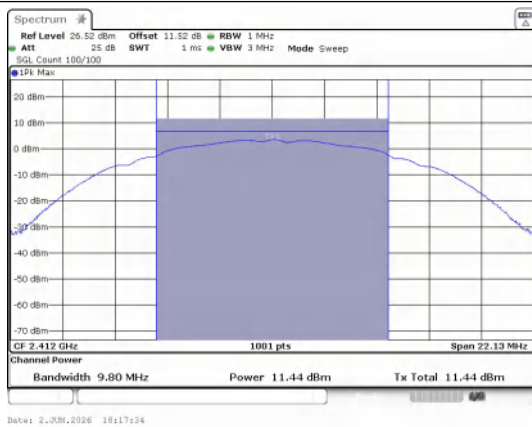


Conducted Output Power
IEEE 802.11b_Channel 1_Antenna 0

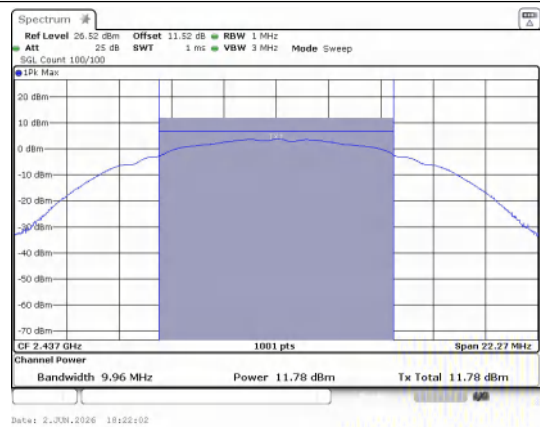


Conducted Output Power
IEEE 802.11b_Channel 6_Antenna 0

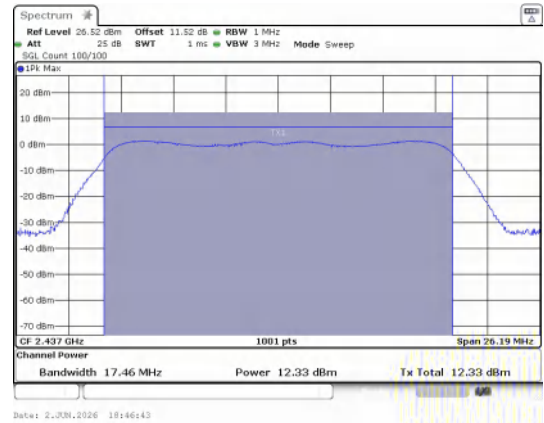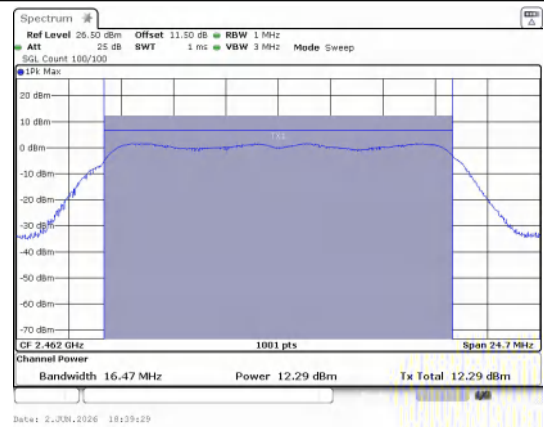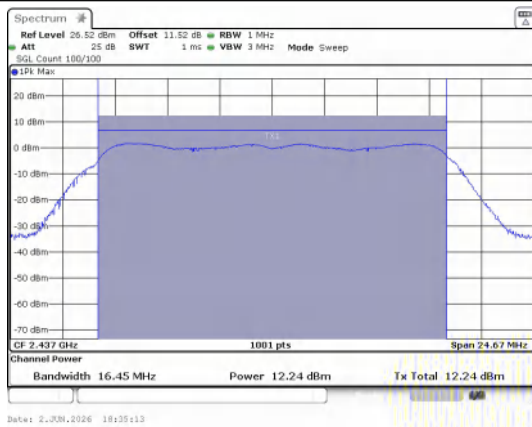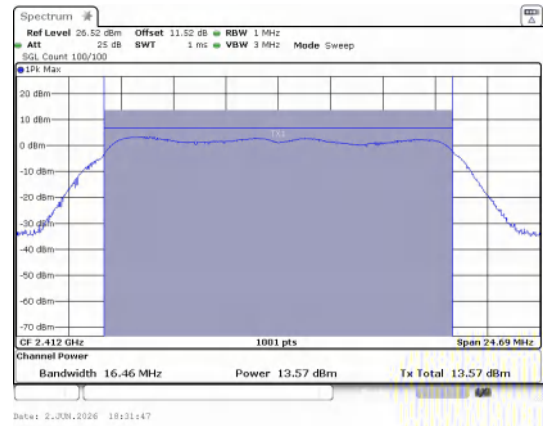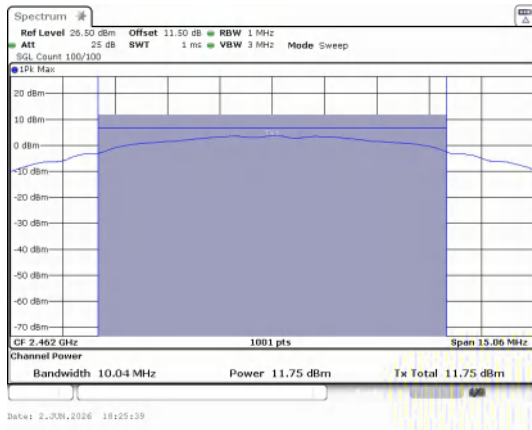


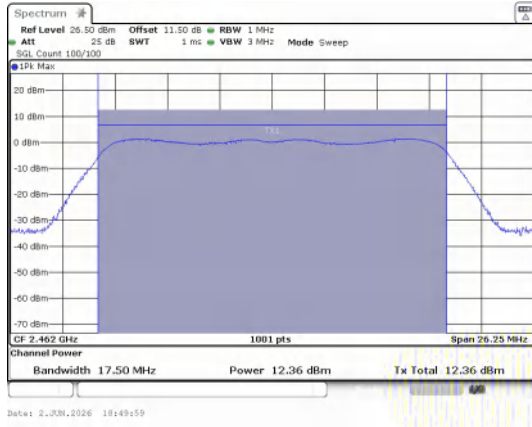


**Conducted Output Power
IEEE 802.11n_20_Channel 11_Antenna 0**

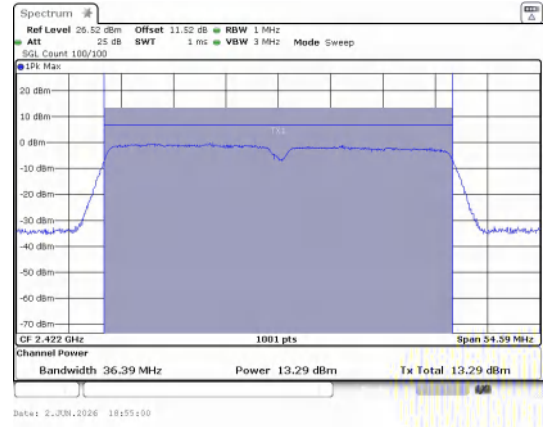

**Conducted Output Power
IEEE 802.11n_40_Channel 3_Antenna 0**

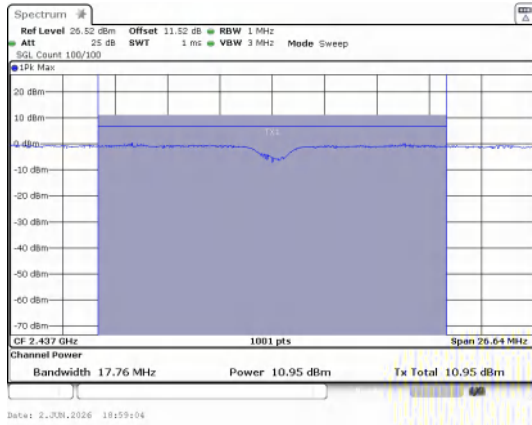

**Conducted Output Power
IEEE 802.11n_40_Channel 6_Antenna 0**

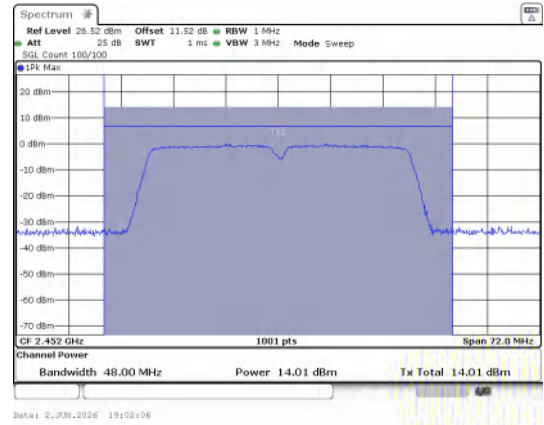

**Conducted Output Power
IEEE 802.11n_40_Channel 9_Antenna 0**

MIMO

Mode	Channel	Ant. 0 (dBm)	Ant. 1 (dBm)	MIMO (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	11.48	11.44	14.5	≤27.79	PASS
	6	11.04	11.78	14.4	≤27.79	PASS
	11	11.06	11.75	14.4	≤27.79	PASS
IEEE 802.11g	1	16.31	13.57	18.2	≤27.79	PASS
	6	11.79	12.24	15.0	≤27.79	PASS
	11	11.94	12.29	15.1	≤27.79	PASS
IEEE 802.11n_20	1	11.72	13.68	15.8	≤27.79	PASS
	6	11.95	12.33	15.2	≤27.79	PASS
	11	12.13	12.36	15.3	≤27.79	PASS
IEEE 802.11n_40	3	12.75	13.29	16.0	≤27.79	PASS
	6	12.21	10.95	14.6	≤27.79	PASS
	9	11.42	14.01	15.9	≤27.79	PASS

Note:

- Array Gain = $10 \log (N_{ant} / N_{ss})$ dB = 3.01 dB
Directional gain = Ant Max Gain + Array Gain = 5.21 + 3.01 = 8.21 dB
- Limit = $30 - (8.21 - 6)$ = 27.79 dBm


7.2. Power Spectral Density


Test Result

Ant0:


Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-21.790	≤8	PASS
	6	-22.230		PASS
	11	-22.190		PASS
IEEE 802.11g	1	-19.440		PASS
	6	-23.910		PASS
	11	-23.860		PASS
IEEE 802.11n_20	1	-21.510		PASS
	6	-23.210		PASS
	11	-23.090		PASS
IEEE 802.11n_40	3	-23.690		PASS
	6	-24.480		PASS
	9	-24.330		PASS

Test Graphs

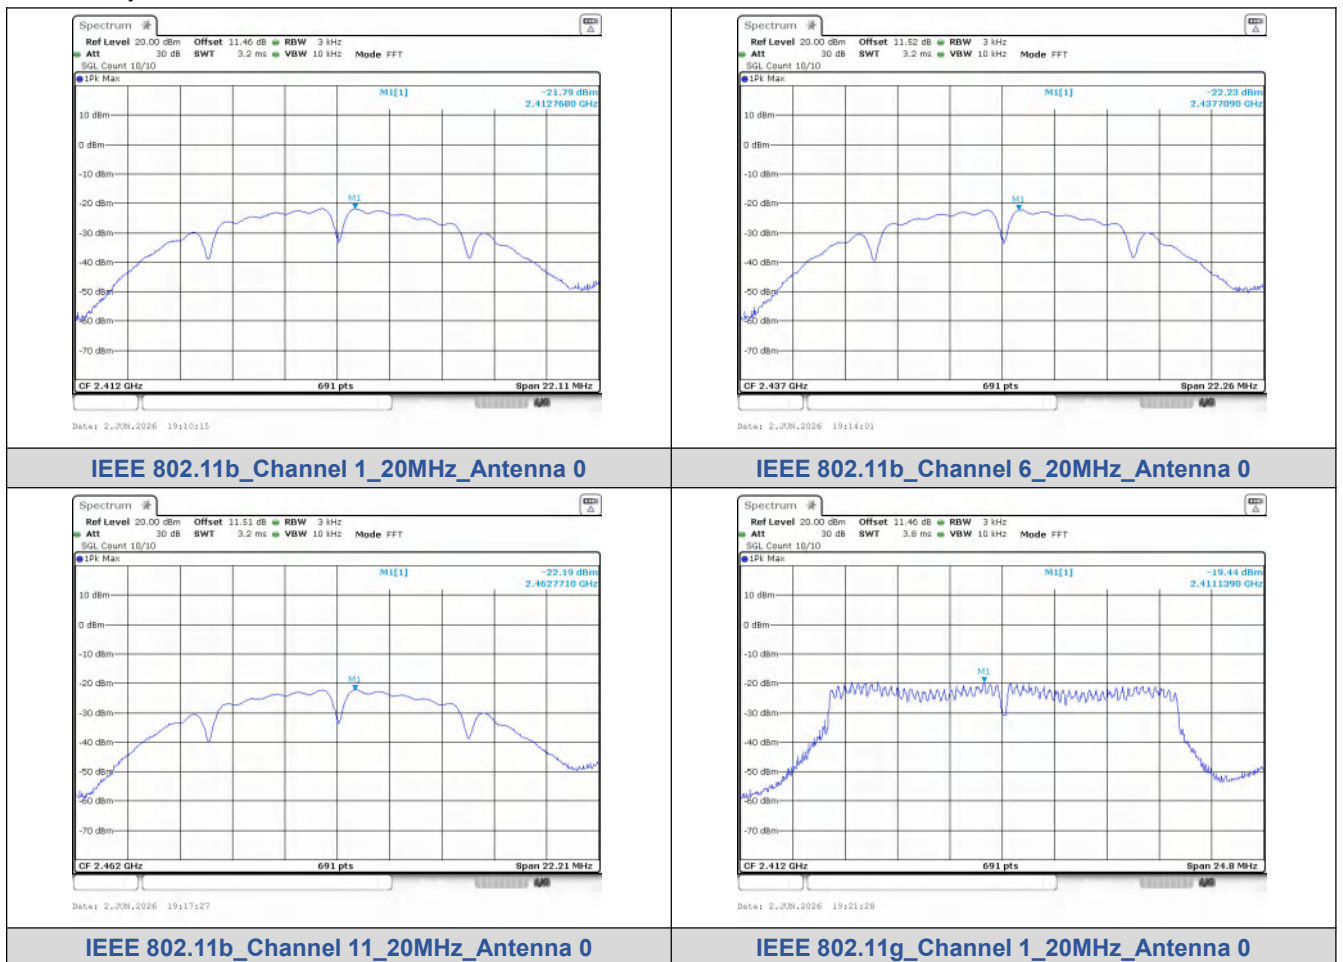


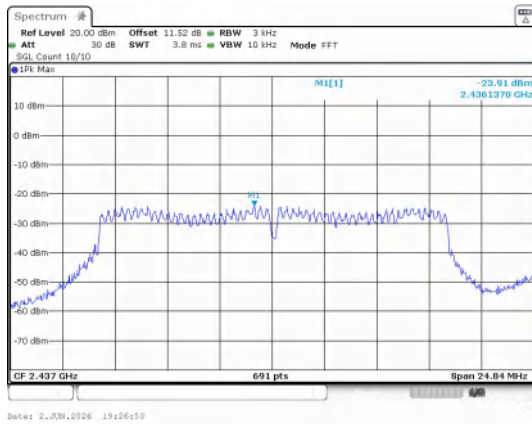


IEEE 802.11g_Channel 6_20MHz_Antenna 0

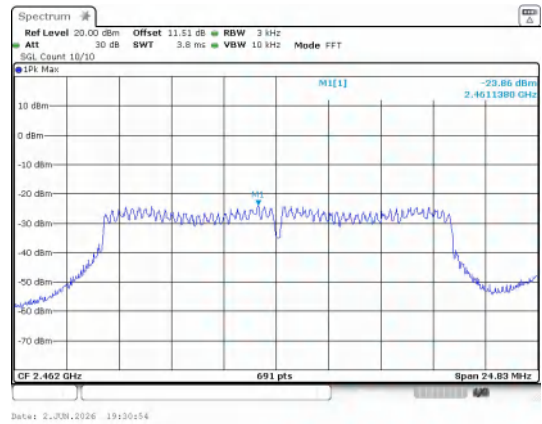


IEEE 802.11g_Channel 11_20MHz_Antenna 0

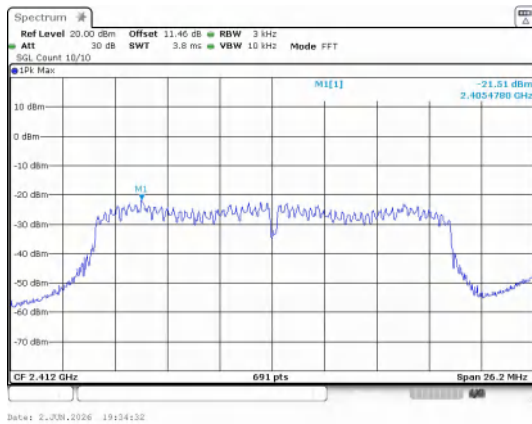


IEEE 802.11n_Channel 1_20MHz_Antenna 0

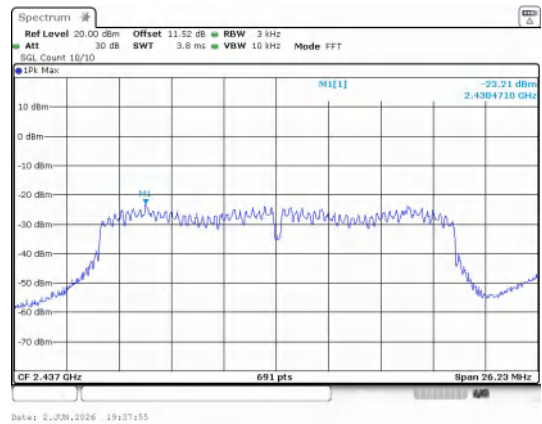


IEEE 802.11n_Channel 6_20MHz_Antenna 0

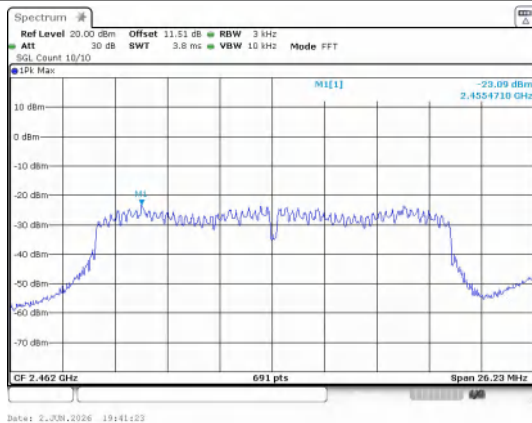


IEEE 802.11n_Channel 11_20MHz_Antenna 0

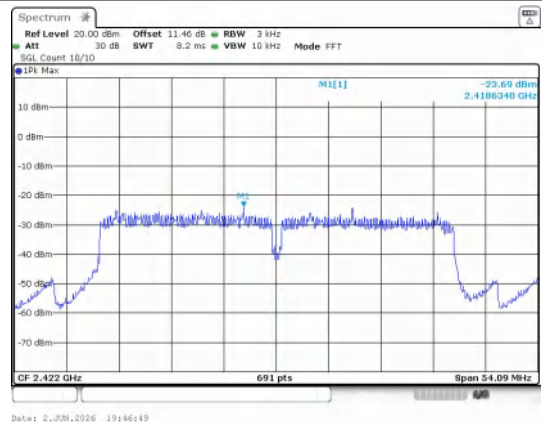

IEEE 802.11n_Channel 3_40MHz_Antenna 0

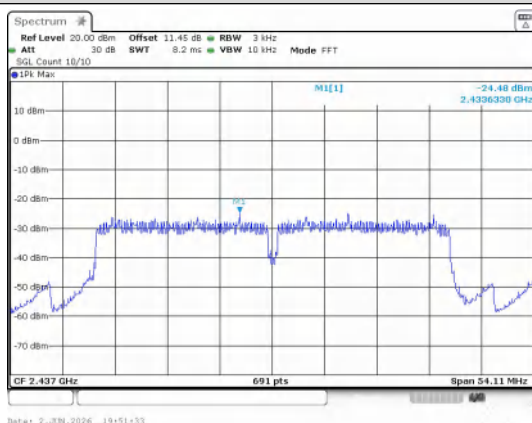

IEEE 802.11n_Channel 6_20MHz_Antenna 0

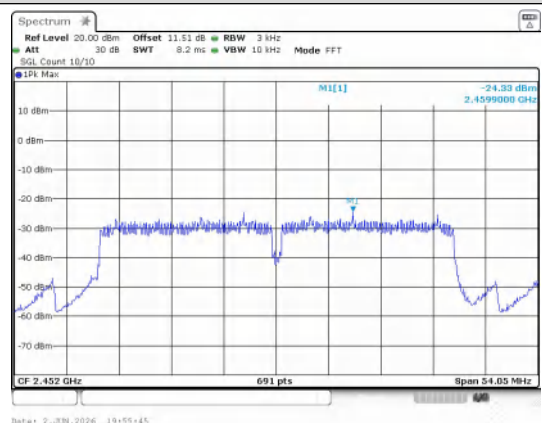

IEEE 802.11n_Channel 11_20MHz_Antenna 0


IEEE 802.11n_Channel 6_40MHz_Antenna 0


IEEE 802.11n_Channel 9_40MHz_Antenna 0

Ant1:


Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-21.810	≤8	PASS
	6	-21.450		PASS
	11	-21.560		PASS
IEEE 802.11g	1	-22.060		PASS
	6	-23.470		PASS
	11	-23.440		PASS
IEEE 802.11n_20	1	-21.070		PASS
	6	-22.650		PASS
	11	-22.690		PASS
IEEE 802.11n_40	3	-23.000		PASS
	6	-22.590		PASS
	9	-22.370		PASS

Test Graphs

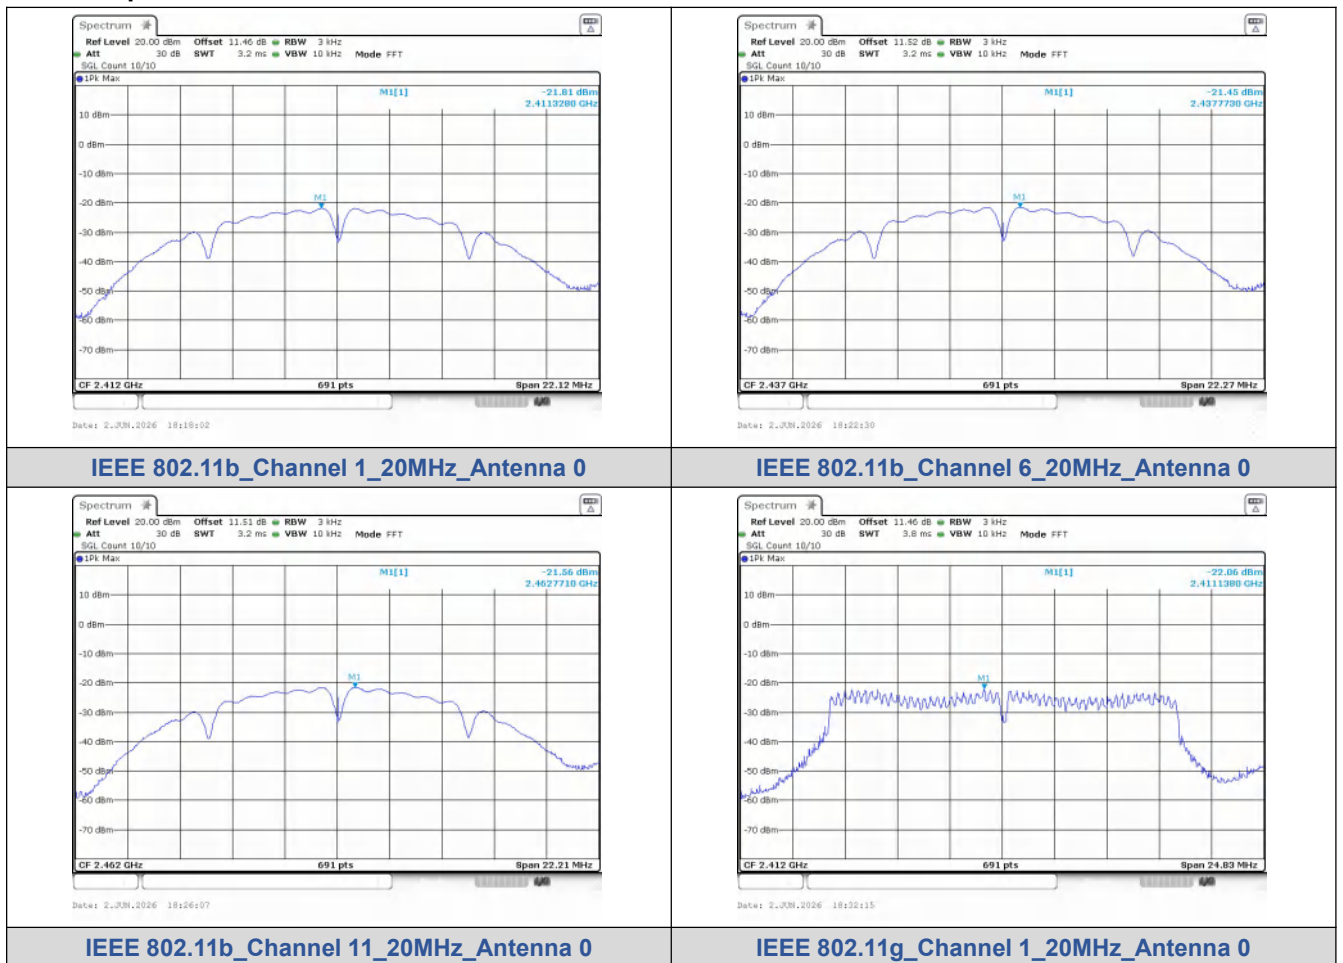


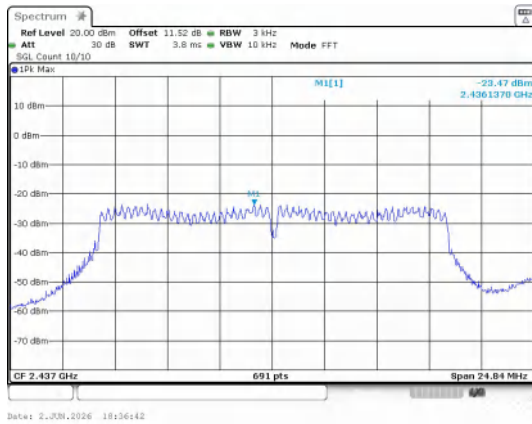


IEEE 802.11g_Channel 6_20MHz_Antenna 0

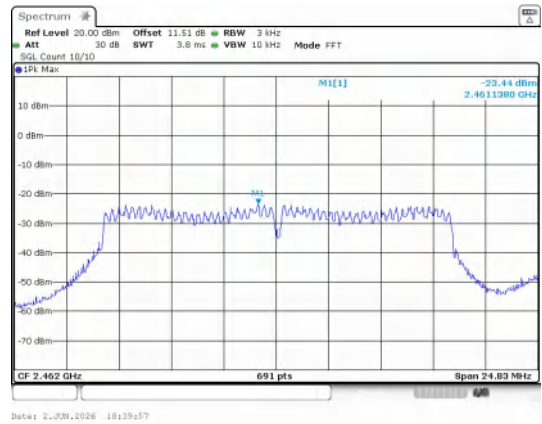


IEEE 802.11g_Channel 11_20MHz_Antenna 0

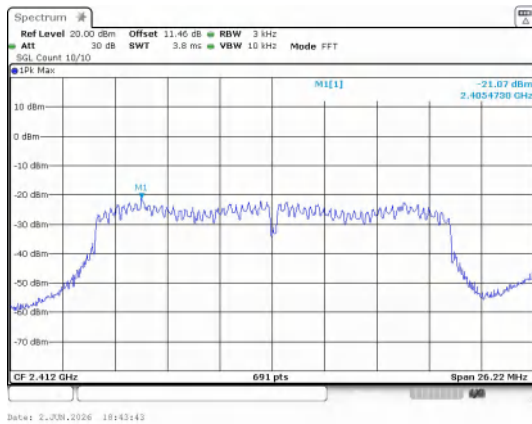


IEEE 802.11n_Channel 1_20MHz_Antenna 0

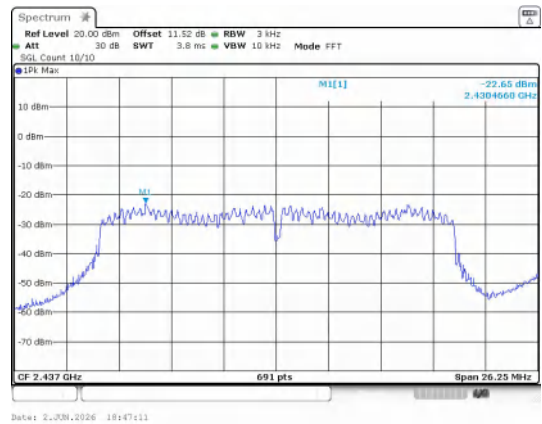


IEEE 802.11n_Channel 11_20MHz_Antenna 0

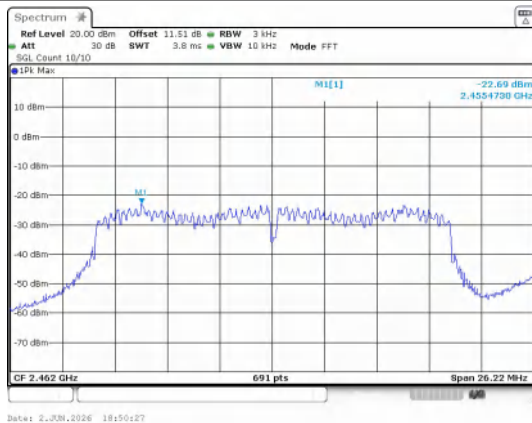


IEEE 802.11n_Channel 6_20MHz_Antenna 0

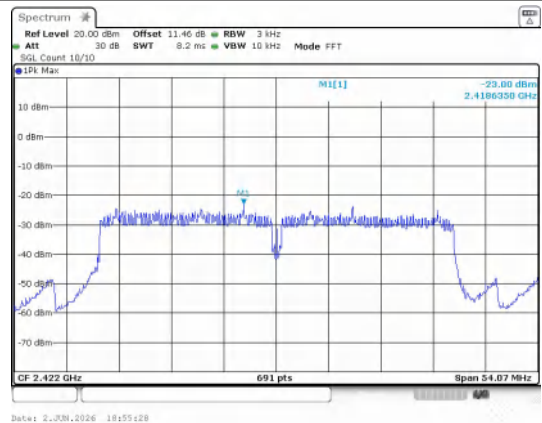

IEEE 802.11n_Channel 3_40MHz_Antenna 0

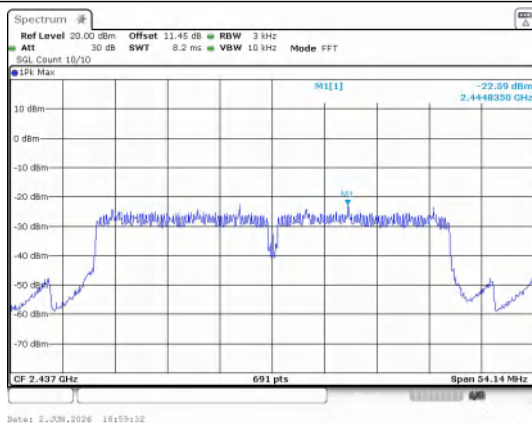

IEEE 802.11n_Channel 11_20MHz_Antenna 0

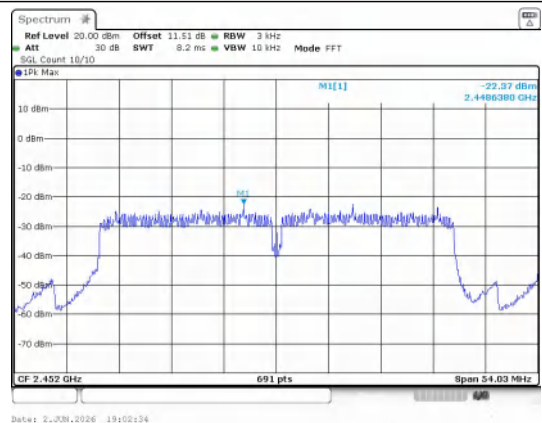

IEEE 802.11n_Channel 3_40MHz_Antenna 0

IEEE 802.11n_Channel 6_40MHz_Antenna 0

IEEE 802.11n_Channel 9_40MHz_Antenna 0

MIMO

Mode	Channel	PSD (dBm/3kHz) Ant. 0	PSD (dBm/3kHz) Ant. 1	MIMO (dBm/3kHz)	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-21.790	-21.810	-18.79	≤5.79	PASS
	6	-22.230	-21.450	-18.81		PASS
	11	-22.190	-21.560	-18.85		PASS
IEEE 802.11g	1	-19.440	-22.060	-17.54		PASS
	6	-23.910	-23.470	-20.68		PASS
	11	-23.860	-23.440	-20.63		PASS
IEEE 802.11n_20	1	-21.510	-21.070	-18.27		PASS
	6	-23.210	-22.650	-19.91		PASS
	11	-23.090	-22.690	-19.88		PASS
IEEE 802.11n_40	3	-23.690	-23.000	-20.32		PASS
	6	-24.480	-22.590	-20.42		PASS
	9	-24.330	-22.370	-20.23		PASS

Note:

2. Array Gain = $10 \log (N_{ant} / N_{ss})$ dB=3.01dBi

Directional gain = Ant Max Gain + Array Gain=5.21+3.01=8.21dBi

2.Limit=8-(8.21-6)=5.79dBm/3kHz


7.3. 6dB Bandwidth


Test Result

Ant0:


Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	9.810	≥0.5	PASS
	6		2437	10.00		PASS
	11		2462	9.960		PASS
IEEE 802.11g	1		2412	23.25		PASS
	6		2437	16.49		PASS
	11		2462	16.45		PASS
IEEE 802.11n_20	1		2412	12.33		PASS
	6		2437	17.57		PASS
	11		2462	17.56		PASS
IEEE 802.11n_40	3		2422	36.28		PASS
	6		2437	60.00		PASS
	9		2452	30.53		PASS

Test Graphs

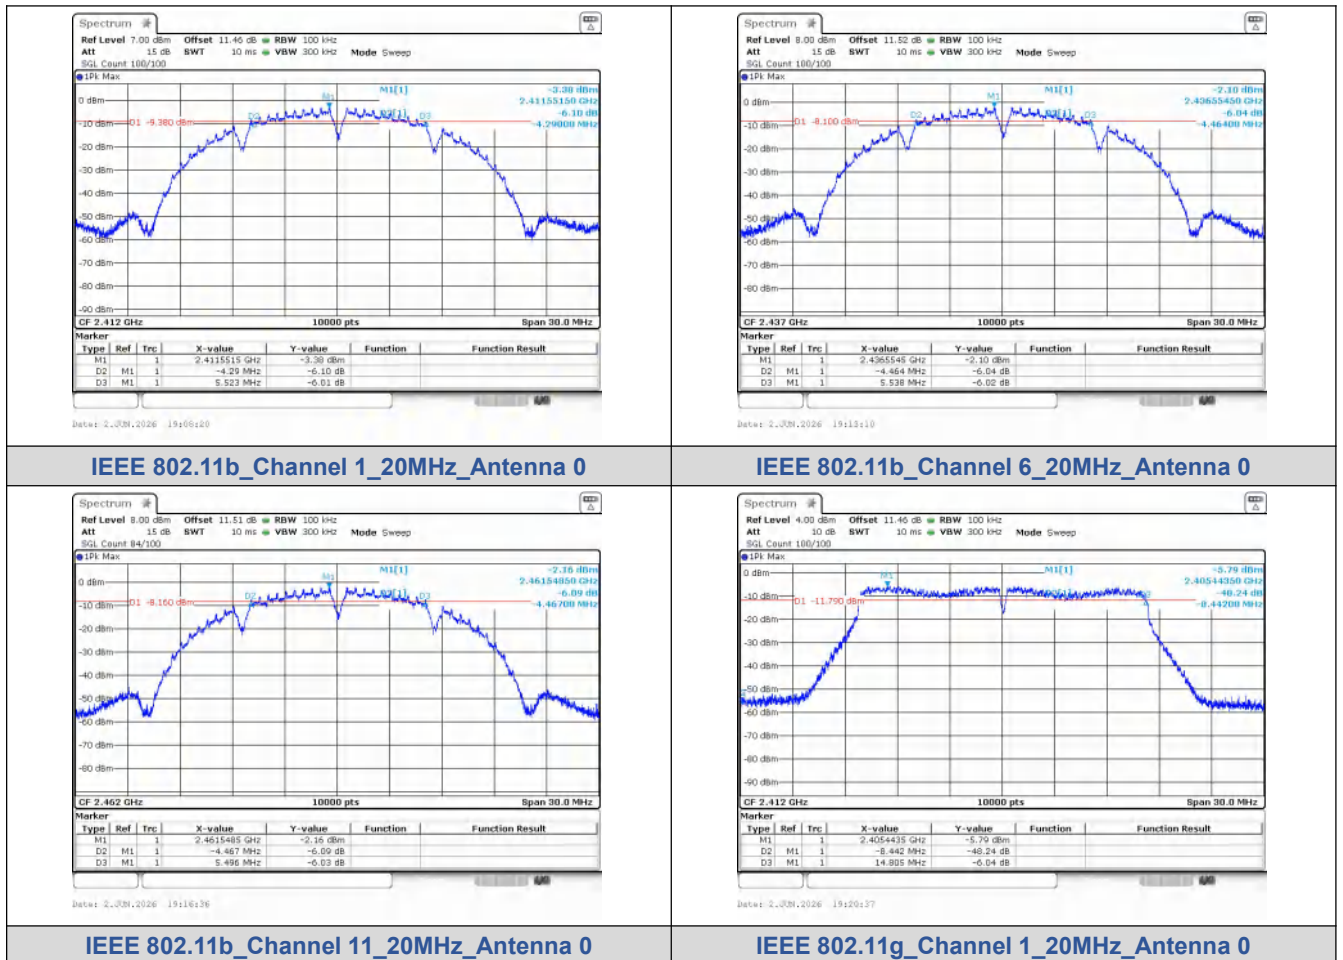


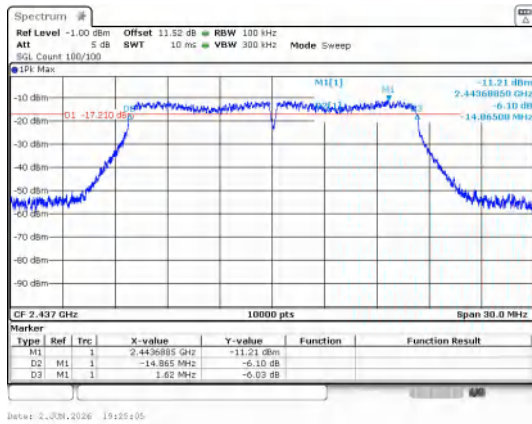


IEEE 802.11g_Channel 6_20MHz_Antenna 0

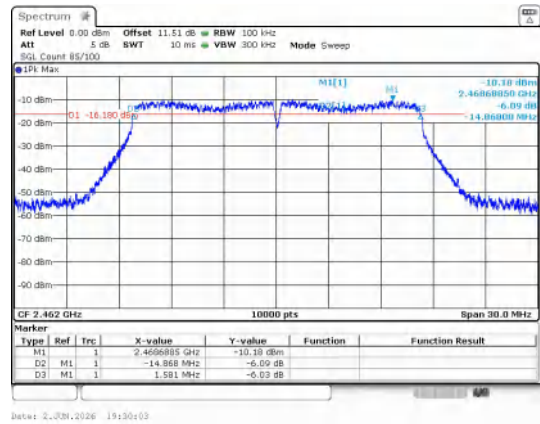


IEEE 802.11g_Channel 11_20MHz_Antenna 0

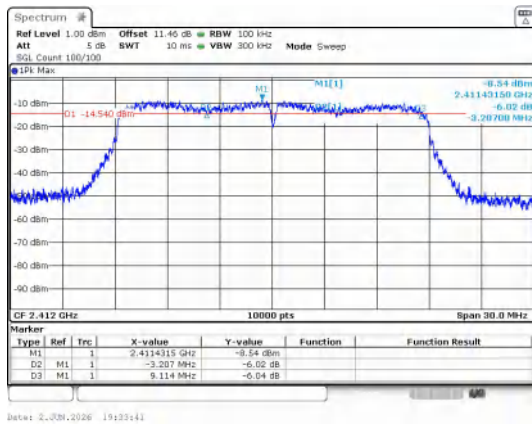


IEEE 802.11n_Channel 1_20MHz_Antenna 0

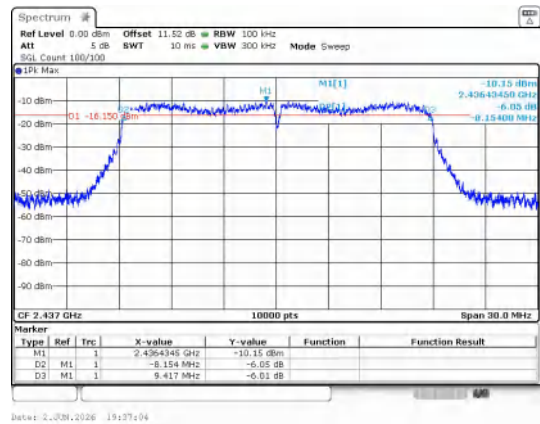


IEEE 802.11n_Channel 6_20MHz_Antenna 0

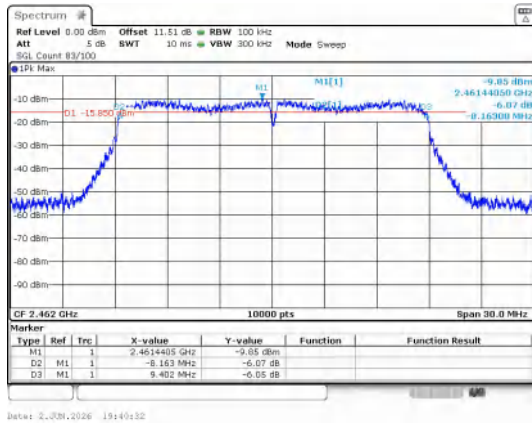


IEEE 802.11n_Channel 11_20MHz_Antenna 0

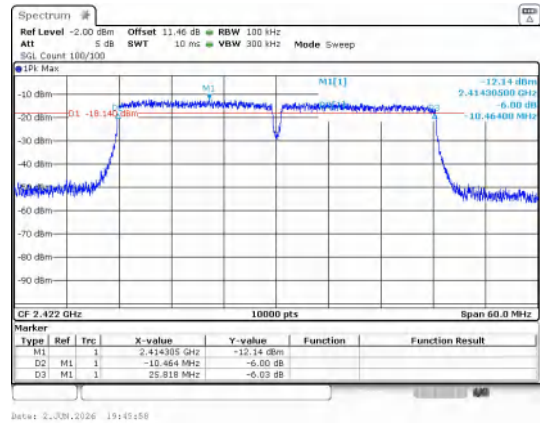

IEEE 802.11n_Channel 3_40MHz_Antenna 0

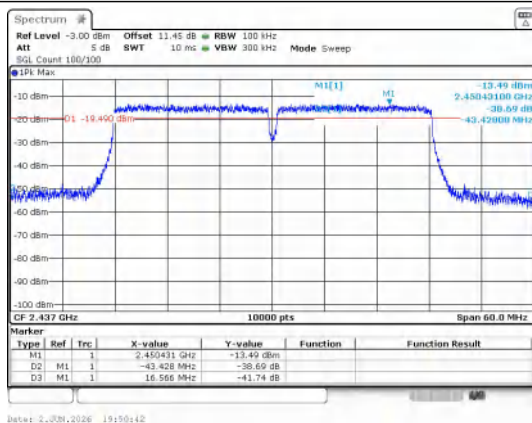

IEEE 802.11n_Channel 11_20MHz_Antenna 0

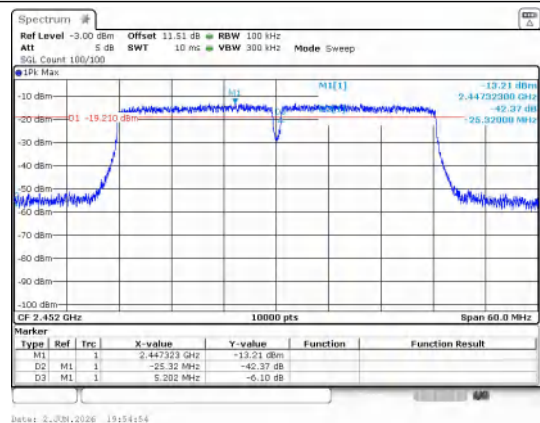

IEEE 802.11n_Channel 3_40MHz_Antenna 0



IEEE 802.11n_Channel 6_40MHz_Antenna 0

IEEE 802.11n_Channel 9_40MHz_Antenna 0

Ant1:



Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	9.800	≥0.5	PASS
	6		2437	9.960		PASS
	11		2462	10.04		PASS
IEEE 802.11g	1		2412	16.46		PASS
	6		2437	16.45		PASS
	11		2462	16.47		PASS
IEEE 802.11n_20	1		2412	17.55		PASS
	6		2437	17.46		PASS
	11		2462	17.50		PASS
IEEE 802.11n_40	3		2422	36.39		PASS
	6		2437	17.76		PASS
	9		2452	48.00		PASS

Test Graphs

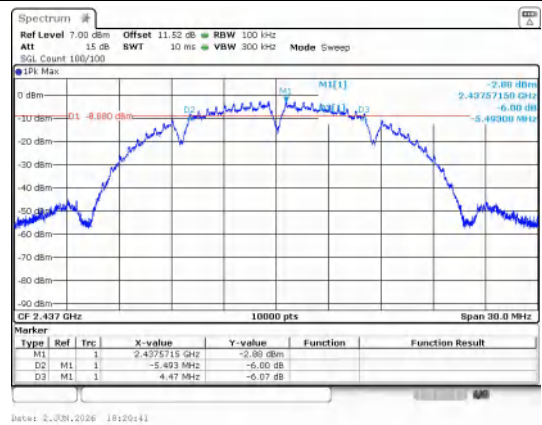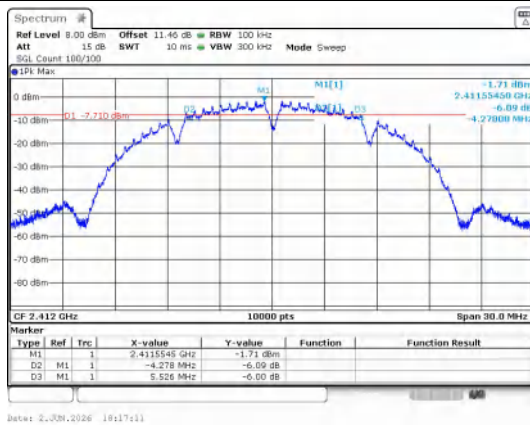


IEEE 802.11b_Channel 1_20MHz_Antenna 0

IEEE 802.11b_Channel 6_20MHz_Antenna 0

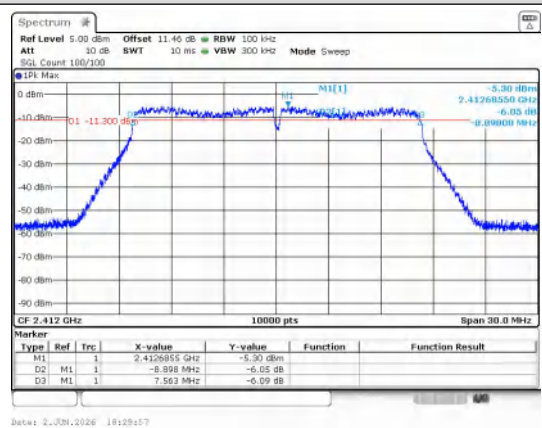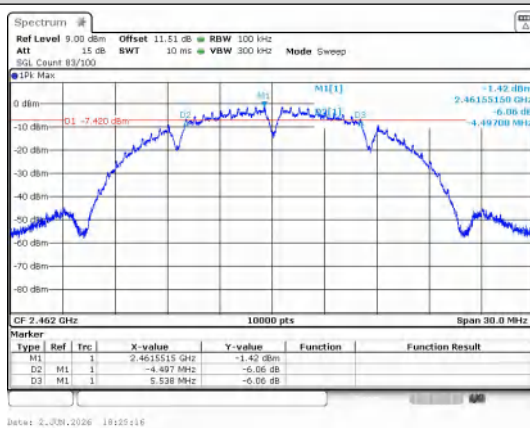


IEEE 802.11b_Channel 11_20MHz_Antenna 0


IEEE 802.11g_Channel 1_20MHz_Antenna 0

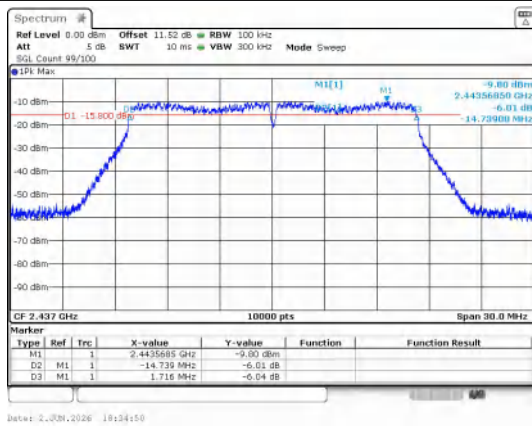


IEEE 802.11g_Channel 6_20MHz_Antenna 0

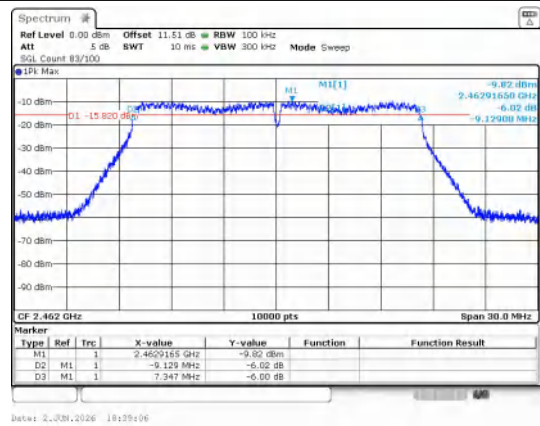


IEEE 802.11g_Channel 11_20MHz_Antenna 0

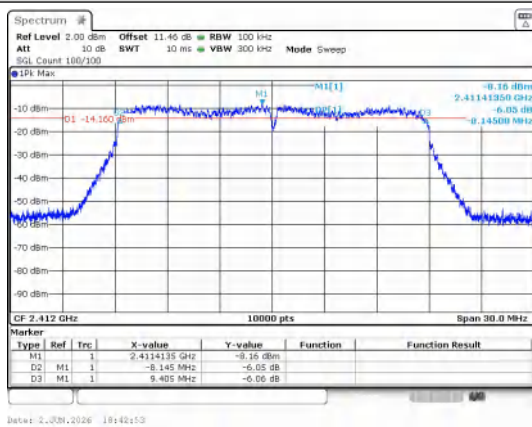


IEEE 802.11n_Channel 1_20MHz_Antenna 0

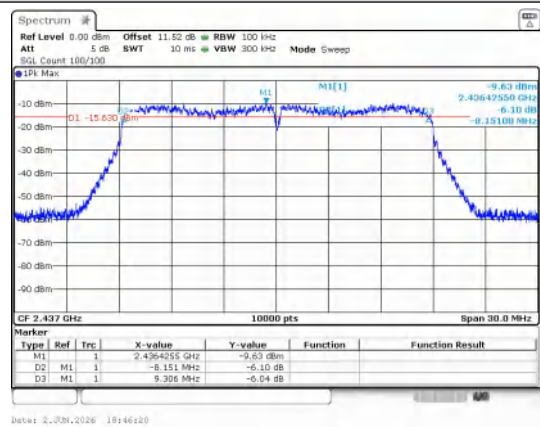


IEEE 802.11n_Channel 6_20MHz_Antenna 0

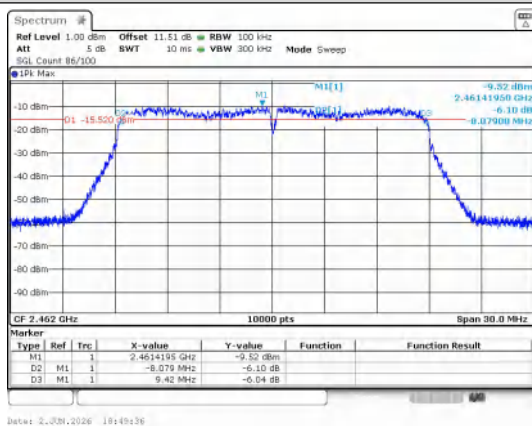


IEEE 802.11n_Channel 11_20MHz_Antenna 0

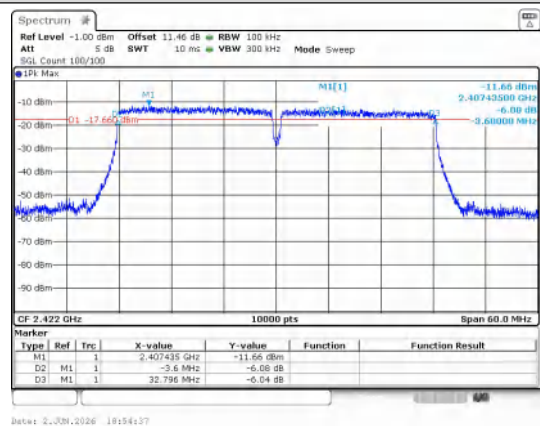

IEEE 802.11n_Channel 3_40MHz_Antenna 0

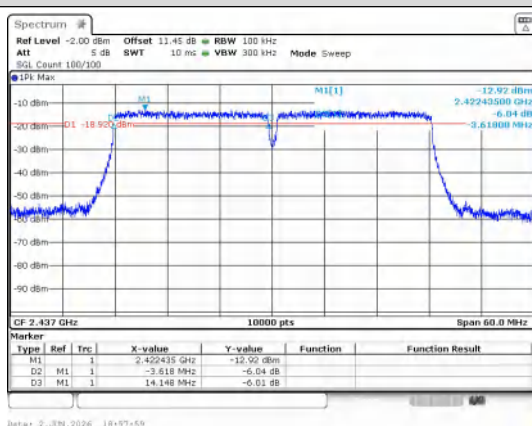

IEEE 802.11n_Channel 11_20MHz_Antenna 0

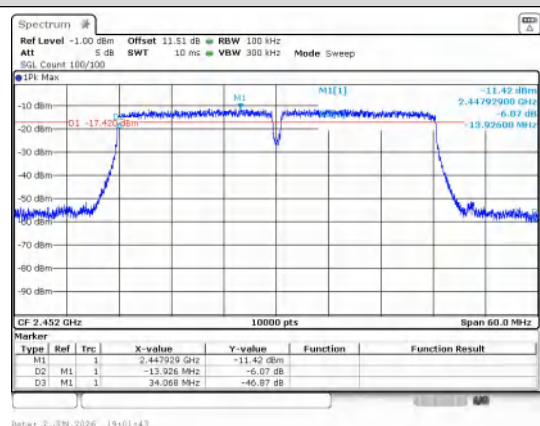

IEEE 802.11n_Channel 3_40MHz_Antenna 0

IEEE 802.11n_Channel 6_40MHz_Antenna 0

IEEE 802.11n_Channel 9_40MHz_Antenna 0


7.4. Duty Cycle


Test Result

Ant0:

Mode	Data rates	Channel	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)	1/T
IEEE 802.11b	1	1	1	30.000	30.000	100	1	0.0	0.0333
		6		30.000	30.000	100	1	0.0	0.0333
		11		30.000	30.000	100	1	0.0	0.0333
IEEE 802.11g		1		10.000	10.000	100	1	0.0	0.1000
		6		10.000	10.000	100	1	0.0	0.1000
		11		10.000	10.000	100	1	0.0	0.1000
IEEE 802.11n_20	MCS 0	1		10.000	10.000	100	1	0.0	0.1000
		6		10.000	10.000	100	1	0.0	0.1000
		11		10.000	10.000	100	1	0.0	0.1000
IEEE 802.11n_40		3	10.000	10.000	100	1	0.0	0.1000	
		6	10.000	10.000	100	1	0.0	0.1000	
		9	10.000	10.000	100	1	0.0	0.1000	

Test Graphs

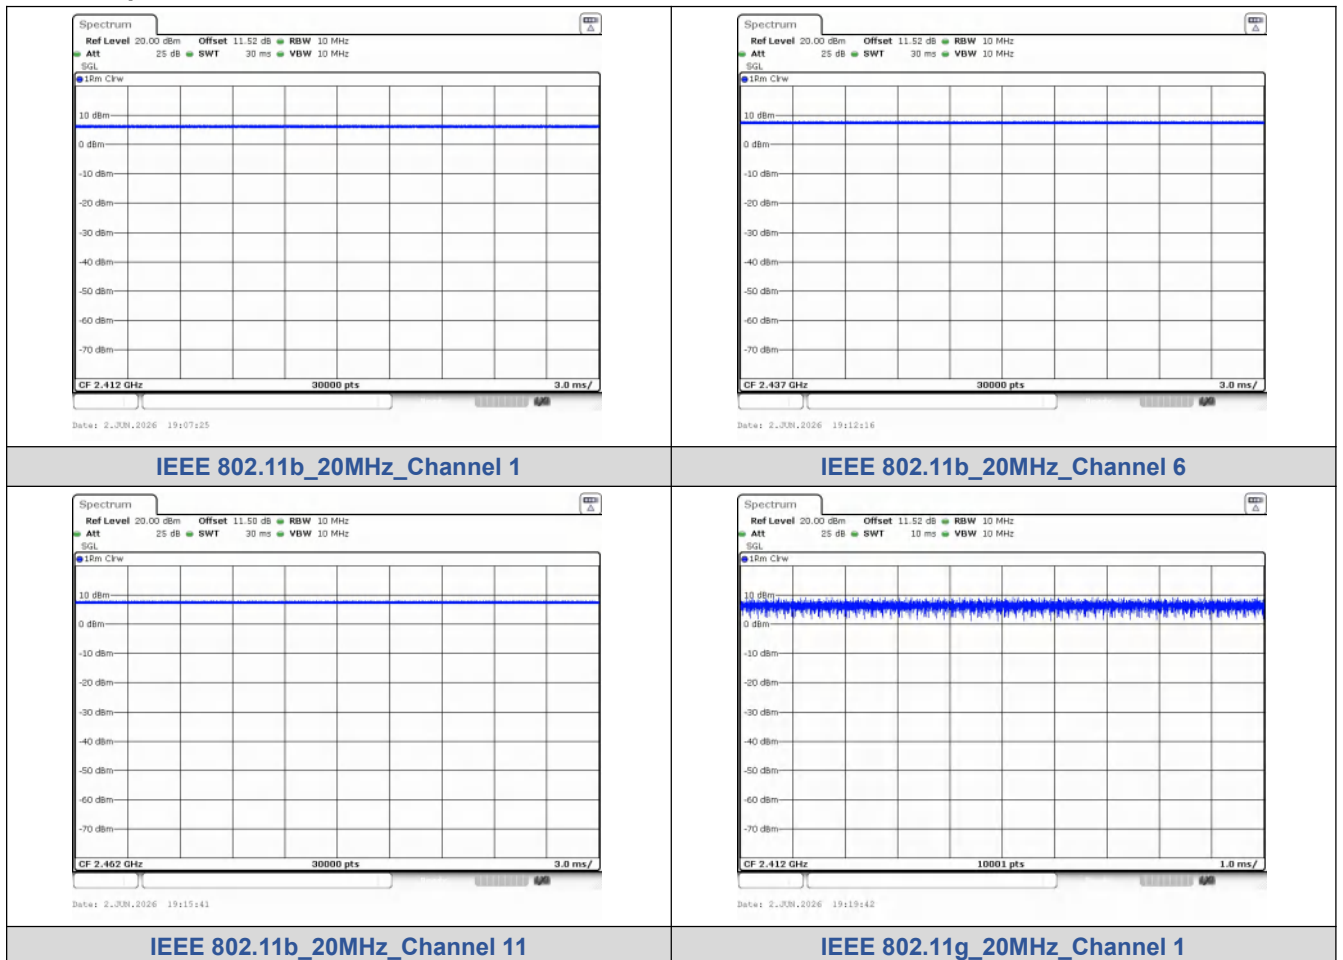

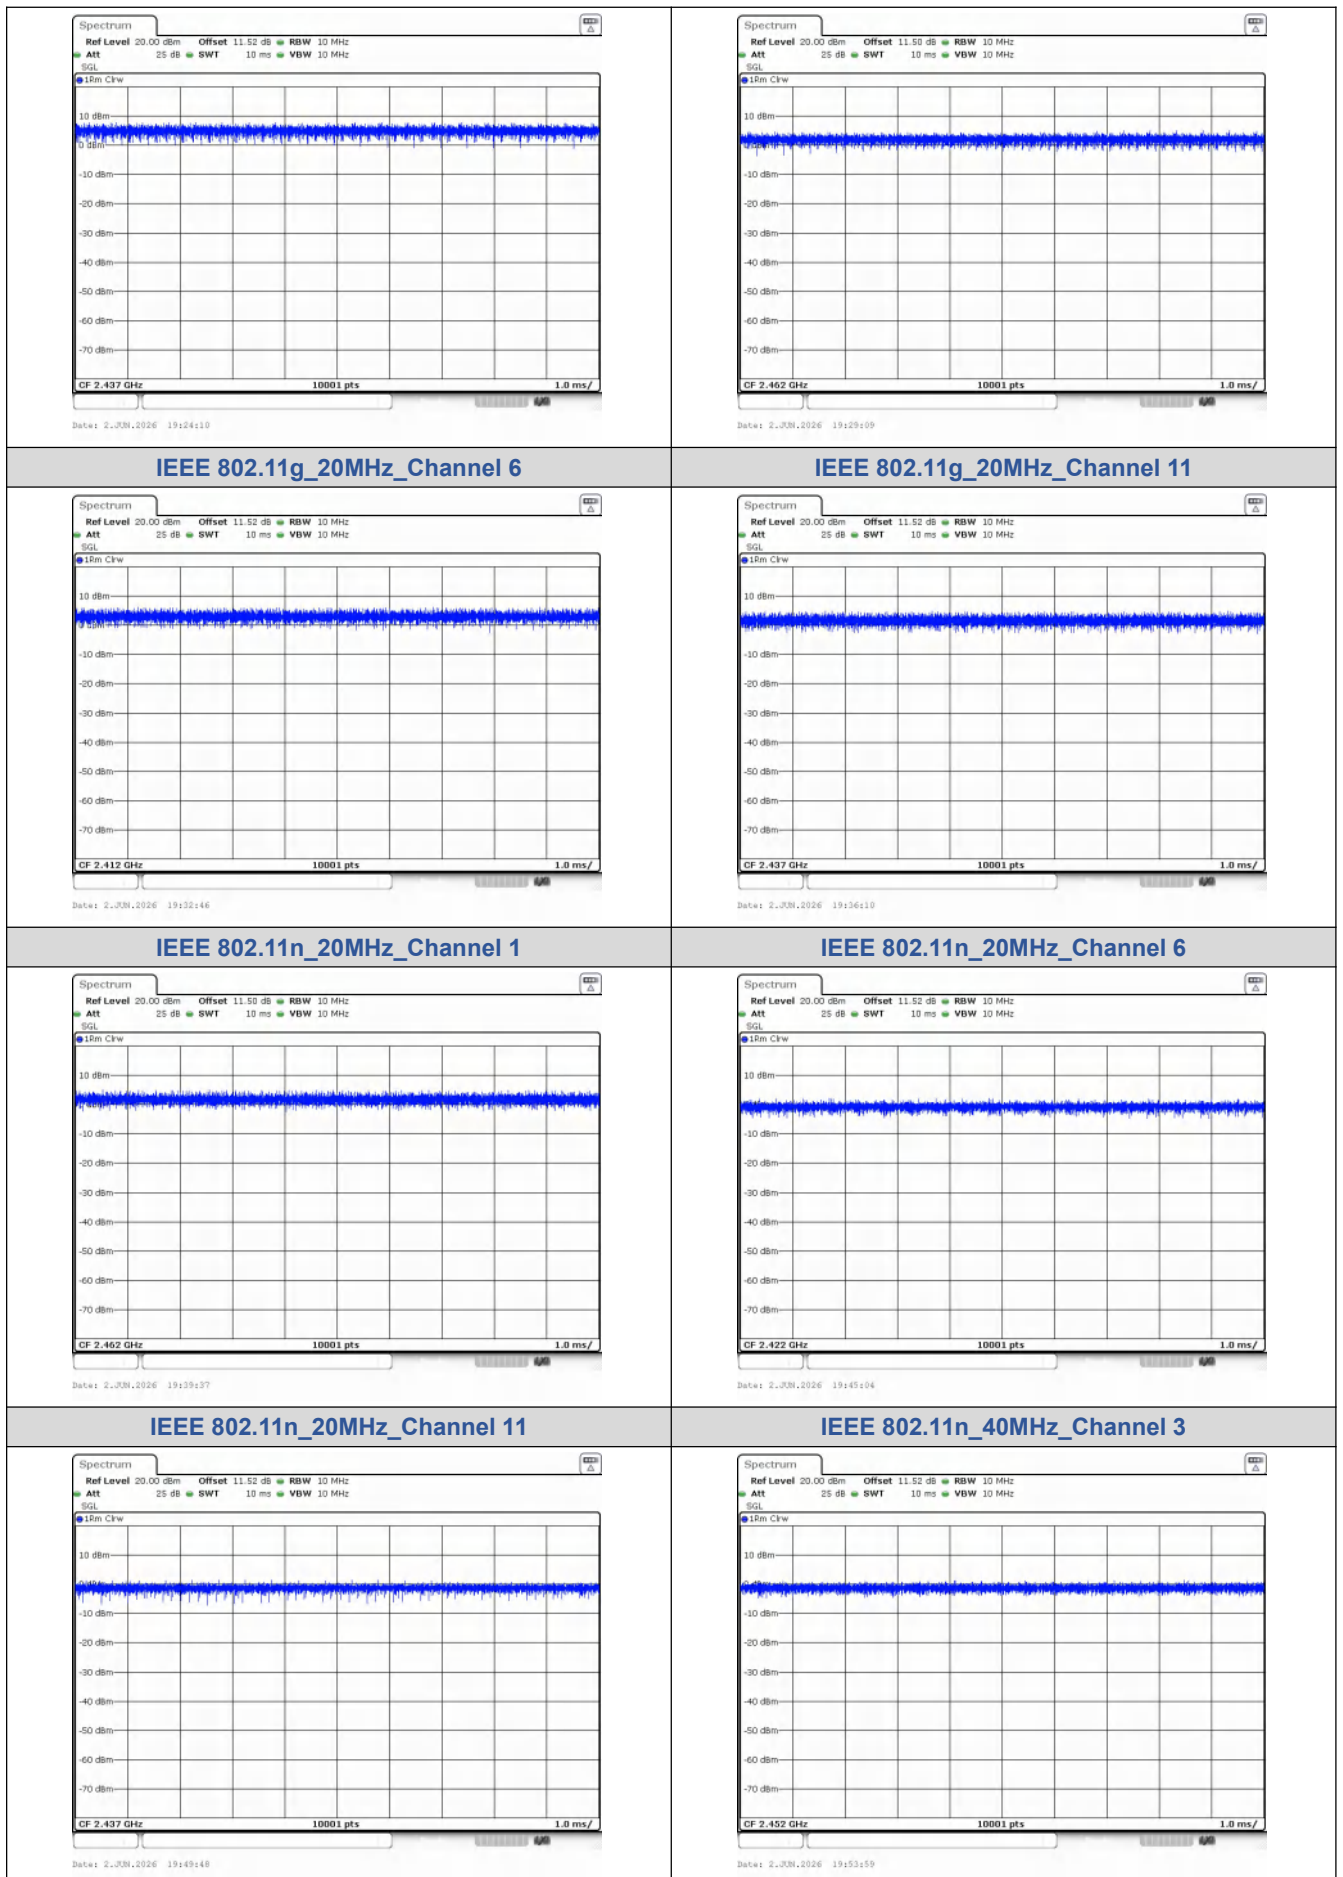



IEEE 802.11n_40MHz_Channel 6

IEEE 802.11n_40MHz_Channel 9

Ant1:



Mode	Data rates	Channel	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)	1/T
IEEE 802.11b	1	1	1	30.000	30.000	100	1	0.0	0.0333
		6		30.000	30.000	100	1	0.0	0.0333
		11		30.000	30.000	100	1	0.0	0.0333
IEEE 802.11g		1		10.000	10.000	100	1	0.0	0.1000
		6		10.000	10.000	100	1	0.0	0.1000
		11		10.000	10.000	100	1	0.0	0.1000
IEEE 802.11n_20	MCS 0	1		10.000	10.000	100	1	0.0	0.1000
		6		10.000	10.000	100	1	0.0	0.1000
		11		10.000	10.000	100	1	0.0	0.1000
IEEE 802.11n_40		3	10.000	10.000	100	1	0.0	0.1000	
		6	10.000	10.000	100	1	0.0	0.1000	
		9	10.000	10.000	100	1	0.0	0.1000	

Test Graphs

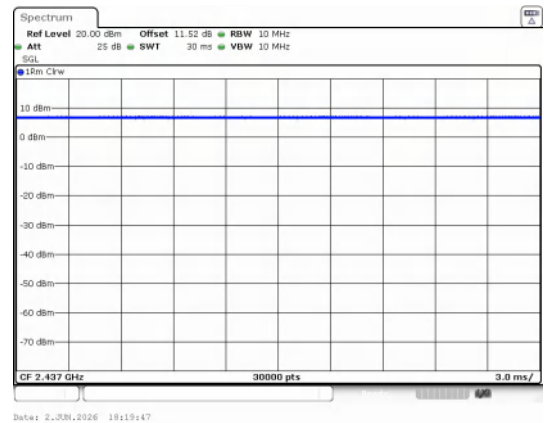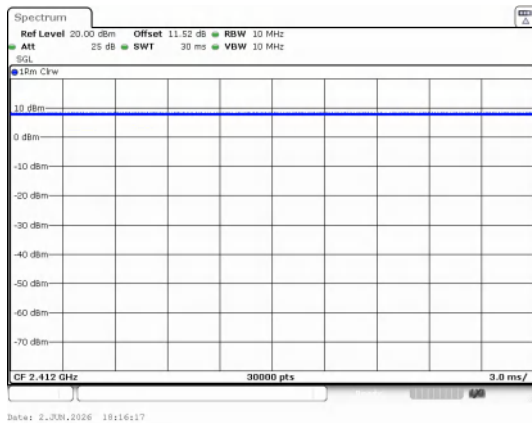


IEEE 802.11b_20MHz_Channel 1

IEEE 802.11b_20MHz_Channel 6

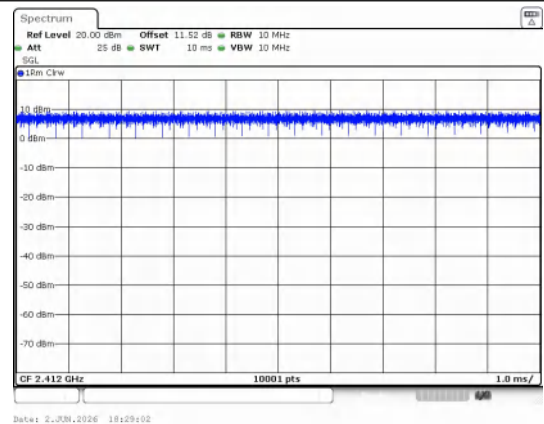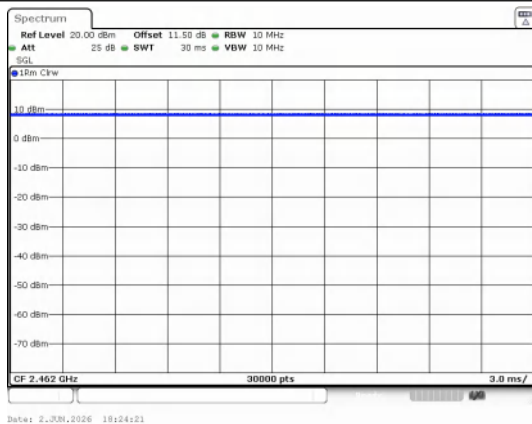

IEEE 802.11b_20MHz_Channel 11

IEEE 802.11g_20MHz_Channel 1

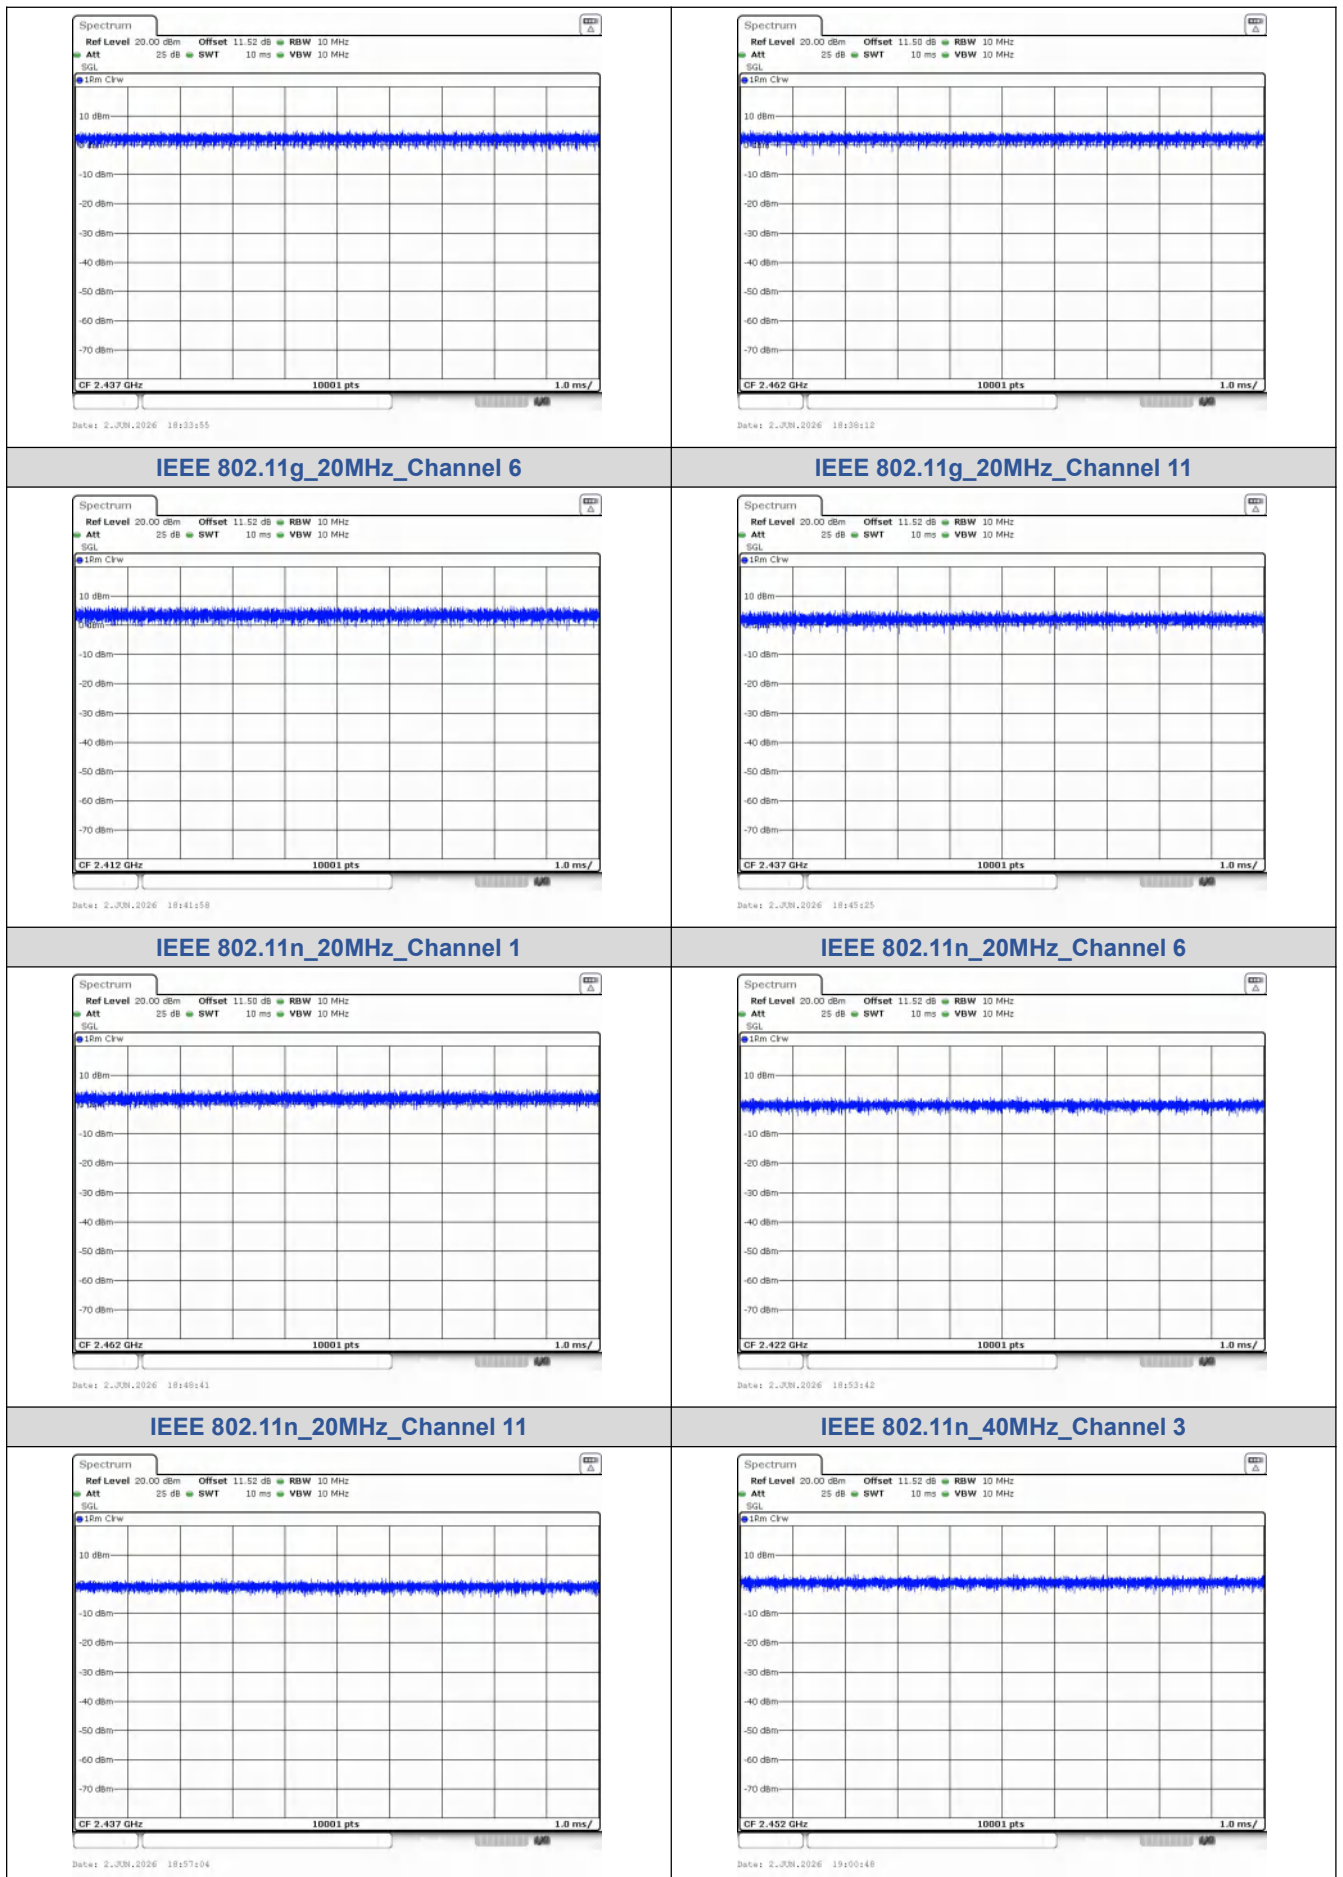

IEEE 802.11n_40MHz_Channel 6

IEEE 802.11n_40MHz_Channel 9

7.5. Conducted Out Of Band Emission


Test Result


Ant0:

Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
IEEE 802.11b	1	0	2389.30	-31.916	-21.58	-10.336	PASS	
			2400.00	-33.780	-21.58	-12.200	PASS	
			6979.60	-38.673	-21.58	-17.093	PASS	
	6		22048.1	-38.155	-22.03	-16.125	PASS	
			11	2483.50	-33.540	-22.01	-11.530	PASS
				6934.62	-38.485	-22.01	-16.475	PASS
IEEE 802.11g	1			2397.58	-42.299	-25.72	-16.579	PASS
			2400.00	-43.440	-25.72	-17.720	PASS	
			6938.00	-38.335	-25.72	-12.615	PASS	
	6		6902.99	-38.077	-30.16	-7.917	PASS	
			11	2483.50	-44.180	-29.99	-14.190	PASS
				6957.93	-38.316	-29.99	-8.326	PASS
IEEE 802.11n_20	1			2398.89	-41.003	-28.78	-12.223	PASS
			2400.00	-42.260	-28.78	-13.480	PASS	
			22000.7	-38.893	-28.78	-10.113	PASS	
	6		6920.47	-38.461	-29.97	-8.491	PASS	
			11	2483.50	-43.770	-29.95	-13.820	PASS
				5870.07	-38.803	-29.95	-8.853	PASS
IEEE 802.11n_40	3			2398.70	-41.038	-31.91	-9.128	PASS
			2400.00	-42.450	-31.91	-10.540	PASS	
			6978.70	-38.719	-31.91	-6.809	PASS	
	6		704.61	-37.686	-32.96	-4.726	PASS	
			9	2483.50	-43.290	-33.77	-9.520	PASS
				5878.39	-37.664	-33.77	-3.894	PASS


Note: input compensation coefficient (dB)= Cable Loss (dB)

Test Graphs

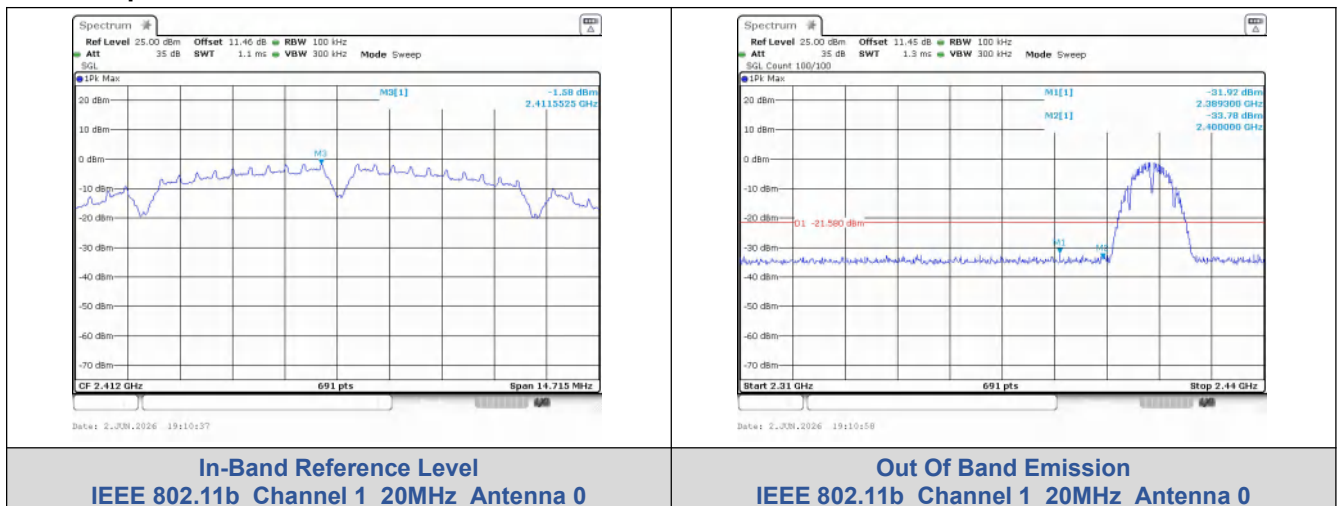


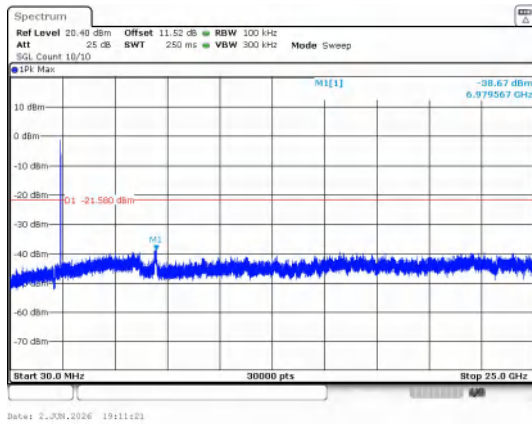


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 1_20MHz_Antenna 0

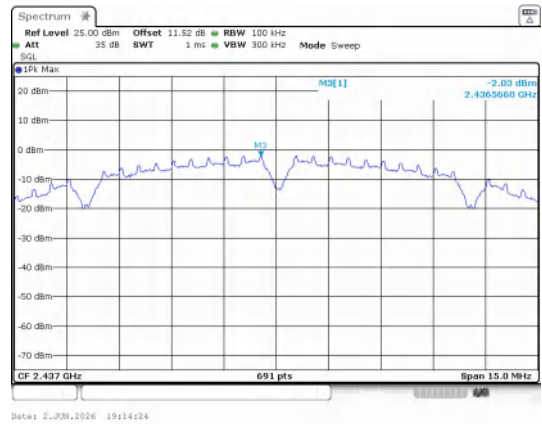


In-Band Reference Level
IEEE 802.11b_Channel 6_20MHz_Antenna 0

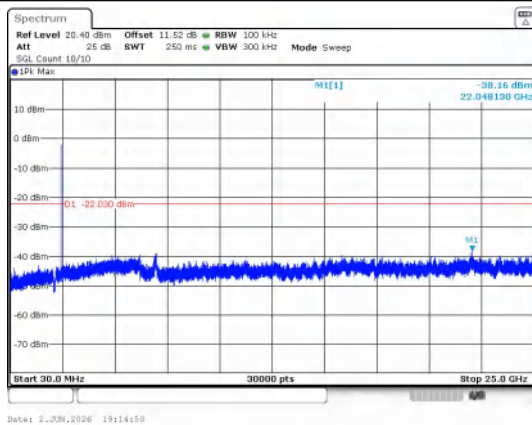


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 6_20MHz_Antenna 0

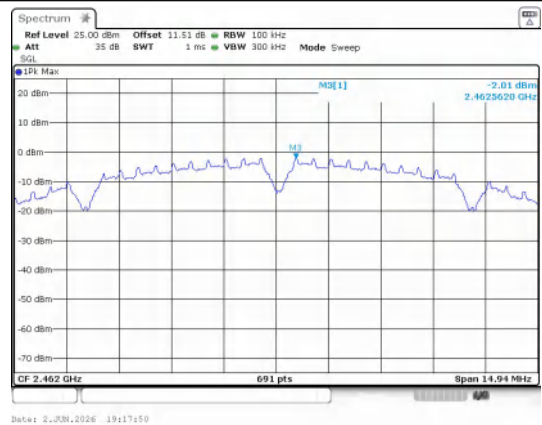


In-Band Reference Level
IEEE 802.11b_Channel 11_20MHz_Antenna 0

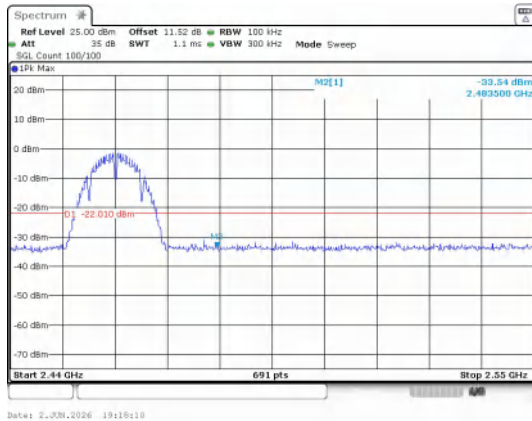


Out Of Band Emission
IEEE 802.11b_Channel 11_20MHz_Antenna 0

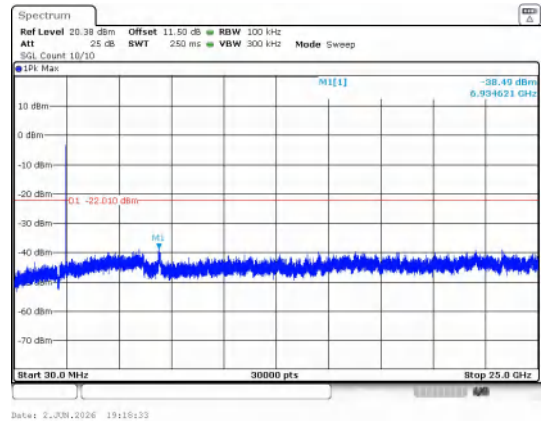


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 11_20MHz_Antenna 0

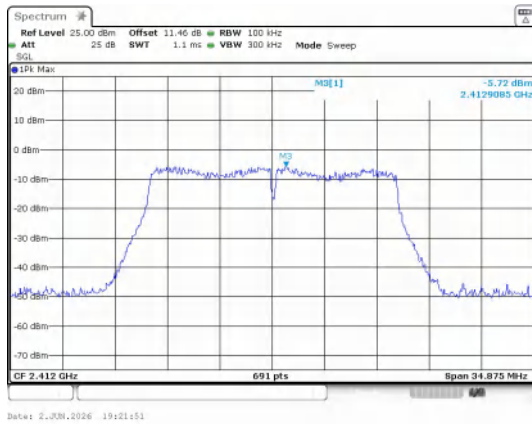


**In-Band Reference Level
IEEE 802.11g_Channel 1_20MHz_Antenna 0**

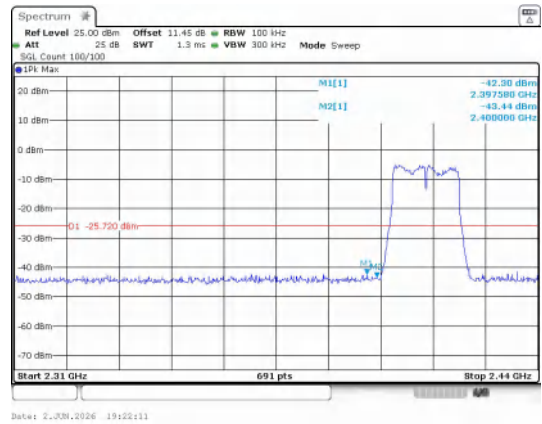


**Out Of Band Emission
IEEE 802.11g_Channel 1_20MHz_Antenna 0**

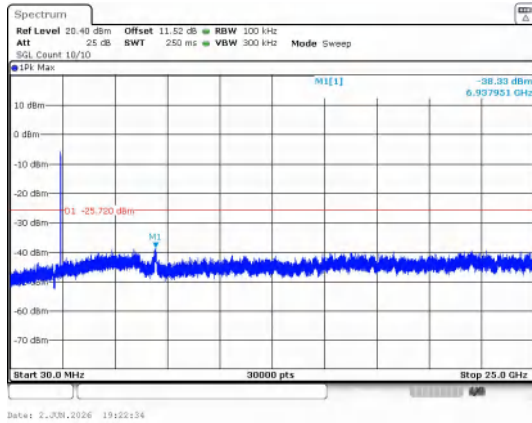


**30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 1_20MHz_Antenna 0**

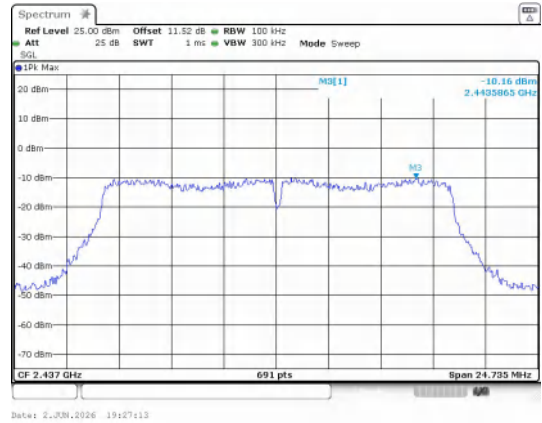


**In-Band Reference Level
IEEE 802.11g_Channel 6_20MHz_Antenna 0**

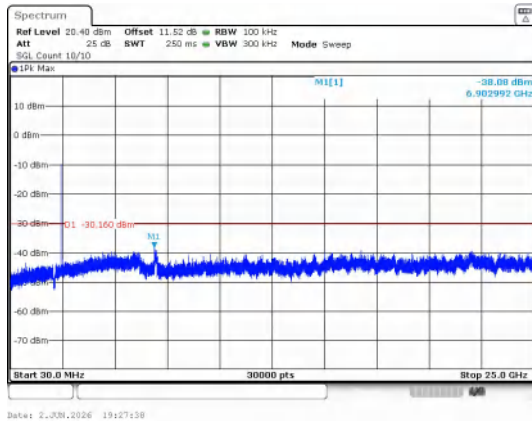


**30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 6_20MHz_Antenna 0**

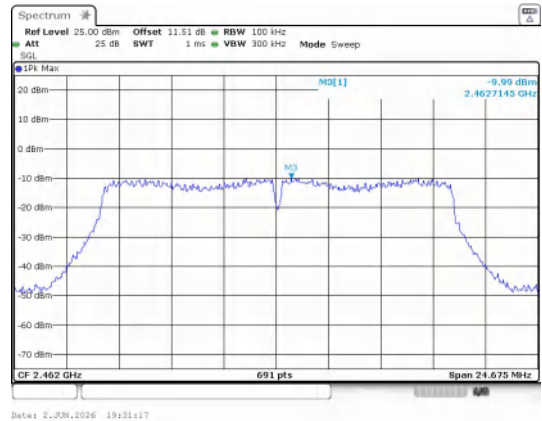


**In-Band Reference Level
IEEE 802.11g_Channel 11_20MHz_Antenna 0**

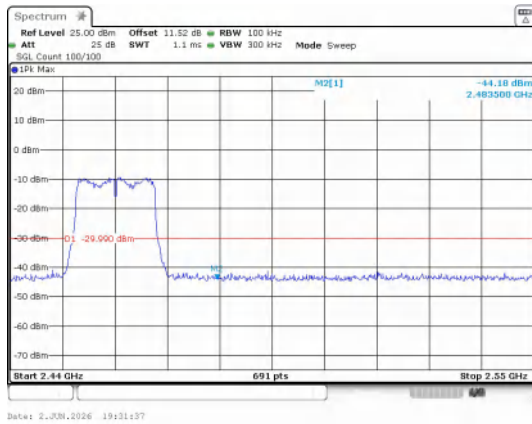


Out Of Band Emission
IEEE 802.11g_Channel 11_20MHz_Antenna 0

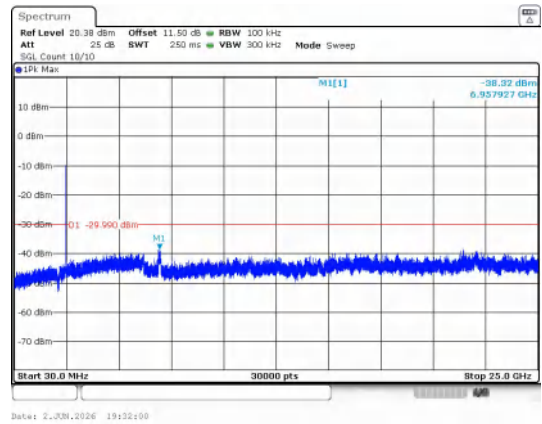


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 11_20MHz_Antenna 0

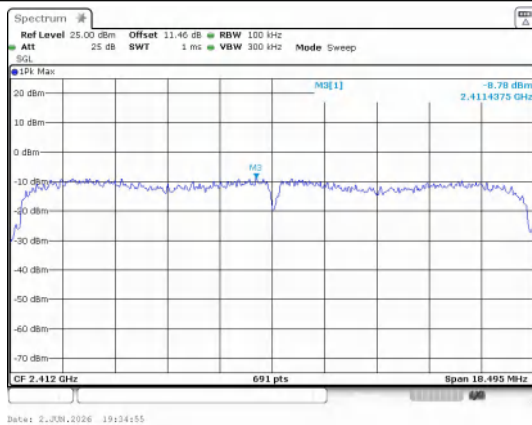


In-Band Reference Level
IEEE 802.11n_Channel 1_20MHz_Antenna 0

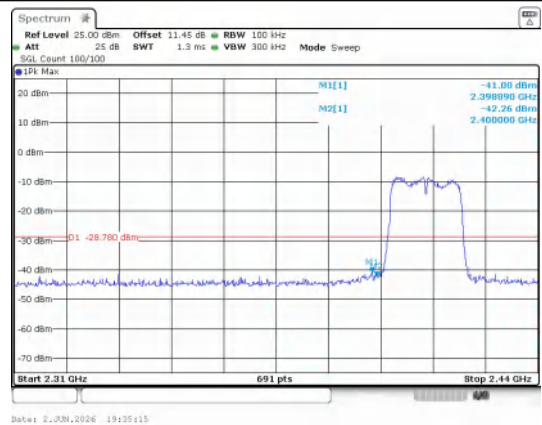


Out Of Band Emission
IEEE 802.11n_Channel 1_20MHz_Antenna 0

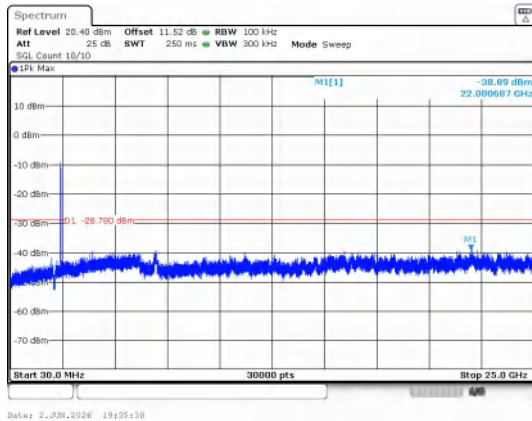


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 1_20MHz_Antenna 0

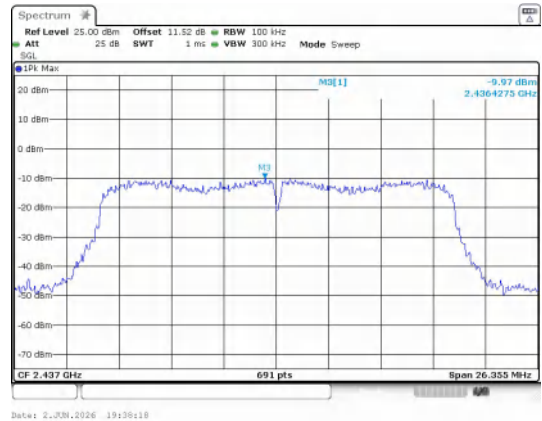


In-Band Reference Level
IEEE 802.11n_Channel 6_20MHz_Antenna 0

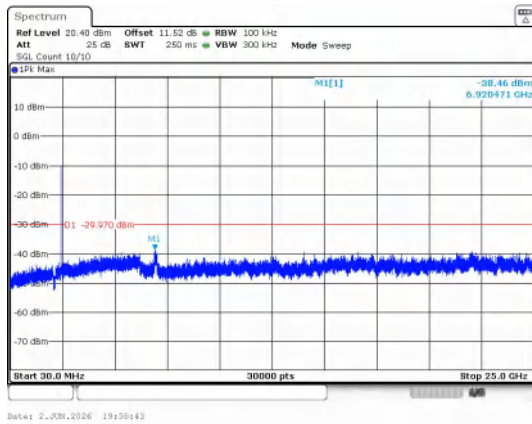


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 6_20MHz_Antenna 0

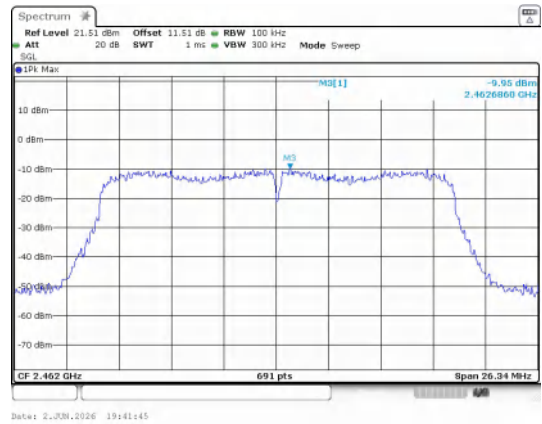


In-Band Reference Level
IEEE 802.11n_Channel 11_20MHz_Antenna 0

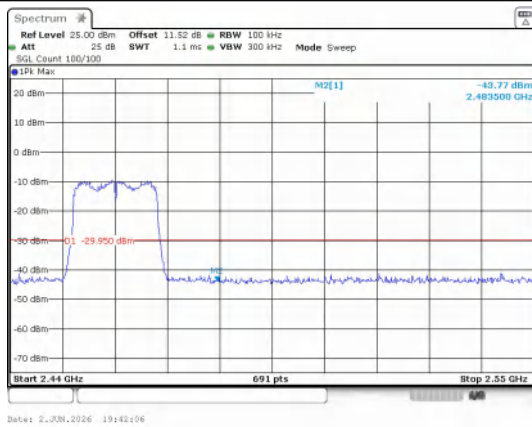


Out Of Band Emission
IEEE 802.11n_Channel 11_20MHz_Antenna 0

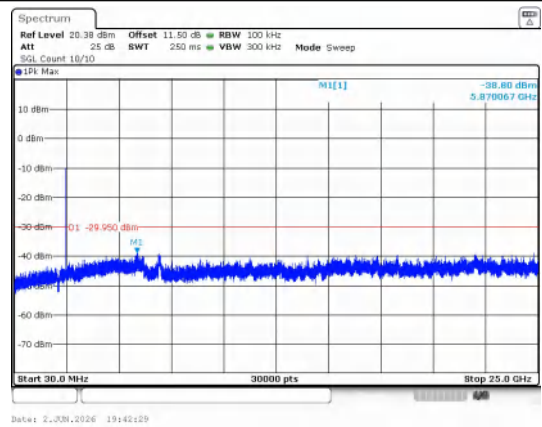


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 11_20MHz_Antenna 0

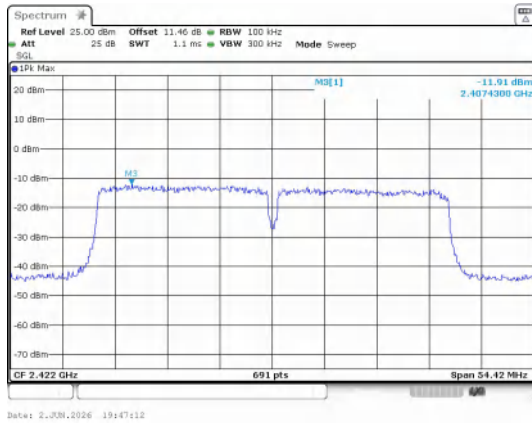

In-Band Reference Level
IEEE 802.11n_Channel 3_40MHz_Antenna 0

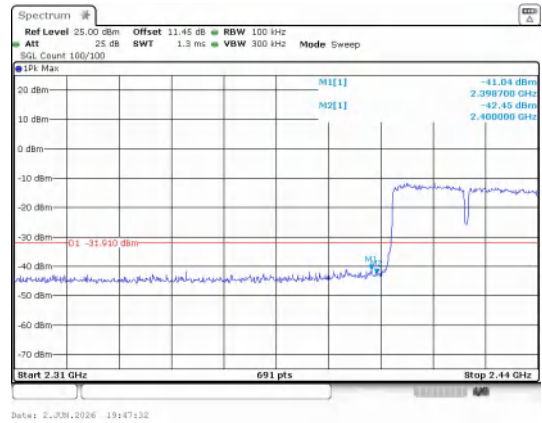

Out Of Band Emission
IEEE 802.11n_Channel 3_40MHz_Antenna 0

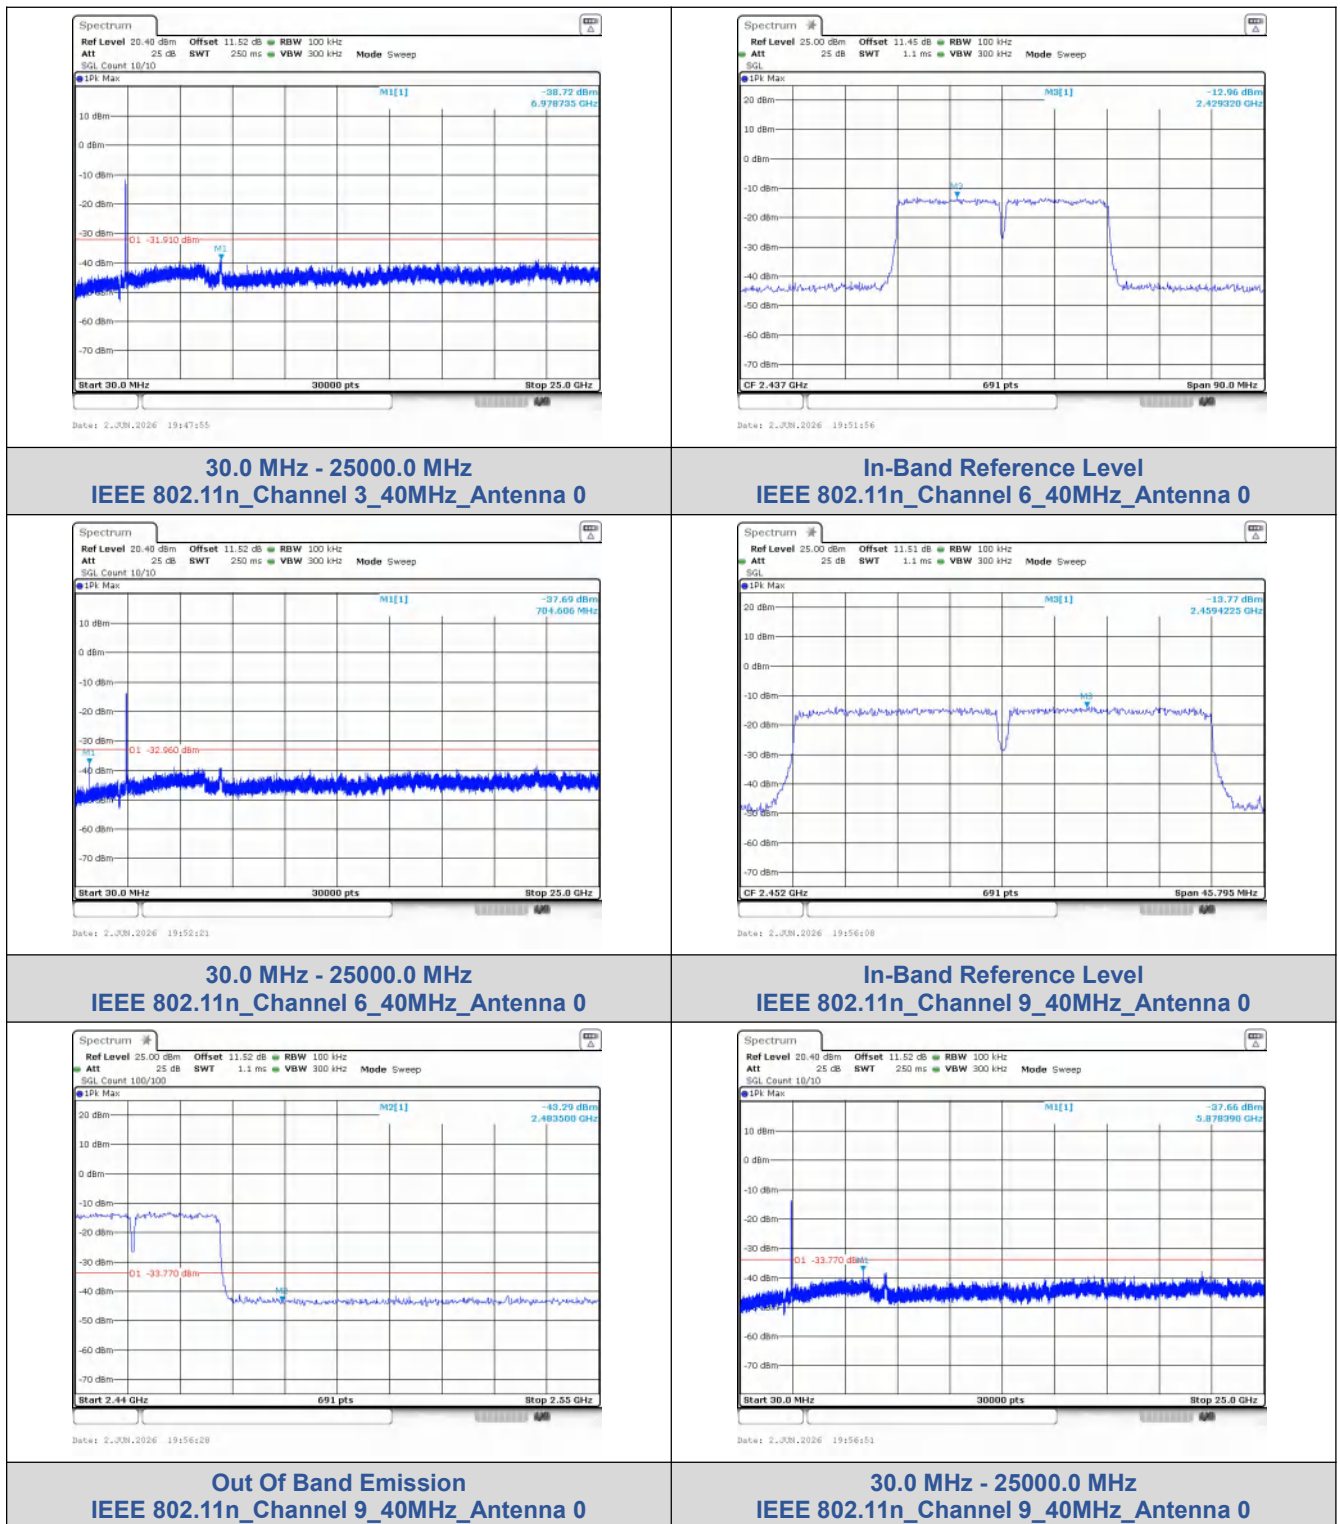



Ant1:
Test Result

Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	0	2343.58	-32.192	-21.61	-10.582	PASS
			2400.00	-34.350	-21.61	-12.740	PASS
			6910.50	-38.815	-21.61	-17.205	PASS


	6		5895.87	-38.322	-21.35	-16.972	PASS
	11		2483.50	-34.310	-21.36	-12.950	PASS
			6893.00	-37.954	-21.36	-16.594	PASS
IEEE 802.11g	1		2385.54	-41.847	-28.36	-13.487	PASS
			2400.00	-43.430	-28.36	-15.070	PASS
			22056.5	-39.038	-28.36	-10.678	PASS
	6		16589.7	-38.716	-29.73	-8.986	PASS
	11		2483.50	-42.730	-29.51	-13.220	PASS
			6907.99	-37.890	-29.51	-8.380	PASS
IEEE 802.11n_20	1		2394.94	-41.608	-28.21	-13.398	PASS
			2400.00	-44.610	-28.21	-16.400	PASS
			22045.6	-38.252	-28.21	-10.042	PASS
	6		6935.45	-38.574	-29.74	-8.834	PASS
	11		2483.50	-44.340	-29.46	-14.880	PASS
		6903.82	-39.211	-29.46	-9.751	PASS	
IEEE 802.11n_40	3	2397.95	-41.614	-31.24	-10.374	PASS	
		2400.00	-43.050	-31.24	-11.810	PASS	
		6174.70	-38.187	-31.24	-6.947	PASS	
	6	16453.2	-38.768	-31.71	-7.058	PASS	
	9	2483.50	-44.160	-31.18	-12.980	PASS	
		6947.11	-37.793	-31.18	-6.613	PASS	

Note: input compensation coefficient (dB)= Cable Loss (dB)


Test Graphs

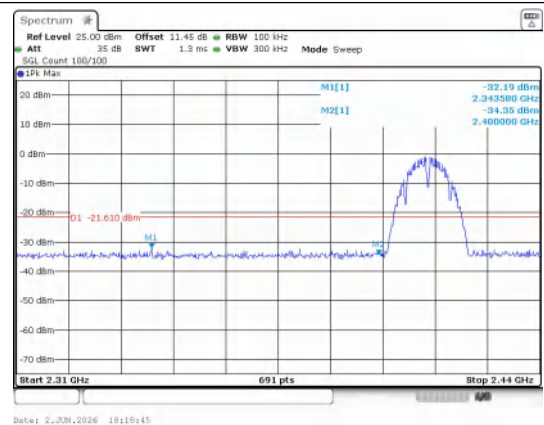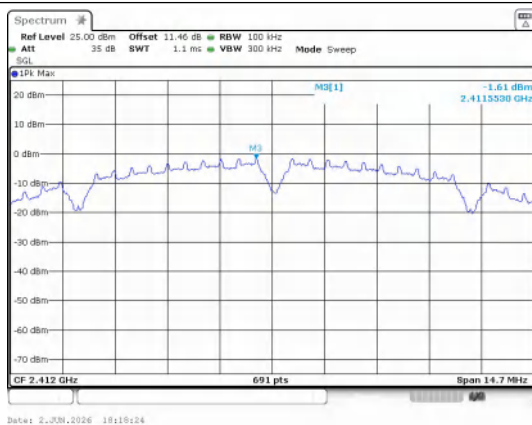


In-Band Reference Level
IEEE 802.11b_Channel 1_20MHz_Antenna 0

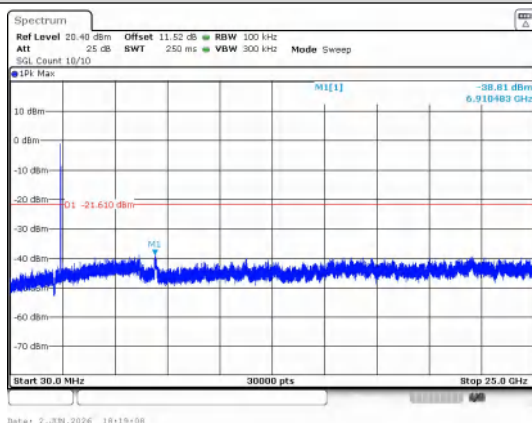


Out Of Band Emission
IEEE 802.11b_Channel 1_20MHz_Antenna 0

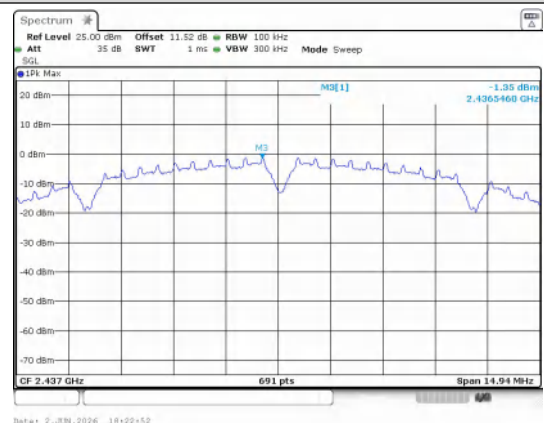


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 1_20MHz_Antenna 0

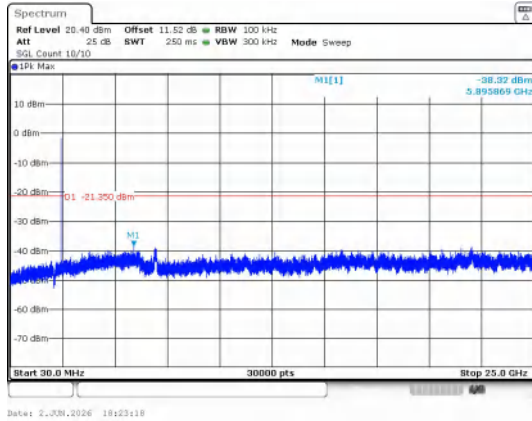


In-Band Reference Level
IEEE 802.11b_Channel 6_20MHz_Antenna 0

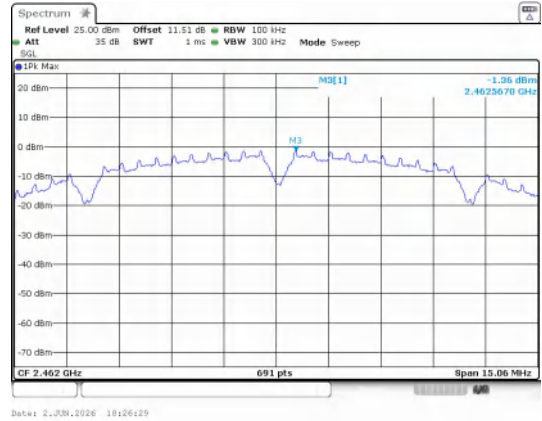


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 6_20MHz_Antenna 0

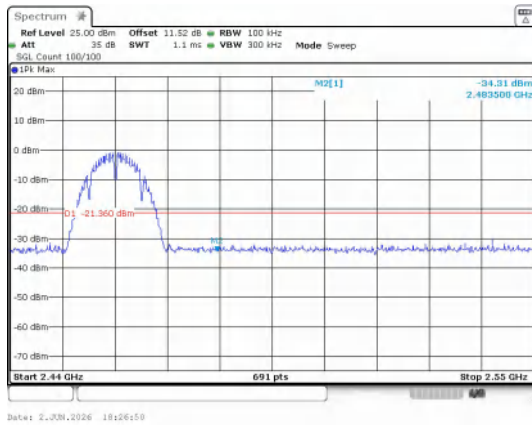


In-Band Reference Level
IEEE 802.11b_Channel 11_20MHz_Antenna 0

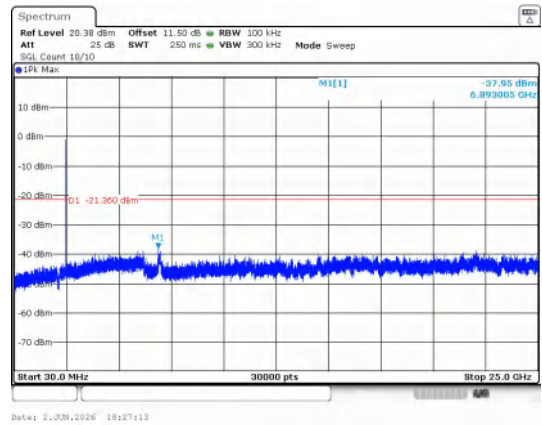

Out Of Band Emission
IEEE 802.11b_Channel 11_20MHz_Antenna 0

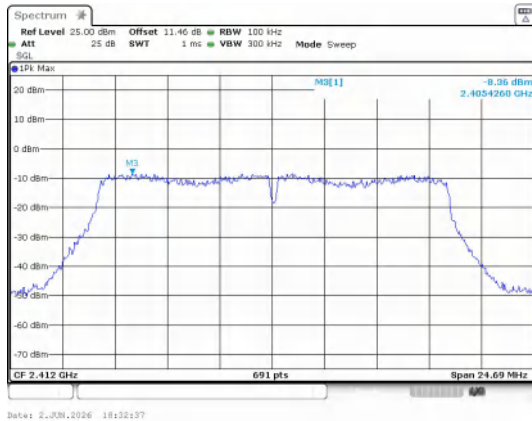


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 11_20MHz_Antenna 0

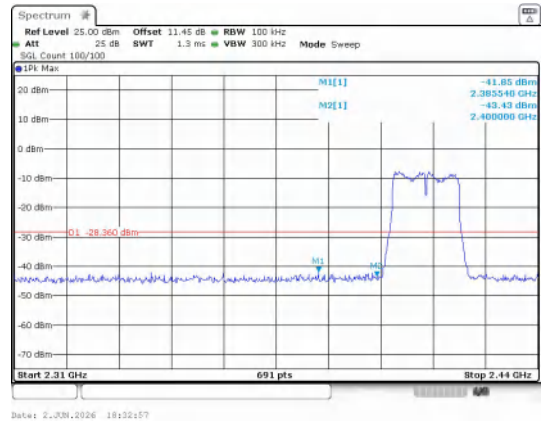


In-Band Reference Level
IEEE 802.11g_Channel 1_20MHz_Antenna 0


Out Of Band Emission
IEEE 802.11g_Channel 1_20MHz_Antenna 0

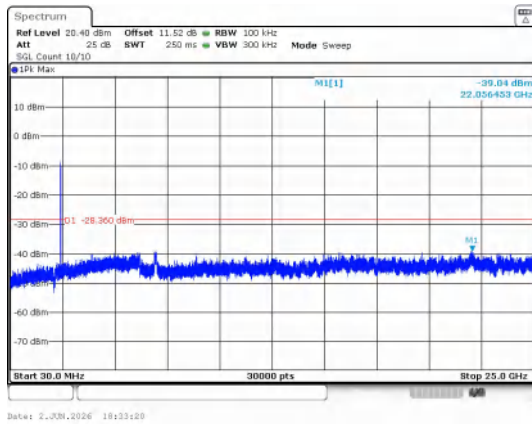


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 1_20MHz_Antenna 0

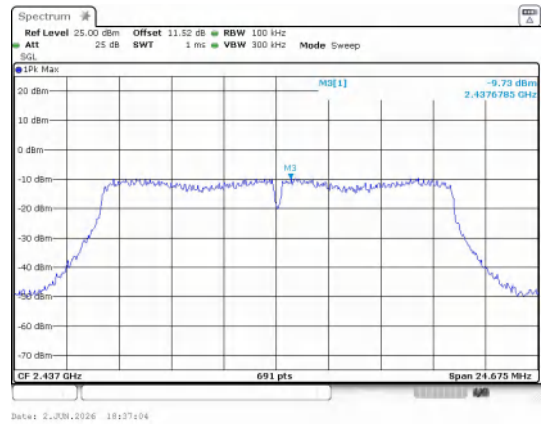


In-Band Reference Level
IEEE 802.11g_Channel 6_20MHz_Antenna 0

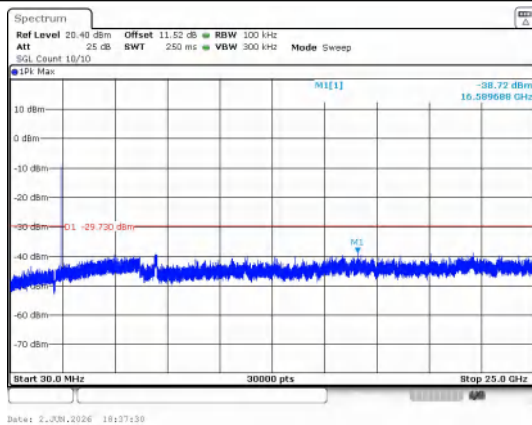


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 6_20MHz_Antenna 0

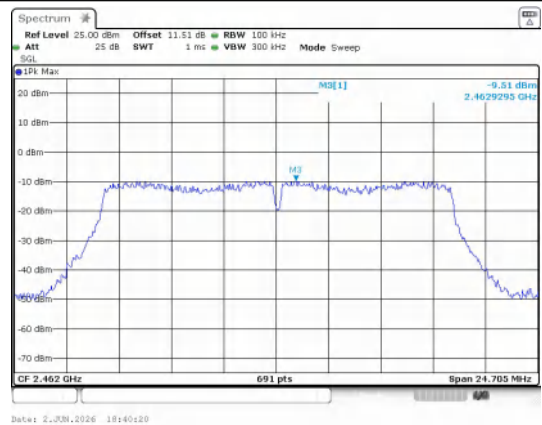


In-Band Reference Level
IEEE 802.11g_Channel 11_20MHz_Antenna 0

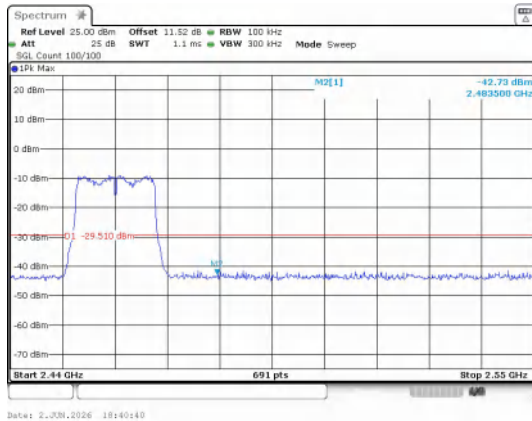


Out Of Band Emission
IEEE 802.11g_Channel 11_20MHz_Antenna 0

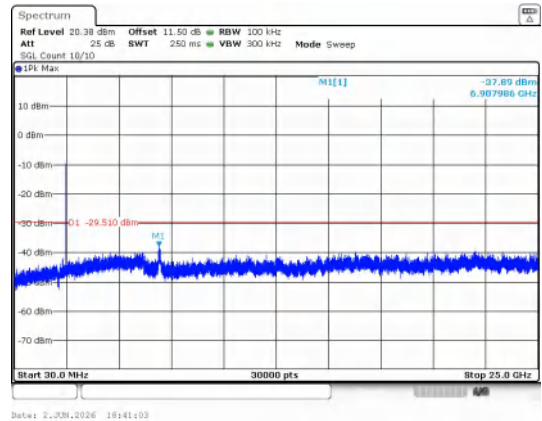


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 11_20MHz_Antenna 0

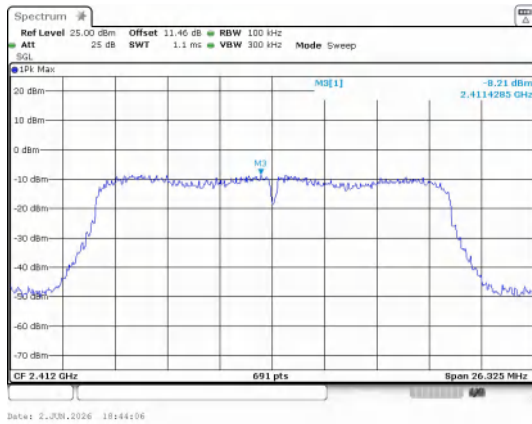


In-Band Reference Level
IEEE 802.11n_Channel 1_20MHz_Antenna 0

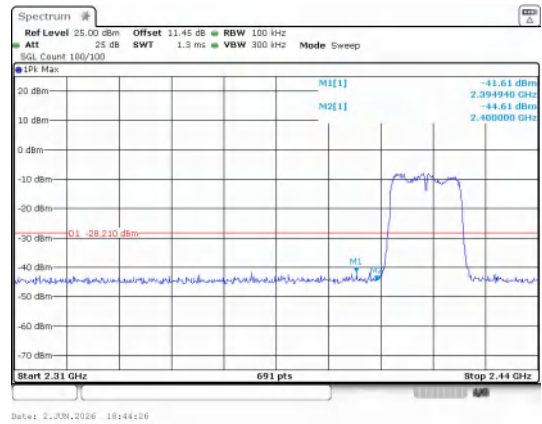


Out Of Band Emission
IEEE 802.11n_Channel 1_20MHz_Antenna 0

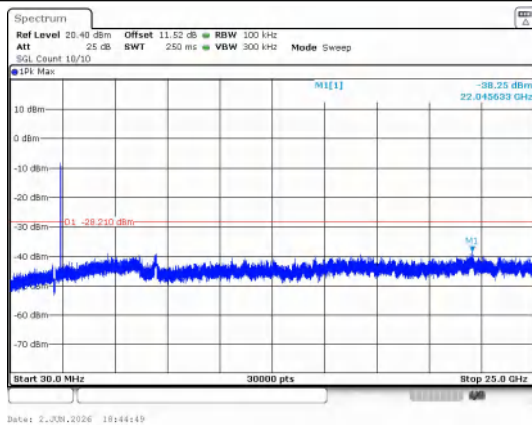


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 1_20MHz_Antenna 0

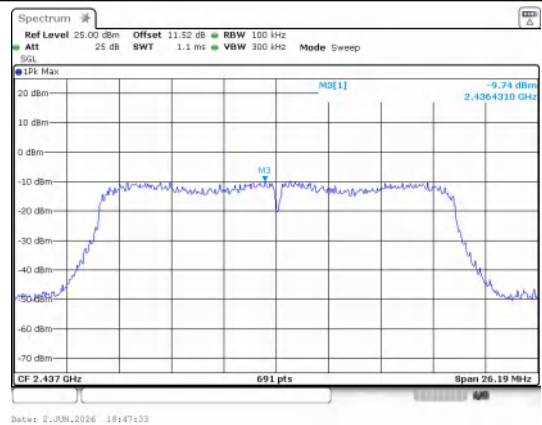


In-Band Reference Level
IEEE 802.11n_Channel 6_20MHz_Antenna 0

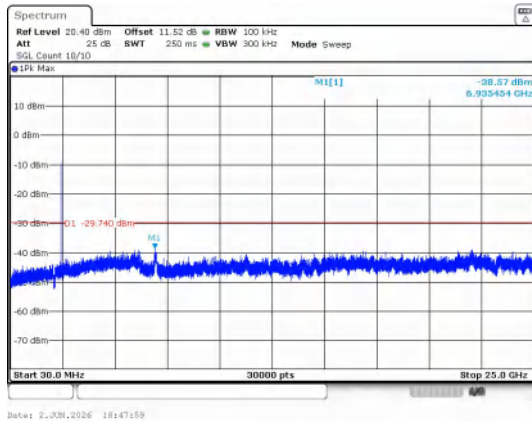


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 6_20MHz_Antenna 0

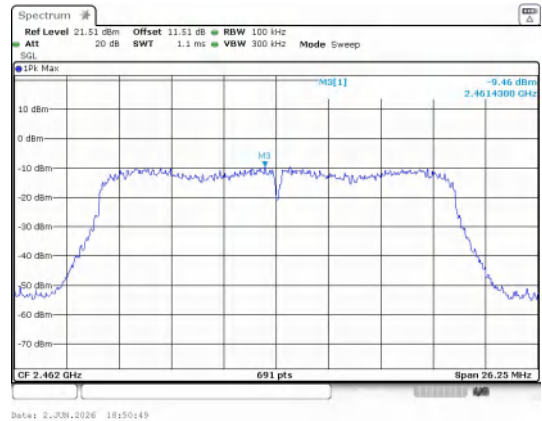


In-Band Reference Level
IEEE 802.11n_Channel 11_20MHz_Antenna 0

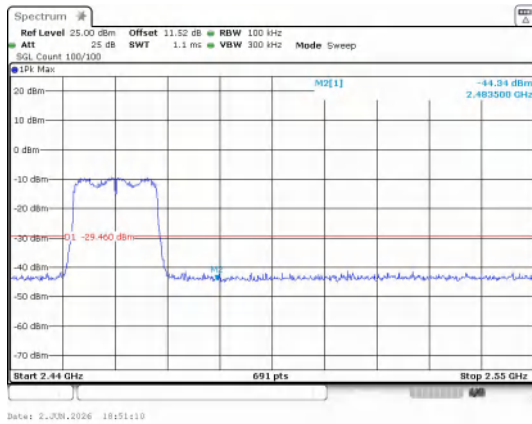


Out Of Band Emission
IEEE 802.11n_Channel 11_20MHz_Antenna 0

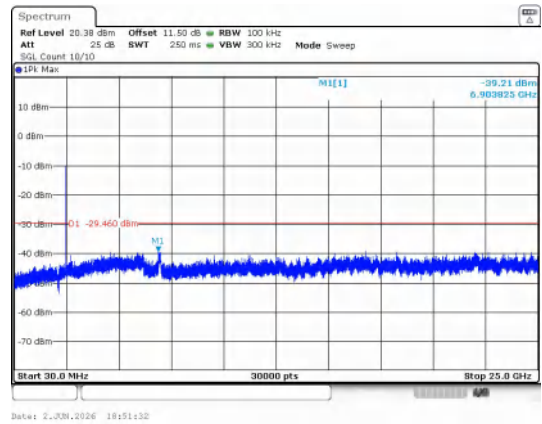


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 11_20MHz_Antenna 0

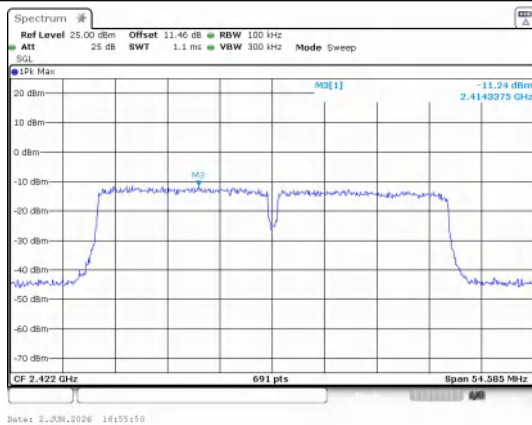


In-Band Reference Level
IEEE 802.11n_Channel 3_40MHz_Antenna 0

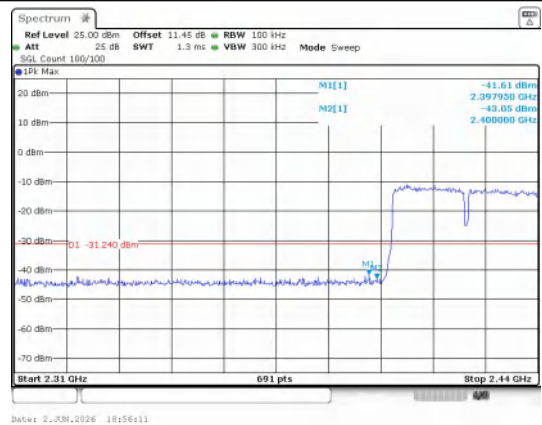


Out Of Band Emission
IEEE 802.11n_Channel 3_40MHz_Antenna 0

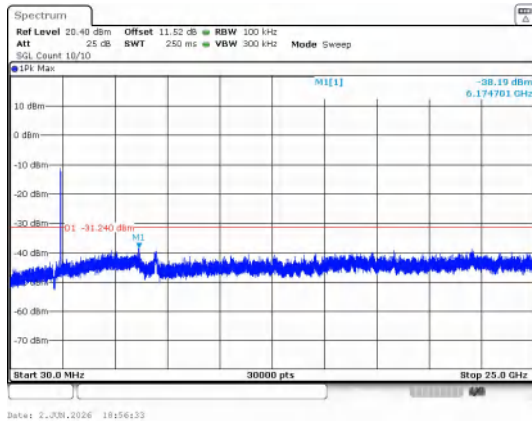

30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 3_40MHz_Antenna 0

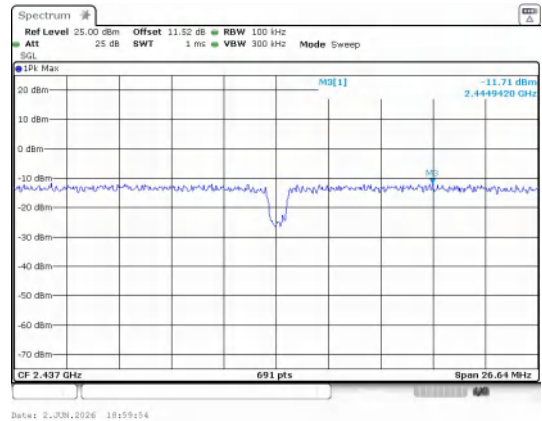

In-Band Reference Level
IEEE 802.11n_Channel 6_40MHz_Antenna 0

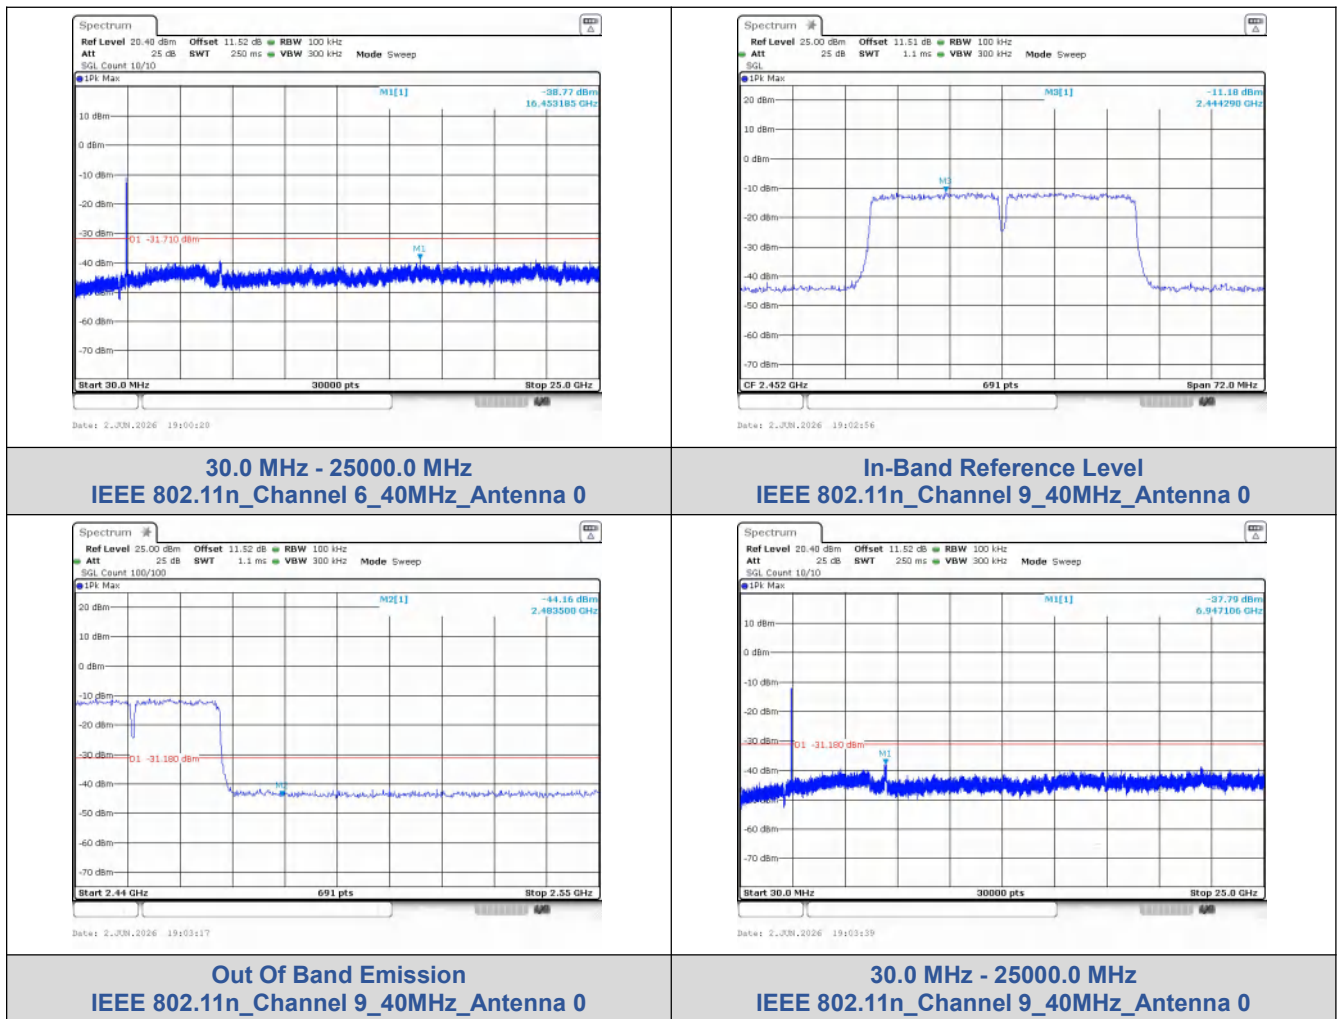

-----End of the report-----