

Antenna specification

►Company Name

Shenzhen Ruidida Intelligent Technology Co.,Ltd.

►Company address


Room 503, Building 53, Yuanling New Village, No.3, Yuanling First Street, Hongli Community, Yuanling Street, Futian District, Shenzhen

APPlications

※Bluetooth Home RF

※ISM band 2.4GHz applications

1. Dimensions

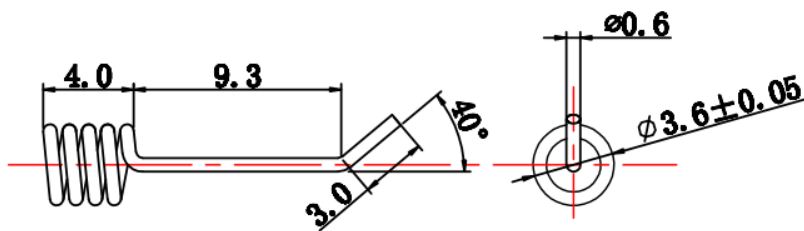

unit : mm


2. Specifications

number	Item	Specifications
1	Working Central Frequency	2441 MHz
2	Band Width	(2402-2480)MHz
3	Gain	0dBi
4	VSWR	≤2.0
5	Antenna type	Spiral antenna
6	Azimuth Beam width	Omni - directional
7	Impedance	50ohm
8	Modulation mode	GFSK

3. simulation parameter


① VSWR

Mkr1: 2397MHz 1.47 Mkr2: 2450MHz 1.51 Mkr3: 2482 MHz 1.59

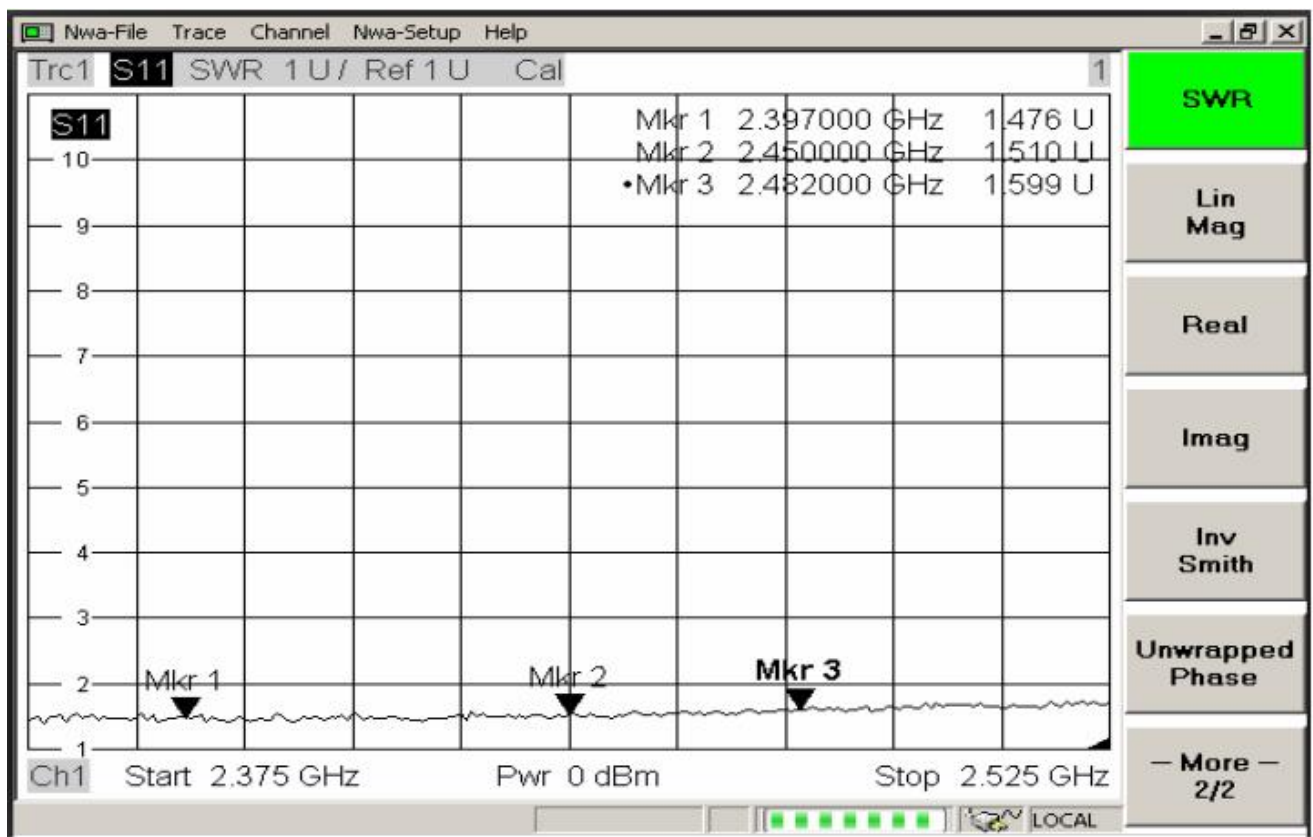


②Smith Char

Mkr1: 2397MHz 73.4 Mkr2: 2450MHz 62.7 Mkr3: 2482MHz 66.8

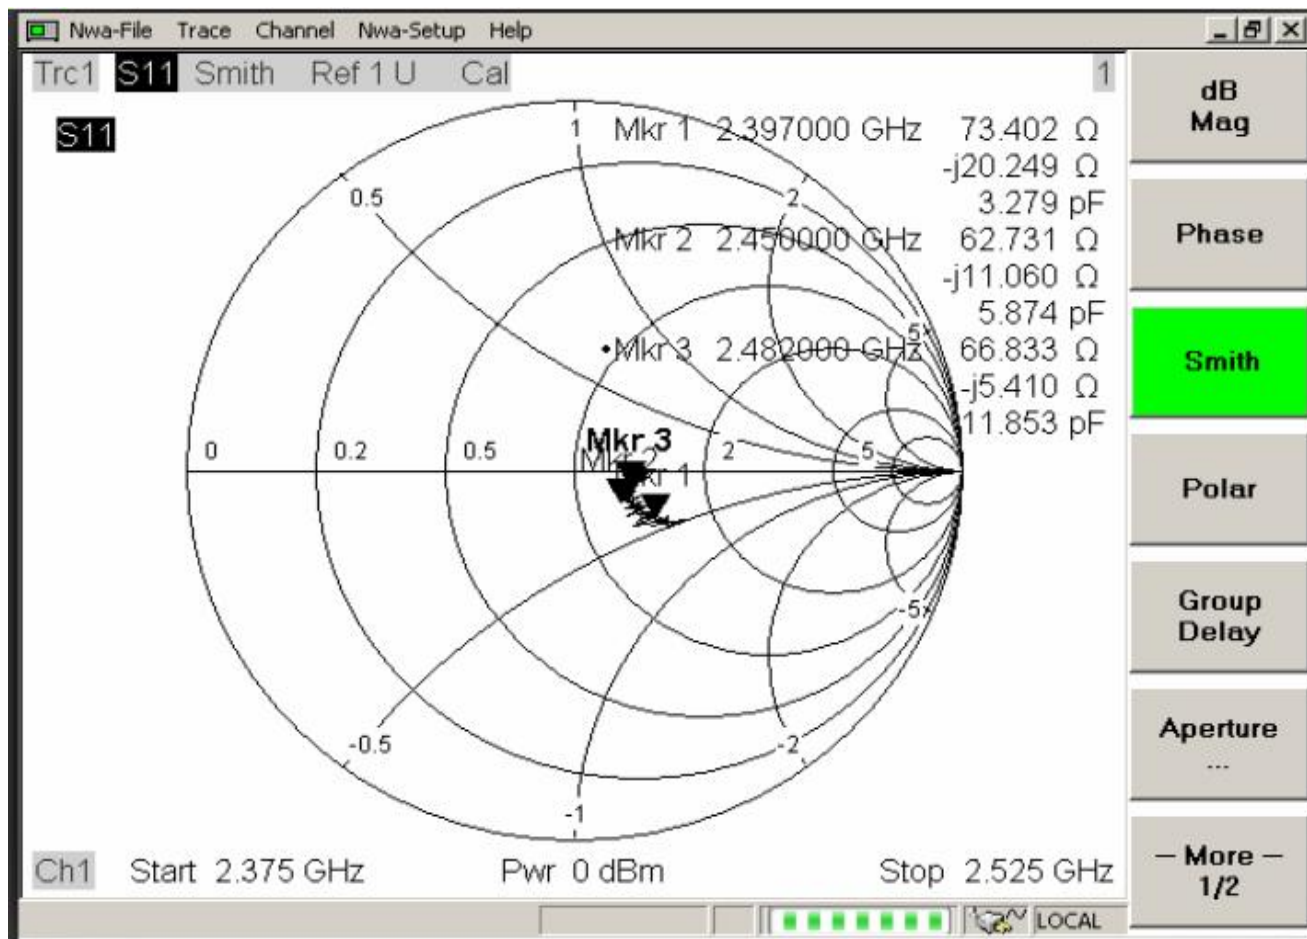


③Return Loss

Mkr1: 2397MHz -15 Mkr2: 2450MHz -18 Mkr3: 2482 MHz -16

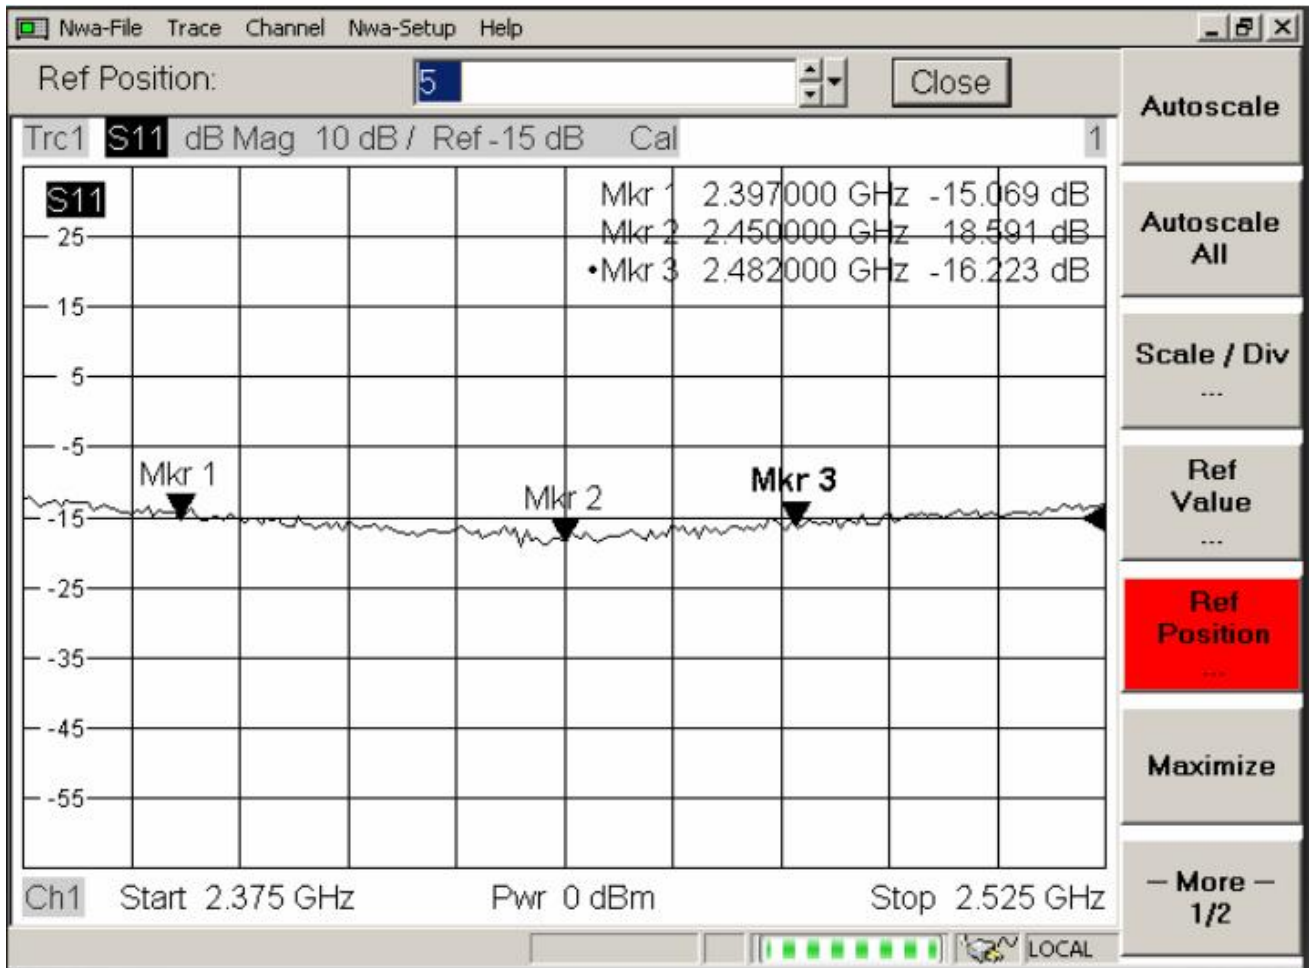


④Smith Char

Mkr1: 2400MHz 1.234 Mkr2: 2500MHz 1.051Mkr3: 2600MHz 1.322

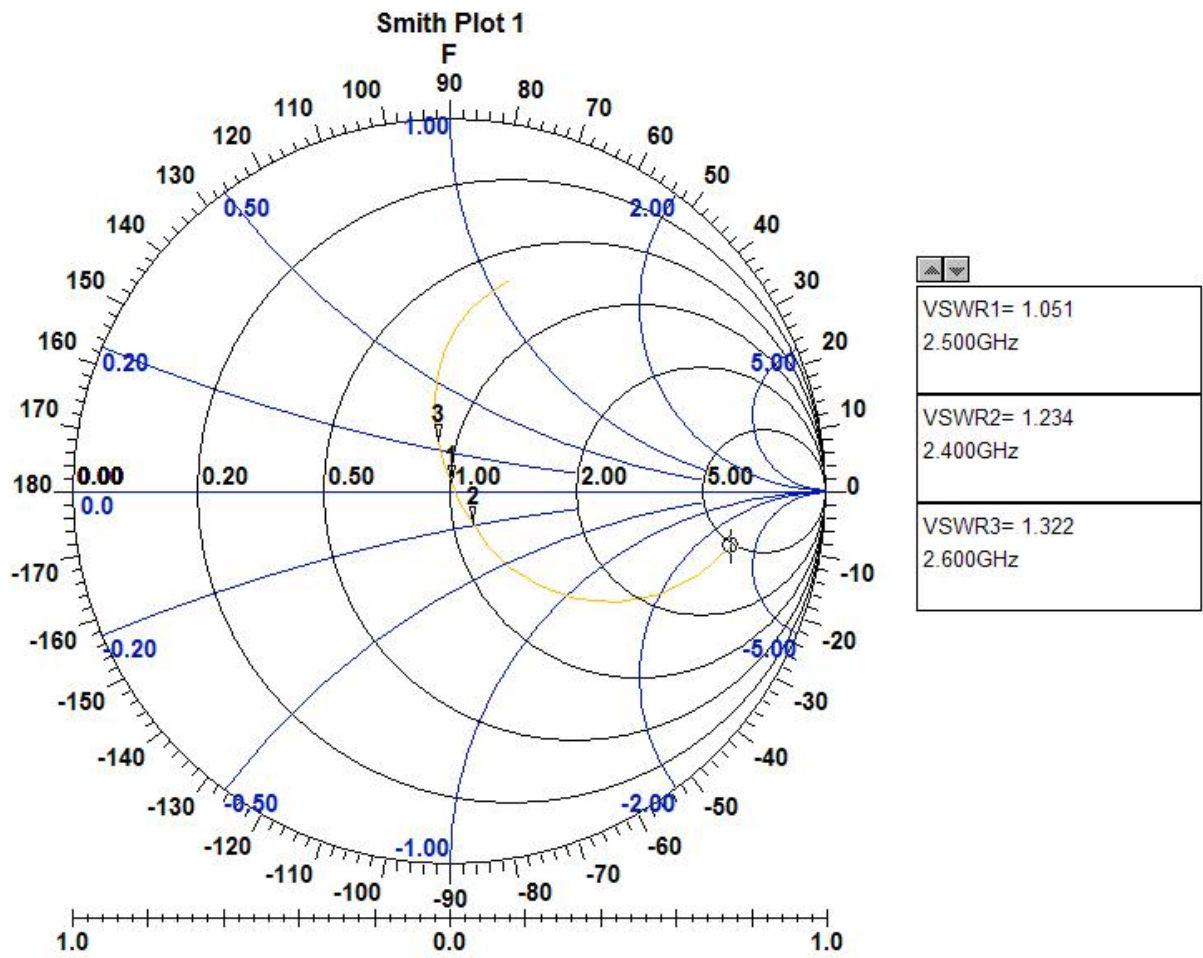


⑤Return Loss

Mkr1: 2400MHz -19.59 Mkr2: 2450MHz -27.70Mkr3: 2500MHz -31.97 Mkr4:
2550MHz -21.83

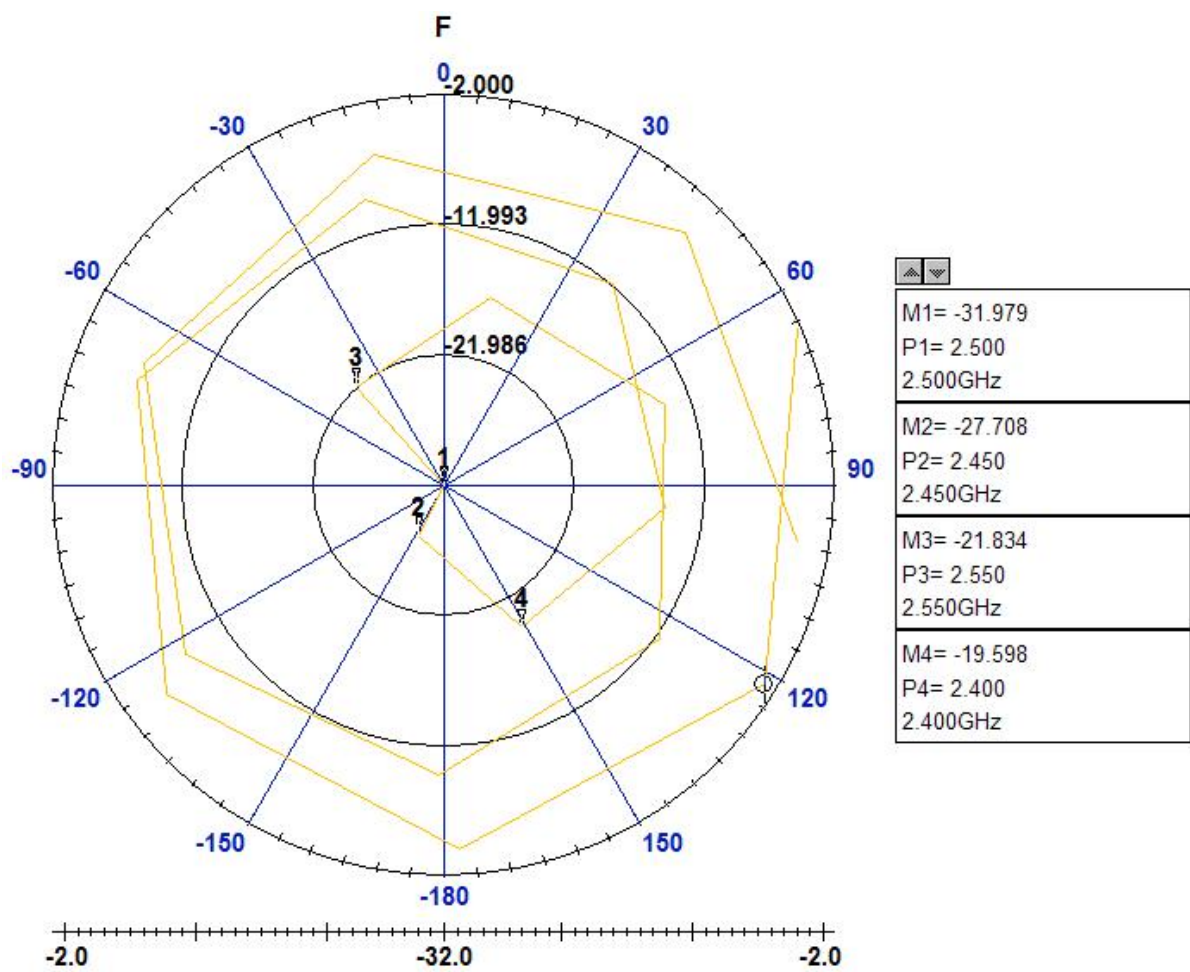


⑥Phase

Mkr1: 2400MHz -54.89 Mkr2: 2500MHz -82.03 Mkr3: 2600MHz -102.6

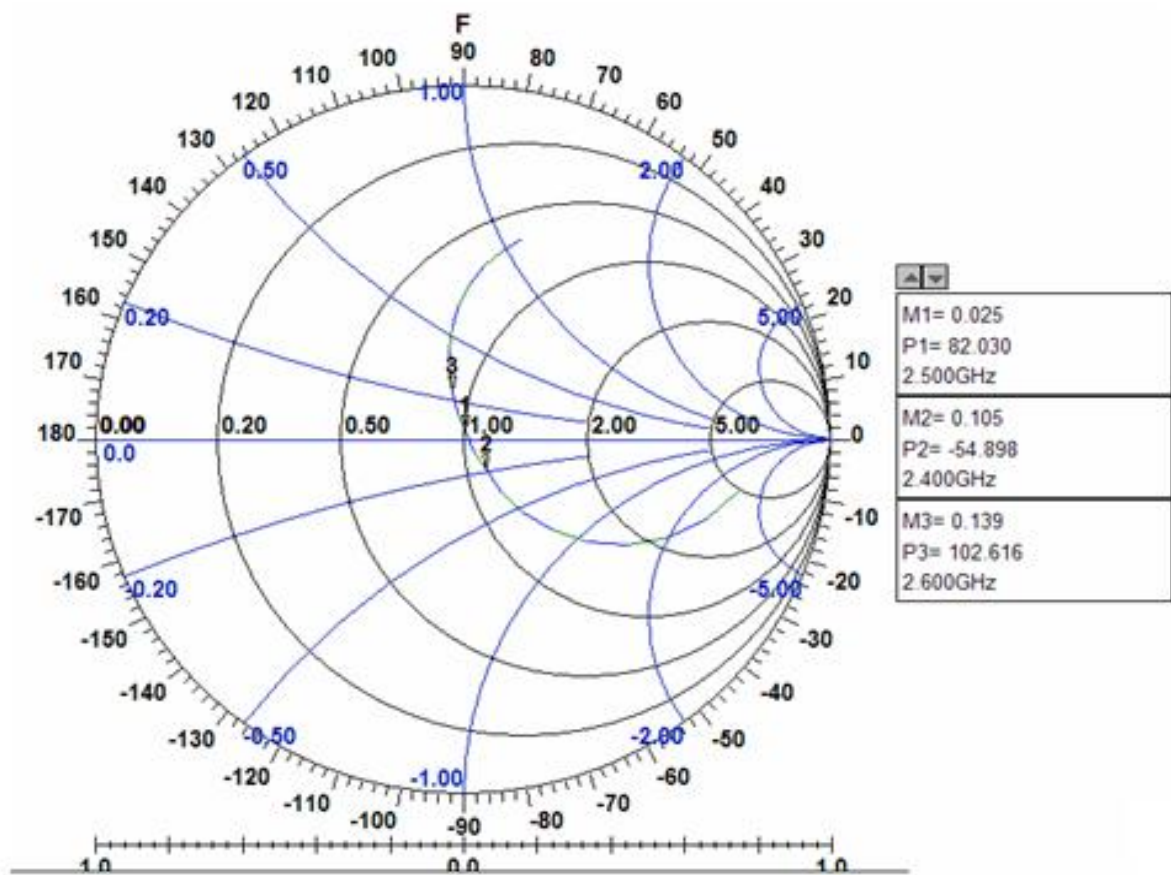

4. Radiation Patterns

XY-plane ———
XZ-plane ———
YZ-plane ———

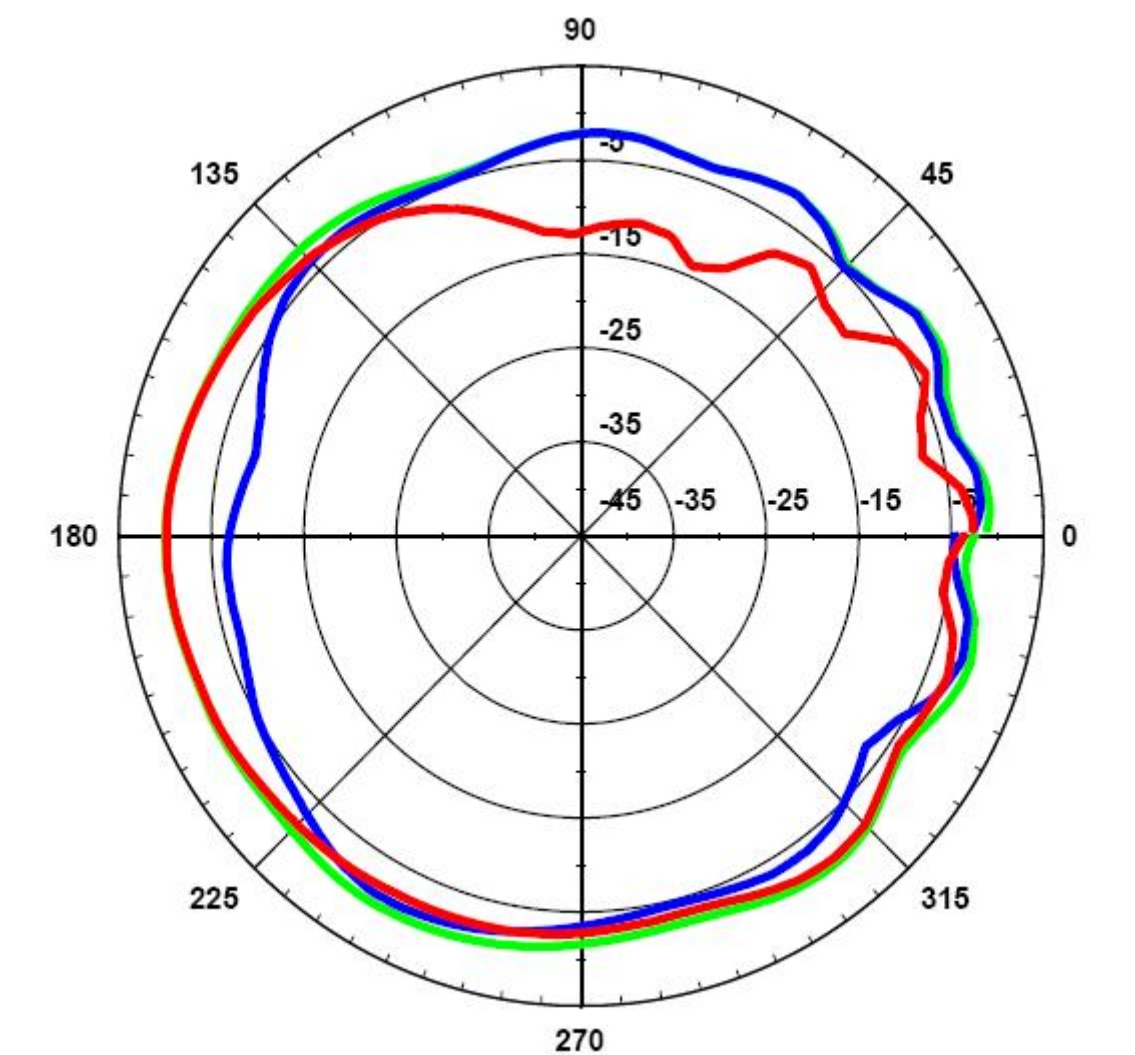

- 3DRadiation pattern

