

RF TEST REPORT

Applicant Shenzhen D-Health Medical
Technology Co., Ltd.

FCC ID 2BD8CPM6100

Product Patient Monitor

Brand **BERRY®**

Model PM6100; PM6100A; AM6200

Report No. R2404A0388-R1V1

Issue Date June 6, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Zhu Chentao

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report.....	5
1.2. Test Facility	5
1.3. Testing Location.....	5
2. General Description of Equipment Under Test.....	6
2.1. Applicant and Manufacturer Information	6
2.2. General Information	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	10
5.1. Maximum output power	10
5.2. 99% Bandwidth and 6dB Bandwidth	12
5.3. Band Edge	18
5.4. Power Spectral Density	21
5.5. Spurious RF Conducted Emissions.....	26
5.6. Unwanted Emission	30
5.7. Conducted Emission	46
6. Main Test Instruments.....	49
ANNEX A: The EUT Appearance.....	50
ANNEX B: Test Setup Photos	51

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	May 28, 2024
Rev.1	Update information in Page 6.	June 6, 2024
Note: This revised report (Report No.: R2404A0388-R1V1) supersedes and replaces the previously issued report (Report No.: R2404A0388-R1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: (Conducted) April 16, 2024 (Radiated) April 18, 2024 ~ May 23, 2024 Date of Sample Received: April 15, 2024			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Shenzhen D-Health Medical Technology Co., Ltd.
Applicant address	Unit 501, No. 1 Juyin Technology Industrial Plant, Jihua Street, Longgang District, Shenzhen, China
Manufacturer	Shanghai Berry Electronic Tech Co., Ltd
Manufacturer address	Unit 104, 1st Floor, 7th Building, No.1188 Lianhang Road, Minhang District, Shanghai

2.2. General Information

EUT Description	
Model	PM6100; PM6100A; AM6200
SN	Conducted: M6000451 Radiated: M6000450
Hardware Version	V3.3
Software Version	PM6100; PM6100A: V2.53.00.00 AM6200: V1.55.00.00
Power Supply	Battery/ AC Adapter
Antenna Type	Ceramic Chip Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	5.05 dBi
Additional Beamforming Gain	NA
Operating Frequency Range(s)	Bluetooth LE V5.0: 2402 ~2480 MHz
Modulation Type	Bluetooth LE: GFSK
Max. Output Power	Bluetooth LE: 3.47 dBm
EUT Accessory	
Battery	Manufacturer: Shanghai Berry Electronic Tech Co., Ltd Model: / DC 3.7V, 1800mAh
Blood Pressur Cuff	Manufacturer: Shanghai Berry Electronic Tech Co., Ltd Model: MH002RC12HP1
Auxiliary Test Equipment	
Adapter	Manufacturer: Xiaomi Communications Co., Ltd. Model: MDY-09-EQ Input: 100-240V~50/60Hz 0.3A Output: 5.0V $\pm$ 2.0A
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

The differences between models are shown in the table below:

Model Item	PM6100	PM6100A	AM6200
SW Version	V2.53.00.00	V2.53.00.00	V1.55.00.00
SpO ₂ (Arterial oxygen saturation in the blood)	√	√	√
PR/HR (Heart Rate or Pulse Rate)	√	√	√
NIBP (non-invasive blood pressure)	√	√	√
TEMP (body temperature)	√	×	√
Communication (Bluetooth)	√	√	√
RESP (Respiration rate)	√	√	√
Appearance	The same		Different
Others	The same		
Note: This report only tests PM6100.			

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2023) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth (Low Energy)	1Mbps

5. Test Case Results

5.1. Maximum output power


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1\text{W (30dBm)}$
----------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44 \text{ dB}$.

Test Results

Power Index	
Channel	Bluetooth (Low Energy)
CH0	default
CH19	default
CH39	default

Test Mode	Duty cycle	Duty cycle correction Factor (dB)
Bluetooth LE	1.000	0.00
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.		

Test Mode	Carrier frequency (MHz) / Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
Bluetooth (Low Energy)	2402/CH0	2.63	2.63	30	PASS
	2440/CH19	3.26	3.26	30	PASS
	2480/CH39	3.47	3.47	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:


Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
Bluetooth (Low Energy)	2402	1.054	0.727	500	PASS
	2440	1.054	0.721	500	PASS
	2480	1.055	0.720	500	PASS

99%bandwidth


OBW BLE 2402MHz

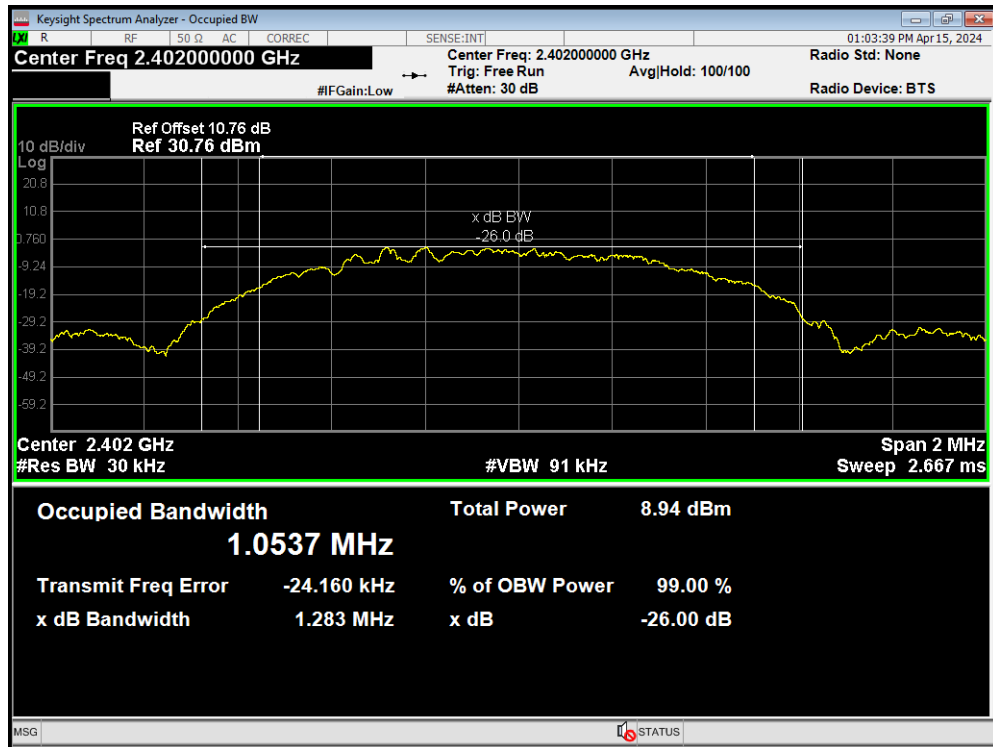

OBW BLE 2440MHz

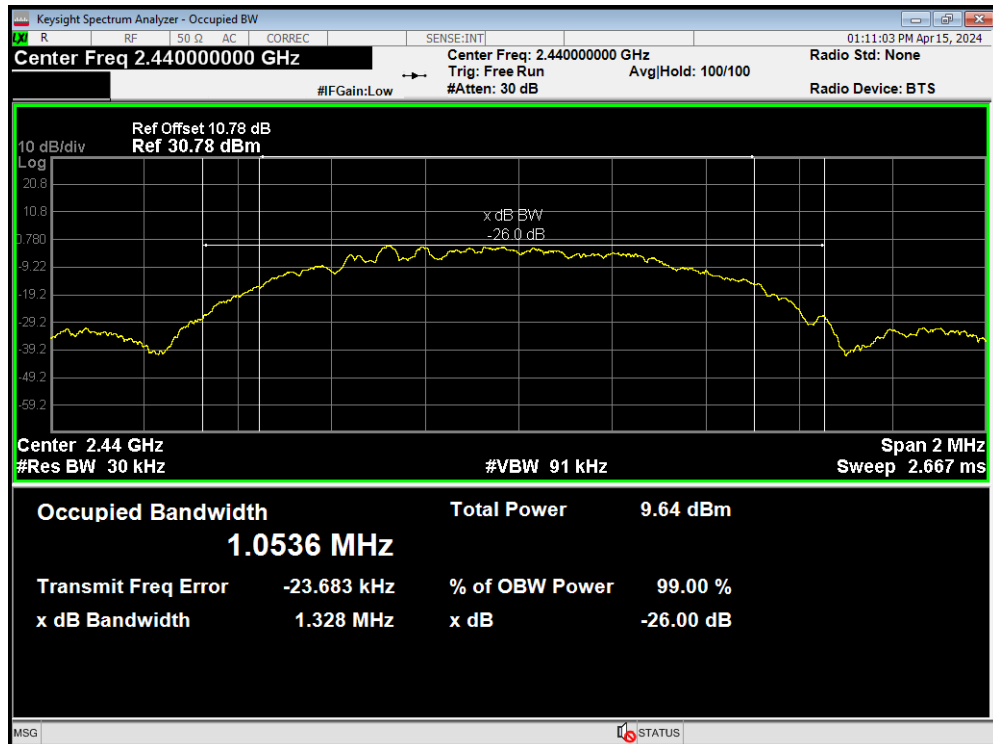


OBW BLE 2480MHz

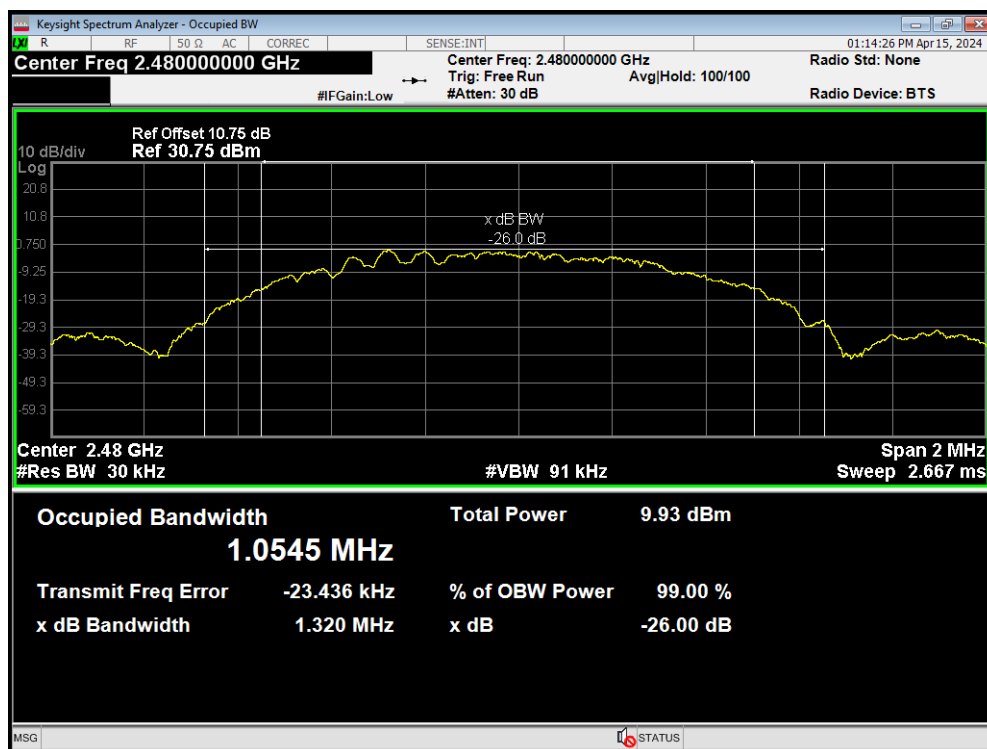


6 dB bandwidth


-6dB Bandwidth BLE 2402MHz

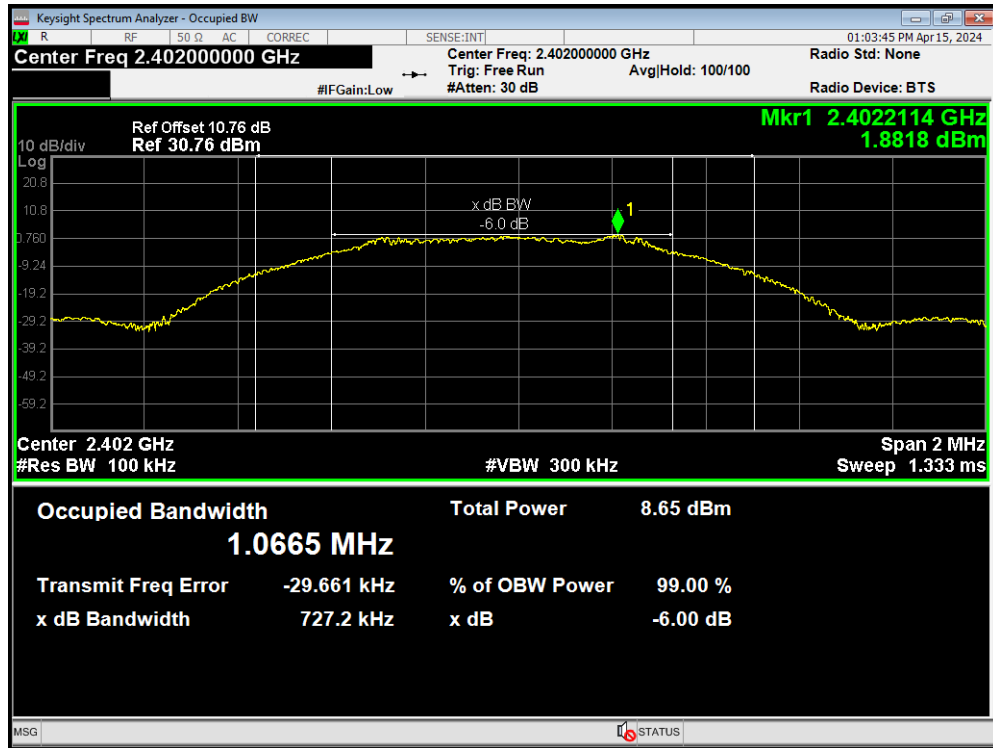

-6dB Bandwidth BLE 2440MHz

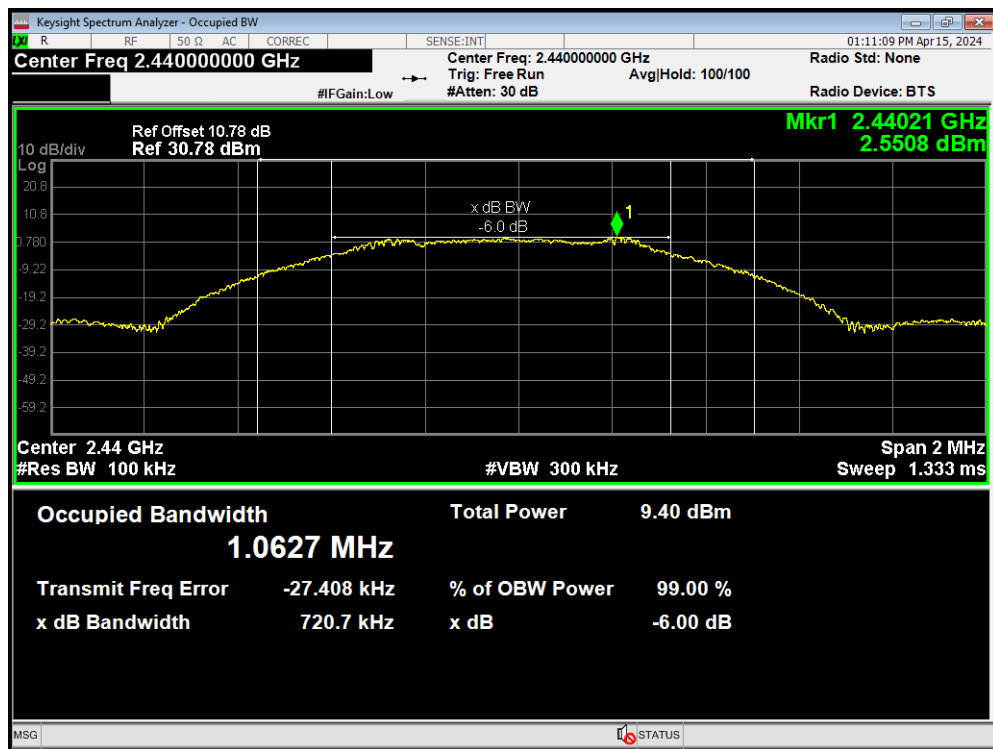

-6dB Bandwidth BLE 2480MHz

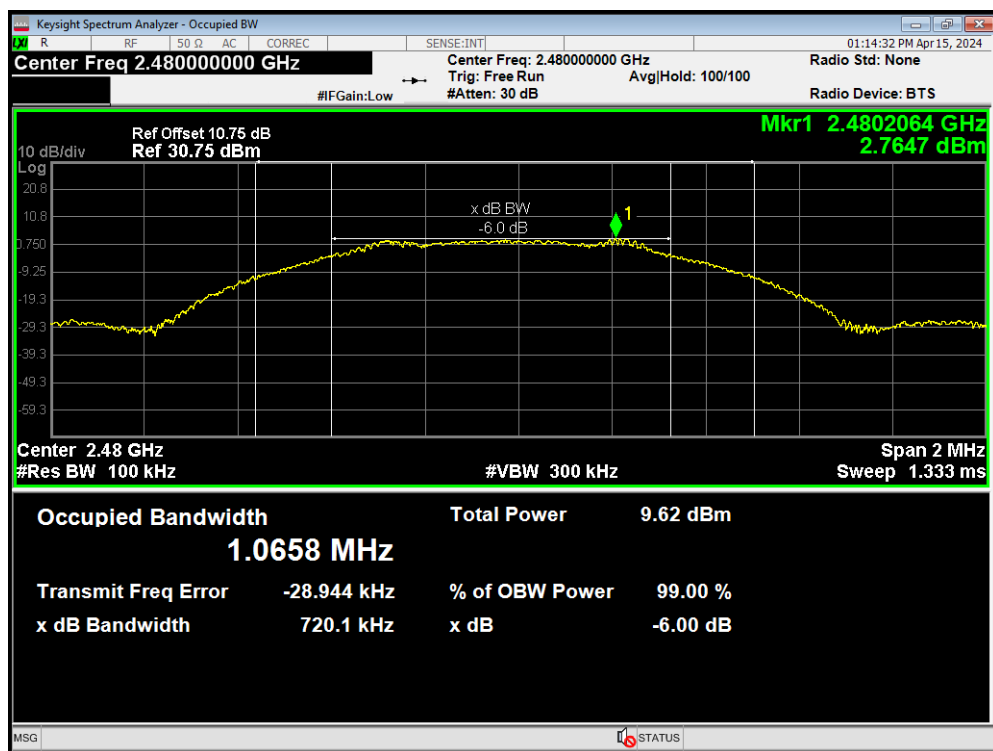

5.3. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB

Test Results: PASS


Band Edge BLE 2402MHz Ref

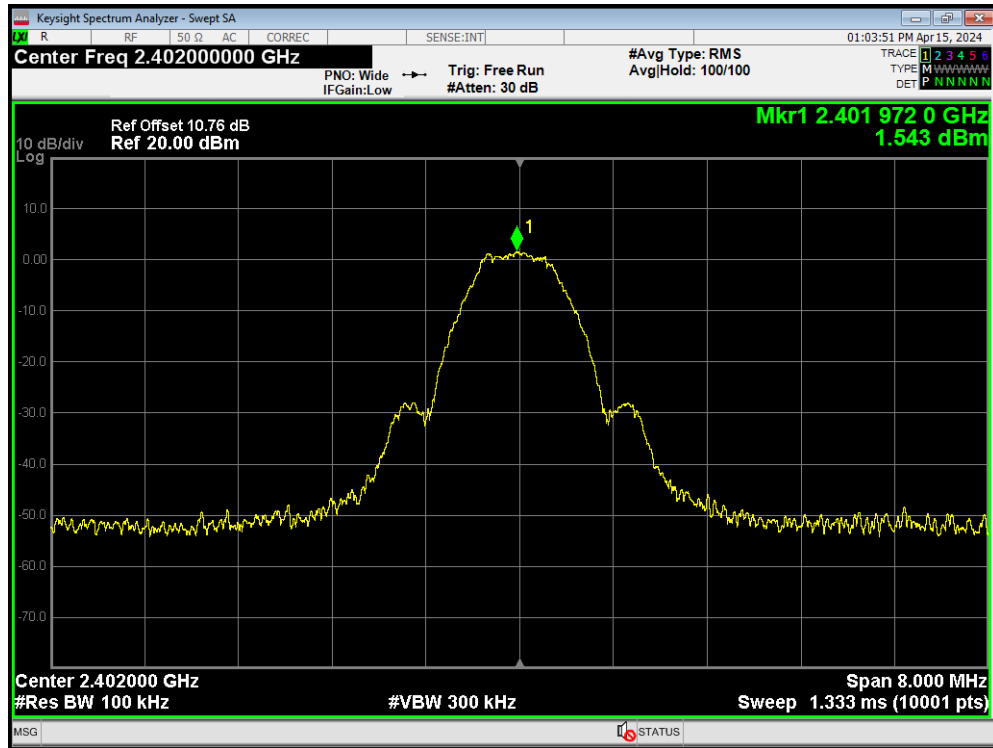


Band Edge BLE 2402MHz Emission

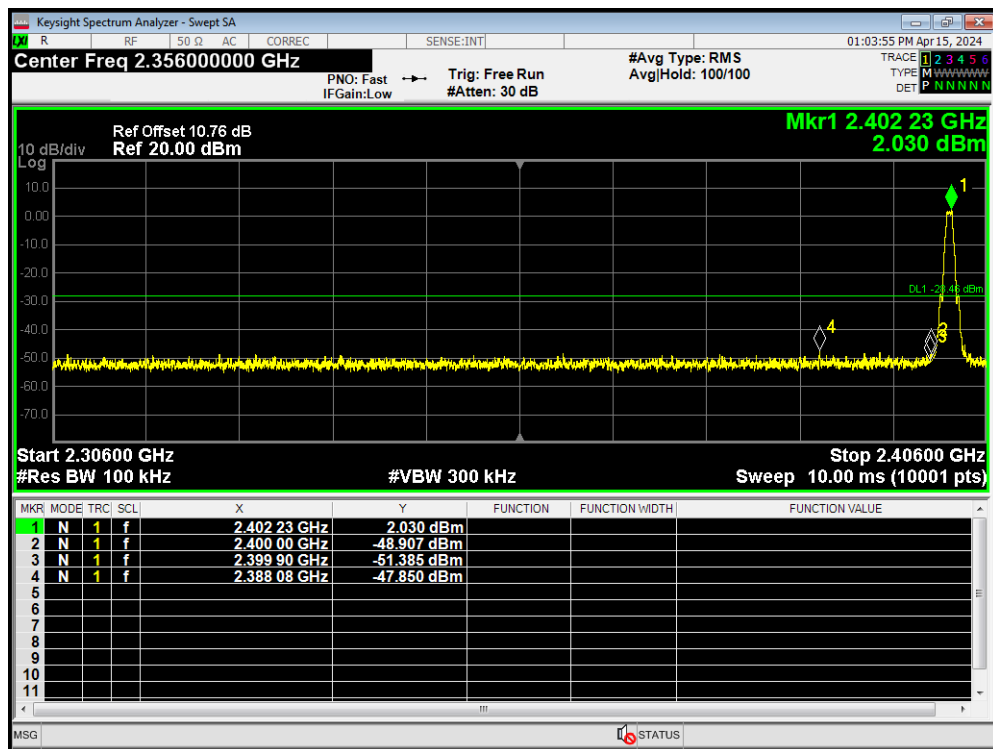

Band Edge BLE 2480MHz Ref

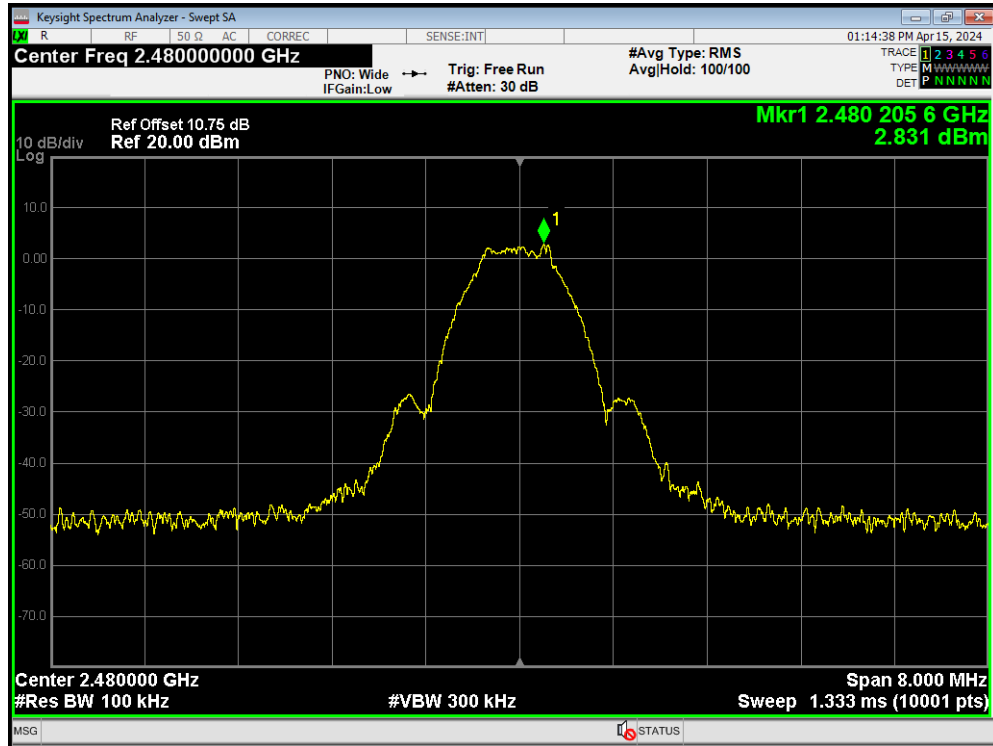

Band Edge BLE 2480MHz Emission

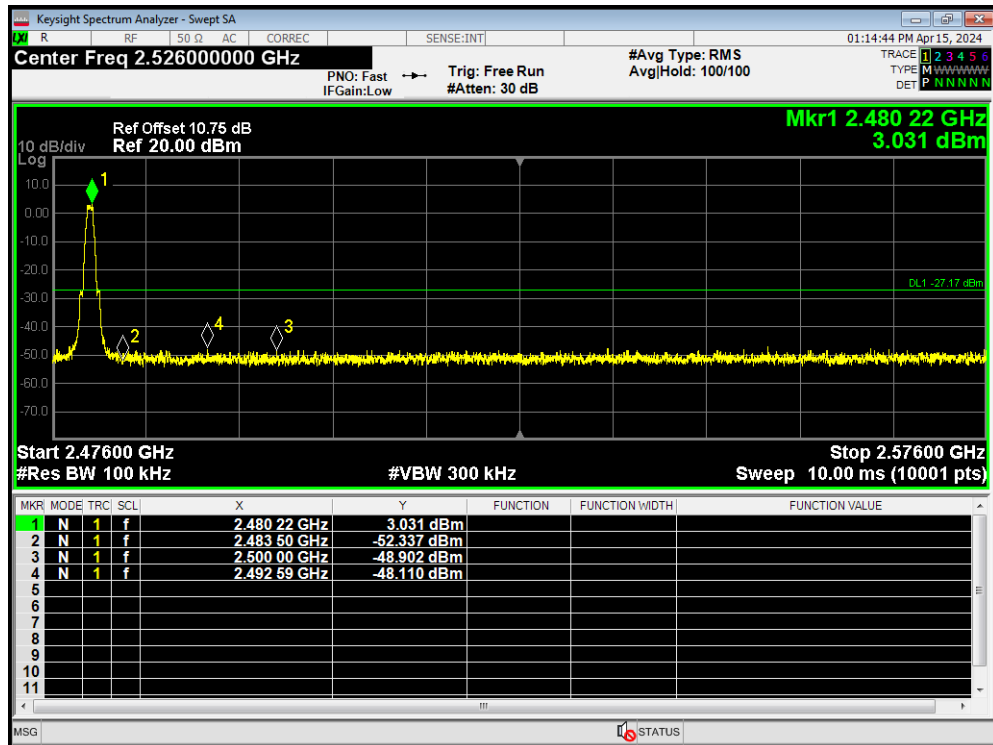

5.4. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPS-1 was used for this test.

- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector=power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$
- Sweep time auto couple
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)
- Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. “

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.


Test Results:

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy)	2402/CH0	-18.56	-18.56	8	PASS
	2440/CH19	-18.01	-18.01	8	PASS
	2480/CH39	-17.53	-17.53	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					


PSD BLE 2402MHz

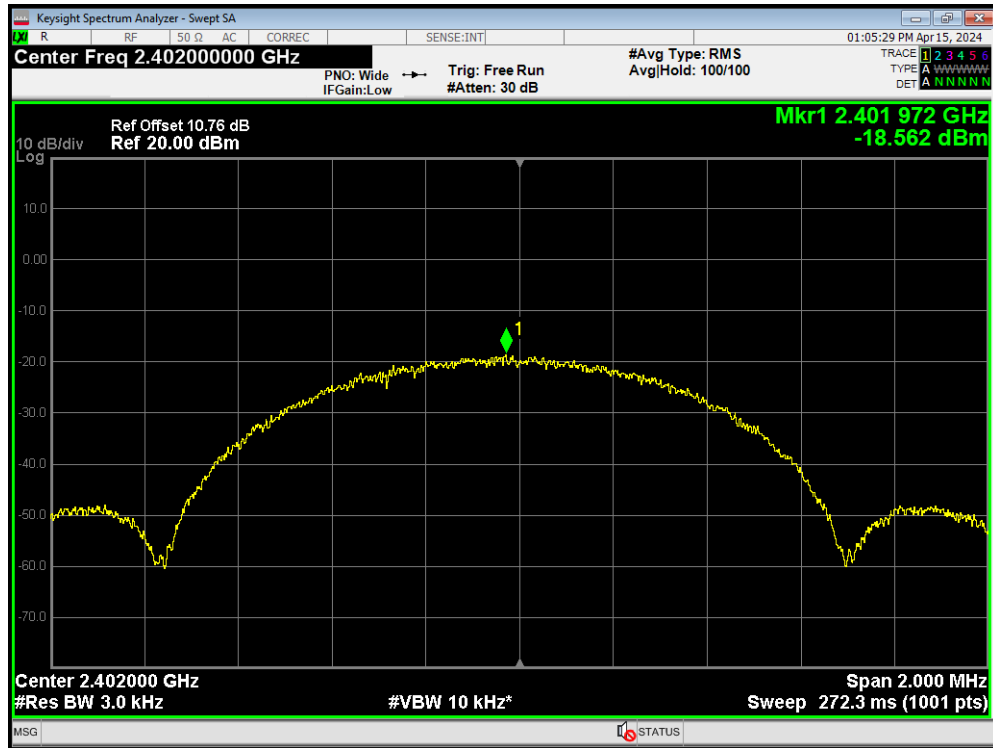

PSD BLE 2440MHz

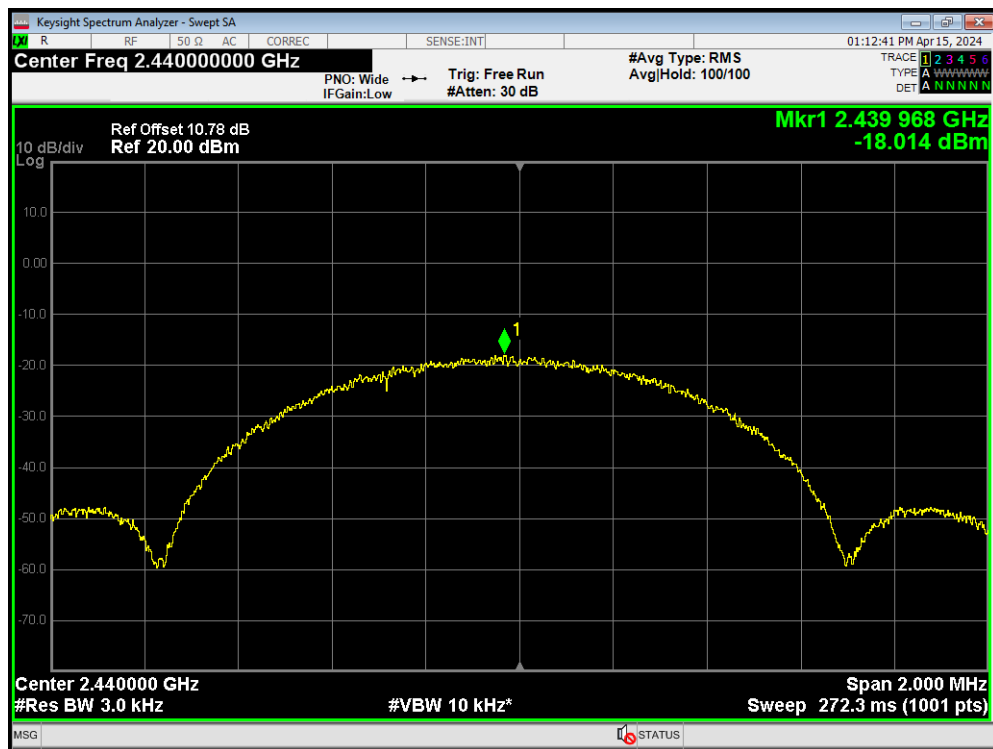

PSD BLE 2480MHz

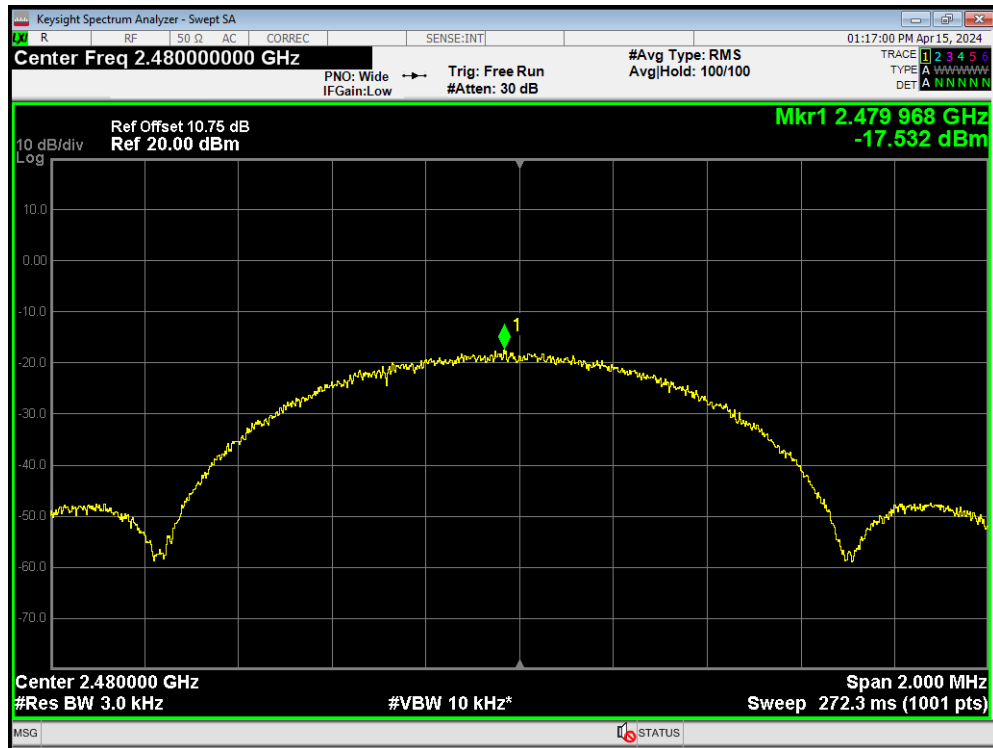

5.5. Spurious RF Conducted Emissions

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
Bluetooth (Low Energy)	2402	1.86	-28.14
	2440	2.54	-27.46
	2480	2.79	-27.21


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:


Tx. Spurious BLE 2402MHz Ref

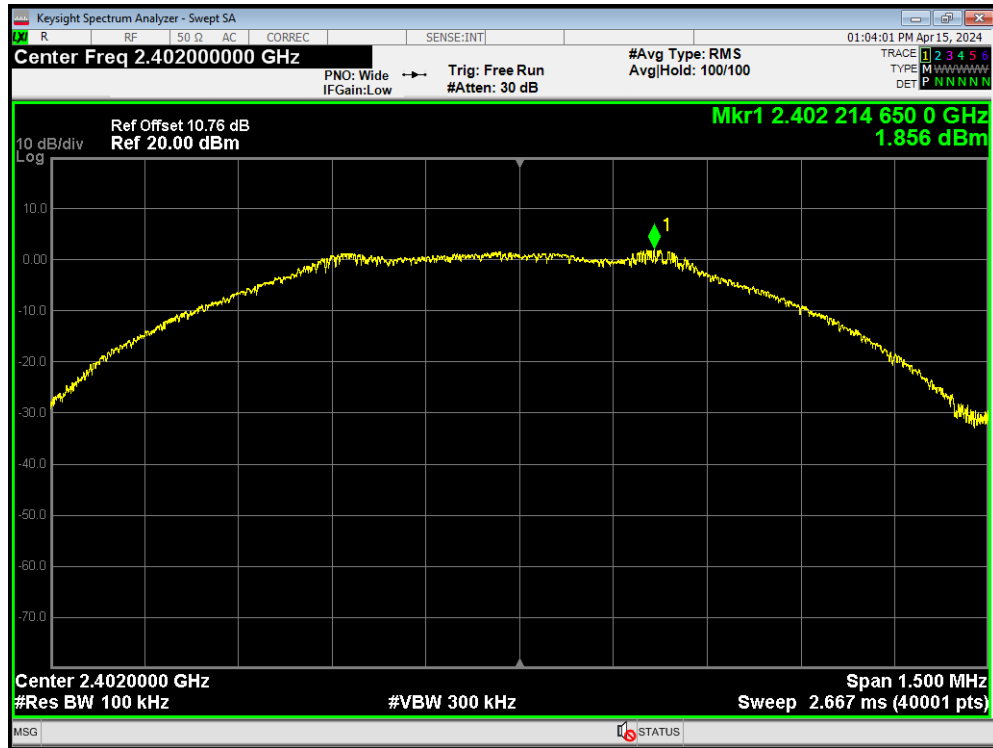


Tx. Spurious BLE 2402MHz Emission

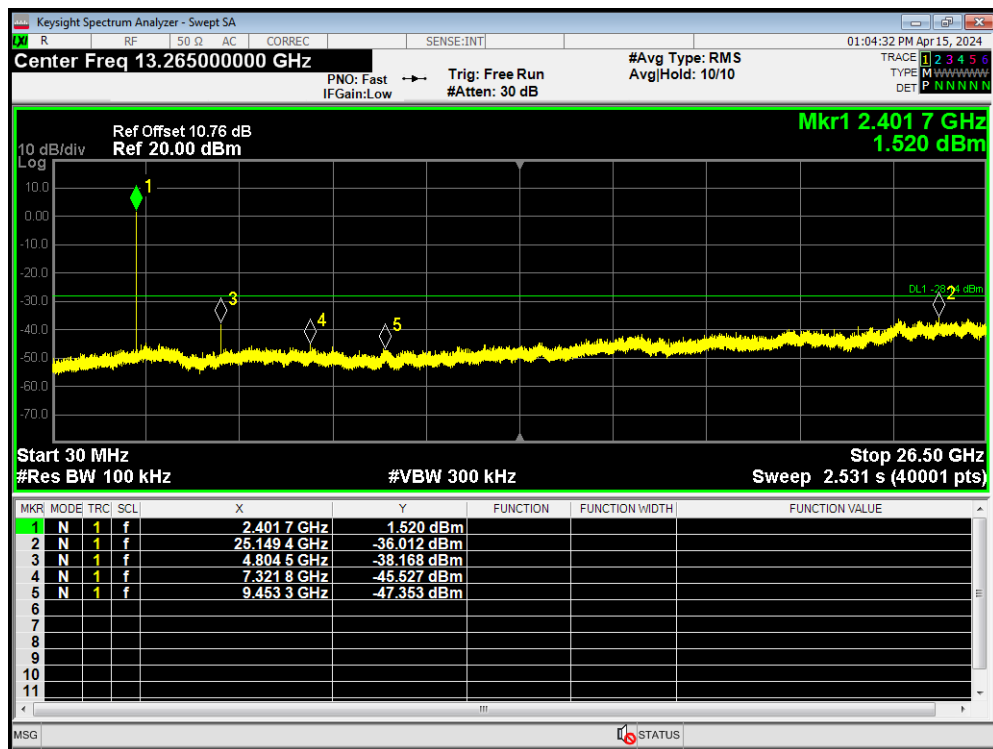


Tx. Spurious BLE 2440MHz Ref

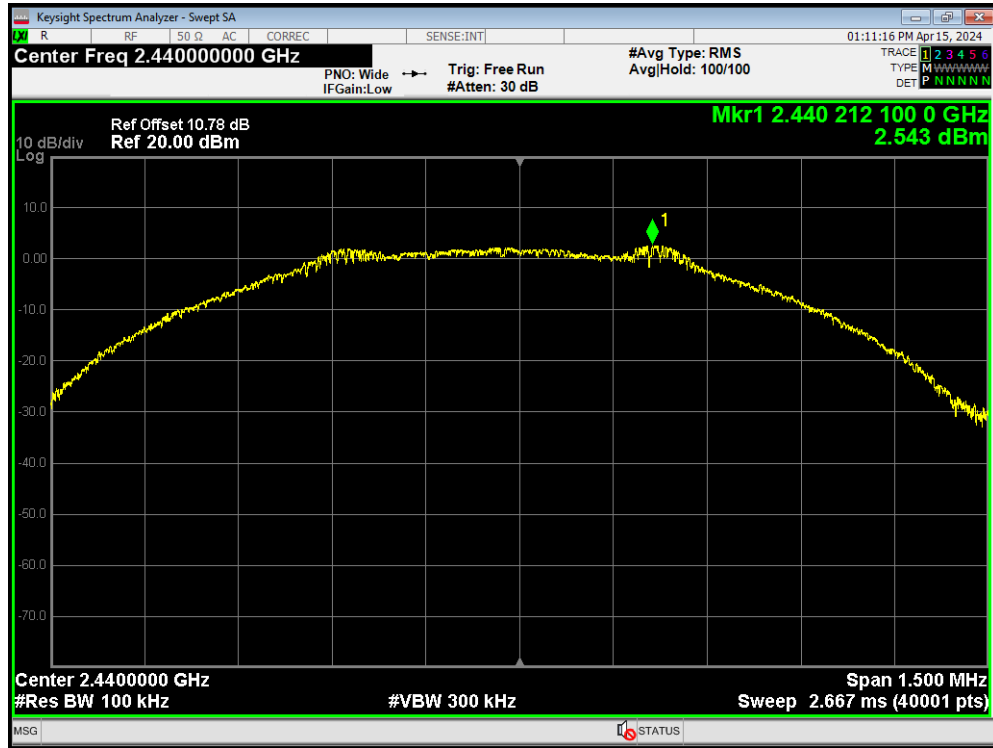


Tx. Spurious BLE 2440MHz Emission

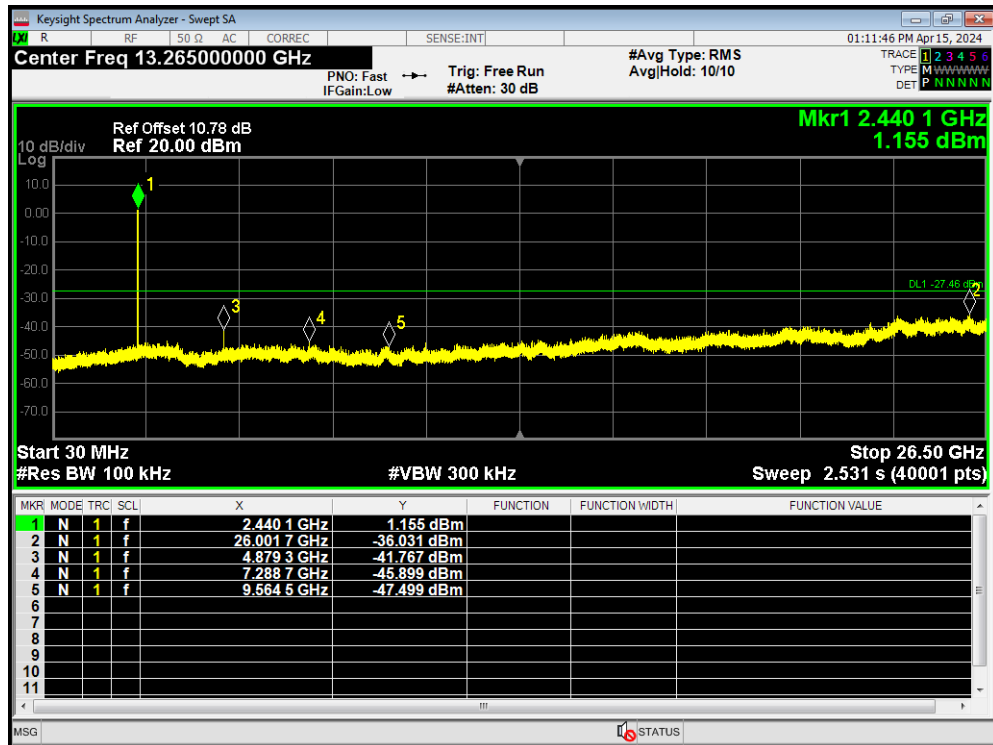

Tx. Spurious BLE 2480MHz Ref

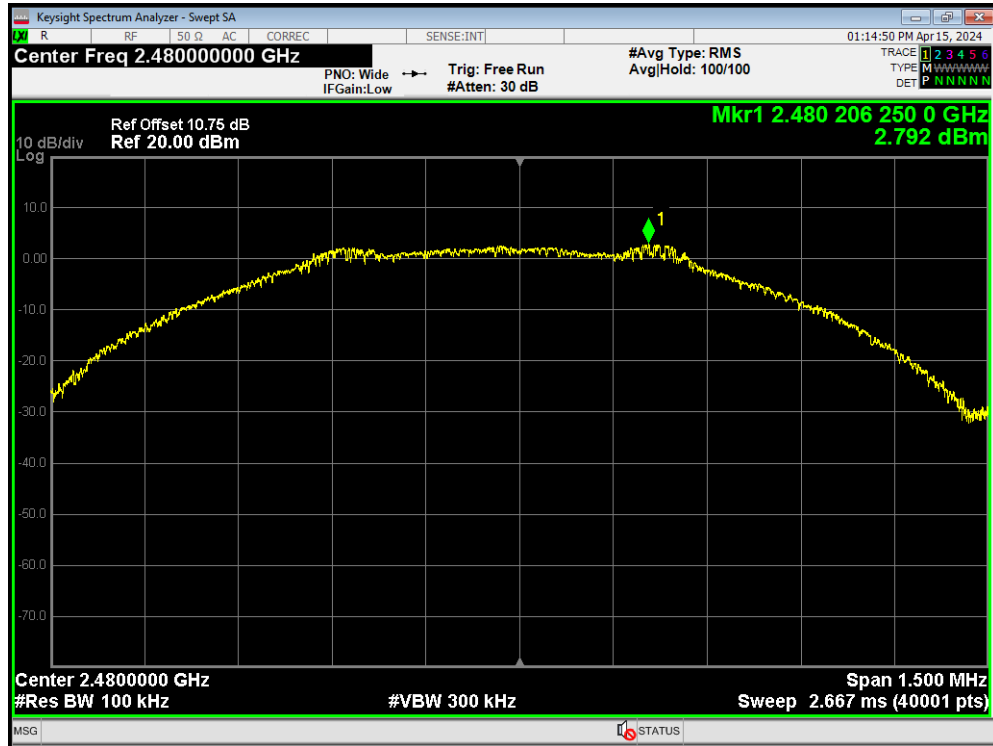

Tx. Spurious BLE 2480MHz Emission

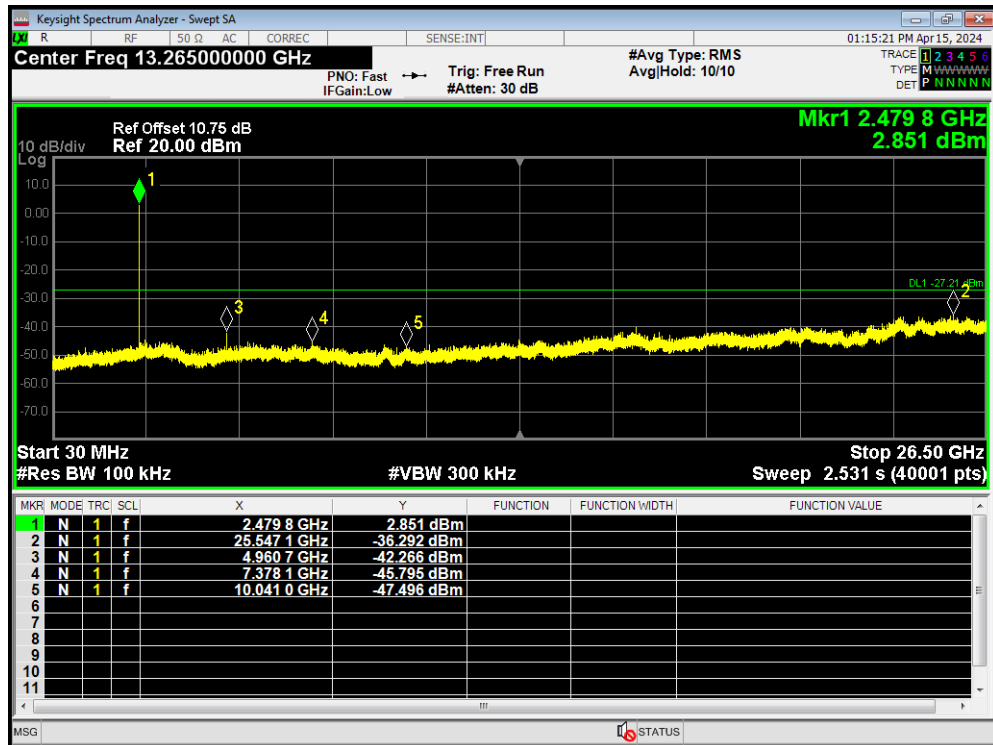

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 10 meters for 30MHz~ 1GHz; 3 meters for 9kHz~ 30MHz and above 1GHz between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.

Test Setup

9kHz~ 30MHz


Distance 3m

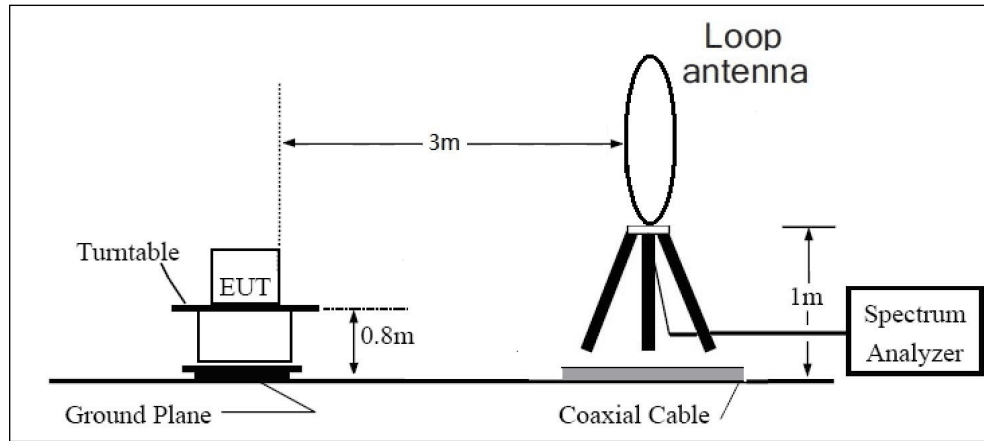

Note: Area side:2.4mX3.6m


30MHz~ 1GHz

Distance 10m

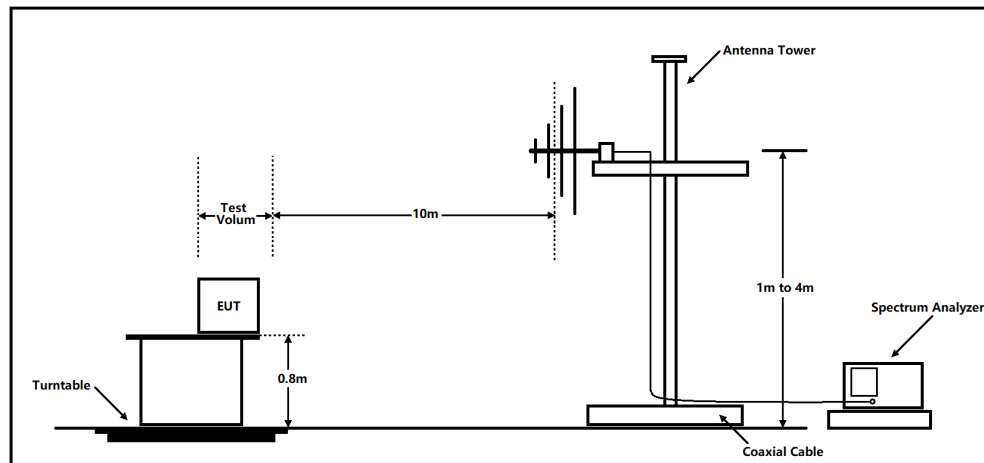

Note: Area side: 21m x 12m

Above 1GHz
Distance 3m

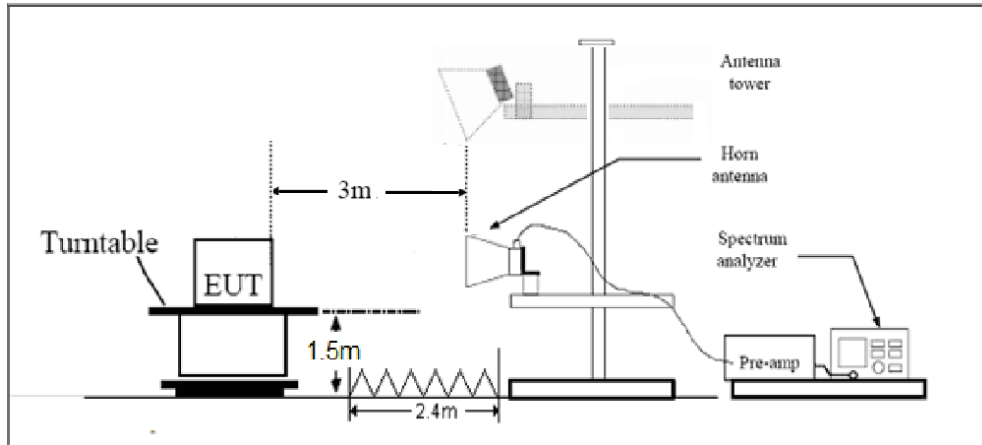

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength($\mu\text{V/m}$)	Field strength($\text{dB}\mu\text{V/m}$)
0.009–0.490	$2400/F(\text{kHz})$	/
0.490–1.705	$24000/F(\text{kHz})$	/
1.705–30.0	30	/
30-88	100	30
88-216	150	33.5
216-960	200	36
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 $\text{dB}\mu\text{V/m}$

Average Limit=54 $\text{dB}\mu\text{V/m}$

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty (3m)	Uncertainty (10m)
9kHz-30MHz	3.55 dB	--
30MHz-200MHz	--	3.39 dB
200MHz-1GHz	--	3.82 dB
1-18GHz	--	6.51 dB
18-26.5GHz	5.90 dB	--

Test Results:

The following graphs display the maximum values of horizontal and vertical by software.
Blue trace uses the peak detection, Green trace uses the average detection.

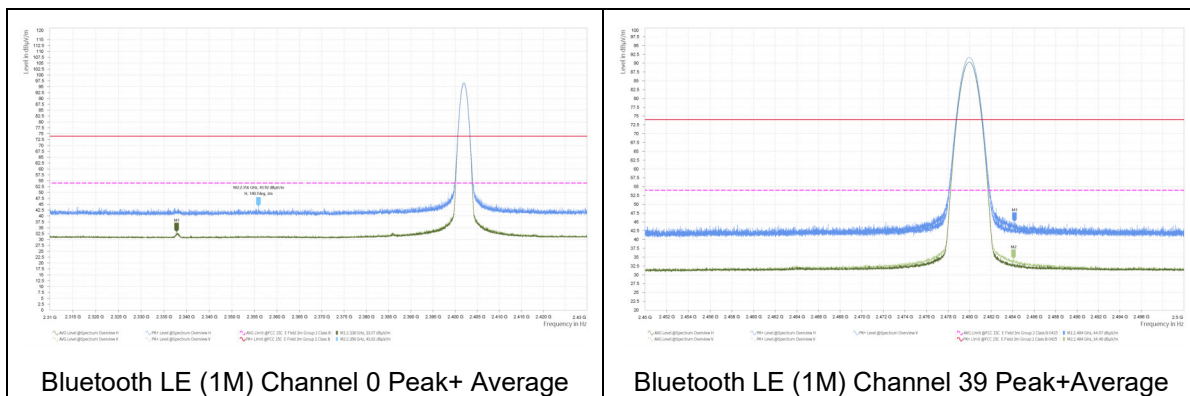

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.


For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:


Bluetooth LE

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)

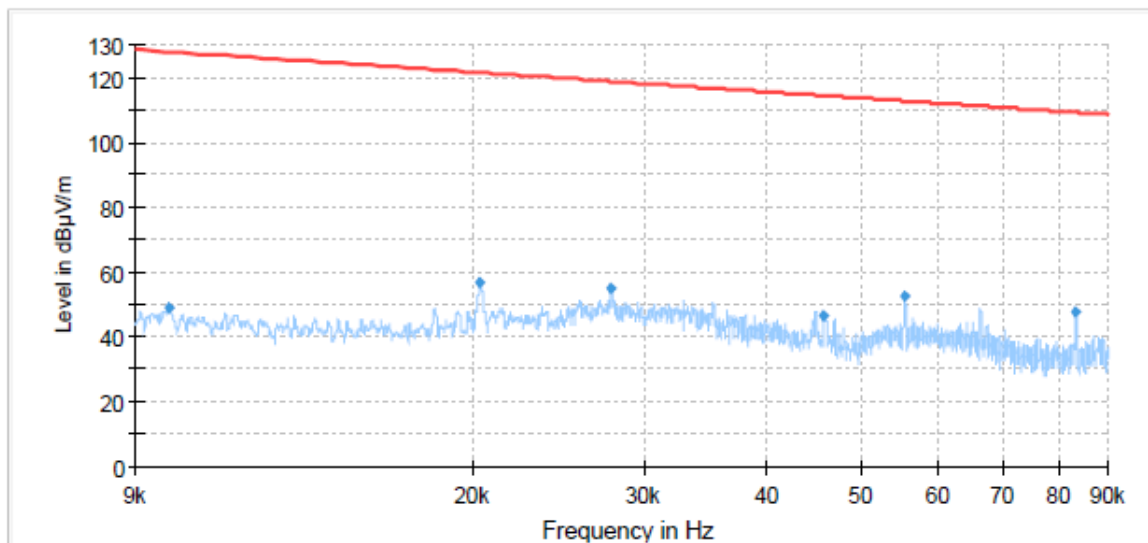


Radiates Emission from 9kHz to 90kHz

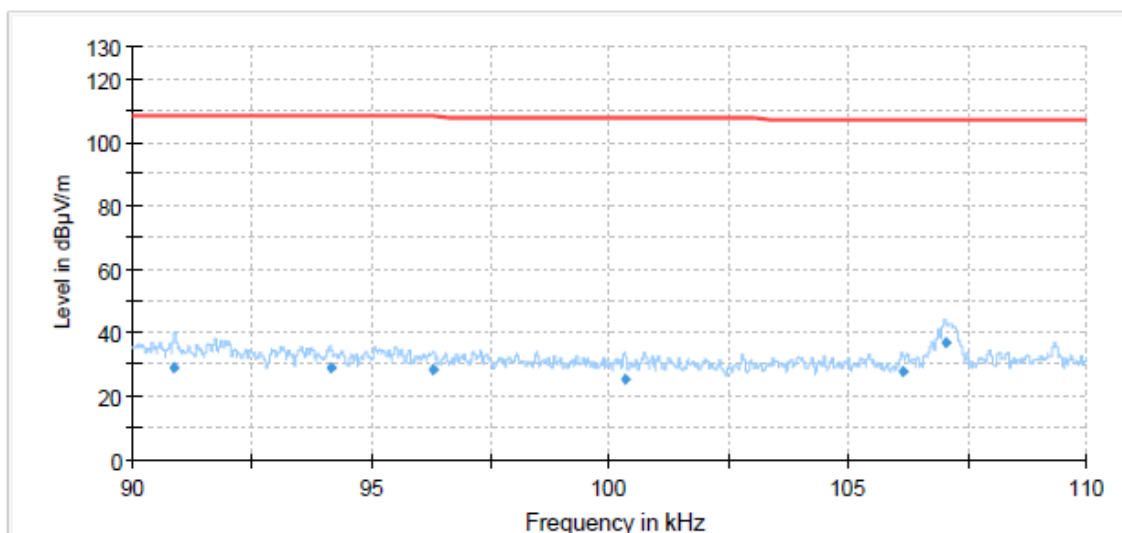


Radiates Emission from 90kHz to 110kHz

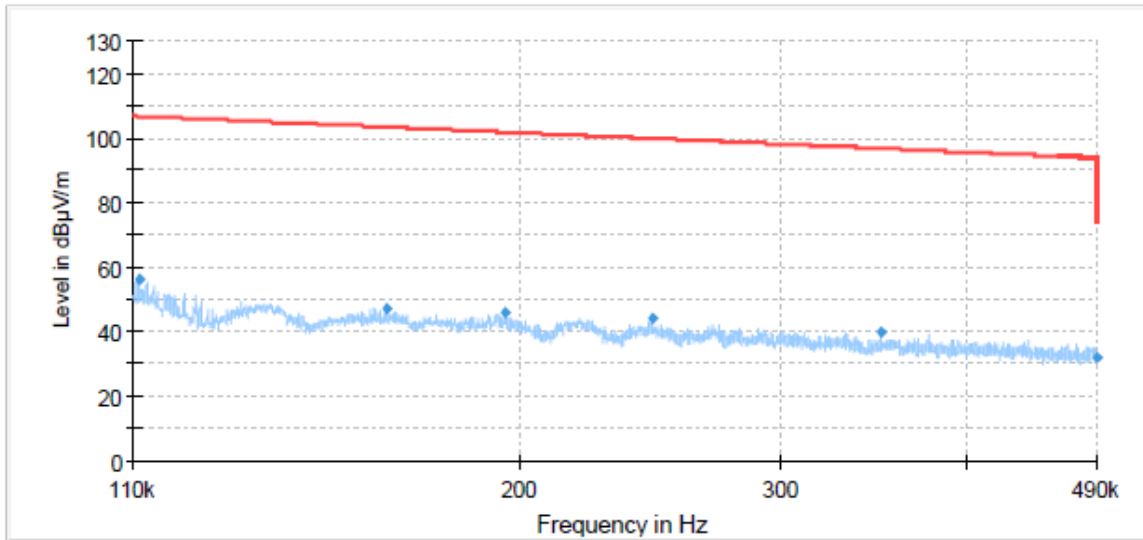

Radiates Emission from 110kHz to 490kHz

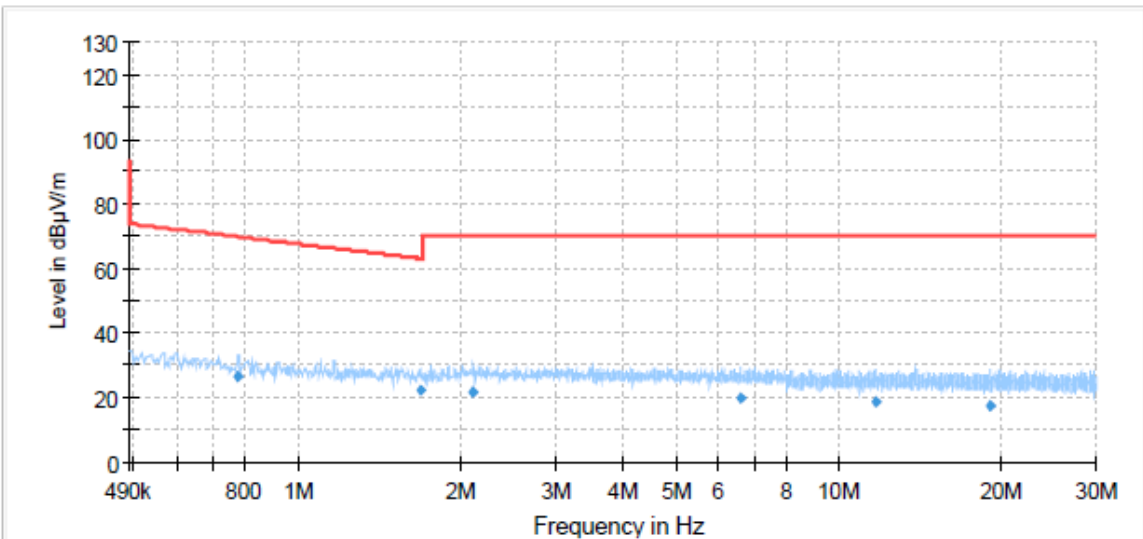

Radiates Emission from 490kHz to 30MHz

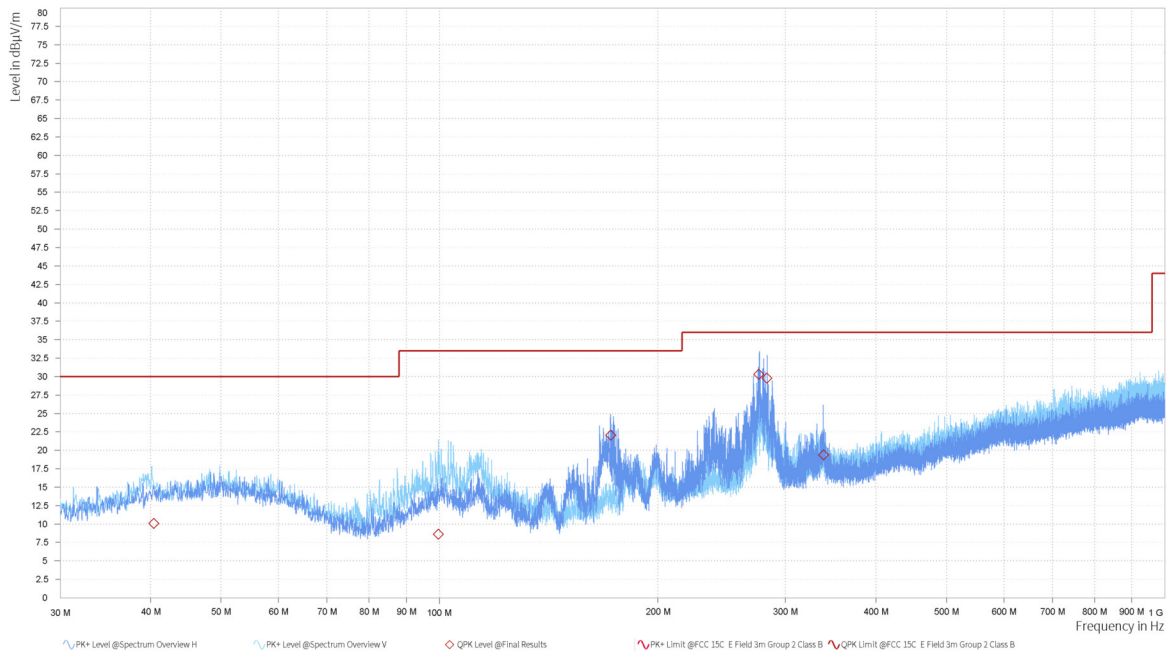


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
172.213	22.04	33.50	11.46	3.96	H	97.9	-12.58
275.511	30.32	36.00	5.68	4.00	H	146.4	-8.51
282.816	29.78	36.00	6.22	3.22	H	323.8	-8.34
338.449	19.40	36.00	16.60	3.91	H	151.3	-6.59
40.371	10.09	30.00	19.91	3.91	V	157.1	-9.56
99.678	8.63	33.50	24.87	1.25	V	223.6	-9.64


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

Bluetooth LE-Channel 0

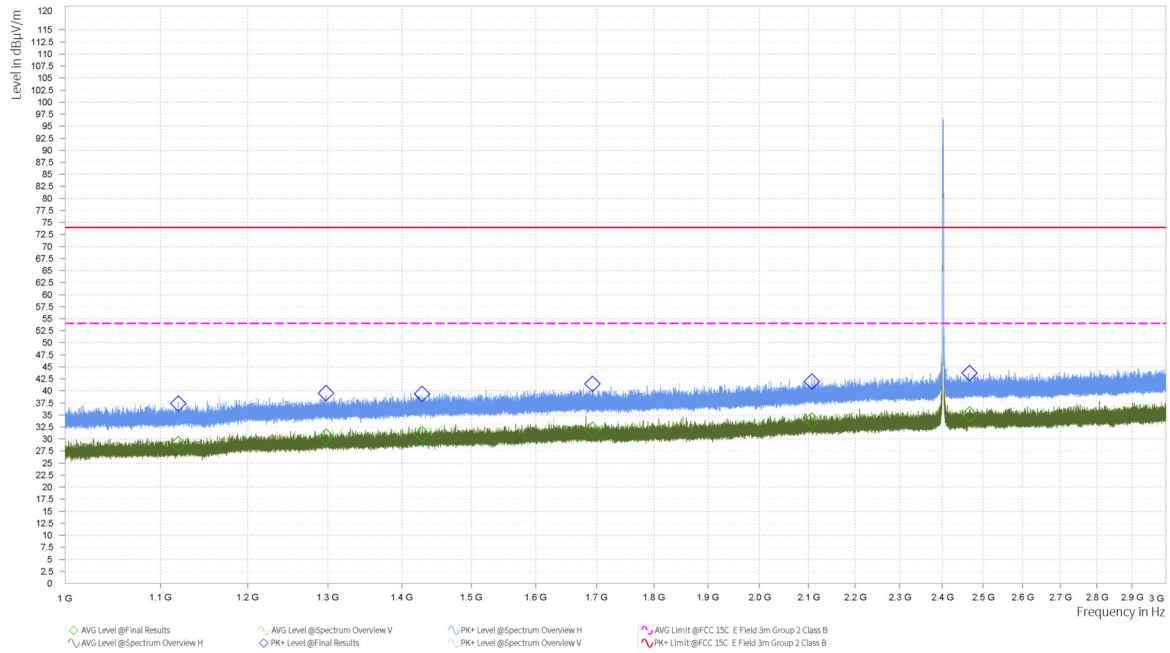

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

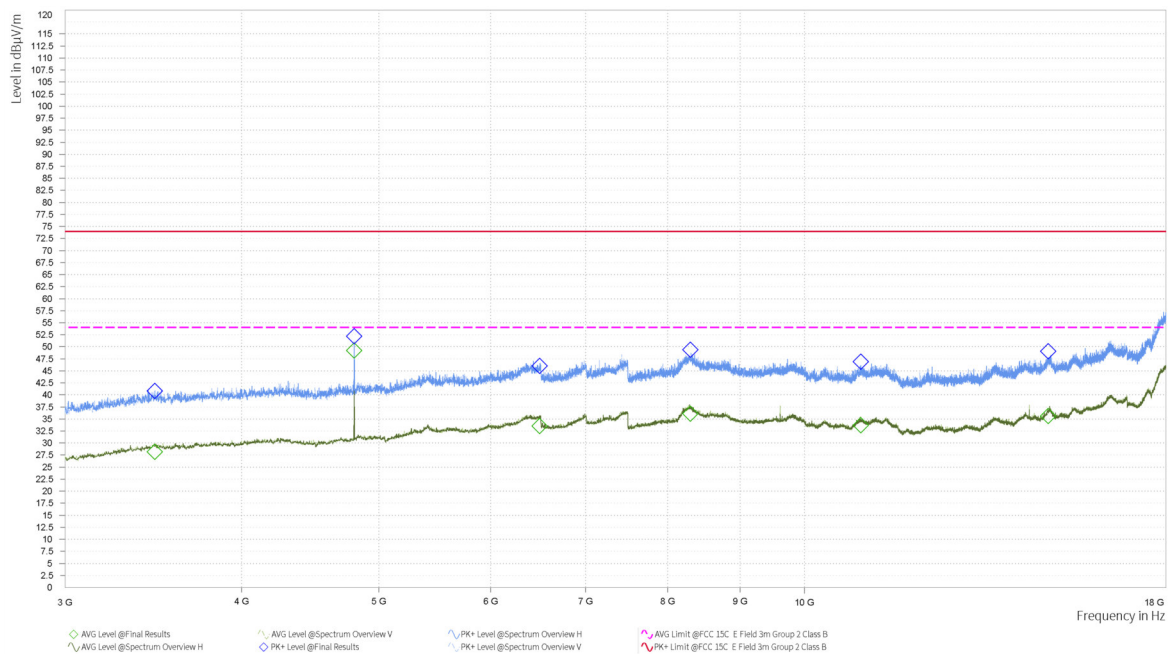


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,119.620	37.42	74.00	36.58	29.01	54.00	24.99	-9.85	H	258.8	2.00	1.000
1,297.360	39.58	74.00	34.42	30.47	54.00	23.53	-7.85	H	258.8	2.00	1.000
1,428.120	39.42	74.00	34.58	30.96	54.00	23.04	-6.90	V	206.3	2.00	1.000
1,692.520	41.50	74.00	32.50	31.97	54.00	22.03	-5.20	H	44.2	2.00	1.000
2,107.020	41.93	74.00	32.07	33.83	54.00	20.17	-2.73	H	277.7	2.00	1.000
2,466.000	43.68	74.00	30.32	35.15	54.00	18.85	-1.14	V	226.3	1.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

Bluetooth LE-Channel 19

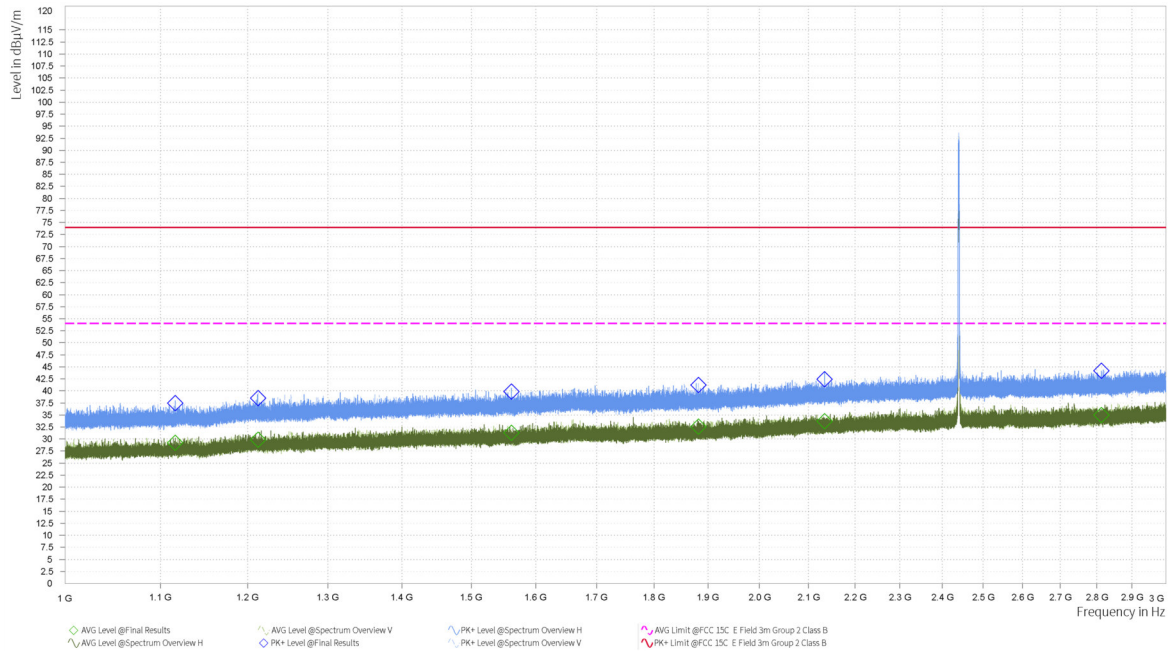

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

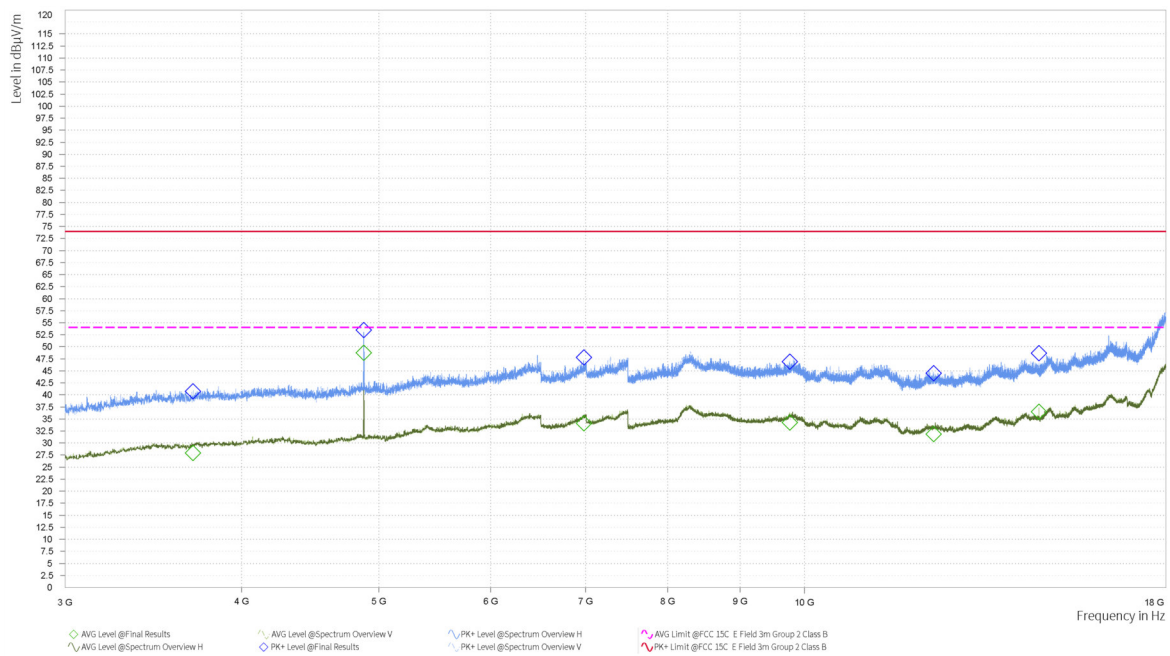


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,116.220	37.47	74.00	36.53	29.25	54.00	24.75	-9.93	H	276	2.00	1.000
1,212.840	38.50	74.00	35.50	29.88	54.00	24.12	-8.58	V	262.4	1.00	1.000
1,561.680	39.90	74.00	34.10	31.27	54.00	22.73	-6.19	H	34.9	2.00	1.000
1,881.980	41.21	74.00	32.79	32.60	54.00	21.40	-4.17	V	350.2	1.00	1.000
2,134.220	42.39	74.00	31.61	33.71	54.00	20.29	-2.66	H	360	1.00	1.000
2,813.300	44.16	74.00	29.84	35.02	54.00	18.98	-0.31	H	202.4	2.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

Bluetooth LE-Channel 39

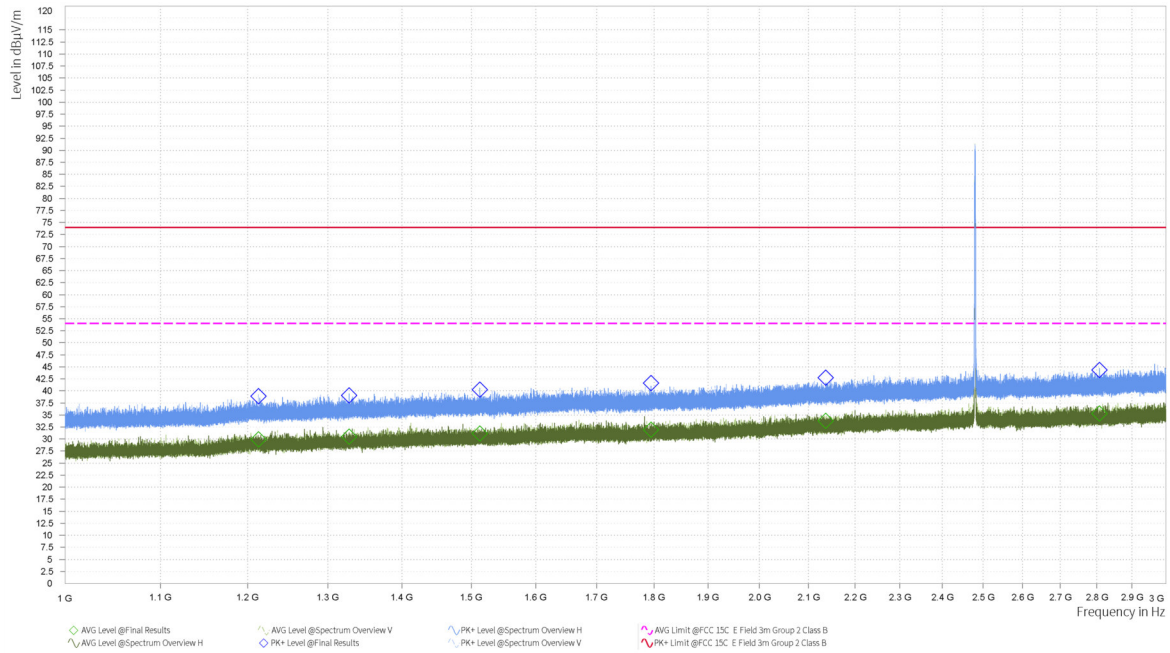

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

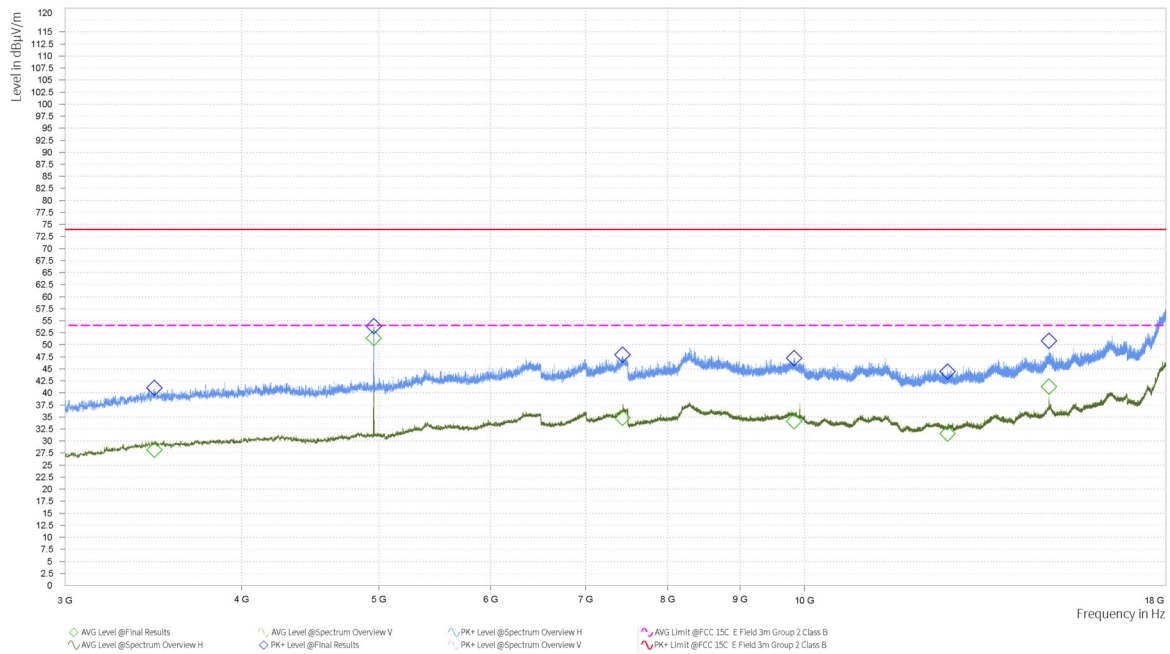


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,213.080	38.88	74.00	35.12	29.96	54.00	24.04	-8.59	V	114.9	1.00	1.000
1,327.800	39.08	74.00	34.92	30.49	54.00	23.51	-7.65	H	79.6	2.00	1.000
1,512.720	40.30	74.00	33.70	31.15	54.00	22.85	-6.38	H	360	1.00	1.000
1,795.040	41.66	74.00	32.34	31.92	54.00	22.08	-4.60	H	248.8	1.00	1.000
2,136.660	42.72	74.00	31.28	33.77	54.00	20.23	-2.66	H	204.3	2.00	1.000
2,807.960	44.35	74.00	29.65	35.33	54.00	18.67	-0.31	H	340.1	1.00	1.000

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

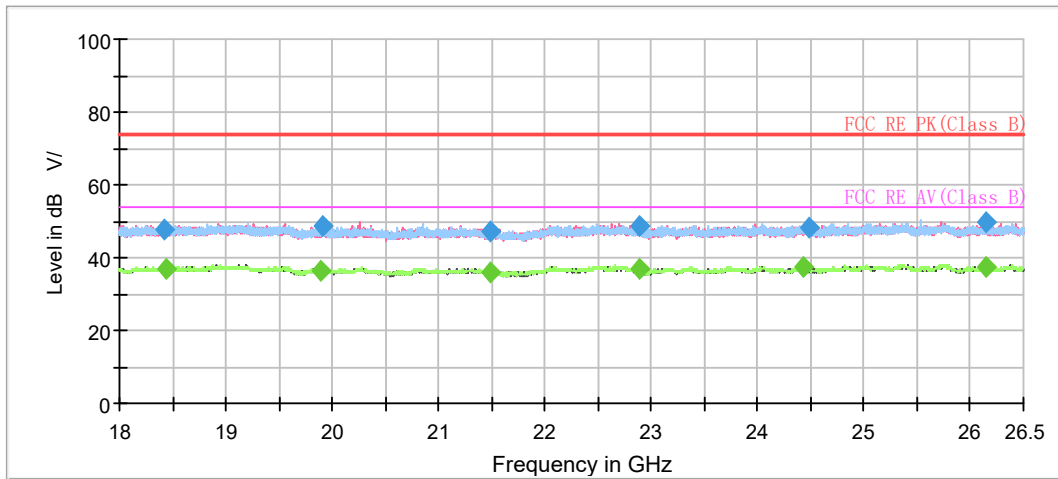

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18424.161250	47.84	---	74.00	26.16	500.0	200.0	V	324.0	-4.6
18443.428750	---	36.97	54.00	17.03	500.0	100.0	H	346.0	-4.6
19900.023750	---	36.47	54.00	17.53	500.0	200.0	V	256.0	-4.8
19909.621250	48.49	---	74.00	25.51	500.0	200.0	H	61.0	-4.8
21482.542500	---	35.92	54.00	18.08	500.0	200.0	V	265.0	-4.2
21489.828750	47.03	---	74.00	26.97	500.0	100.0	H	273.0	-4.2
22890.278750	---	36.79	54.00	17.21	500.0	200.0	V	324.0	-3.0
22894.988750	48.90	---	74.00	25.10	500.0	200.0	V	167.0	-3.0
24439.631250	---	37.54	54.00	16.46	500.0	100.0	H	210.0	-2.3
24477.358750	48.17	---	74.00	25.83	500.0	100.0	H	223.0	-2.3
26144.592500	49.49	---	74.00	24.51	500.0	100.0	V	276.0	-1.4
26146.072500	---	37.44	54.00	16.56	500.0	100.0	V	276.0	-1.4

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

5.7. Conducted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

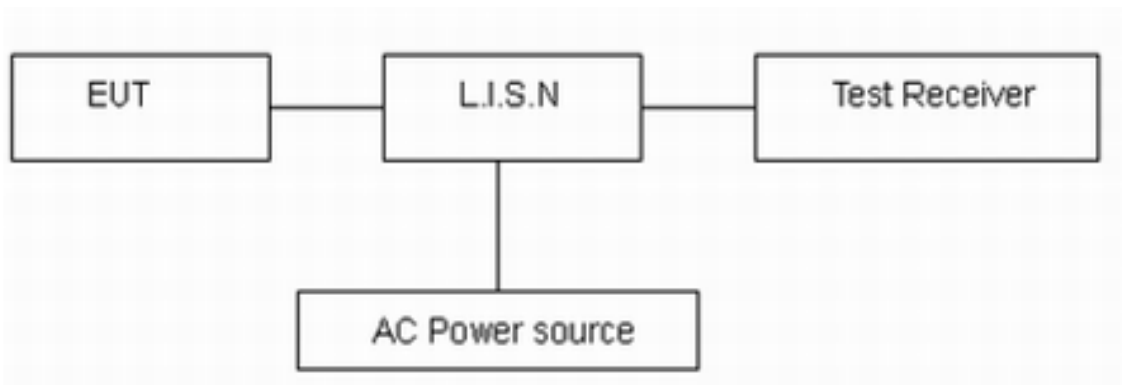

Note: AC Power source is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

Bluetooth LE


During the test, the Conducted Emission was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

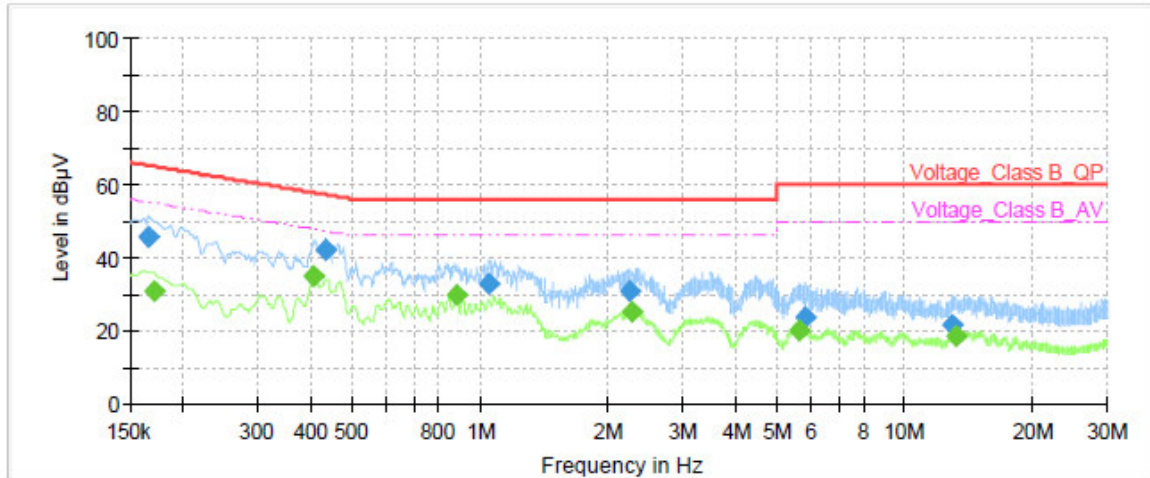

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	45.69	---	65.17	19.48	1000.0	9.000	L1	ON	21.0
0.17	---	30.62	54.95	24.33	1000.0	9.000	L1	ON	21.0
0.41	---	34.98	47.72	12.74	1000.0	9.000	L1	ON	21.0
0.43	41.87	---	57.19	15.32	1000.0	9.000	L1	ON	20.9
0.88	---	29.76	46.00	16.24	1000.0	9.000	L1	ON	20.3
1.05	32.92	---	56.00	23.08	1000.0	9.000	L1	ON	20.2
2.25	30.76	---	56.00	25.24	1000.0	9.000	L1	ON	19.7
2.29	---	24.90	46.00	21.10	1000.0	9.000	L1	ON	19.6
5.64	---	19.99	50.00	30.01	1000.0	9.000	L1	ON	19.5
5.85	23.63	---	60.00	36.37	1000.0	9.000	L1	ON	19.5
12.93	21.73	---	60.00	38.27	1000.0	9.000	L1	ON	19.6
13.26	---	18.48	50.00	31.52	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 kHz to 30 MHz

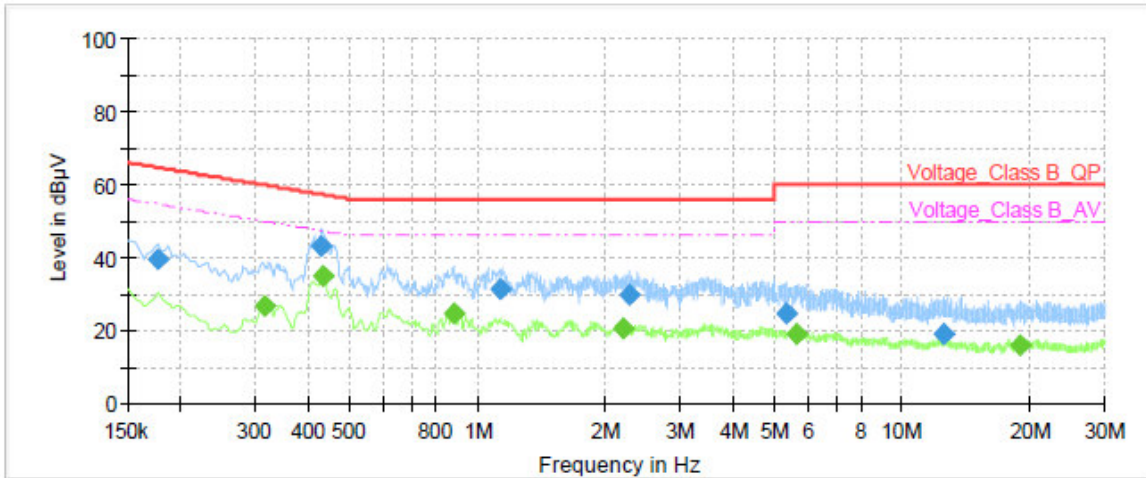

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	39.54	---	64.63	25.09	1000.0	9.000	N	ON	21.1
0.31	---	26.51	49.86	23.35	1000.0	9.000	N	ON	21.0
0.43	43.02	---	57.27	14.25	1000.0	9.000	N	ON	20.9
0.43	---	34.92	47.19	12.27	1000.0	9.000	N	ON	20.9
0.88	---	24.72	46.00	21.28	1000.0	9.000	N	ON	20.3
1.13	31.08	---	56.00	24.92	1000.0	9.000	N	ON	20.1
2.21	---	20.70	46.00	25.30	1000.0	9.000	N	ON	19.7
2.27	29.58	---	56.00	26.42	1000.0	9.000	N	ON	19.6
5.36	24.37	---	60.00	35.63	1000.0	9.000	N	ON	19.5
5.66	---	19.09	50.00	30.91	1000.0	9.000	N	ON	19.5
12.48	18.84	---	60.00	41.16	1000.0	9.000	N	ON	19.6
18.99	---	15.85	50.00	34.15	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz

6. Main Test Instruments

Date of Testing: (Conducted) April 16, 2024

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Power sensor	R&S	NRP18S	101954	2023-05-12	2024-05-11
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2023-05-12	2024-05-11

Date of Testing: (Radiated) April 18, 2024 ~ May 23, 2024

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2023-05-12	2024-05-11
				2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV3044	103495	2023-09-19	2024-09-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	HF907	102723	2021-07-24	2024-07-23
Amplifier	R&S	SCU18	10034	2023-05-12	2024-05-11
				2024-05-08	2025-05-07
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	R&S	BBHA9170	01301	2023-09-19	2026-09-18
Software	R&S	EMC32	9.26.01	/	/
Software	R&S	ELEKTRA	5.00.2	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2023-05-12	2024-05-11
				2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****