

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No...... : **MAX25030212P01-R01**

FCC ID..... : **2BDAJ-H86**

Compiled by
(position+printed name+signature)..: Engineer/ Cindy Zheng

Supervised by
(position+printed name+signature)..: Manager/Haley Wen

Approved by
(position+printed name+signature)..: RF Manager/ Vivian Jiang

Date of issue.....: April 15, 2025

Cindy Zheng
Haley Wen
Vivian Jiang

Testing Laboratory Name..... : **MAXLAB Testing Co.,Ltd.**

Address..... : 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

Applicant's name..... : **Shenzhen HonZen Vision Technology Co., Ltd.**

Address..... : 4/F Building B, Yili Science Park, Guanhu Street, Longhua District, Shenzhen

Test specification..... :

FCC Part 15.247

Standard..... : **KDB558074 D01 15.247 Meas Guidance v05r02**

ANSI C63.10:2020

MAXLAB Testing Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the MAXLAB Testing Co.,Ltd.is acknowledged as copyright owner and source of the material. MAXLAB Testing Co.,Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: WIFI Sports camera

Trade Mark.....: N/A

Manufacturer.....: Shenzhen HonZen Vision Technology Co., Ltd.

Model/Type reference.....: H86

Listed Models: N/A

Modulation Type.....: CCK/ DSSS/ OFDM

Operation Frequency.....: From 2412 - 2462MHz

Rating.....: DC 3.7V From Battery or DC 5V by USB port

Result.....: **PASS**

TEST REPORT

Equipment under Test : **WIFI Sports camera**

Model /Type : **H86**

Series Model No. : **N/A**

Model Declaration : **N/A**

Applicant : **Shenzhen HonZen Vision Technology Co., Ltd.**

Address : **4/F Building B, Yili Science Park, Guanhu Street, Longhua District, Shenzhen**

Manufacturer : **Shenzhen HonZen Vision Technology Co., Ltd.**

Address : **4/F Building B, Yili Science Park, Guanhu Street, Longhua District, Shenzhen**

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Equipment Under Test	5
2.4 Short description of the Equipment under Test (EUT)	5
2.5 EUT operation mode	6
2.6 Block Diagram of Test Setup	6
2.7 Related Submittal(s) / Grant (s)	6
2.8 Modifications	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory	7
3.2 Test Facility	7
3.3 Environmental conditions	7
3.4 Test Description	8
3.5 Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	9
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission	11
4.2 Radiated Emission	14
4.3 Maximum Peak Conducted Output Power	20
4.4 Power Spectral Density	21
4.5 6dB Bandwidth	24
4.6 Out-of-band Emissions	27
4.7 Antenna Requirement	35
5 TEST SETUP PHOTOS OF THE EUT	36
6 PHOTOS OF THE EUT	39

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2020: American National Standard for Testing Unlicensed Wireless Devices

KDB558074 D01 v05r02: Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	April 7, 2025
Testing commenced on	:	April 7, 2025
Testing concluded on	:	April 15, 2025

2.2 Product Description

Product Name:	WIFI Sports camera
Model/Type reference:	H86
Power supply:	DC 3.7V From Battery or DC 5V by USB port
Adapter information (Auxiliary test supplied by testing Lab)	Model: EP-TA20CBC Input: AC 100-240V 50/60Hz Output: DC 5V 2A Firmware Version: EPTA5.14.2 Manufacture: Huizhou Dongyang Yienbi Electronics Co., Ltd
testing sample ID:	MAX25030212P01-R01-1# (Engineer sample), MAX25030212P01-R01-2# (Normal sample)
Hardware version:	8189FTV
Software version:	/
WIFI :	
Supported type:	802.11b/802.11g/802.11n(H20)/ 802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/ 802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40):7
Channel separation:	5MHz
Antenna type:	FPC antenna
Antenna gain:	2.62dBi

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☒ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

DC 3.7V From Battery

2.4 Short description of the Equipment under Test (EUT)

This is a WIFI Sports camera.
For more details, refer to the user's manual of the EUT.

2.5 EUT operation mode

The application provider specific test software(MP_Kit_RTL11n_FTV_USB_v1.25) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

IEEE 802.11n(H40): Seven channels are provided to the EUT.


IEEE 802.11b/g/n

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

IEEE 802.11n(H40)

Channel	Frequency(MHz)		
3	2422		
4	2427		
5	2432		
6	2437		
7	2442		
8	2447		
9	2452		

2.6 Block Diagram of Test Setup

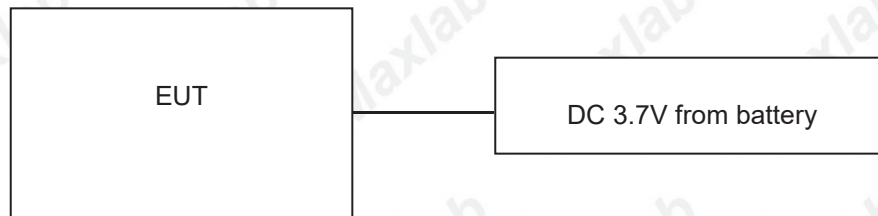

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

MAXLAB Testing Co.,Ltd.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

3.2 Test Facility

FCC-Registration No.: 562200 Designation Number: CN1338

MAX Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 4707.01

MAX Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission

Temperature:	24 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5Mbps	3/9

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the MAXLAB Testing Co.,Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for MAXLAB Testing Co.,Ltd.

Test item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB(10 MHz ≤ f < 3.6 GHz);
	1.38 dB(3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted)(Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB(10 MHz ≤ f < 3.6 GHz);
	1.38 dB(3.6 GHz ≤ f < 8 GHz)

Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB(10 MHz ≤ f < 3.6 GHz);
	1.40 dB(3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3x10 ⁻⁸
Temperature	0.4 °C
Humidity	2%
Uncertainty for Radiation Emission test (9 kHz-30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz-1GHz)	4.70 dB (Antenna Polarize:V)
	4.84 dB(Antenna Polarize:H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10 dB(1-6 GHz)
	4.40 dB(6 GHz- 18 GHz)
	3.54 dB(18 GHz- 26 GHz)
	4.30 dB(26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.34dB(150KHz-30MHz)
	3.72dB(9KHz-150KHz)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test


Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	MAX252	2024-10-28	2025-10-27
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-28	2025-10-27
Coaxial Switch	ANRITSU CORP	MP59B	MAX225	2024-10-28	2025-10-27
ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	MAX226	2024-10-28	2025-10-27
Coaxial Cable	MAX	N/A	MAX227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	MAX233	2024-10-28	2025-10-27
Absorbing clamp	Elektronik-Feinmechanik	MDS21	MAX229	2024-10-28	2025-10-27
LISN	R&S	ENV216	308	2024-10-28	2025-10-27
LISN	R&S	ENV216	314	2024-10-28	2025-10-27

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	MAX250	2024-10-28	2025-10-27
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	MAX251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	MAX203	2024-10-28	2025-10-27
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	MAX214	2024-10-28	2025-10-27
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	MAX208	2024-10-28	2025-10-27
Horn Antenna	ETS-LINDGREN	3160	MAX217	2024-10-28	2025-10-27
EMI Test Software	AUDIX	E3	N/A	N/A	N/A

Coaxial Cable	MAX	N/A	MAX213	2024-10-28	2025-10-27
Coaxial Cable	MAX	N/A	MAX211	2024-10-28	2025-10-27
Coaxial cable	MAX	N/A	MAX210	2024-10-28	2025-10-27
Coaxial Cable	MAX	N/A	MAX212	2024-10-28	2025-10-27
Amplifier(100kHz-3GHz)	HP	8347A	MAX204	2024-10-28	2025-10-27
Amplifier(2GHz-20GHz)	HP	84722A	MAX206	2024-10-28	2025-10-27
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	MAX218	2024-10-28	2025-10-27
Band filter	Amindeon	82346	MAX219	2024-10-28	2025-10-27
Power Meter	Anritsu	ML2495A	MAX540	2024-10-28	2025-10-27
Power Sensor	Anritsu	MA2411B	MAX541	2024-10-28	2025-10-27
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	MAX575	2024-10-28	2025-10-27
Splitter	Agilent	11636B	MAX237	2024-10-28	2025-10-27
Loop Antenna	ZHINAN	ZN30900A	MAX534	2024-10-28	2025-10-27
Breitband hornantenne	SCHWARZBECK	BBHA 9170	MAX579	2024-10-28	2025-10-27
Amplifier	TDK	PA-02-02	MAX574	2024-10-28	2025-10-27
Amplifier	TDK	PA-02-03	MAX576	2024-10-28	2025-10-27
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	MAX578	2024-10-28	2025-10-27

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	MAX566	2024-10-28	2025-10-27
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-28	2025-10-27
Spectrum Analyzer	Agilent	E4440A	MAX533	2024-10-28	2025-10-27
MXG vector Signal Generator	Agilent	N5182A	MAX567	2024-10-28	2025-10-27
ESG Analog Signal Generator	Agilent	E4428C	MAX568	2024-10-28	2025-10-27
USB RF Power Sensor	DARE	RPR3006W	MAX569	2024-10-28	2025-10-27
RF Switch Box	Shongyi	RFSW3003328	MAX571	2024-10-28	2025-10-27
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	MAX572	2024-10-28	2025-10-27

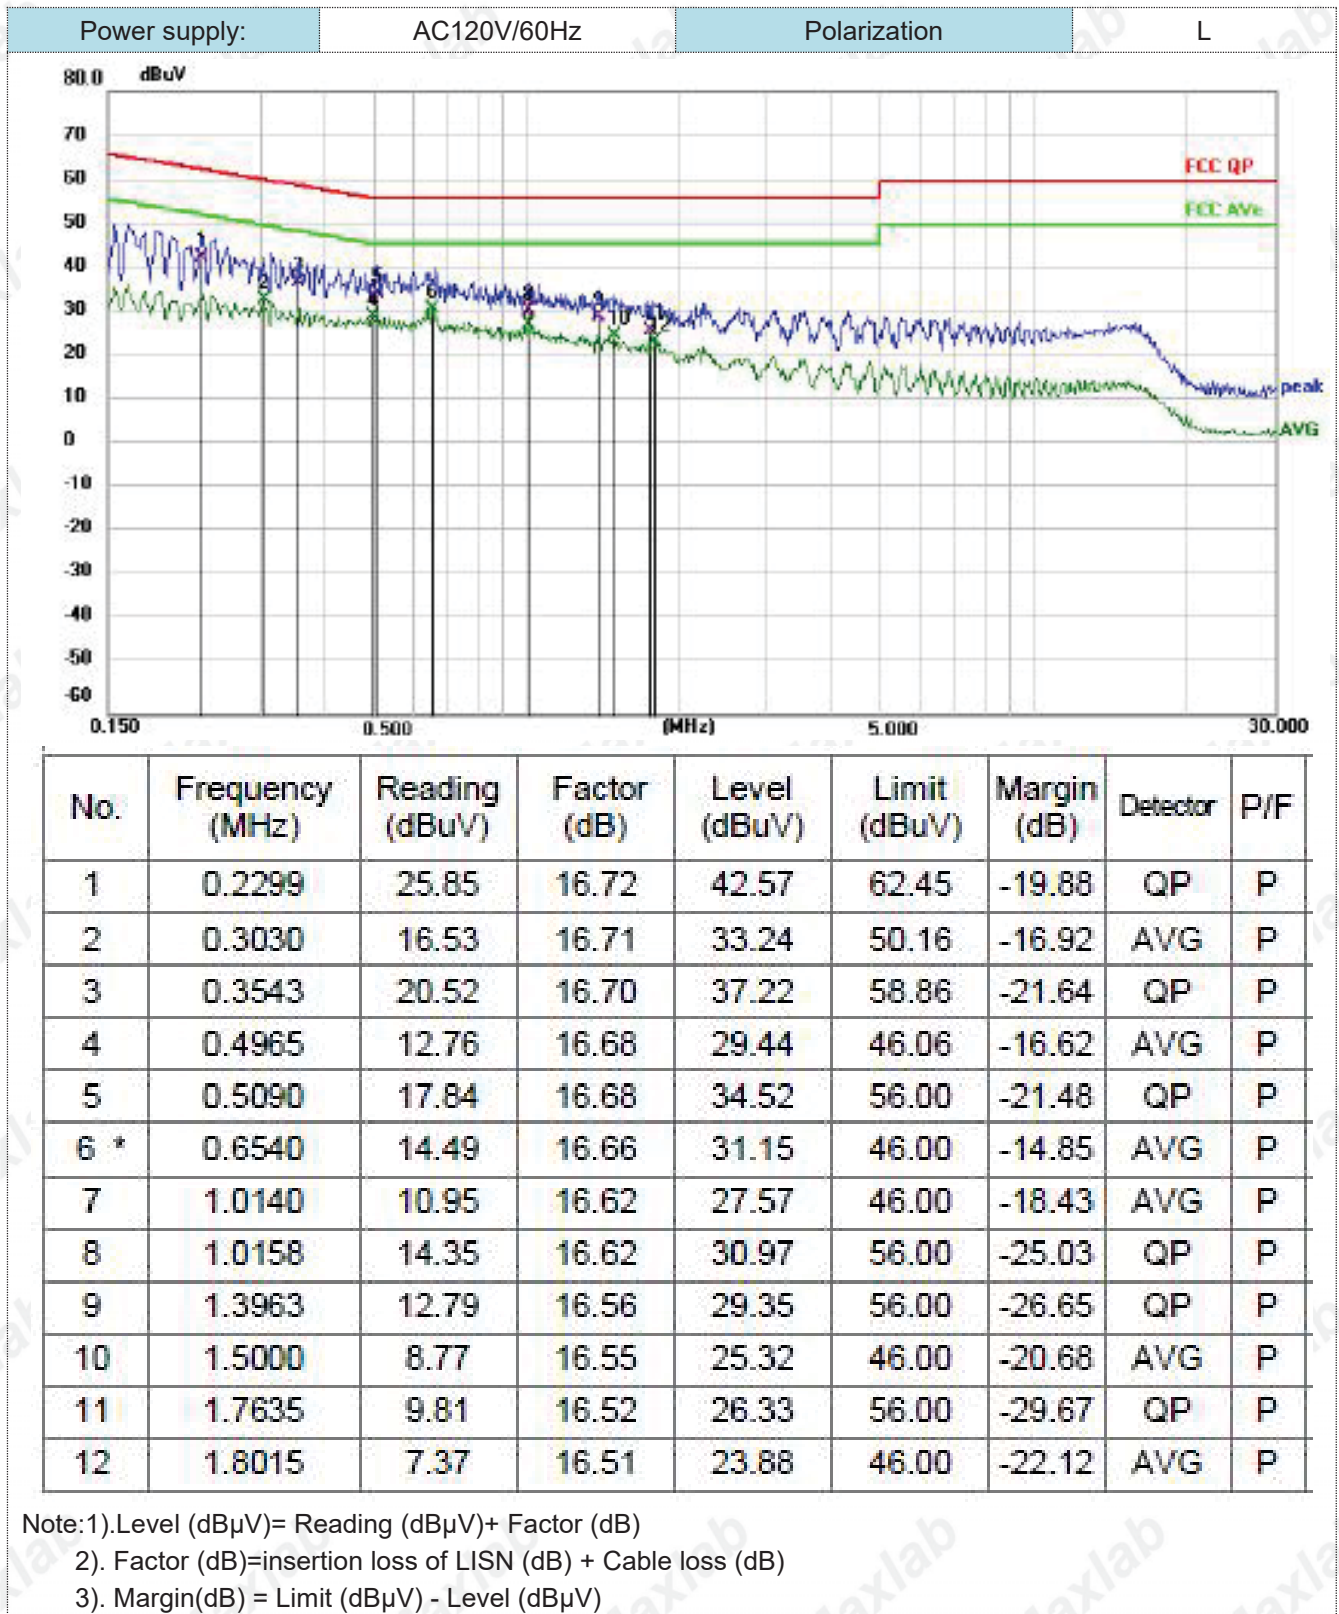

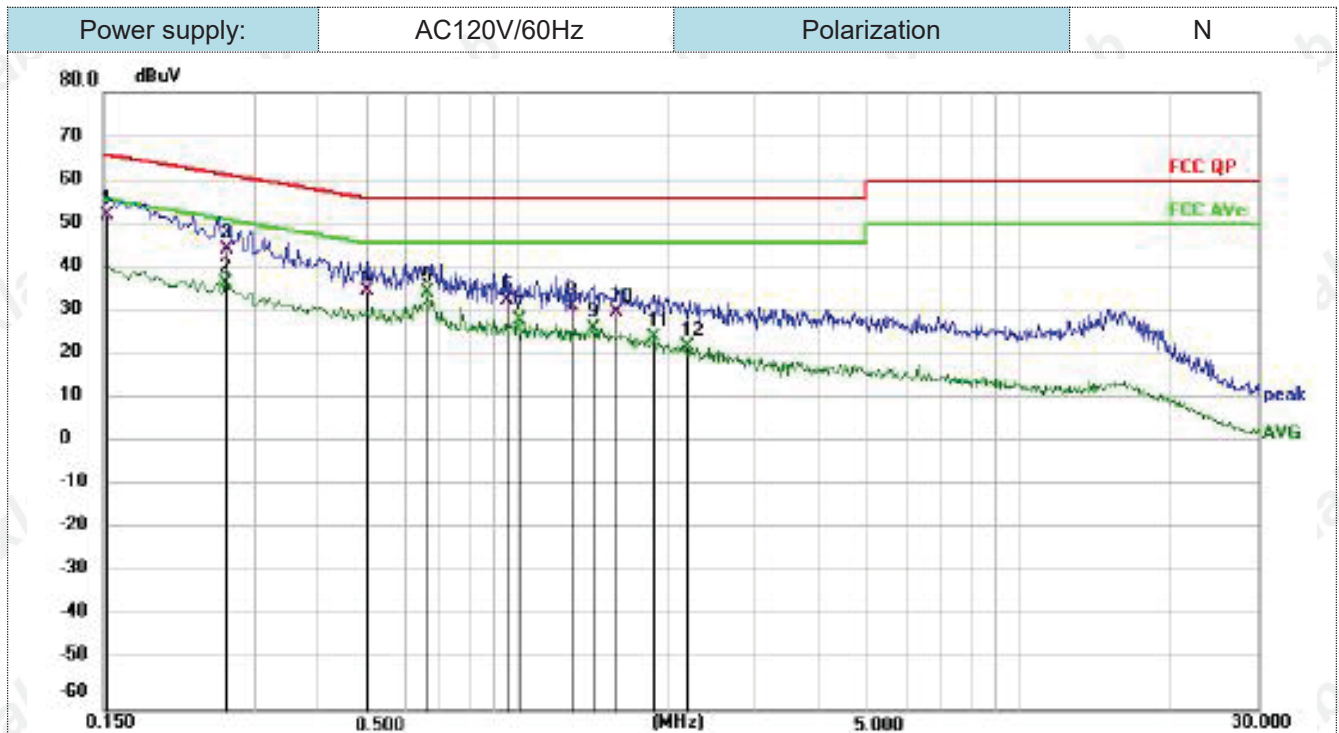

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1516	34.77	17.53	52.30	65.91	-13.61	QP	P
2	0.2625	19.23	17.53	36.76	51.35	-14.59	AVG	P
3	0.2626	27.10	17.53	44.63	61.35	-16.72	QP	P
4	0.5019	17.54	17.52	35.06	56.00	-20.94	QP	P
5 *	0.6630	17.12	17.51	34.63	46.00	-11.37	AVG	P
6	0.9564	15.29	17.51	32.80	56.00	-23.20	QP	P
7	1.0140	10.81	17.50	28.31	46.00	-17.69	AVG	P
8	1.2887	14.10	17.49	31.59	56.00	-24.41	QP	P
9	1.4235	9.07	17.49	26.56	46.00	-19.44	AVG	P
10	1.5859	12.65	17.49	30.14	56.00	-25.86	QP	P
11	1.8690	6.88	17.48	24.36	46.00	-21.64	AVG	P
12	2.1795	4.84	17.47	22.31	46.00	-23.69	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)


2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

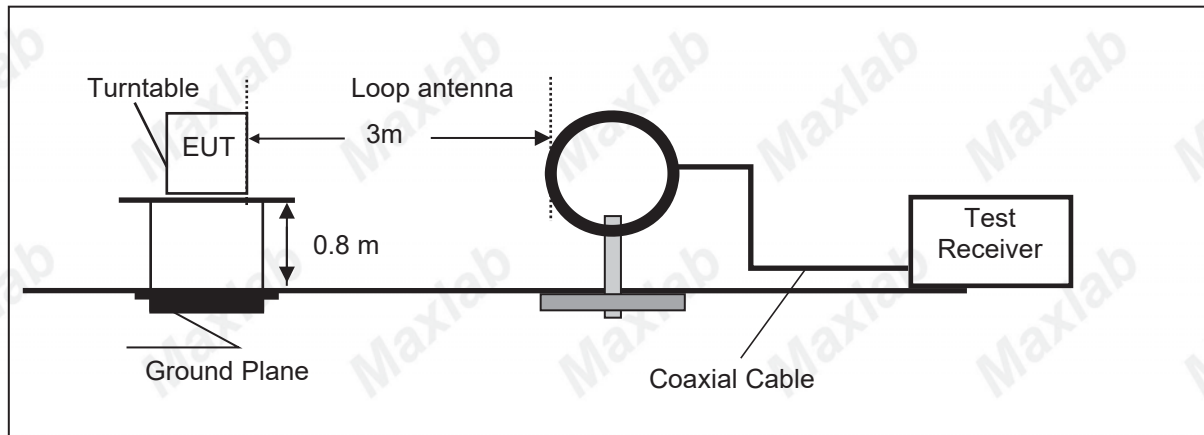

Frequency range 30MHz – 1000MHz

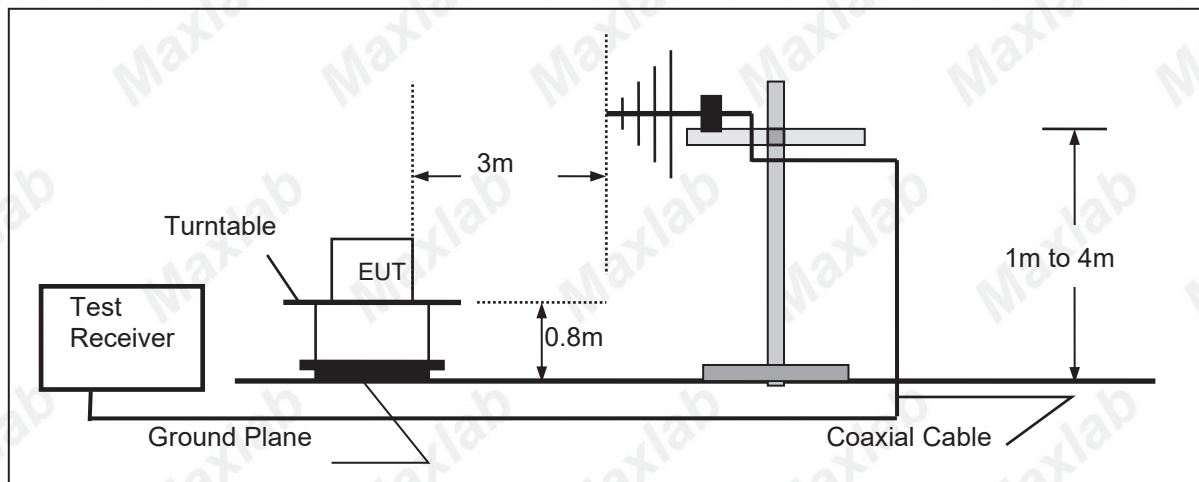

Frequency range above 1GHz-25GHz

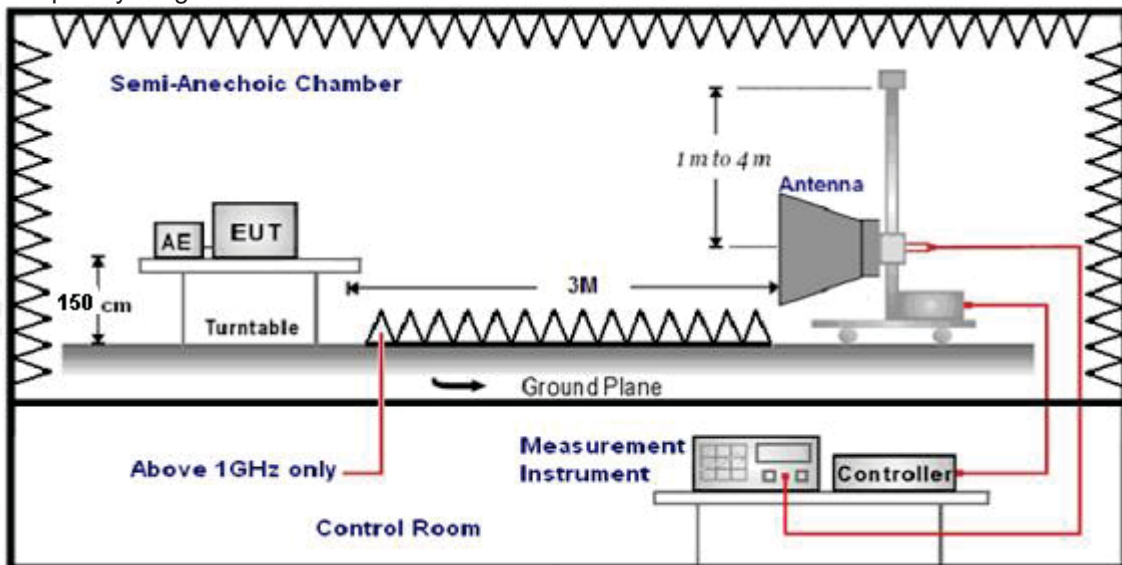

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(300/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150


216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
4. The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

For 30MHz-1GHz

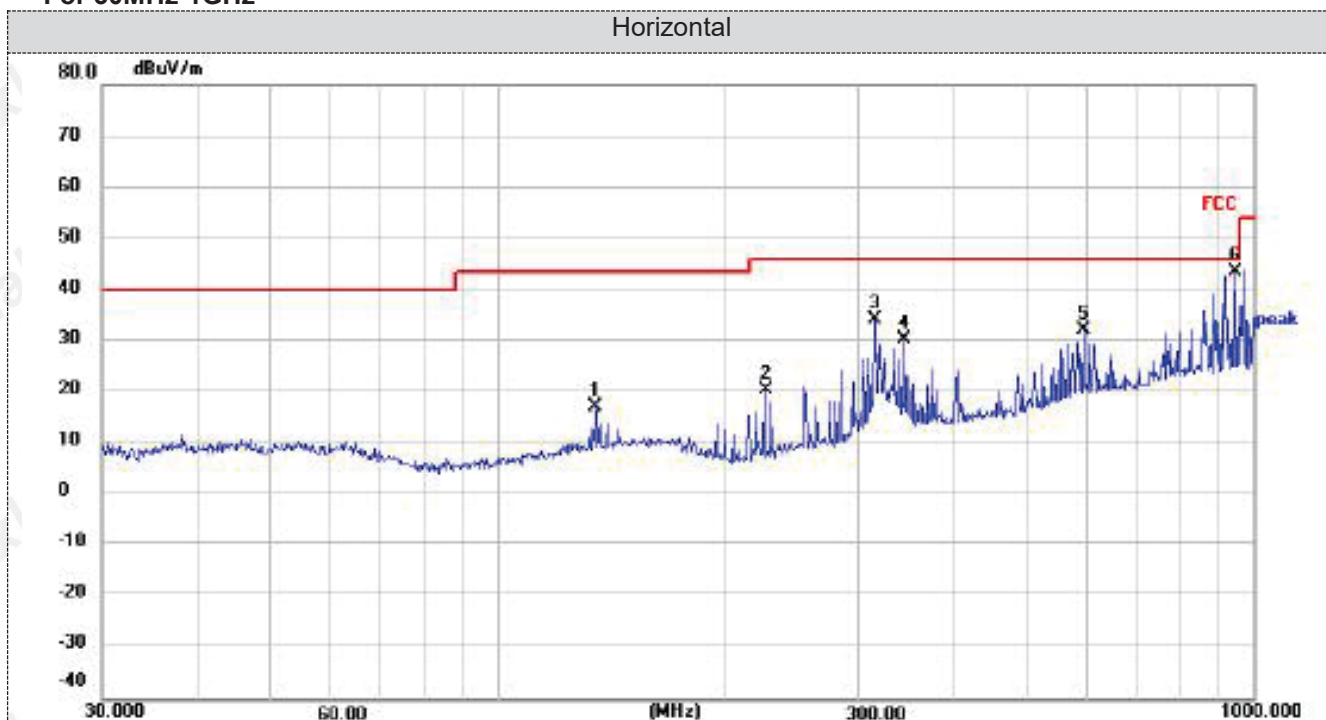


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	135.0318	34.03	-16.99	17.04	43.50	-26.46	peak	100	360	P
2	225.3078	39.26	-18.92	20.34	46.00	-25.66	peak	100	360	P
3	315.4806	49.45	-15.18	34.27	46.00	-11.73	peak	100	360	P
4	345.5951	44.89	-14.45	30.44	46.00	-15.56	peak	100	360	P
5	595.1327	40.18	-7.99	32.19	46.00	-13.81	peak	100	360	P
6 *	945.4400	46.77	-3.08	43.69	46.00	-2.31	peak	100	360	P

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

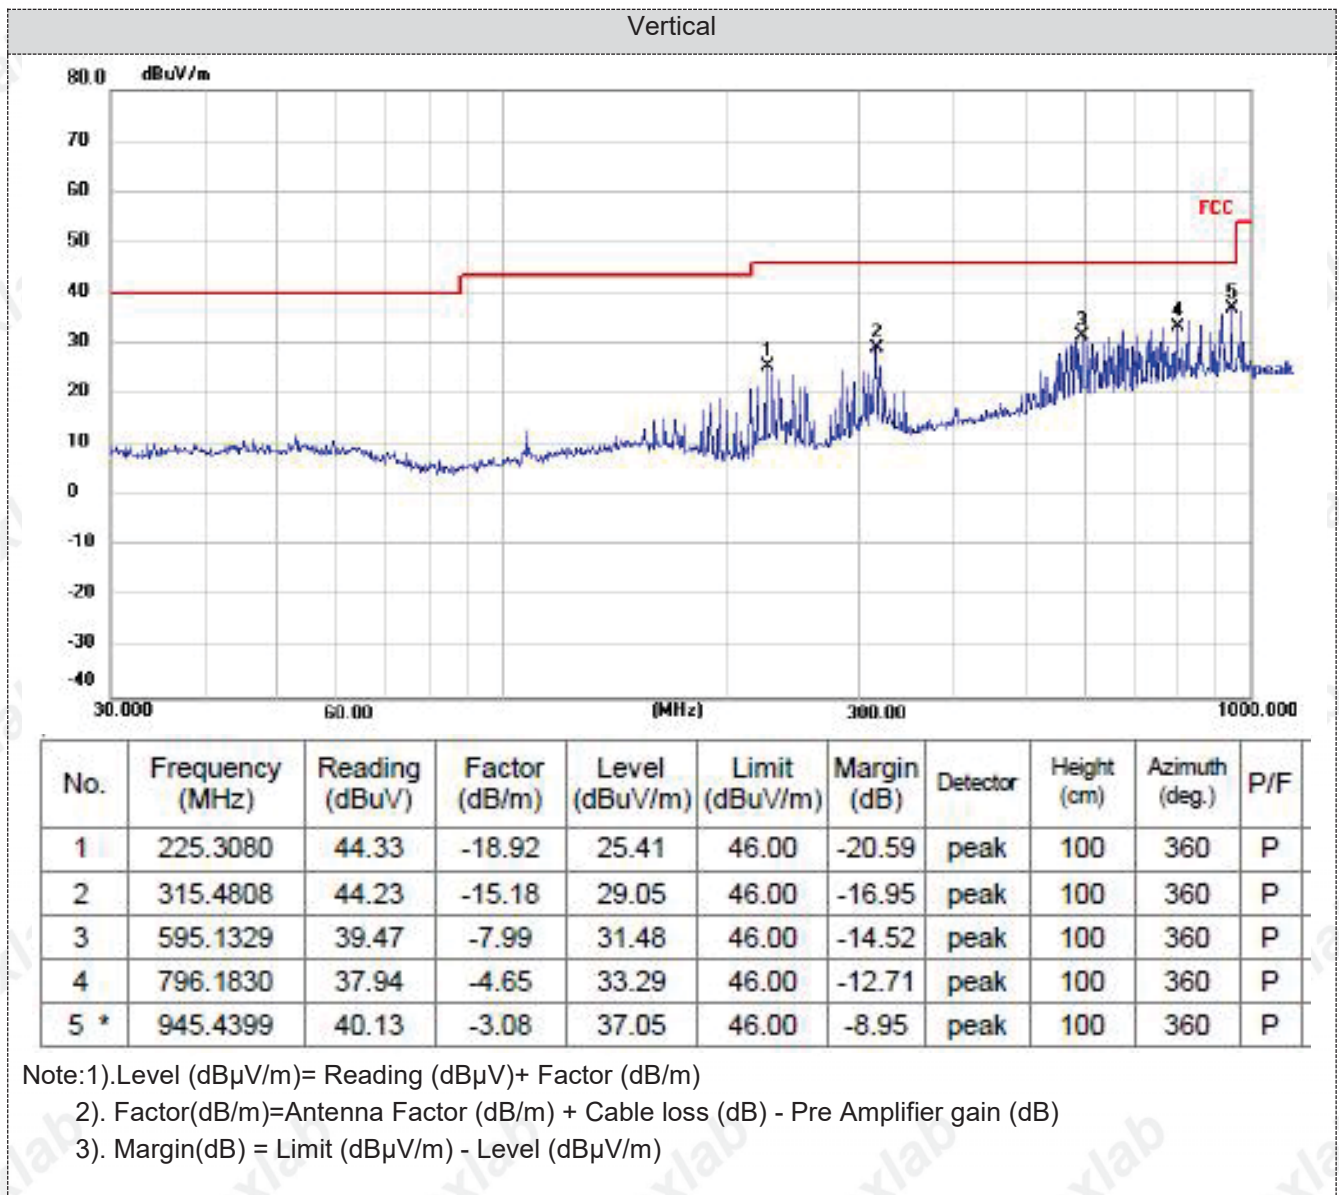

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (H20)/ 802.11n (H40) Mode all have been tested, only worse case 802.11b mode is reported **(above 1GHz)**

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	58.22	PK	74	15.78	62.58	32.40	5.11	41.87	-4.36
4824.00	47.06	AV	54	6.94	51.42	32.40	5.11	41.87	-4.36
7236.00	55.84	PK	74	18.16	56.47	36.58	6.43	43.64	-0.63
7236.00	45.72	AV	54	8.28	46.35	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	57.16	PK	74	16.84	61.52	32.40	5.11	41.87	-4.36
4824.00	46.53	AV	54	7.47	50.89	32.40	5.11	41.87	-4.36
7236.00	55.79	PK	74	18.21	56.42	36.58	6.43	43.64	-0.63
7236.00	44.73	AV	54	9.27	45.36	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	56.50	PK	74	17.50	60.45	32.56	5.34	41.85	-3.95
4874.00	46.63	AV	54	7.37	50.58	32.56	5.34	41.85	-3.95
7311.00	55.38	PK	74	18.62	55.74	36.54	6.81	43.71	-0.36
7311.00	45.50	AV	54	8.50	45.86	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	56.33	PK	74	17.67	60.28	32.56	5.34	41.85	-3.95
4874.00	46.47	AV	54	7.53	50.42	32.56	5.34	41.85	-3.95
7311.00	55.09	PK	74	18.91	55.45	36.54	6.81	43.71	-0.36
7311.00	45.33	AV	54	8.67	45.69	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	57.39	PK	74	16.61	60.85	32.73	5.64	41.83	-3.46
4924.00	47.00	AV	54	7.00	50.46	32.73	5.64	41.83	-3.46
7386.00	55.72	PK	74	18.28	55.78	36.50	7.23	43.79	-0.06
7386.00	45.90	AV	54	8.10	45.96	36.50	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	58.06	PK	74	15.94	61.52	32.73	5.64	41.83	-3.46
4924.00	47.17	AV	54	6.83	50.63	32.73	5.64	41.83	-3.46
7386.00	55.68	PK	74	18.32	55.74	36.50	7.23	43.79	-0.06
7386.00	45.57	AV	54	8.43	45.63	36.50	7.23	43.79	-0.06

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (H20)/ 802.11n (H40) Mode all have been tested, only worse case 802.11b mode is reported

Test Frequency(MHz):			Lowest channel		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	50.16	PK	74	23.84	60.45	27.55	4.35	42.19	-10.29
2390.00	39.95	AV	54	14.05	50.24	27.55	4.35	42.19	-10.29
2400.00	45.55	PK	74	28.45	55.74	27.70	4.39	42.28	-10.19
2400.00	35.07	AV	54	18.93	45.26	27.70	4.39	42.28	-10.19

Test Frequency(MHz):			Lowest channel		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	48.23	PK	74	25.77	58.52	27.55	4.35	42.19	-10.29
2390.00	38.34	AV	54	15.66	48.63	27.55	4.35	42.19	-10.29
2400.00	46.22	PK	74	27.78	56.41	27.70	4.39	42.28	-10.19
2400.00	35.39	AV	54	18.61	45.58	27.70	4.39	42.28	-10.19

Test Frequency(MHz):			Highest channel		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	44.91	PK	74	29.09	55.54	27.55	4.38	42.56	-10.63
2483.50	34.63	AV	54	19.37	45.26	27.55	4.38	42.56	-10.63
2500.00	42.53	PK	74	31.47	53.26	27.69	4.46	42.88	-10.73
2500.00	32.68	AV	54	21.32	43.41	27.69	4.46	42.88	-10.73

Test Frequency(MHz):			Highest channel		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	42.61	PK	74	31.39	53.24	27.55	4.38	42.56	-10.63
2483.50	32.33	AV	54	21.67	42.96	27.55	4.38	42.56	-10.63
2500.00	39.39	PK	74	34.61	50.12	27.69	4.46	42.88	-10.73
2500.00	29.51	AV	54	24.49	40.24	27.69	4.46	42.88	-10.73

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW 1MHz VBW 3MHz Peak detector is for PK value; RBW 1MHz VBW 10Hz Peak detector is for AV value.

4.3 Maximum Peak Conducted Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	6.47	30.00	Pass
	06	6.02		
	11	5.65		
802.11g	01	6.07	30.00	Pass
	06	5.75		
	11	5.89		
802.11n(HT20)	01	5.43	30.00	Pass
	06	5.70		
	11	5.84		
802.11n(HT40)	03	5.22	30.00	Pass
	06	5.90		
	09	5.39		

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

4.4 Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration





Test Results

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-20.344	8.00	Pass
	06	-20.538		
	11	-20.975		
802.11g	01	-18.627	8.00	Pass
	06	-18.723		
	11	-18.688		
802.11n(HT20)	01	-20.267	8.00	Pass
	06	-18.961		
	11	-19.875		
802.11n(HT40)	03	-22.207	8.00	Pass
	06	-20.383		
	09	-21.952		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
 - 2) Test results including cable loss;
 - 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
- Please refer to following plots;

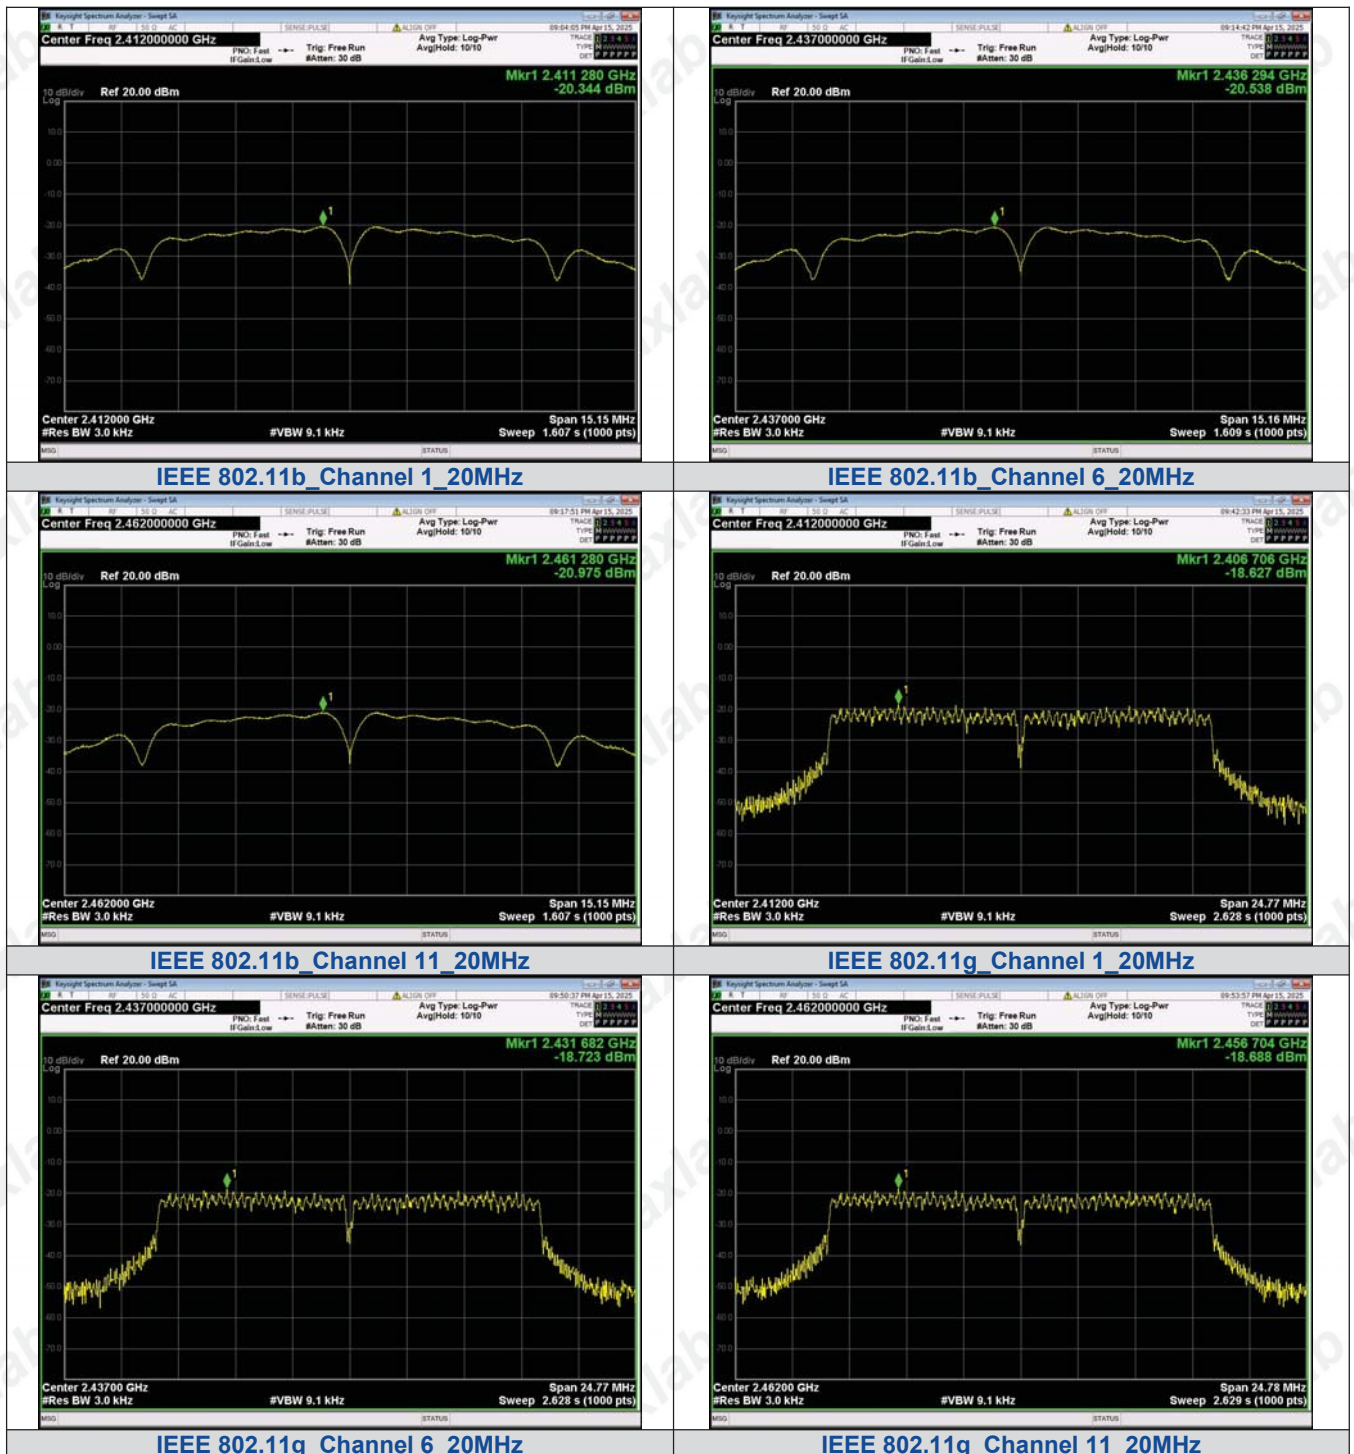

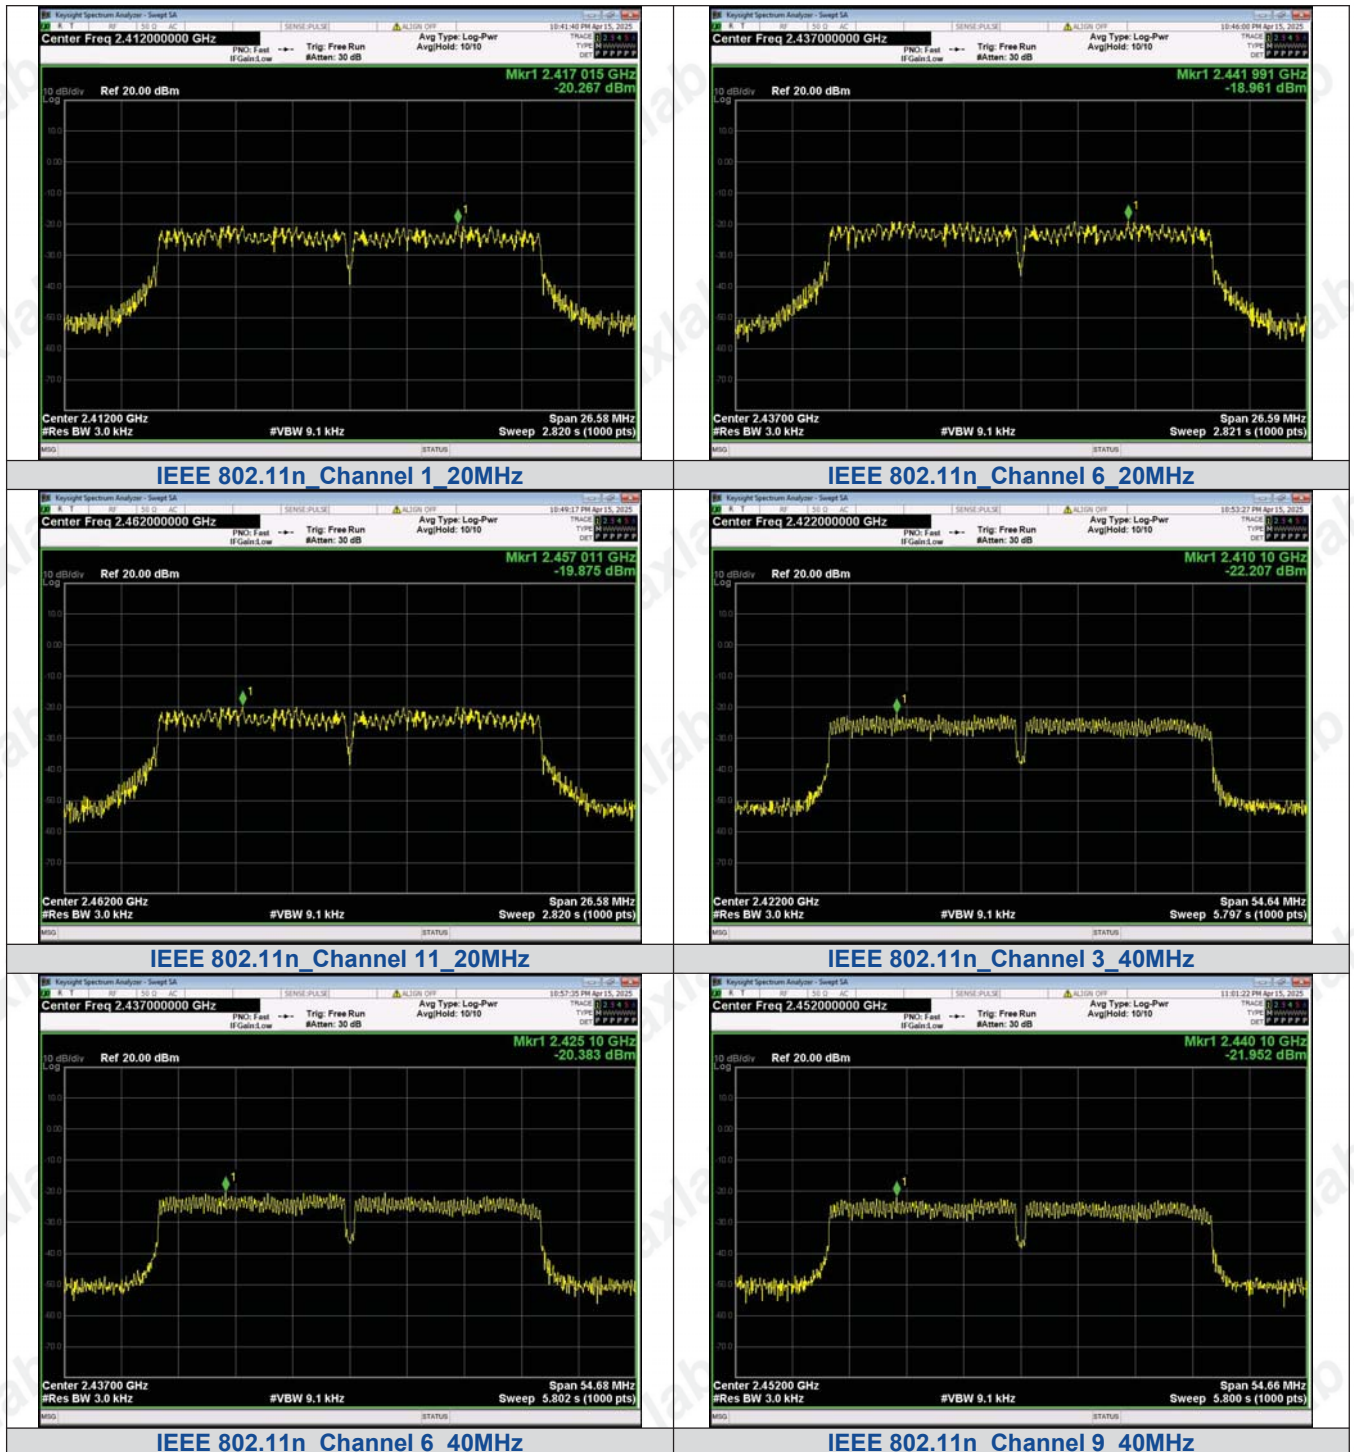

4.5 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration




Test Results


Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	10.10	≥500	Pass
	06	10.11		
	11	10.10		
802.11g	01	16.51	≥500	Pass
	06	16.51		
	11	16.52		
802.11n(HT20)	01	17.72	≥500	Pass
	06	17.73		
	11	17.72		
802.11n(HT40)	03	36.43	≥500	Pass
	06	36.45		
	09	36.44		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
 - 2) Test results including cable loss;
 - 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
- Please refer to following plots;

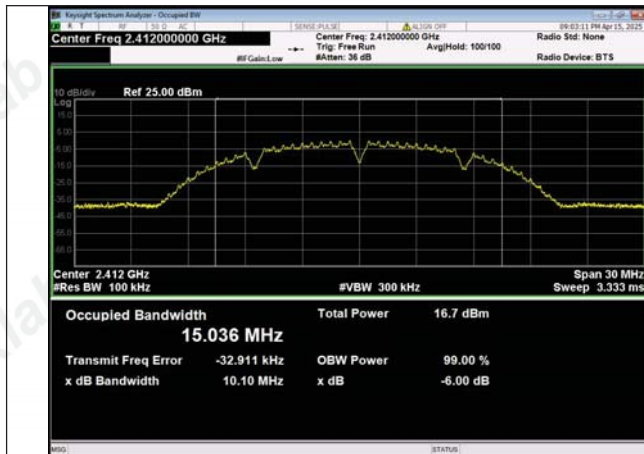


IEEE 802.11b_Channel 1_20MHz

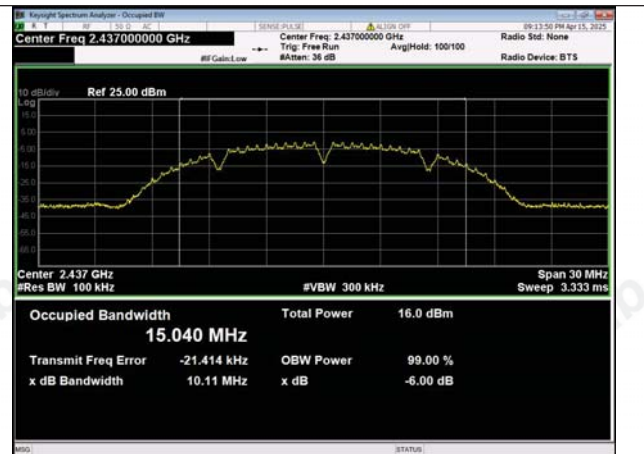

IEEE 802.11b_Channel 6_20MHz




IEEE 802.11b_Channel 11_20MHz

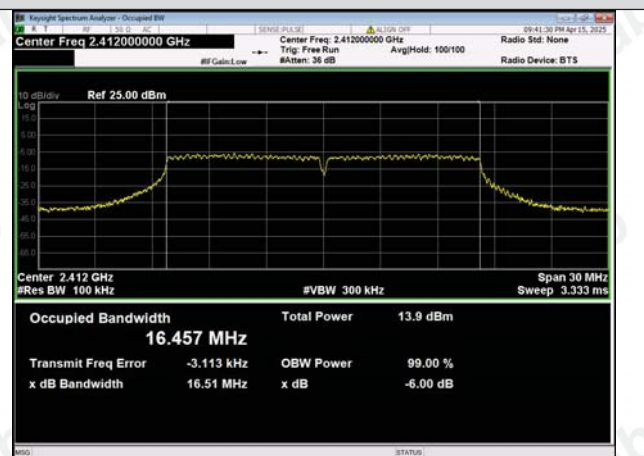


IEEE 802.11g_Channel 1_20MHz



IEEE 802.11g_Channel 6_20MHz

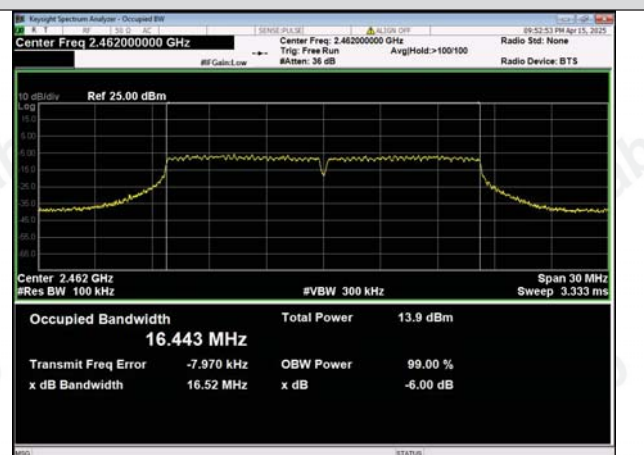

IEEE 802.11g_Channel 11_20MHz

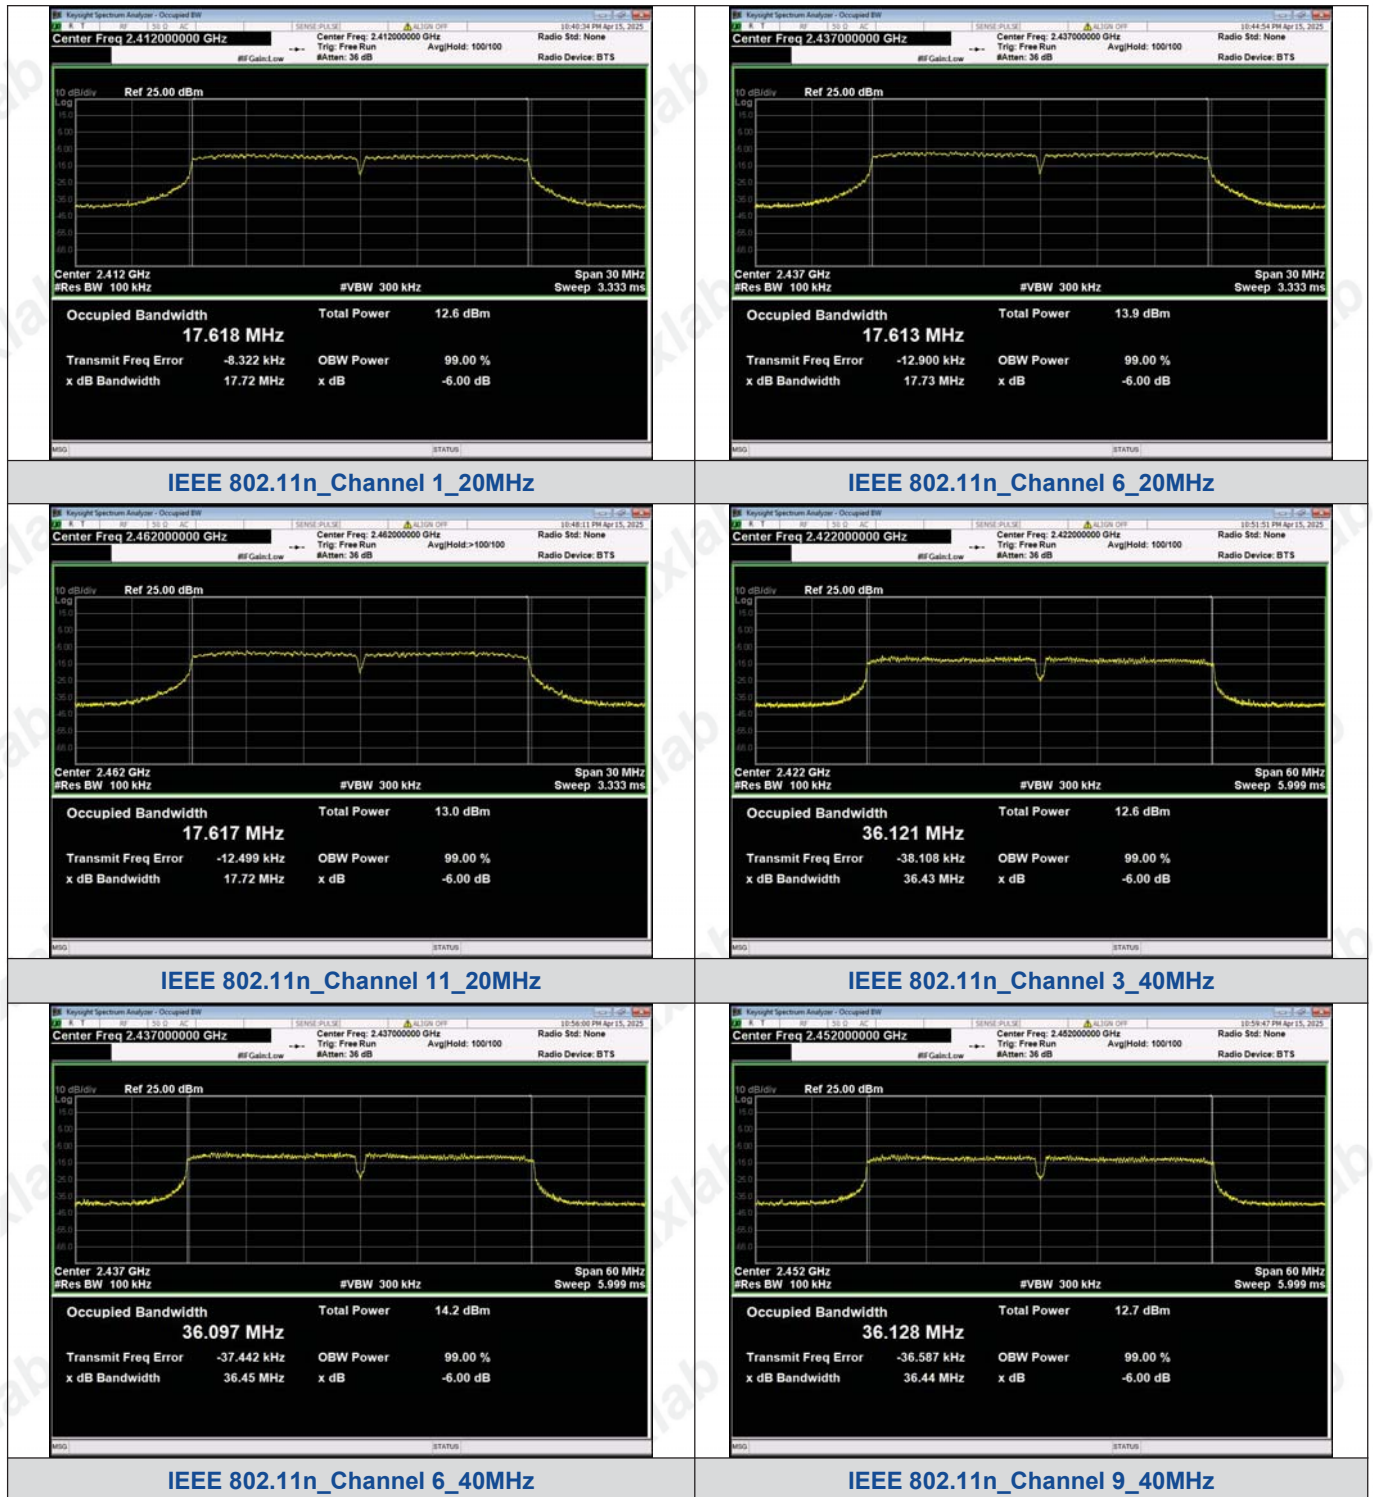

4.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data. And record the worst data in the report.

Test plot as follows:


Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	2398.92	-36.440	-20.57	-15.870	PASS
		2400.00	-37.001	-20.57	-16.431	PASS
		24203.5	-27.446	-20.57	-6.876	PASS
	6	24652.3	-28.013	-20.64	-7.373	PASS
		2483.50	-37.897	-21.12	-16.777	PASS
		24250.3	-28.463	-21.12	-7.343	PASS
IEEE 802.11g	1	2398.40	-36.832	-25.45	-11.382	PASS
		2400.00	-37.298	-25.45	-11.848	PASS
		24247.2	-28.322	-25.45	-2.872	PASS
	6	21295.7	-28.022	-25.75	-2.272	PASS
		2483.50	-38.589	-25.88	-12.709	PASS
		24609.2	-28.360	-25.88	-2.480	PASS
IEEE 802.11n_20	1	2400.00	-37.022	-27.67	-9.352	PASS
		24561.8	-28.415	-27.67	-0.745	PASS
		21255.7	-28.285	-26.47	-1.815	PASS
	11	2483.50	-38.383	-27.22	-11.163	PASS
		24960.7	-28.229	-27.22	-1.009	PASS
		2398.40	-35.722	-26.45	-9.272	PASS
IEEE 802.11n_40	3	2400.00	-36.097	-26.45	-9.647	PASS
		21300.1	-28.053	-26.45	-1.603	PASS
		21711.5	-28.369	-26.83	-1.539	PASS
	6	2483.50	-38.650	-27.42	-11.230	PASS
		24248.4	-28.711	-27.42	-1.291	PASS
		24248.4	-28.711	-27.42	-1.291	PASS




**In-Band Reference Level
IEEE 802.11b_Channel 1_20MHz**

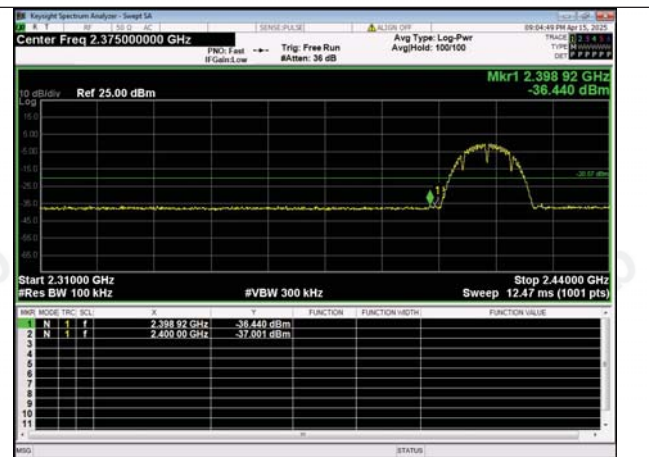


**Out Of Band Emission
IEEE 802.11b_Channel 1_20MHz**

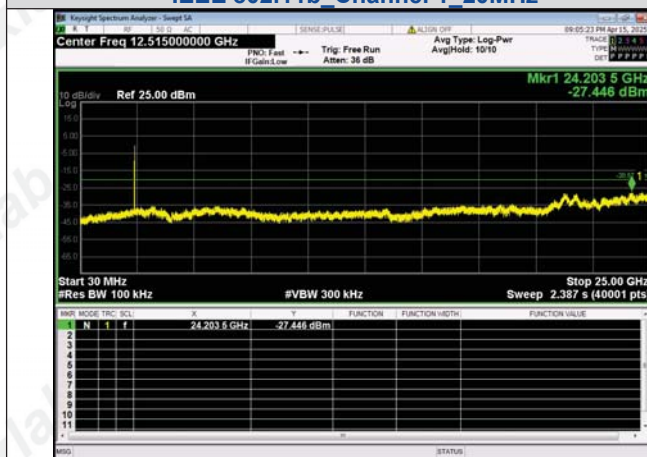

**30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 1_20MHz**

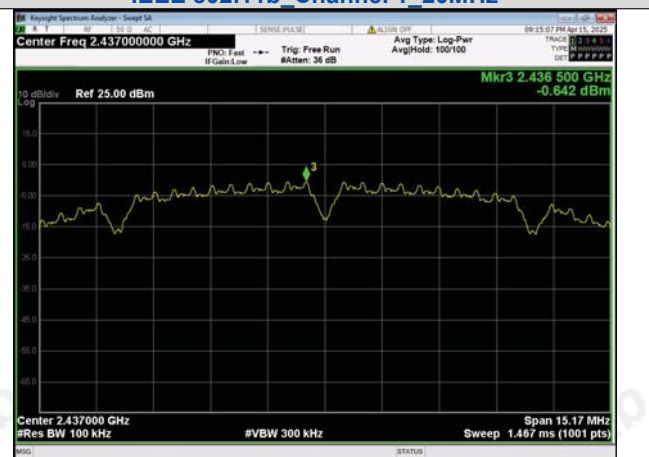


**In-Band Reference Level
IEEE 802.11b_Channel 6_20MHz**

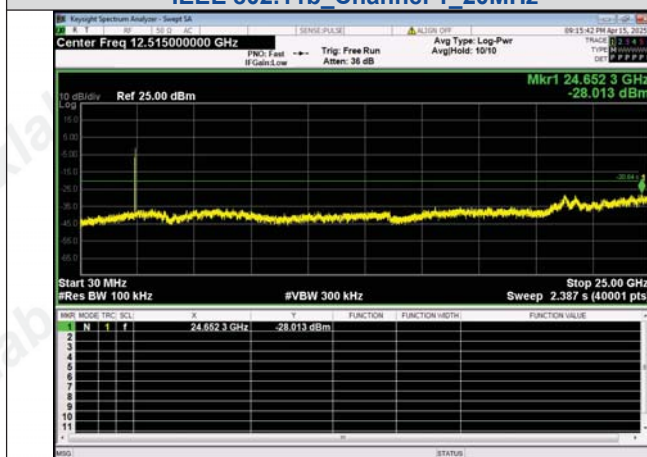


**30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 6_20MHz**



**In-Band Reference Level
IEEE 802.11b_Channel 11_20MHz**

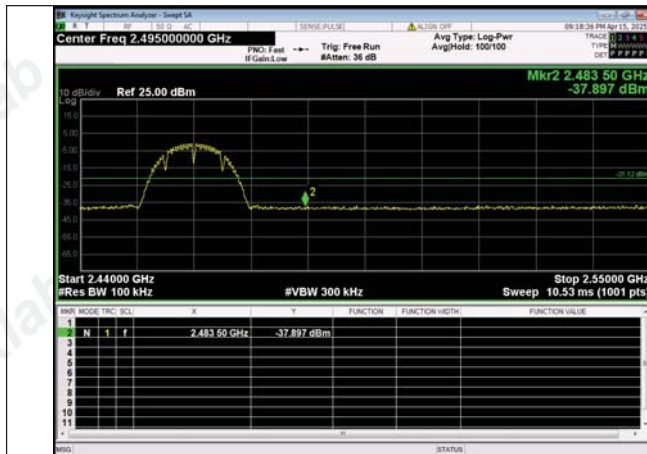


Out Of Band Emission
IEEE 802.11b_Channel 11_20MHz

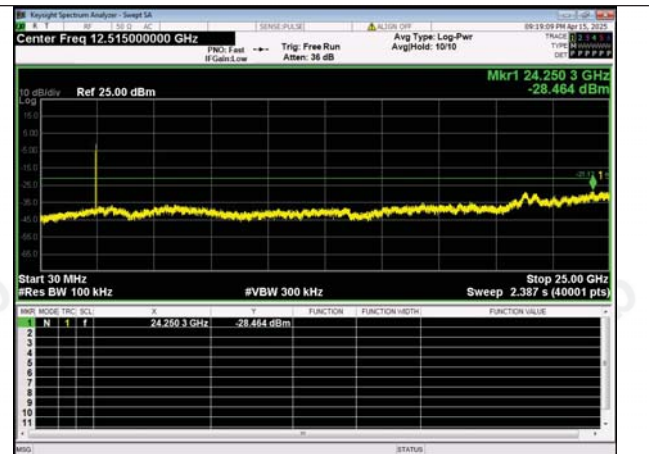


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 11_20MHz



In-Band Reference Level
IEEE 802.11g_Channel 1_20MHz

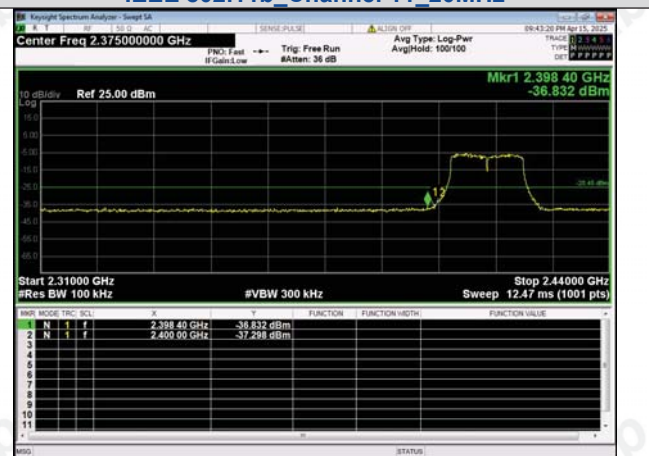


Out Of Band Emission
IEEE 802.11g_Channel 1_20MHz

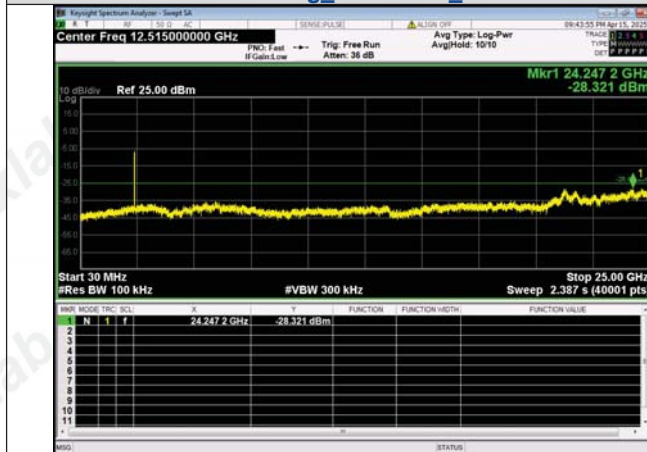


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 1_20MHz




In-Band Reference Level
IEEE 802.11g_Channel 6_20MHz

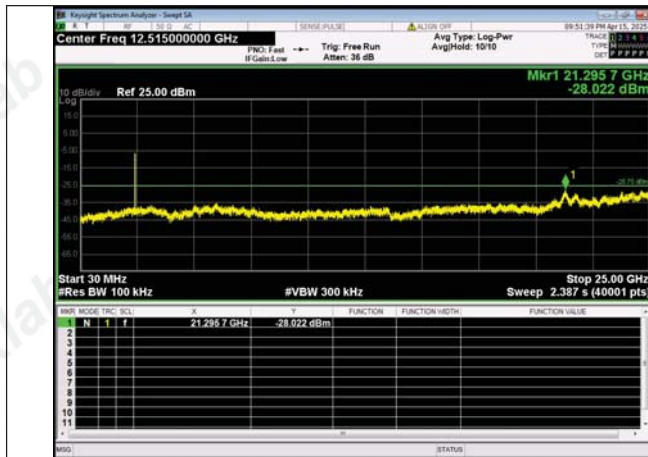


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 6_20MHz

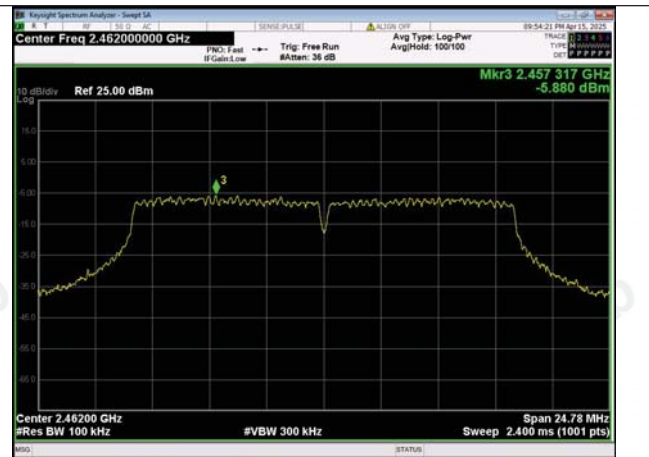

In-Band Reference Level
IEEE 802.11g_Channel 11_20MHz

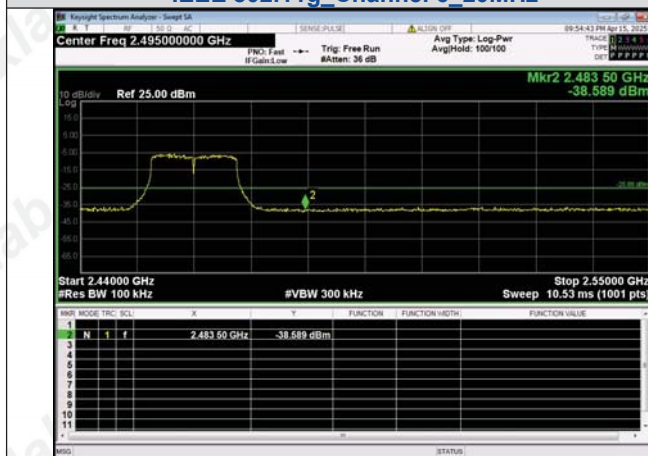


Out Of Band Emission
IEEE 802.11g_Channel 11_20MHz

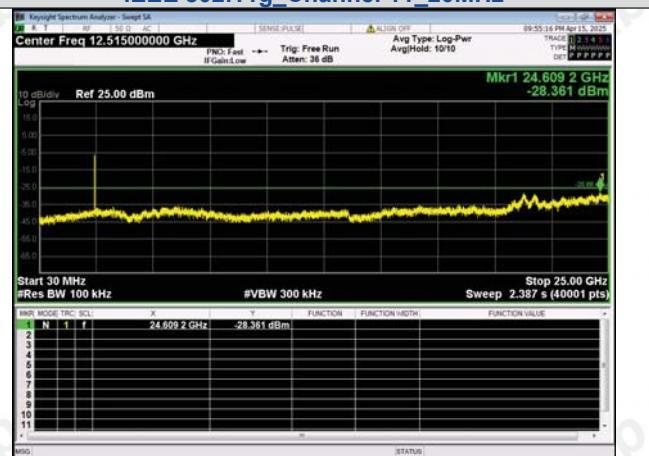


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 11_20MHz



In-Band Reference Level
IEEE 802.11n_Channel 1_20MHz

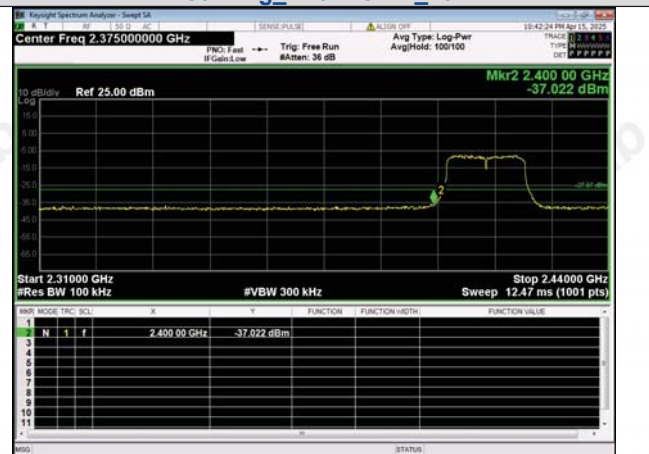


Out Of Band Emission
IEEE 802.11n_Channel 1_20MHz

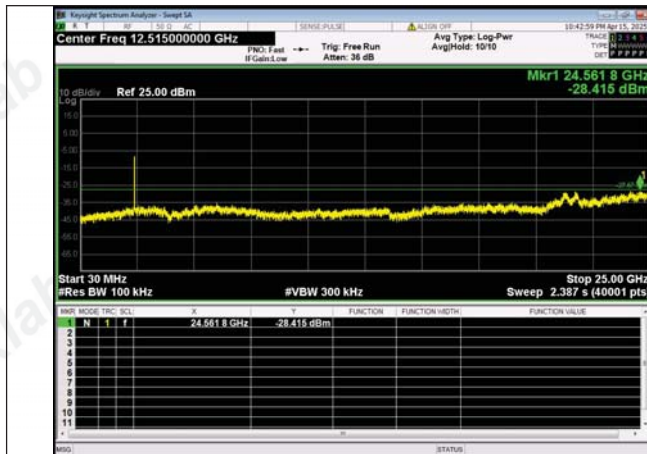

30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 1_20MHz




In-Band Reference Level
IEEE 802.11n_Channel 6_20MHz

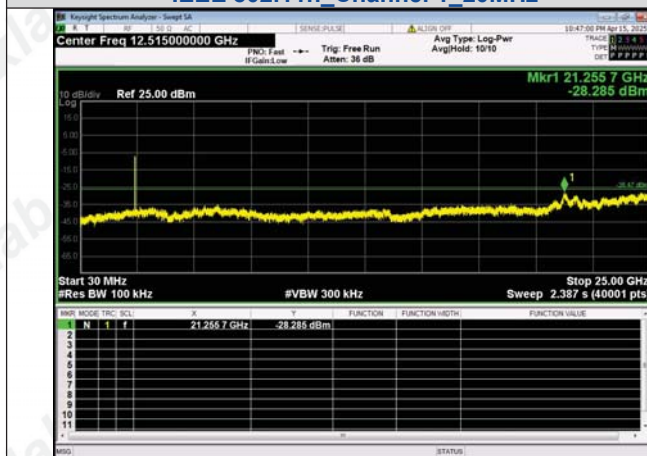


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 6_20MHz



In-Band Reference Level
IEEE 802.11n_Channel 11_20MHz

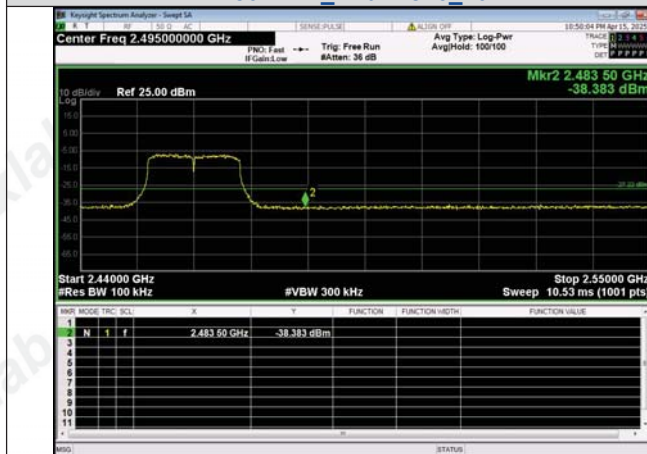


Out Of Band Emission
IEEE 802.11n_Channel 11_20MHz

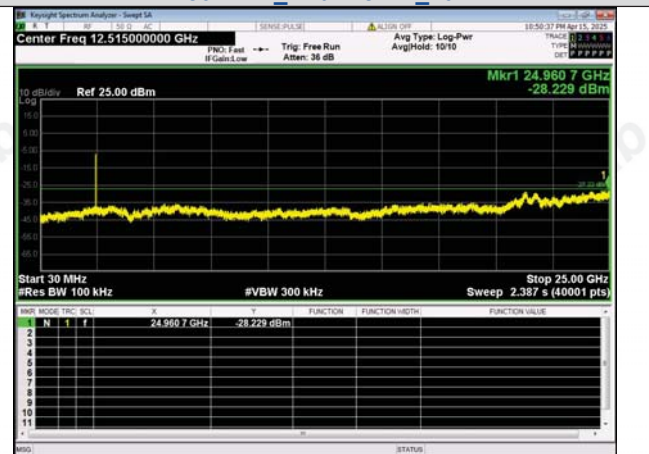


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 11_20MHz




**In-Band Reference Level
IEEE 802.11n_Channel 3_40MHz**

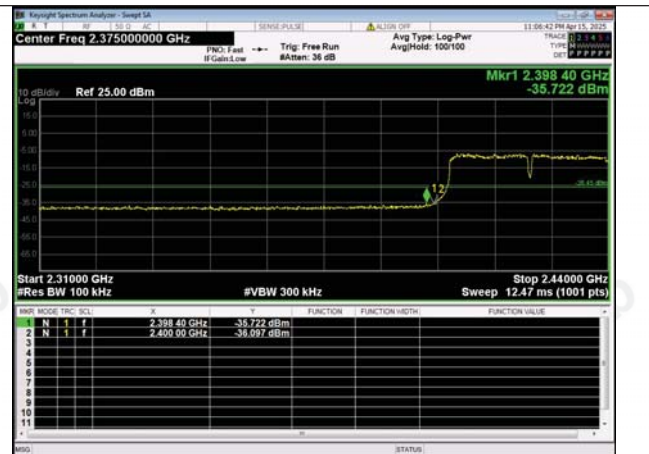


**Out Of Band Emission
IEEE 802.11n_Channel 3_40MHz**

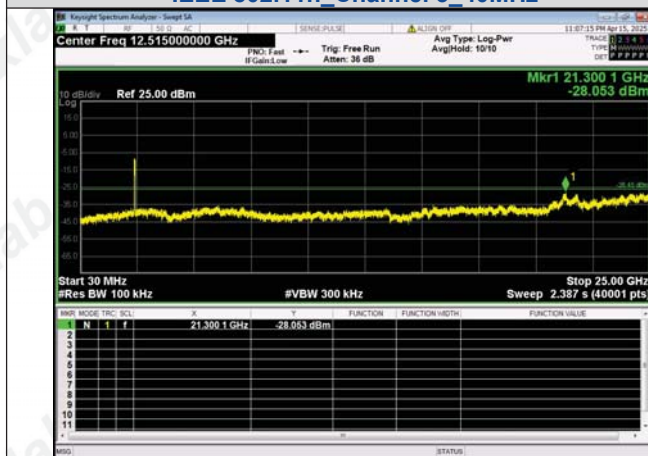


**30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 3_40MHz**

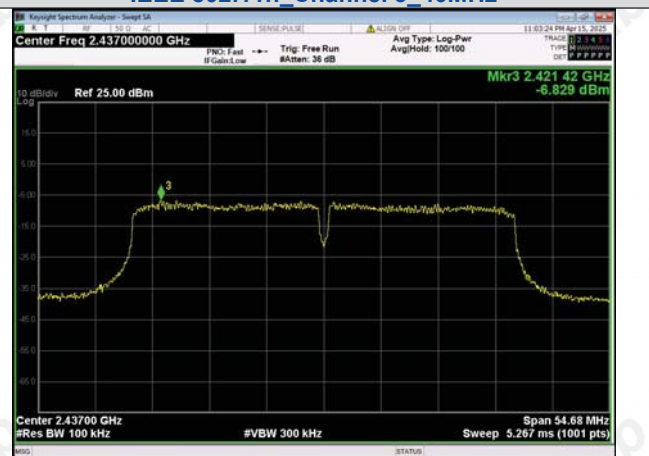


**In-Band Reference Level
IEEE 802.11n_Channel 6_40MHz**

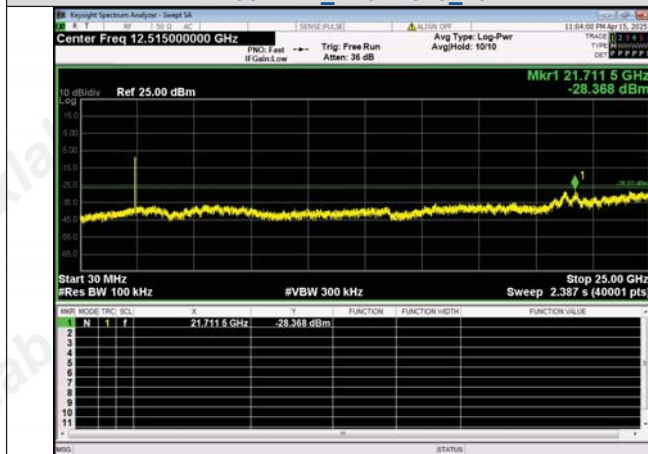


**30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 6_40MHz**

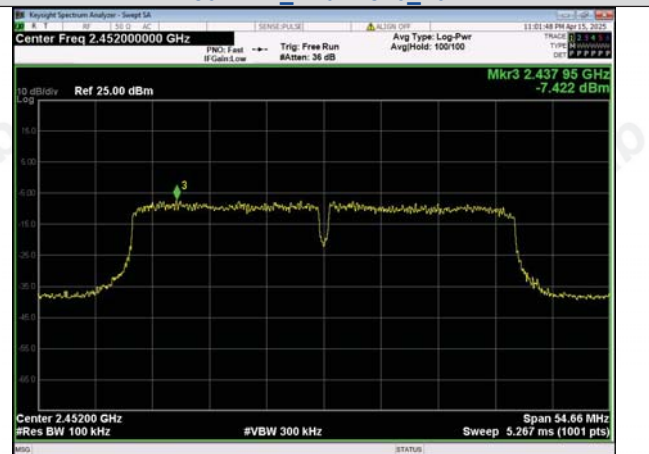

**In-Band Reference Level
IEEE 802.11n_Channel 9_40MHz**

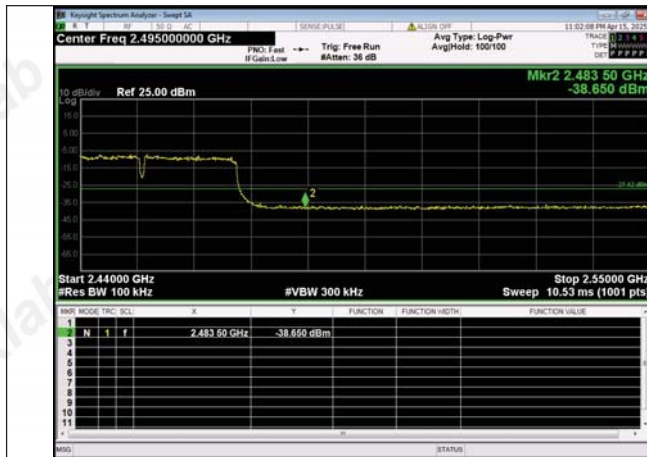

Out Of Band Emission
IEEE 802.11n Channel 9 40MHz

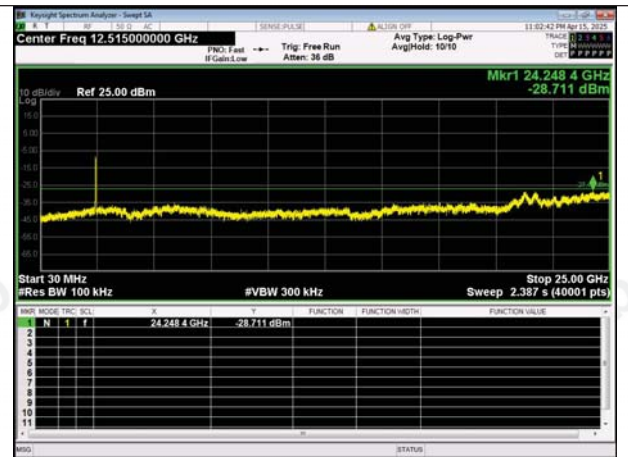

30.0 MHz - 25000.0 MHz
IEEE 802.11n Channel 9 40MHz

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.


Test Result:


The maximum gain of antenna was 2.62 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, MAXLAB Testing Co.,Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

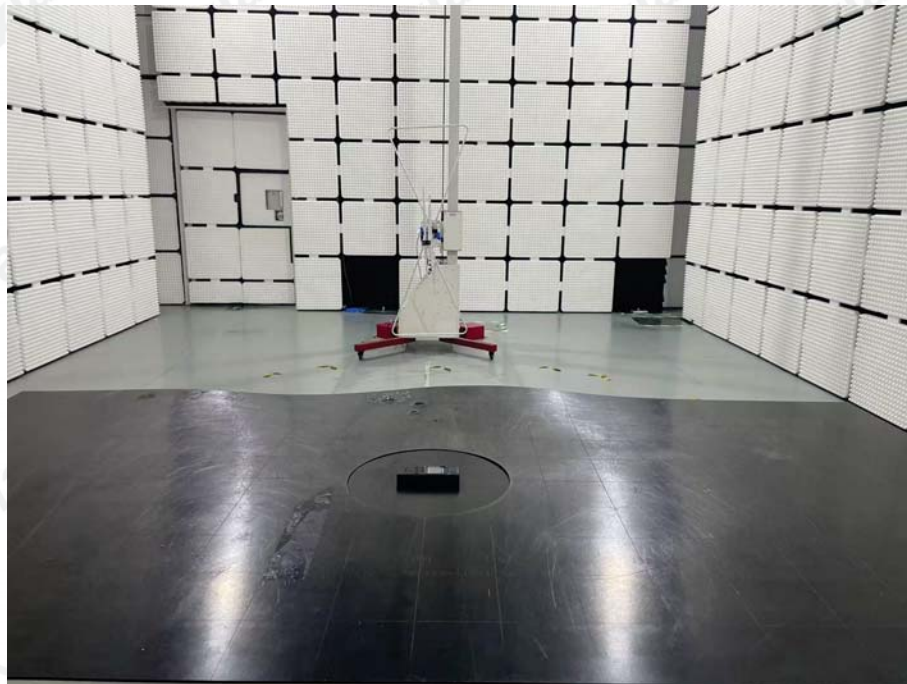

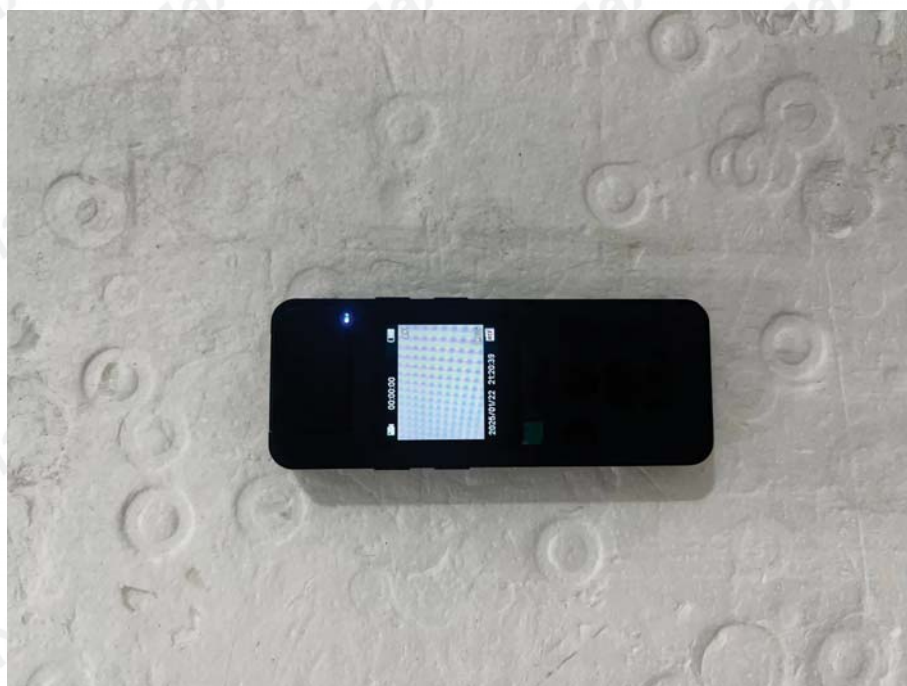

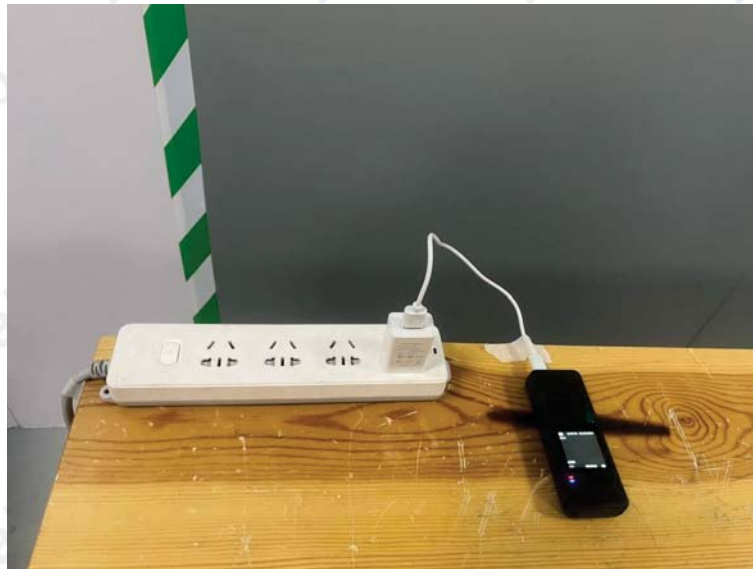

6 Photos of the EUT

Reference to the report ANNEX A of external photos and ANNEX B of internal photos.

***** **End of Report** *****