



Radio Test Report

Report No.: STS2604428W02

Issued for

Shenzhen Yunji New Energy Technology Co., LTD

302, Building A2, Silicon VZone, Dafu Community, Guanlan
Street, Longhua District, Shenzhen

Product Name: Portable power station

Brand Name: N/A

Model Name: P1500PLUS

Series Model(s): N/A

FCC ID: 2BDCB--P1500PLUS

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Shenzhen Yunji New Energy Technology Co., LTD
Address: 302, Building A2, Silicon VZone, Dafu Community, Guanlan Street, Longhua District, Shenzhen
Manufacturer's Name: Shenzhen Yunji New Energy Technology Co., LTD
Address: 302, Building A2, Silicon VZone, Dafu Community, Guanlan Street, Longhua District, Shenzhen

Product Description

Product Name: Portable power station
Brand Name: N/A
Model Name: P1500PLUS
Series Model(s): N/A
Standards: FCC Part 15.247
Test Procedure: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 19 Nov. 2025
Date (s) of performance of tests: 19 Nov. 2025 ~ 28 Apr. 2026
Date of Issue: 28 Apr. 2026
Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	31
4.1 LIMIT	31
4.2 TEST PROCEDURE	31
4.3 DEVIATION FROM STANDARD	31
4.4 TEST SETUP	31
4.5 EUT OPERATION CONDITIONS	31
4.6 TEST RESULTS	31
5. POWER SPECTRAL DENSITY TEST	32
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM STANDARD	32
5.4 TEST SETUP	32
5.5 EUT OPERATION CONDITIONS	32
5.6 TEST RESULTS	32
6. BANDWIDTH TEST	33
6.1 LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33



Table of Contents	Page
6.6 TEST RESULTS	33
7. PEAK OUTPUT POWER TEST	34
7.1 LIMIT	34
7.2 TEST PROCEDURE	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8. ANTENNA REQUIREMENT	35
8.1 STANDARD REQUIREMENT	35
8.2 EUT ANTENNA	35
APPENDIX 1-TEST DATA	36
APPENDIX 2-PHOTOS OF TEST SETUP	76

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	28 Apr. 2026	STS2604428W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Portable power station	
Brand Name	N/A	
Model Name	P1500PLUS	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a Portable power station	
	Operation Frequency:	802.11b/g/n 20: 2412~2462 MHz 802.11n40:2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11b/g Support SISO 802.11n Support SISO
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n(40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps
	Number of Channel:	802.11b/g/n20: 11CH 802.11n 40: 7CH
	Antenna Type:	Internal Antenna
	Antenna Gain (dBi):	-1
Channel List	Please refer to the Note 3.	
Power Rating	AC 120V/60Hz/DC 51.2V from battery	
Adapter	N/A	
Battery	DC 51.2V	
Hardware version number	N/A	
Software version number	N/A	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues..



3

Operation Frequency of channel			
802.11b/g/n(20MHz)		Channel List for 802.11n(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)		For 802.11n (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452

3. This product does not support MIMO mode and is a single-transmit-single-receive type.



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH01	1 Mbps
Mode 2	TX IEEE 802.11b CH06	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH01	6 Mbps
Mode 5	TX IEEE 802.11g CH06	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH01	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH06	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n HT40 CH03	MCS 0
Mode 11	TX IEEE 802.11n HT40 CH06	MCS 0
Mode 12	TX IEEE 802.11n HT40 CH09	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode13: Keeping TX + WLAN Link



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode or Modulation type	Power Class	Software for Testing
WIFI(2.4G)	WIFI(2.4G)	802.11b	Default	Realtek 8821
		802.11g	Default	
		802.11n(HT20)	Default	
		802.11n(HT40)	Default	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

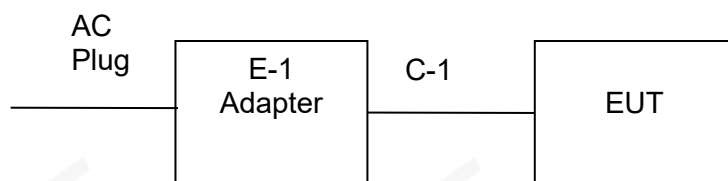



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment

No.	Device Type	Brand	Model	Series No.	Note
---	---	---	---	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Unshielded	NO	1M	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
Pre-Amplifier(0.1M-3GHz)	EM	EM330	60665	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	2014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Band 2.4G-2.5G Filter	HX MICROWAVE	HXLBQ-DZA61	N/A	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2025.09.22	2026.09.21
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	N/A	N/A
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Pulse Power Sensor	Anritsu	MA2411B	917389	2025.09.23	2026.09.22
Power Meter	Anritsu	ML2480	1005127	2025.09.23	2026.09.22
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
RF Coaxial Cable	XINQY	CT26PE	DC-26.5G	N/A	N/A
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

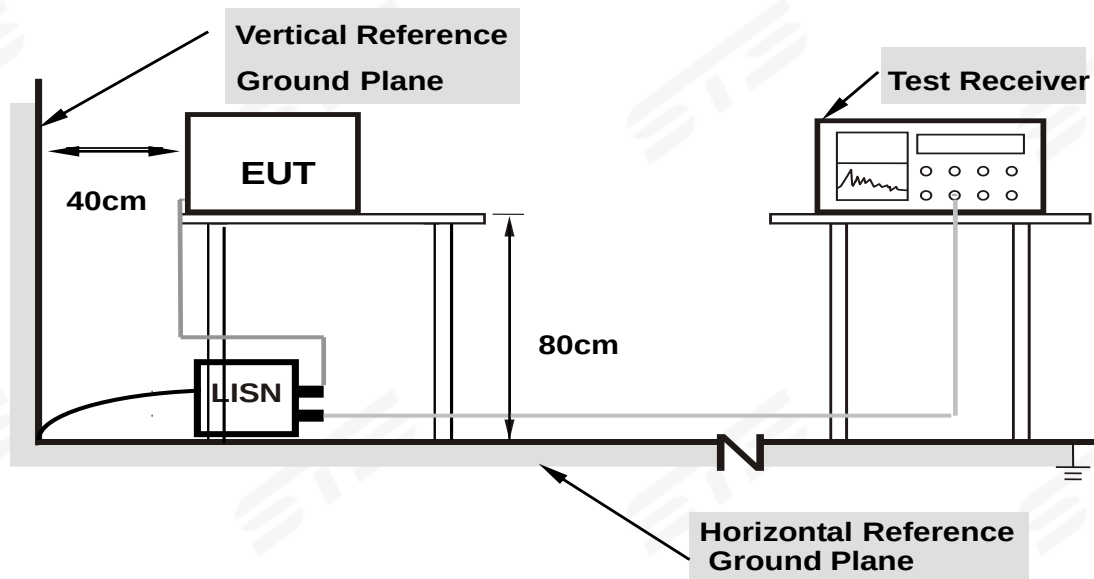

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 13		

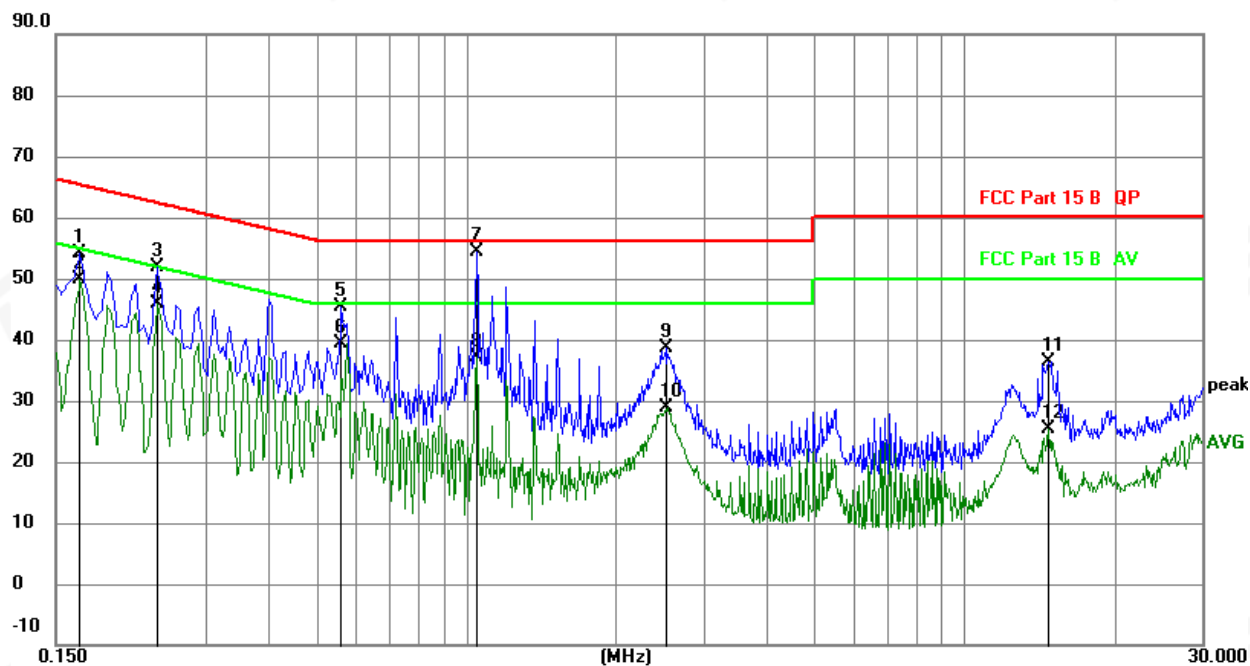


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1675	34.14	20.04	54.18	65.08	-10.90	QP
2		0.1675	29.82	20.04	49.86	55.08	-5.22	AVG
3		0.2391	31.91	20.04	51.95	62.13	-10.18	QP
4		0.2391	25.84	20.04	45.88	52.13	-6.25	AVG
5		0.5611	25.32	20.12	45.44	56.00	-10.56	QP
6		0.5611	19.17	20.12	39.29	46.00	-6.71	AVG
7	*	1.0483	34.19	20.27	54.46	56.00	-1.54	QP
8		1.0483	16.89	20.27	37.16	46.00	-8.84	AVG
9		2.5131	18.42	20.29	38.71	56.00	-17.29	QP
10		2.5131	8.50	20.29	28.79	46.00	-17.21	AVG
11		14.7497	14.07	22.42	36.49	60.00	-23.51	QP
12		14.7497	3.00	22.42	25.42	50.00	-24.58	AVG



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 13		

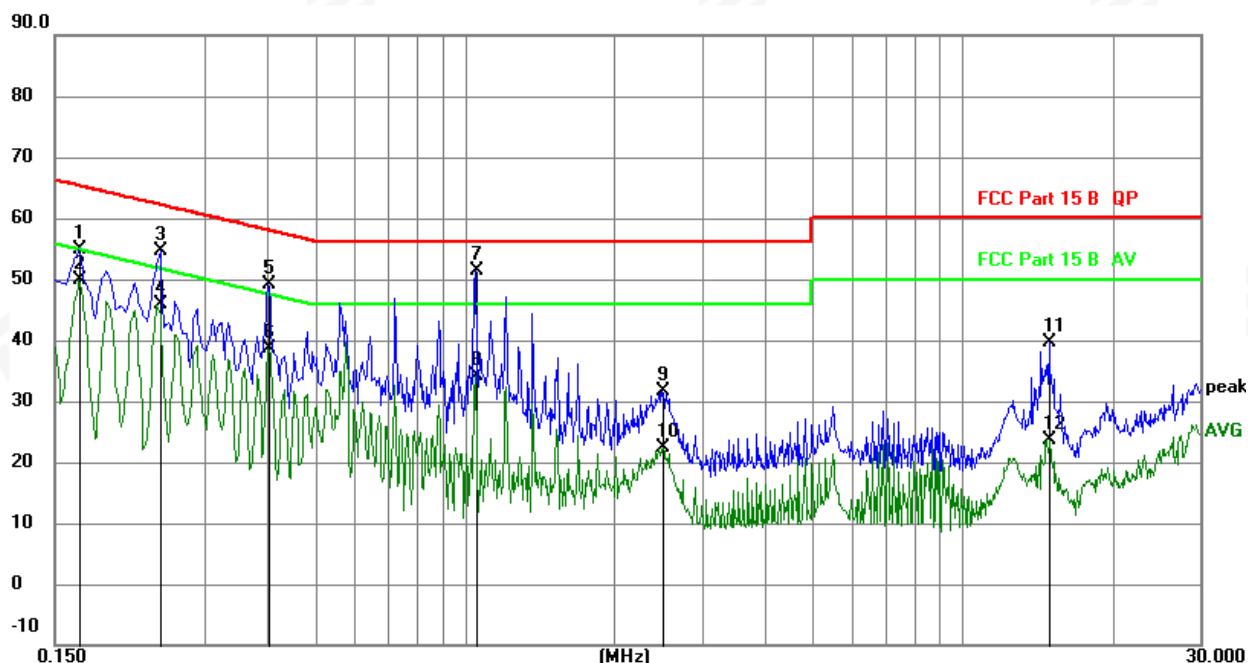

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1680	34.81	20.04	54.85	65.06	-10.21	QP
2		0.1680	29.95	20.04	49.99	55.06	-5.07	AVG
3		0.2444	34.48	20.04	54.52	61.95	-7.43	QP
4		0.2444	25.84	20.04	45.88	51.95	-6.07	AVG
5		0.4020	29.08	20.05	49.13	57.81	-8.68	QP
6		0.4020	18.65	20.05	38.70	47.81	-9.11	AVG
7	*	1.0500	31.18	20.27	51.45	56.00	-4.55	QP
8		1.0500	13.92	20.27	34.19	46.00	-11.81	AVG
9		2.4990	11.32	20.29	31.61	56.00	-24.39	QP
10		2.4990	2.12	20.29	22.41	46.00	-23.59	AVG
11		14.9190	17.27	22.46	39.73	60.00	-20.27	QP
12		14.9190	1.19	22.46	23.65	50.00	-26.35	AVG



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

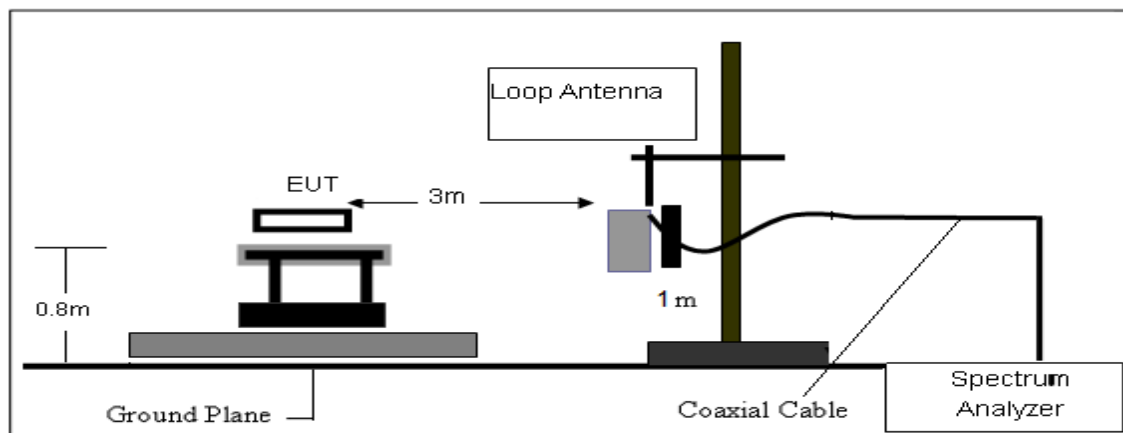

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

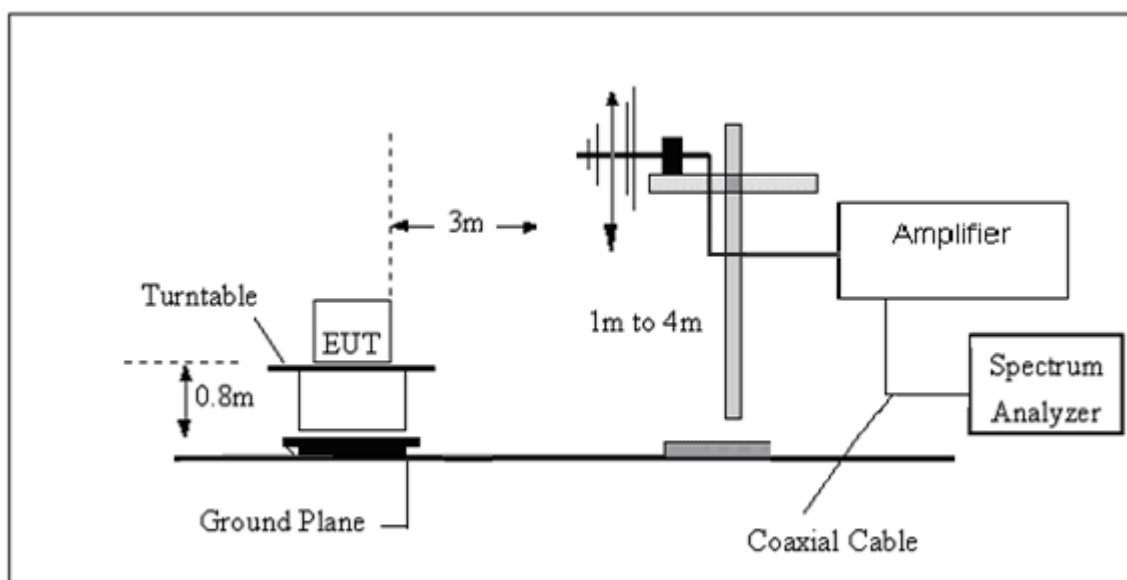

(C) Radiated Emission Test-Up Frequency Above 1GHz

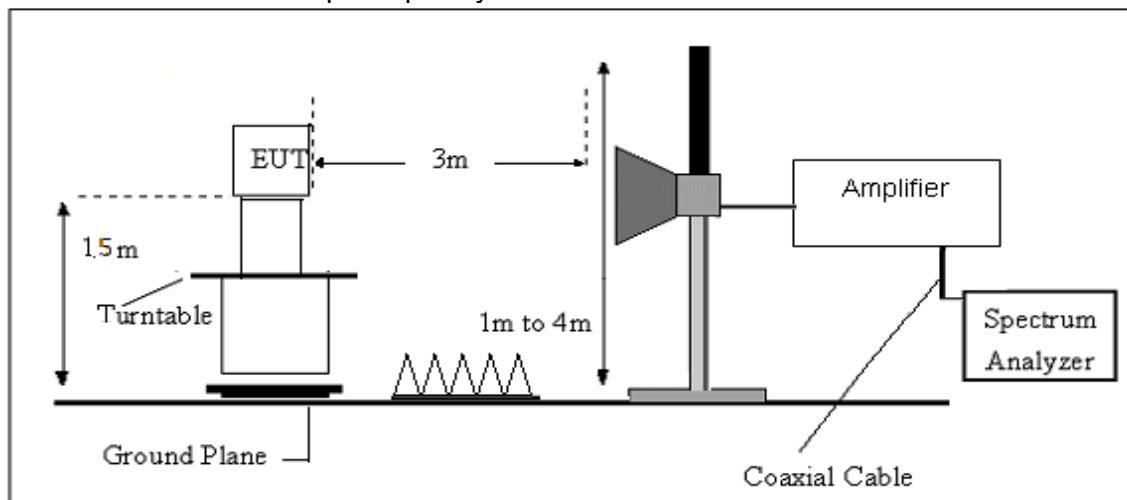

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



(30MHz - 1000MHz)

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1-12(worst Mode 1)		

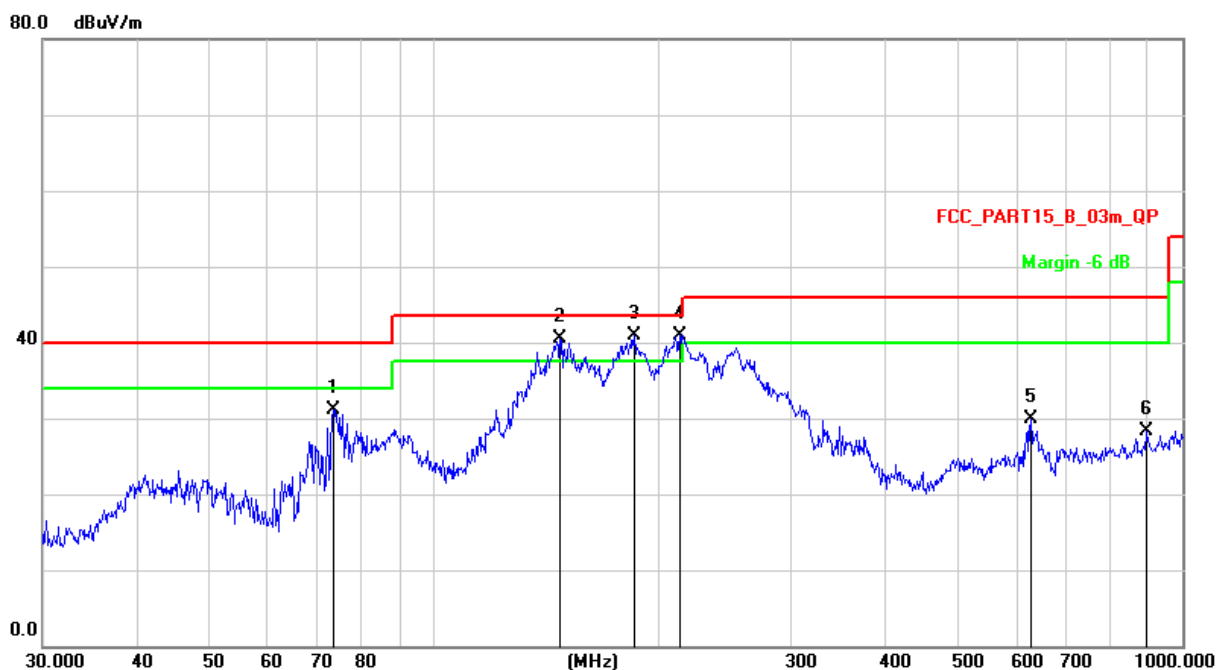


Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		73.3593	44.94	-13.81	31.13	40.00	-8.87	QP
2	!	147.4036	55.66	-15.24	40.42	43.50	-3.08	QP
3	!	185.1379	53.89	-12.99	40.90	43.50	-2.60	QP
4	*	213.0151	52.80	-11.80	41.00	43.50	-2.50	QP
5		627.2738	33.68	-3.87	29.81	46.00	-16.19	QP
6		896.9964	28.27	0.11	28.38	46.00	-17.62	QP



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1-12(worst Mode 1)		

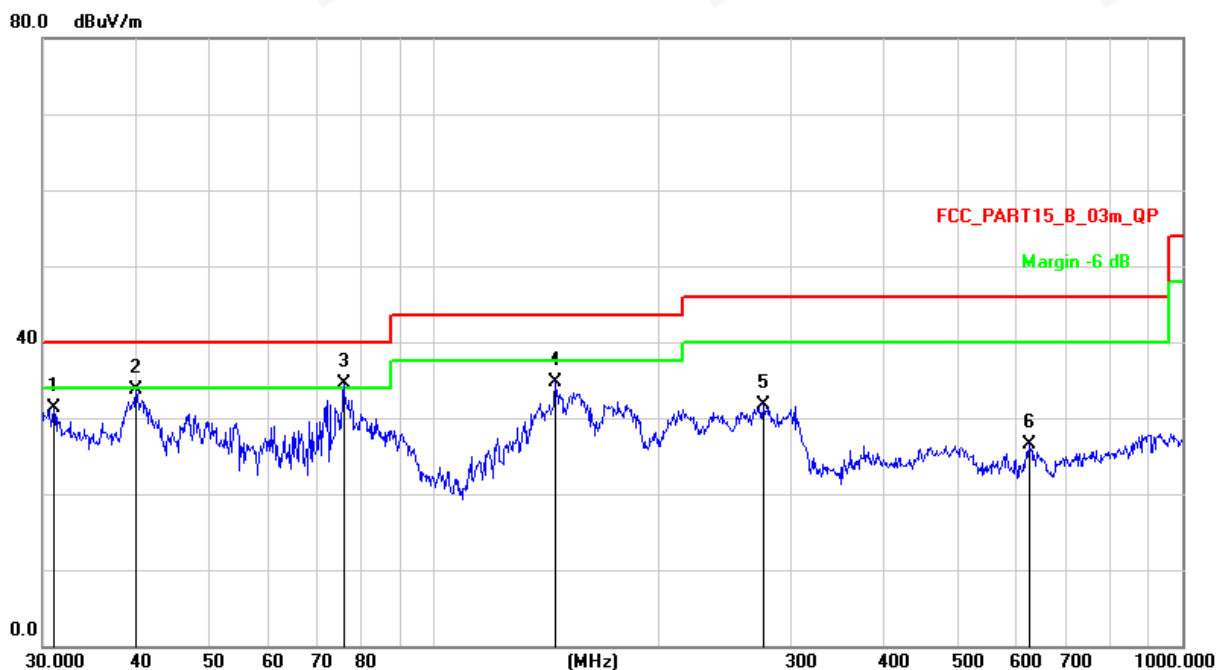

Remark:.

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		31.0704	43.79	-12.50	31.29	40.00	-8.71	QP
2		39.9942	45.19	-11.56	33.63	40.00	-6.37	QP
3	*	75.7114	48.09	-13.68	34.41	40.00	-5.59	QP
4		145.3506	49.76	-15.13	34.63	43.50	-8.87	QP
5		275.1569	42.50	-10.82	31.68	46.00	-14.32	QP
6		625.0778	30.47	-3.89	26.58	46.00	-19.42	QP



(1000MHz-25GHz) Spurious emission Requirements

Above 1000 MHz										
Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11b/2412 MHz)										
3264.64	61.68	44.70	6.70	28.20	-9.80	51.88	74.00	-22.12	PK	Vertical
3264.64	50.82	44.70	6.70	28.20	-9.80	41.02	54.00	-12.98	AV	Vertical
3264.65	62.24	44.70	6.70	28.20	-9.80	52.44	74.00	-21.56	PK	Horizontal
3264.65	51.28	44.70	6.70	28.20	-9.80	41.48	54.00	-12.52	AV	Horizontal
4824.32	59.24	44.20	9.04	31.60	-3.56	55.68	74.00	-18.32	PK	Vertical
4824.32	49.83	44.20	9.04	31.60	-3.56	46.27	54.00	-7.73	AV	Vertical
4824.38	59.19	44.20	9.04	31.60	-3.56	55.63	74.00	-18.37	PK	Horizontal
4824.38	50.56	44.20	9.04	31.60	-3.56	47.00	54.00	-7.00	AV	Horizontal
5359.82	49.39	44.20	9.86	32.00	-2.34	47.04	74.00	-26.96	PK	Vertical
5359.82	40.40	44.20	9.86	32.00	-2.34	38.06	54.00	-15.94	AV	Vertical
5359.63	47.60	44.20	9.86	32.00	-2.34	45.25	74.00	-28.75	PK	Horizontal
5359.63	38.15	44.20	9.86	32.00	-2.34	35.81	54.00	-18.19	AV	Horizontal
7235.76	53.90	43.50	11.40	35.50	3.40	57.30	74.00	-16.70	PK	Vertical
7235.76	44.61	43.50	11.40	35.50	3.40	48.01	54.00	-5.99	AV	Vertical
7235.76	54.31	43.50	11.40	35.50	3.40	57.71	74.00	-16.29	PK	Horizontal
7235.76	44.75	43.50	11.40	35.50	3.40	48.15	54.00	-5.85	AV	Horizontal
Middle Channel (802.11b/2437 MHz)										
3264.66	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3264.66	51.38	44.70	6.70	28.20	-9.80	41.58	54.00	-12.42	AV	Vertical
3264.82	62.14	44.70	6.70	28.20	-9.80	52.34	74.00	-21.66	PK	Horizontal
3264.82	50.30	44.70	6.70	28.20	-9.80	40.50	54.00	-13.50	AV	Horizontal
4874.36	58.33	44.20	9.04	31.60	-3.56	54.77	74.00	-19.23	PK	Vertical
4874.36	49.13	44.20	9.04	31.60	-3.56	45.57	54.00	-8.43	AV	Vertical
4874.40	58.14	44.20	9.04	31.60	-3.56	54.58	74.00	-19.42	PK	Horizontal
4874.40	49.66	44.20	9.04	31.60	-3.56	46.10	54.00	-7.90	AV	Horizontal
5359.69	48.66	44.20	9.86	32.00	-2.34	46.31	74.00	-27.69	PK	Vertical
5359.69	39.82	44.20	9.86	32.00	-2.34	37.48	54.00	-16.52	AV	Vertical
5359.81	47.44	44.20	9.86	32.00	-2.34	45.09	74.00	-28.91	PK	Horizontal
5359.81	38.45	44.20	9.86	32.00	-2.34	36.10	54.00	-17.90	AV	Horizontal
7310.71	53.78	43.50	11.40	35.50	3.40	57.18	74.00	-16.82	PK	Vertical
7310.71	44.31	43.50	11.40	35.50	3.40	47.71	54.00	-6.29	AV	Vertical
7310.68	54.44	43.50	11.40	35.50	3.40	57.84	74.00	-16.16	PK	Horizontal
7310.68	44.61	43.50	11.40	35.50	3.40	48.01	54.00	-5.99	AV	Horizontal



High Channel (802.11b/2462 MHz)										
3264.67	61.20	44.70	6.70	28.20	-9.80	51.40	74.00	-22.60	PK	Vertical
3264.67	51.71	44.70	6.70	28.20	-9.80	41.91	54.00	-12.09	AV	Vertical
3264.68	61.18	44.70	6.70	28.20	-9.80	51.38	74.00	-22.62	PK	Horizontal
3264.68	50.89	44.70	6.70	28.20	-9.80	41.09	54.00	-12.91	AV	Horizontal
4924.45	59.55	44.20	9.04	31.60	-3.56	55.99	74.00	-18.01	PK	Vertical
4924.45	49.85	44.20	9.04	31.60	-3.56	46.29	54.00	-7.71	AV	Vertical
4924.52	58.66	44.20	9.04	31.60	-3.56	55.10	74.00	-18.90	PK	Horizontal
4924.52	50.42	44.20	9.04	31.60	-3.56	46.86	54.00	-7.14	AV	Horizontal
5359.63	48.99	44.20	9.86	32.00	-2.34	46.65	74.00	-27.35	PK	Vertical
5359.63	40.38	44.20	9.86	32.00	-2.34	38.03	54.00	-15.97	AV	Vertical
5359.71	47.16	44.20	9.86	32.00	-2.34	44.81	74.00	-29.19	PK	Horizontal
5359.71	38.90	44.20	9.86	32.00	-2.34	36.56	54.00	-17.44	AV	Horizontal
7385.69	54.31	43.50	11.40	35.50	3.40	57.71	74.00	-16.29	PK	Vertical
7385.69	43.62	43.50	11.40	35.50	3.40	47.02	54.00	-6.98	AV	Vertical
7385.93	53.53	43.50	11.40	35.50	3.40	56.93	74.00	-17.07	PK	Horizontal
7385.93	43.86	43.50	11.40	35.50	3.40	47.26	54.00	-6.74	AV	Horizontal

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. All modes have been measurement, only worst mode was reported.
Emission Level = Reading + Factor
Margin = Emission Level-Limit
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.6 TEST RESULTS(Band edge Requirements)

N20-Low

Horizontal

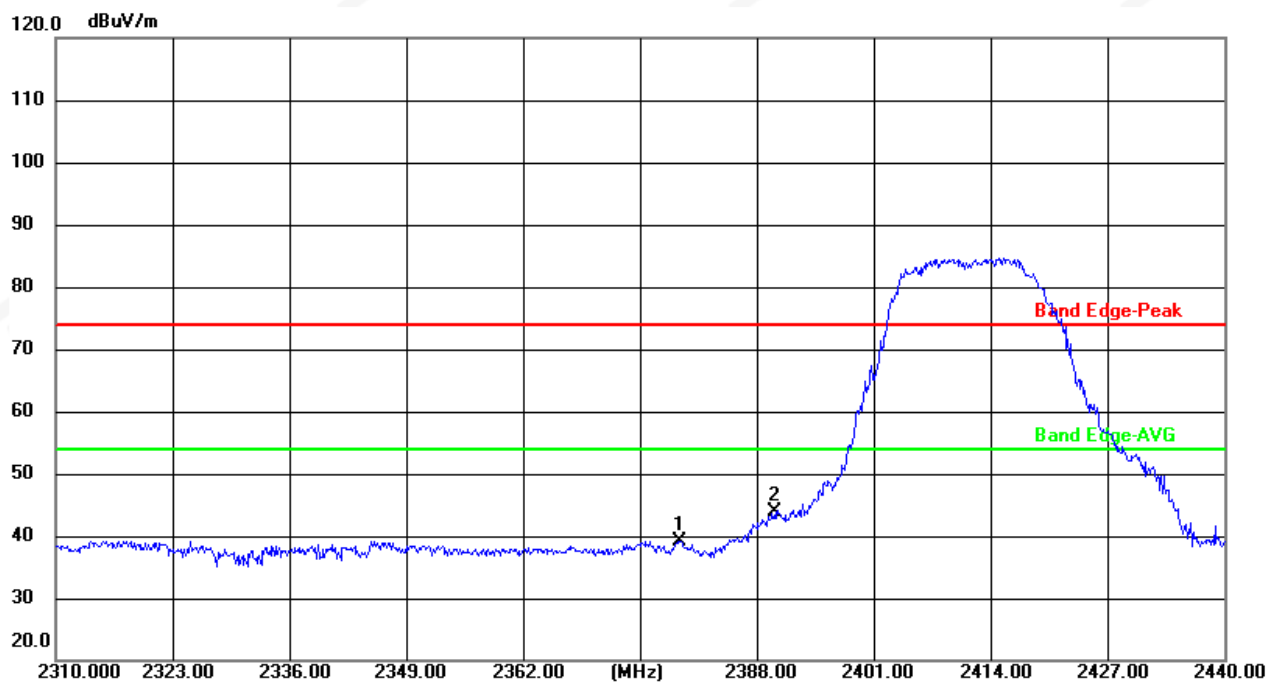


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2379.420	65.04	-25.84	39.20	74.00	-34.80	peak
2 *	2390.000	69.72	-25.82	43.90	74.00	-30.10	peak



N20-Low

Vertical

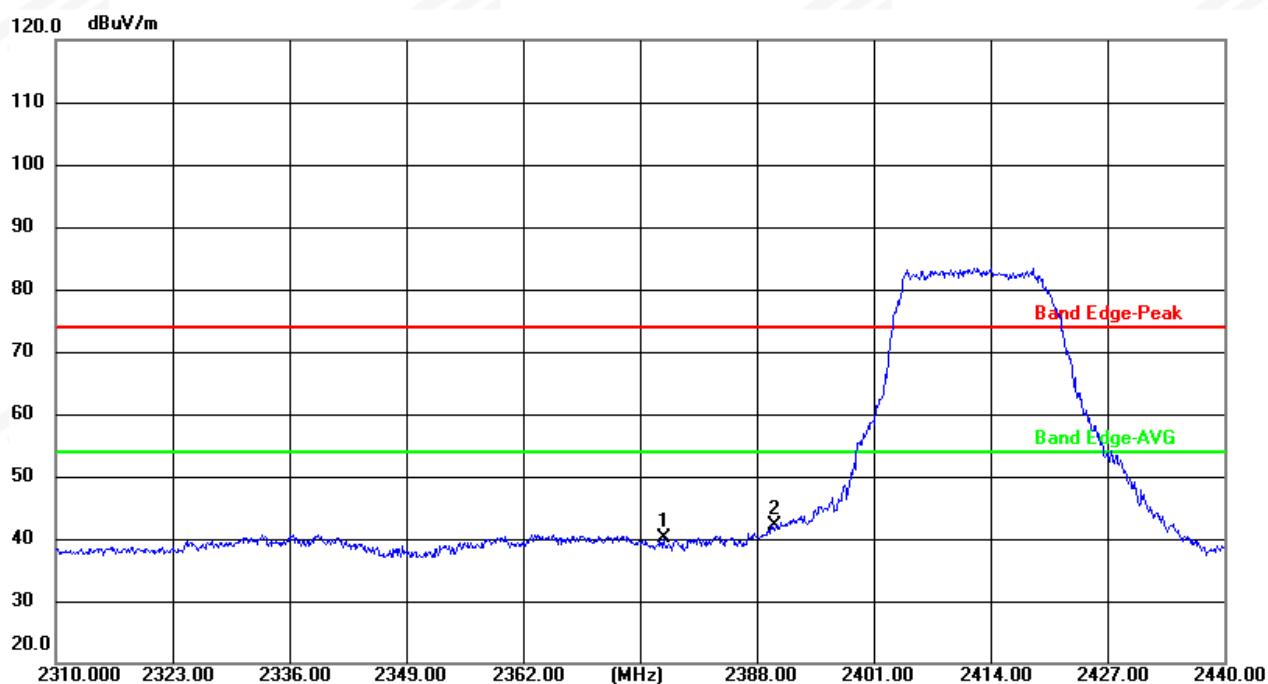


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2377.600	66.04	-25.84	40.20	74.00	-33.80	peak
2 *	2390.000	67.93	-25.82	42.11	74.00	-31.89	peak



N20-High

Horizontal

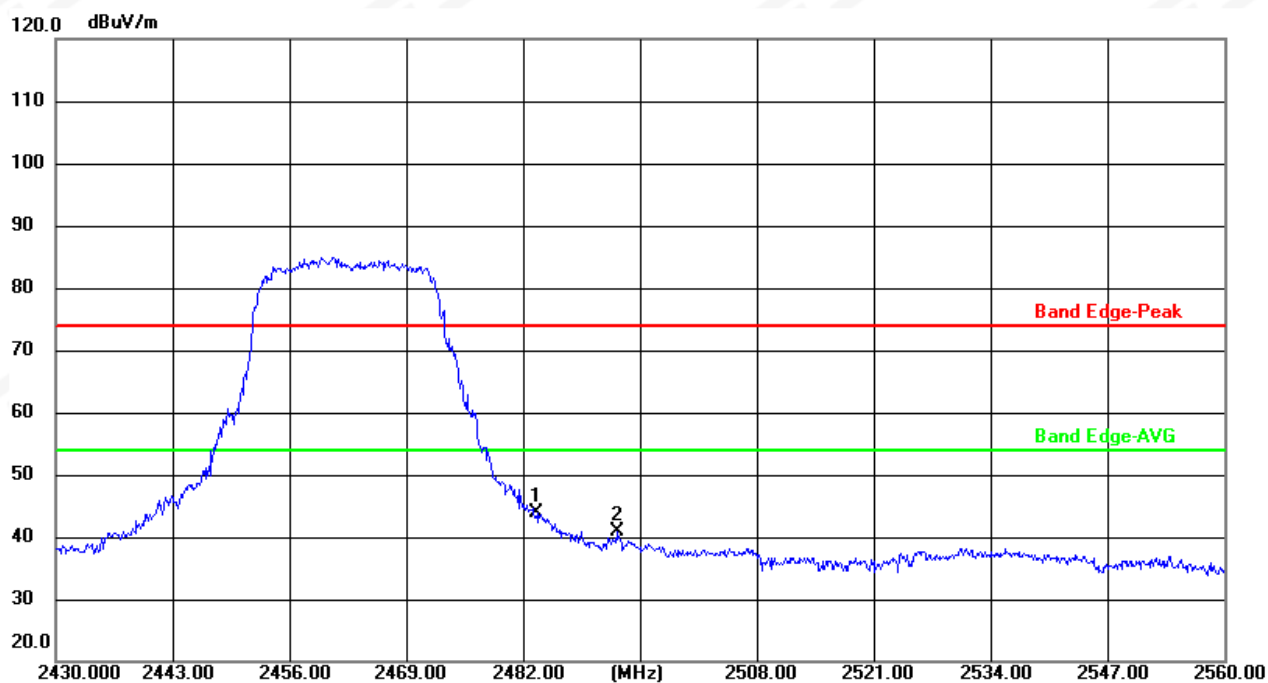


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2483.500	69.46	-25.63	43.83	74.00	-30.17	peak
2	2492.400	66.46	-25.62	40.84	74.00	-33.16	peak



N20-High

Vertical

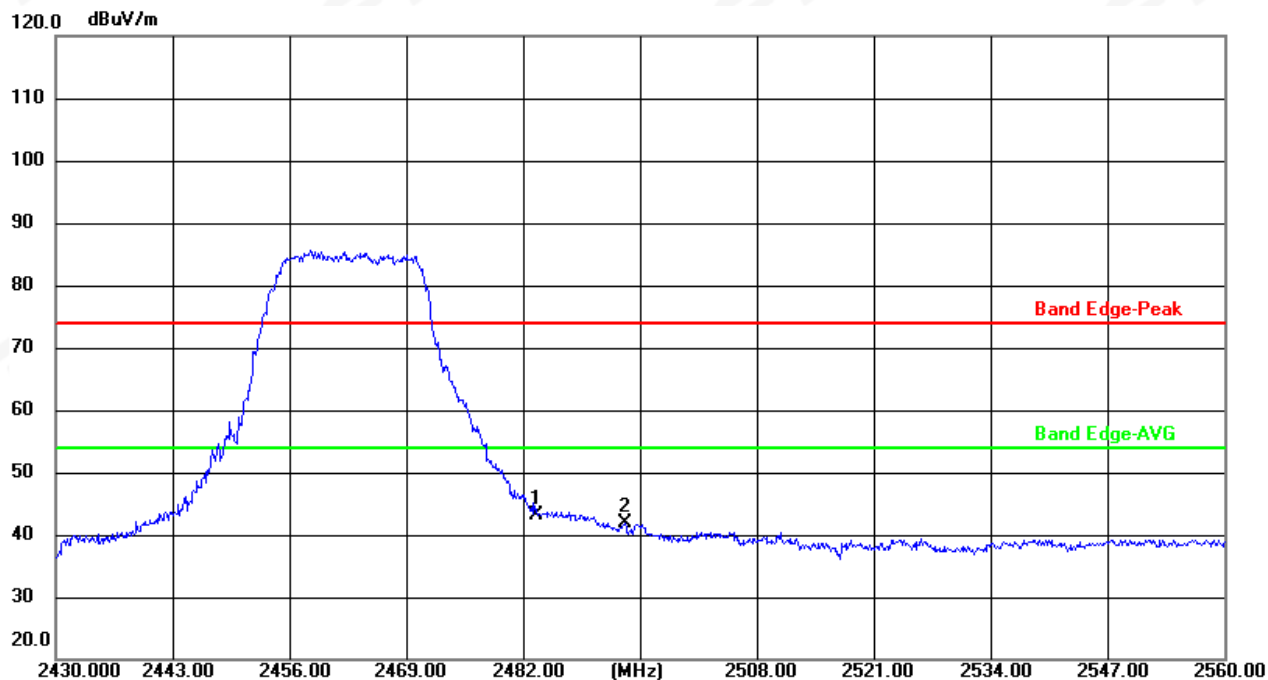

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2483.500	68.65	-25.63	43.02	74.00	-30.98	peak
2	2493.310	67.38	-25.61	41.77	74.00	-32.23	peak

Note: All modes have been measurement, only worst mode was reported.

4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

Note:

1. The test data please refer to APPENDIX 1.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100\text{ kHz} \geq \text{RBW} \geq 3\text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 1% to 5% of the OBW but not less than 100 kHz., VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


8.2 EUT ANTENNA


The EUT antenna is Internal Antenna. It comply with the standard requirement.

**APPENDIX 1-TEST DATA**

Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	100	0	0
NVNT	g	2412	100	0	0
NVNT	n20	2412	100	0	0
NVNT	n40	2422	100	0	0

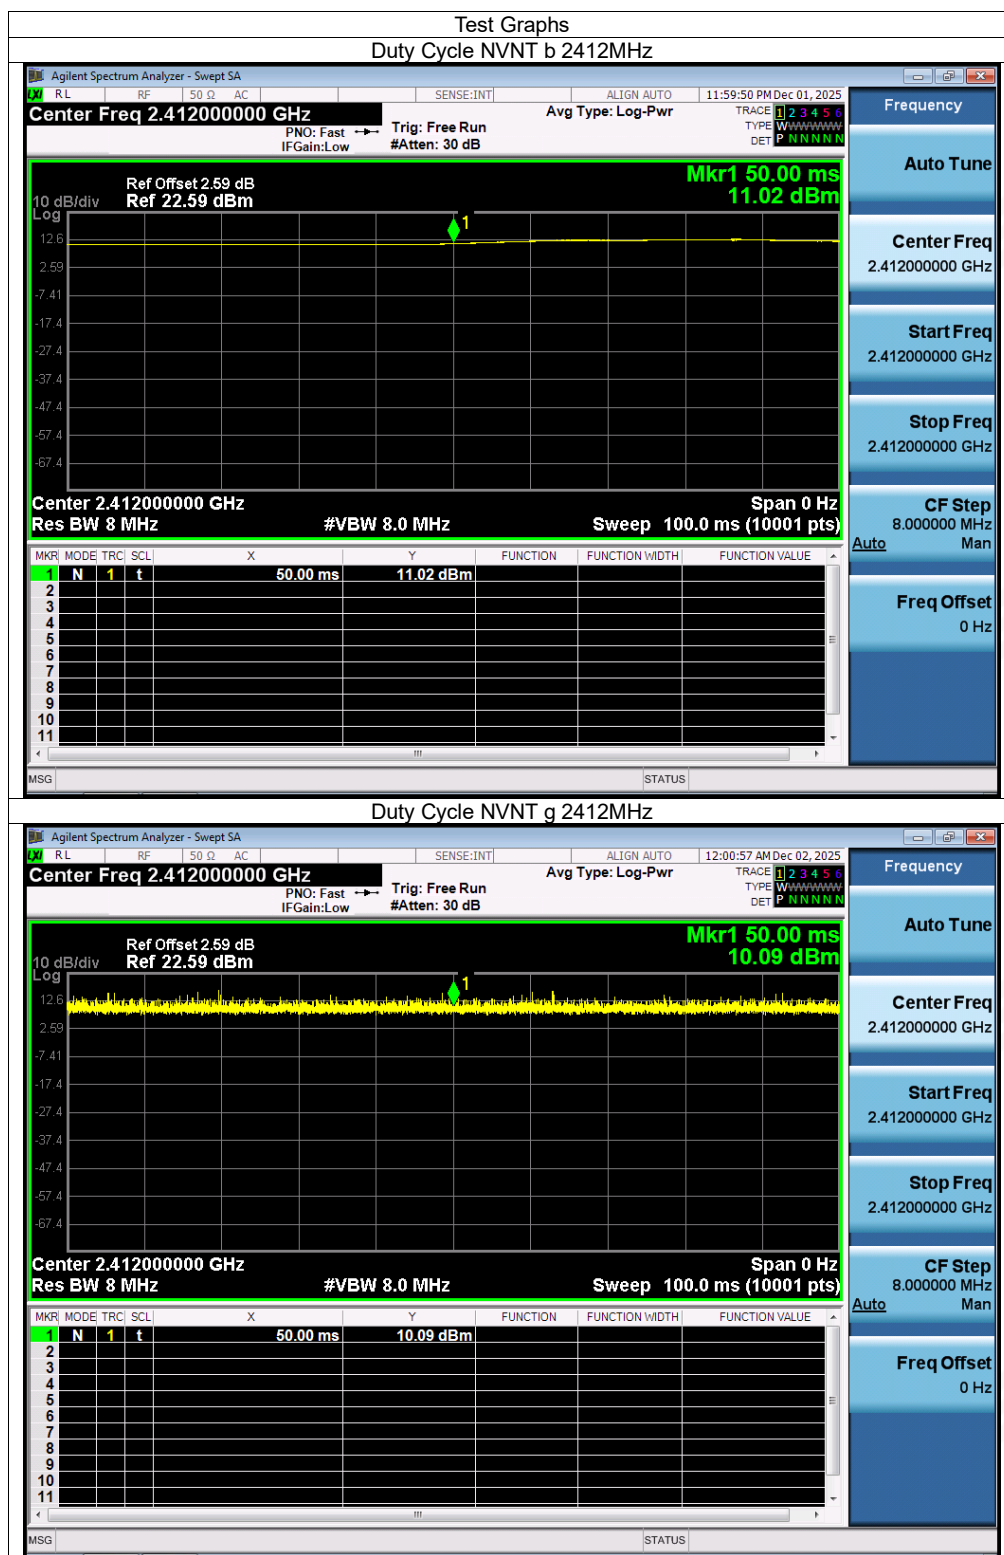

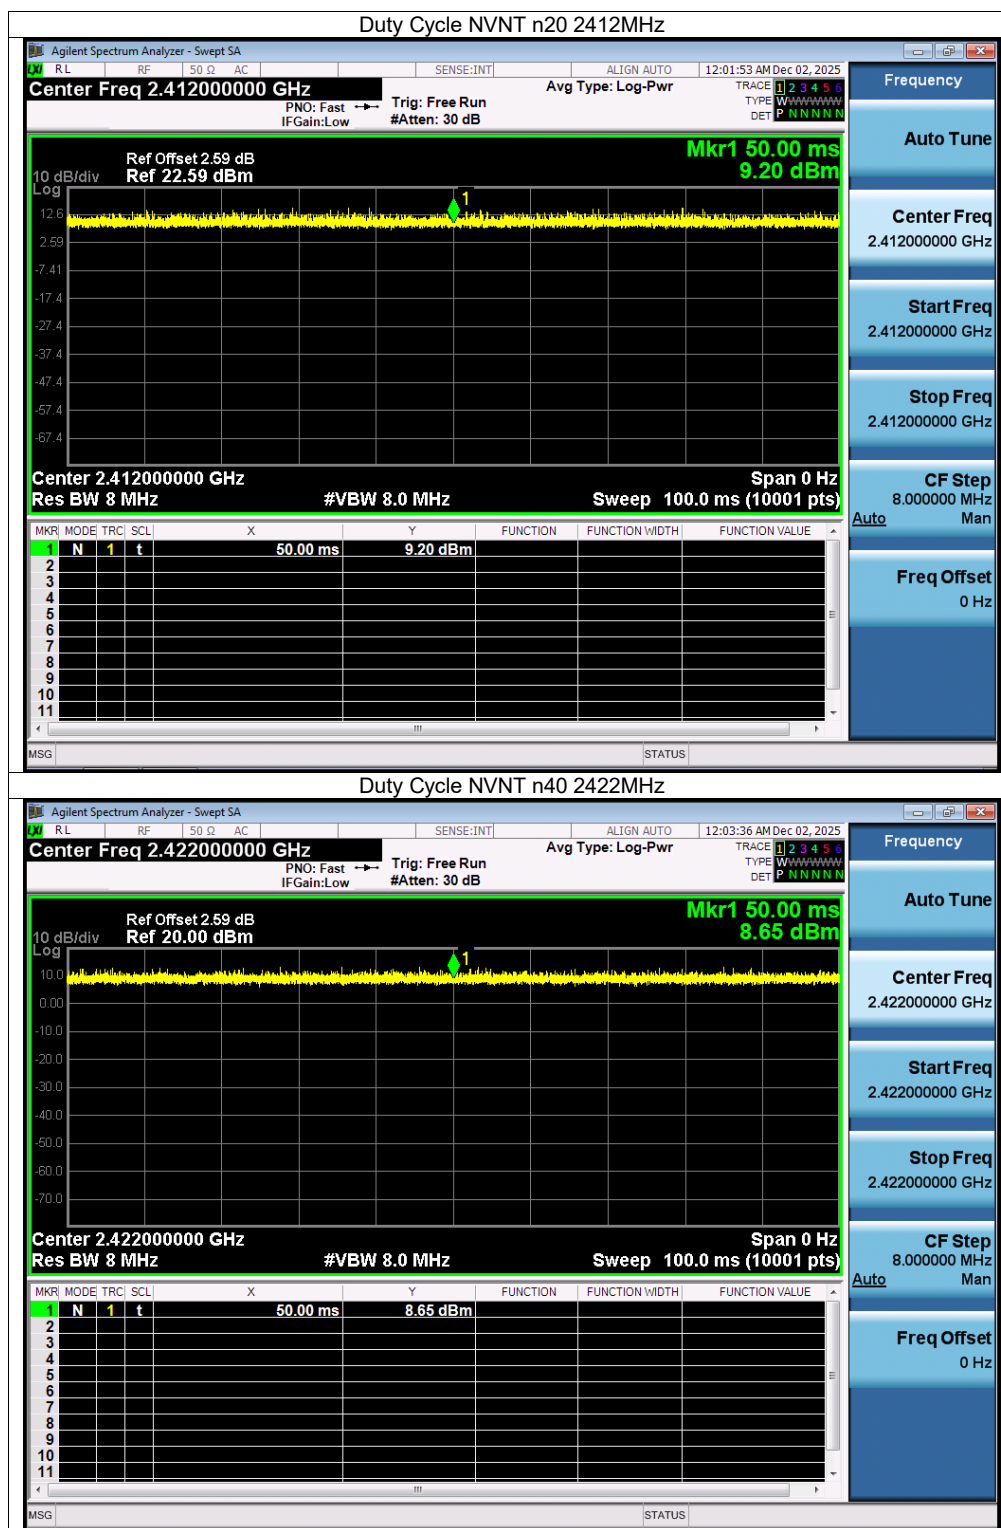




Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	12.44	30	Pass
NVNT	b	2437	12.82	30	Pass
NVNT	b	2462	12.6	30	Pass
NVNT	g	2412	11.31	30	Pass
NVNT	g	2437	11.56	30	Pass
NVNT	g	2462	11.23	30	Pass
NVNT	n20	2412	10.21	30	Pass
NVNT	n20	2437	10.54	30	Pass
NVNT	n20	2462	10.19	30	Pass
NVNT	n40	2422	9.17	30	Pass
NVNT	n40	2437	9.1	30	Pass
NVNT	n40	2452	8.58	30	Pass





-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	10.109	0.5	Pass
NVNT	b	2437	10.106	0.5	Pass
NVNT	b	2462	10.096	0.5	Pass
NVNT	g	2412	17.287	0.5	Pass
NVNT	g	2437	17.354	0.5	Pass
NVNT	g	2462	17.213	0.5	Pass
NVNT	n20	2412	18.265	0.5	Pass
NVNT	n20	2437	18.325	0.5	Pass
NVNT	n20	2462	18.211	0.5	Pass
NVNT	n40	2422	34.935	0.5	Pass
NVNT	n40	2437	35.235	0.5	Pass
NVNT	n40	2452	34.824	0.5	Pass

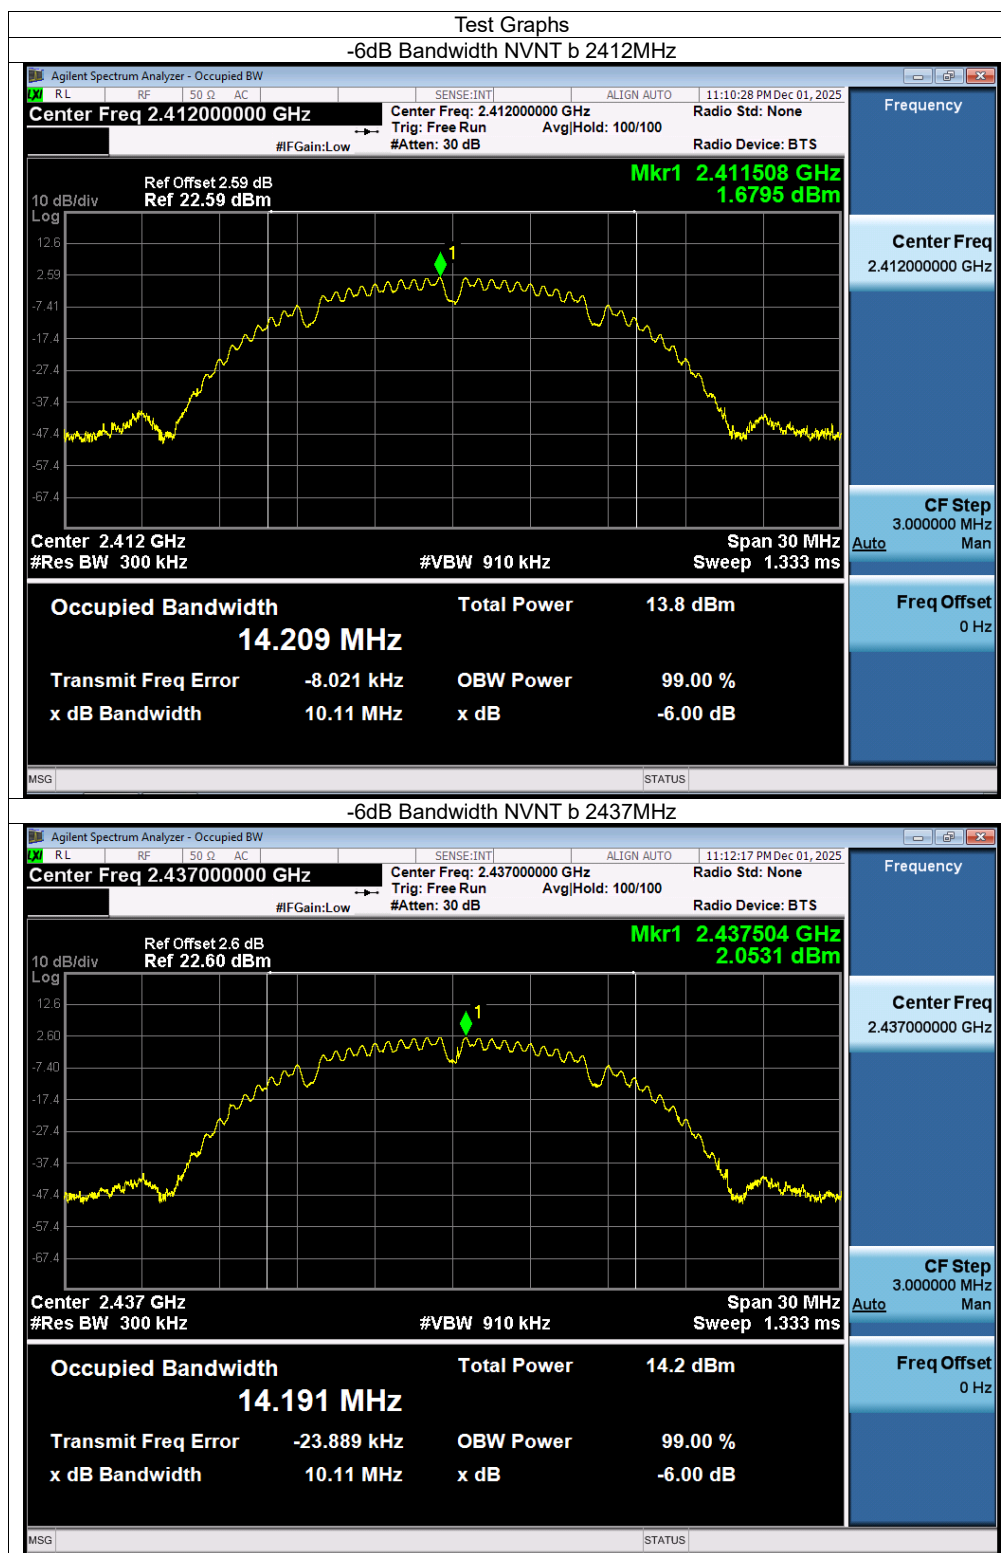


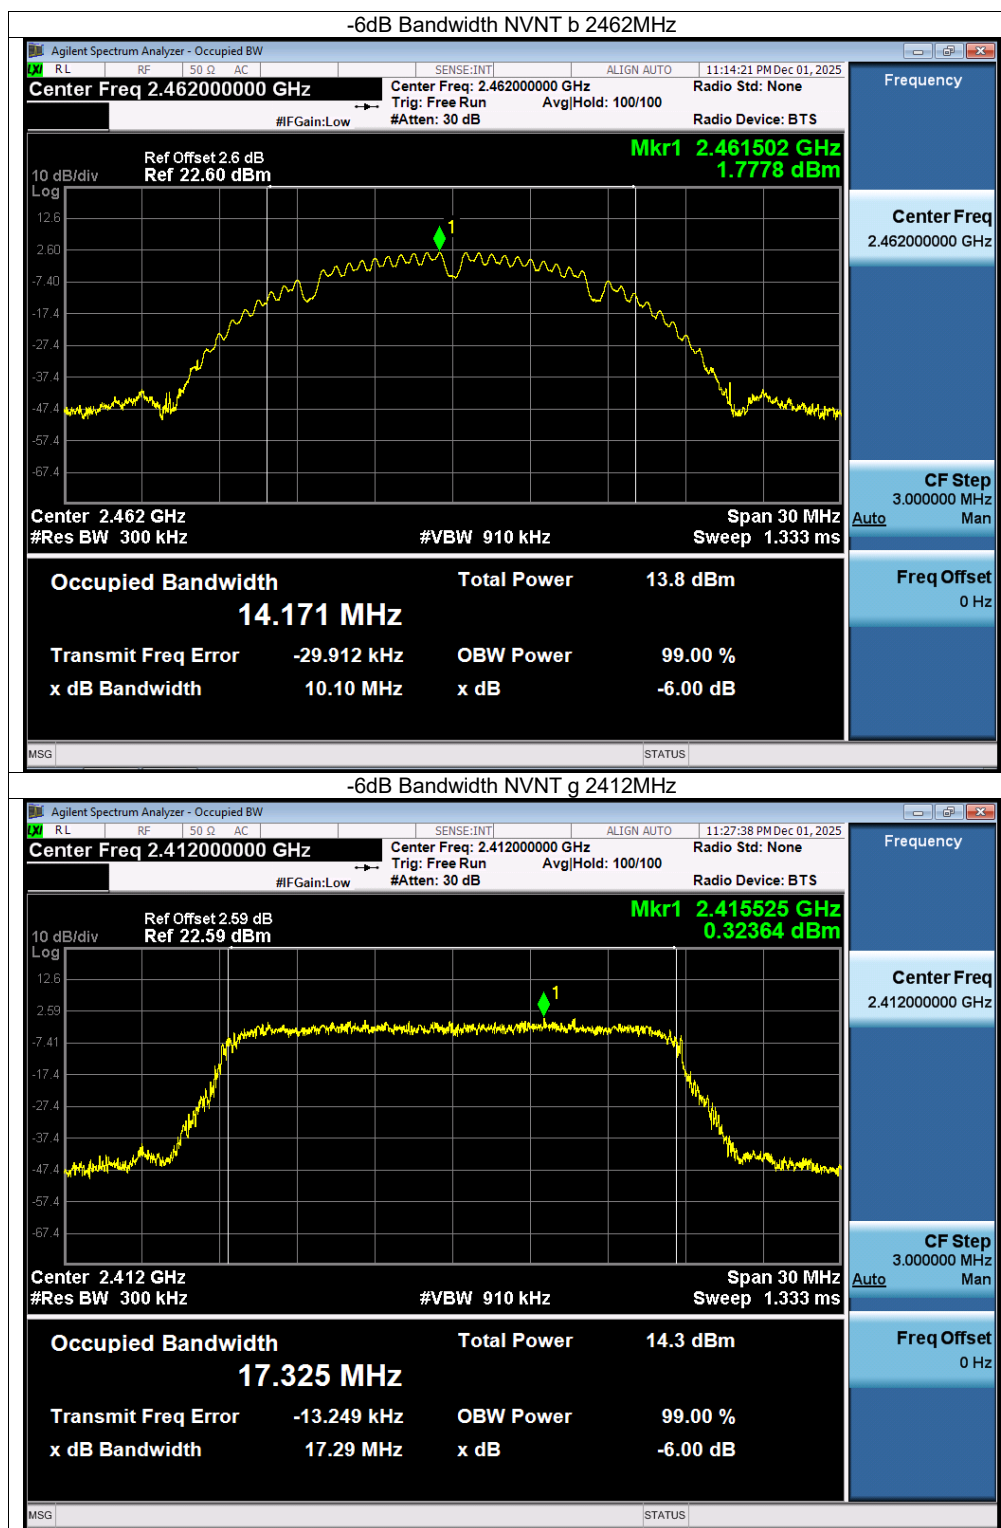

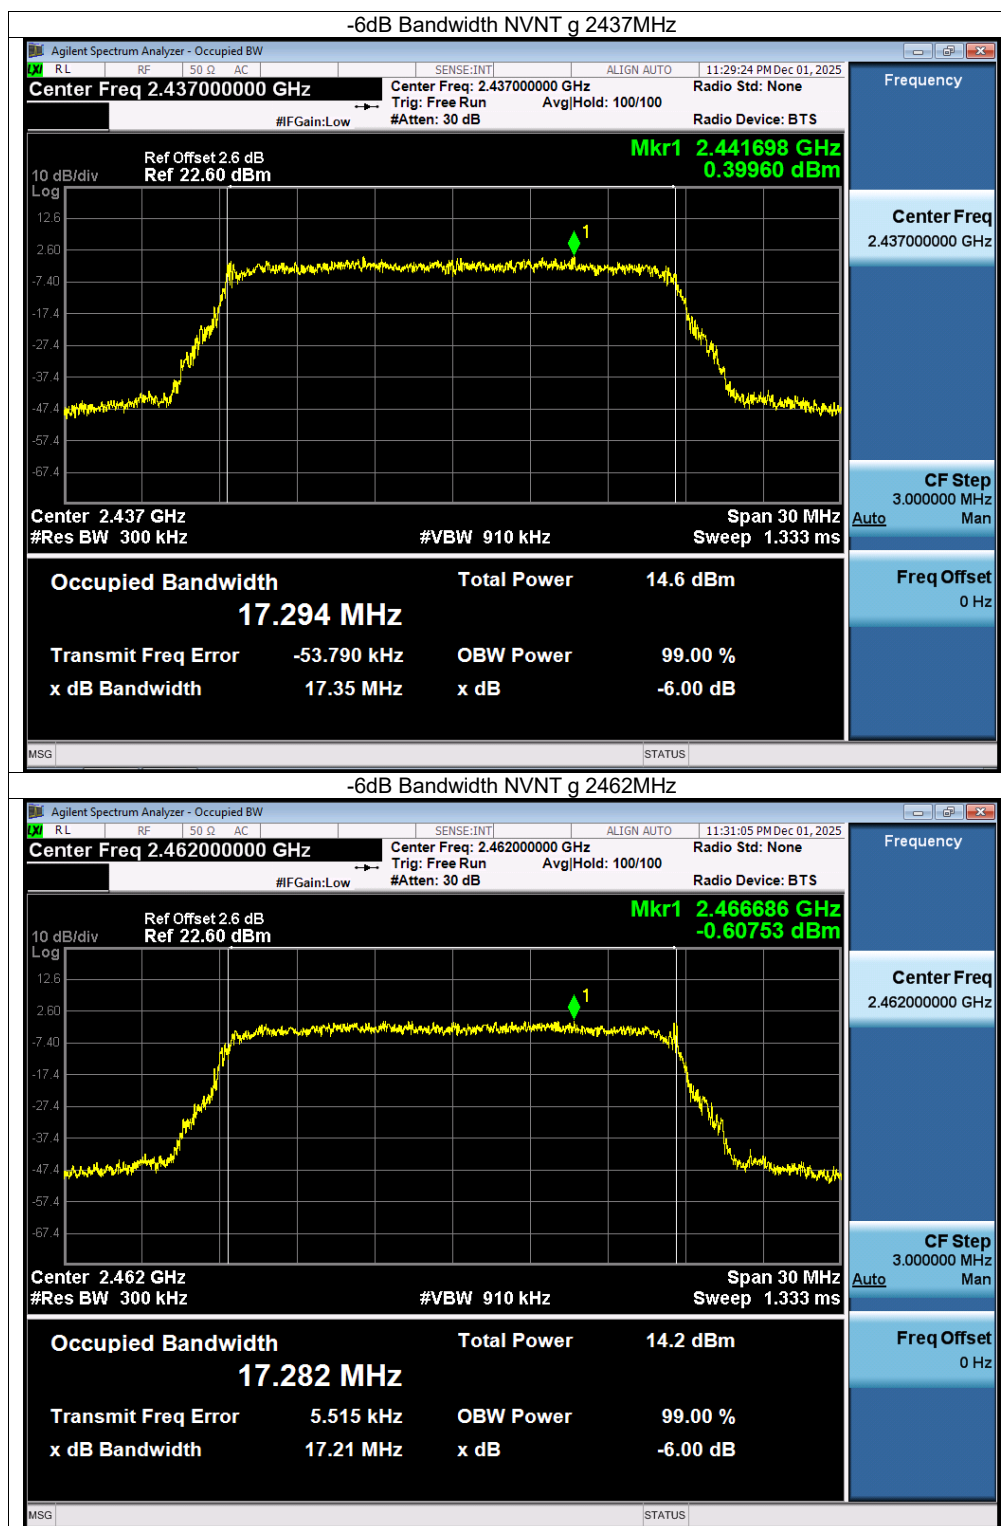

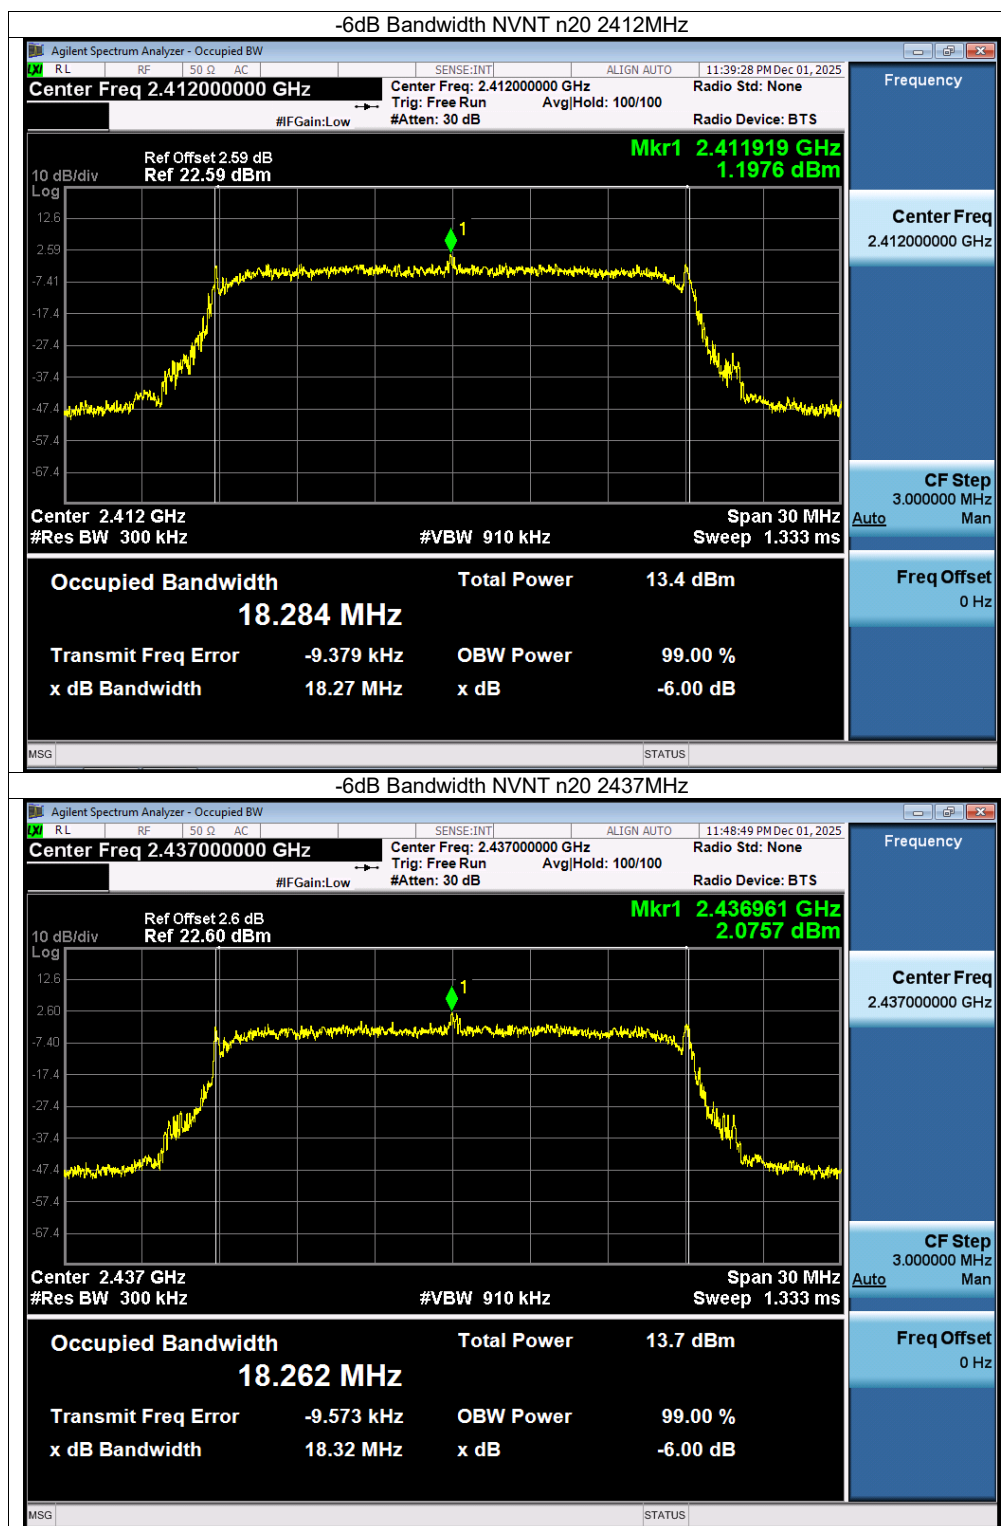

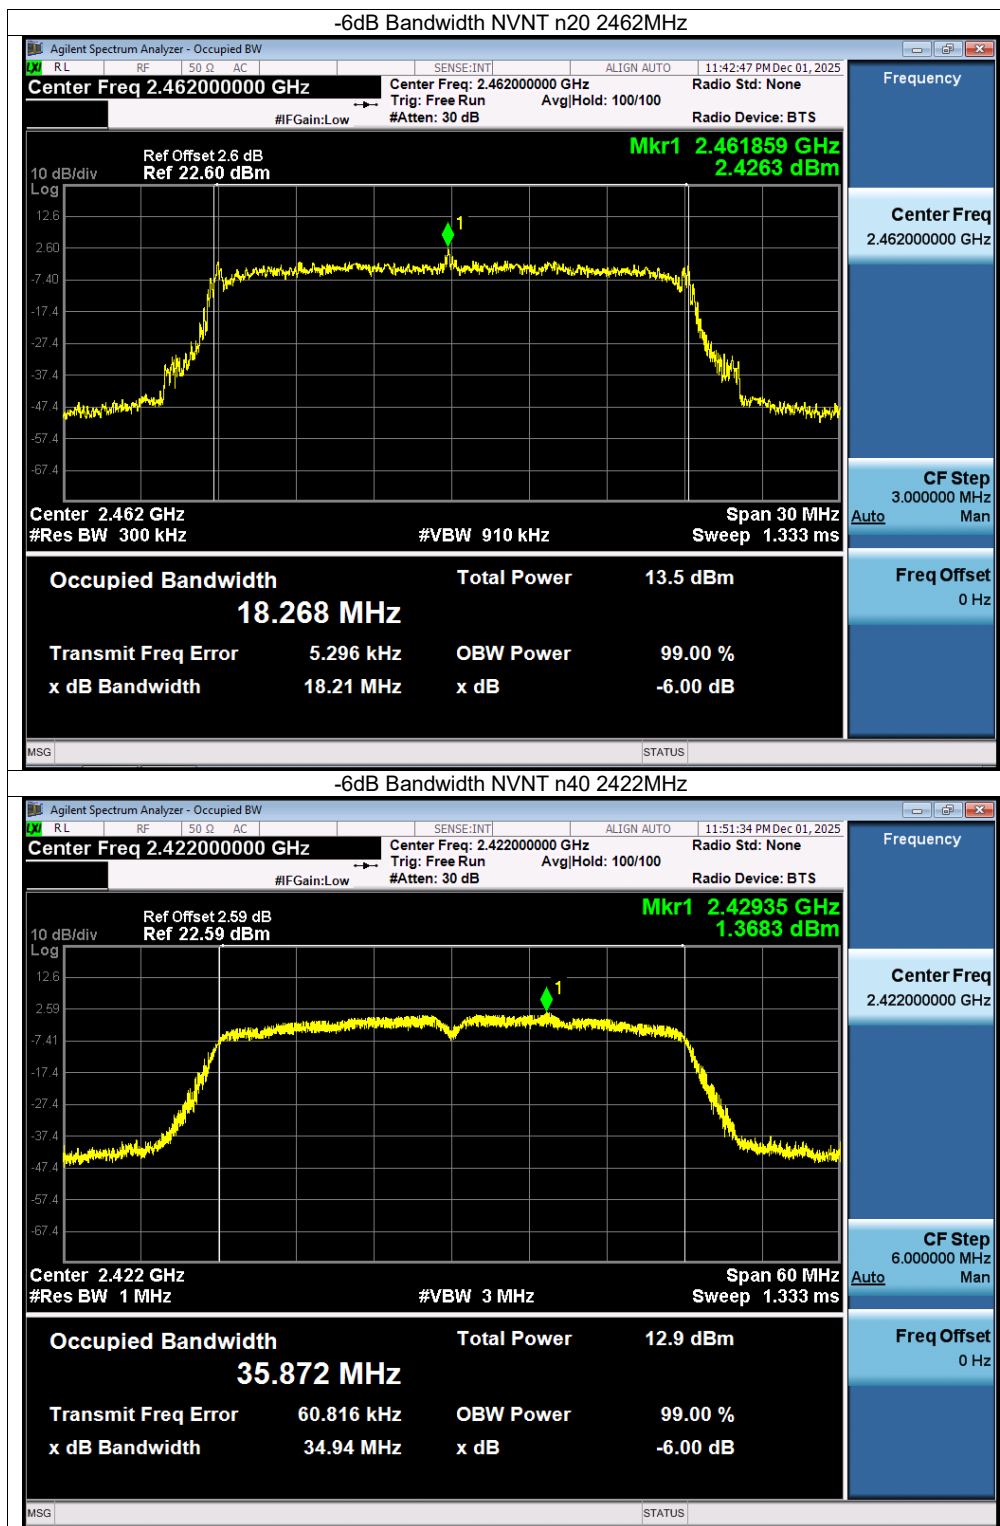

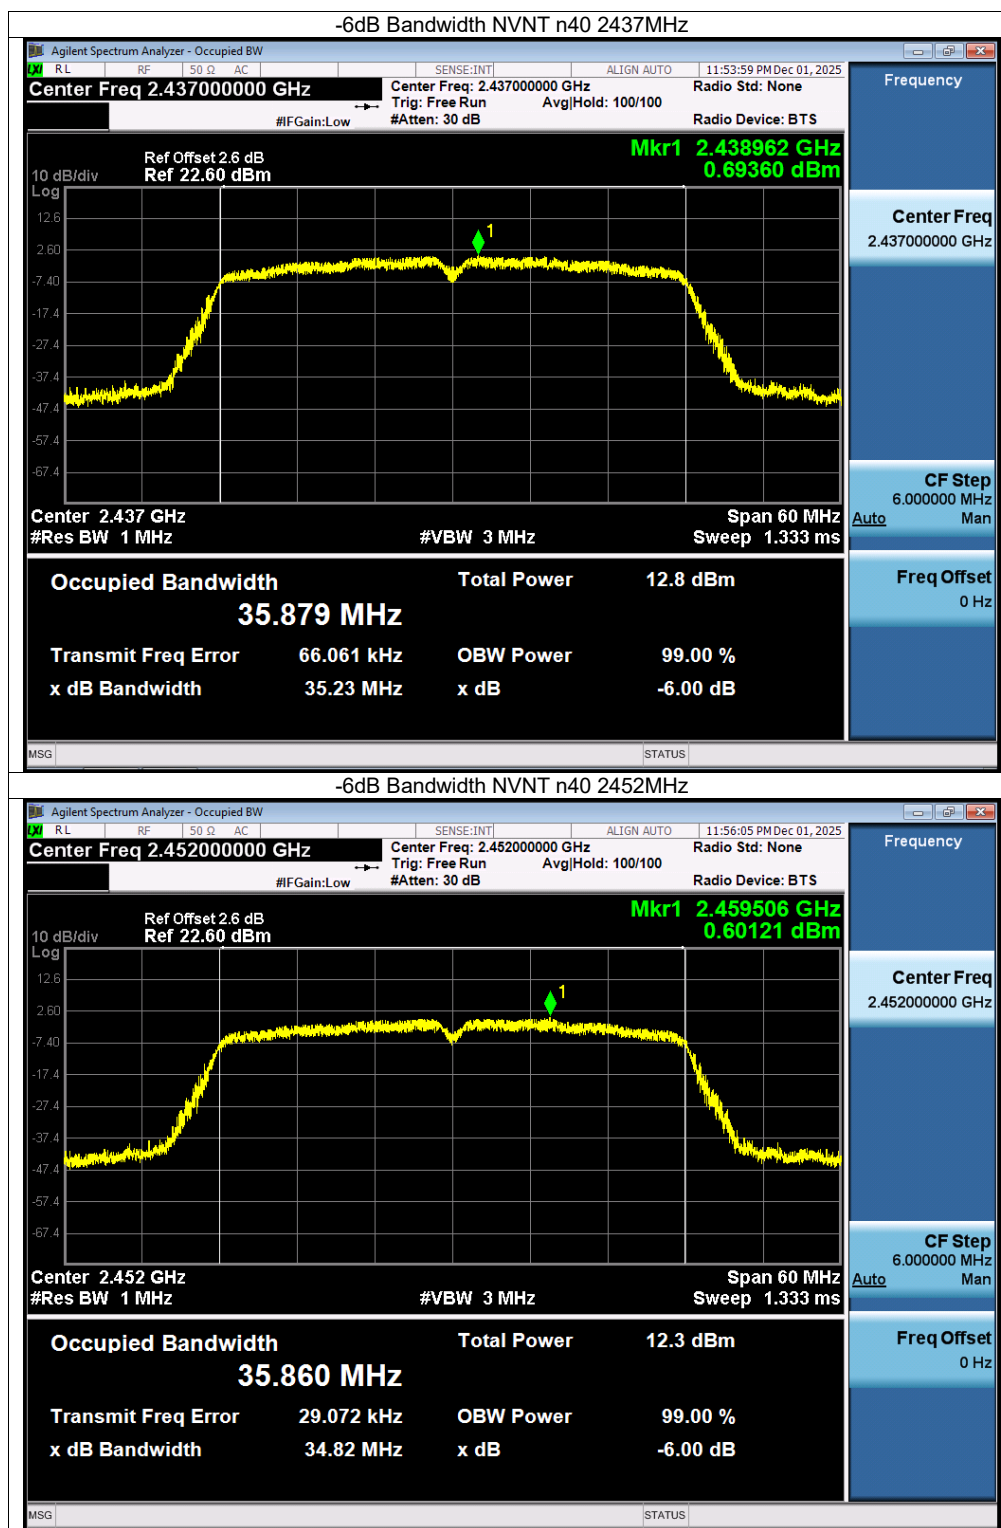



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/10kHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-7.41	-12.64	8	Pass
NVNT	b	2437	-6.58	-11.81	8	Pass
NVNT	b	2462	-7.14	-12.37	8	Pass
NVNT	g	2412	-11.07	-16.3	8	Pass
NVNT	g	2437	-11.03	-16.26	8	Pass
NVNT	g	2462	-10.94	-16.17	8	Pass
NVNT	n20	2412	-13.05	-18.28	8	Pass
NVNT	n20	2437	-12.69	-17.92	8	Pass
NVNT	n20	2462	-13.09	-18.32	8	Pass
NVNT	n40	2422	-14.71	-19.94	8	Pass
NVNT	n40	2437	-15.15	-20.38	8	Pass
NVNT	n40	2452	-15.38	-20.61	8	Pass


Note: Correction Factor = $10\log(3\text{KHz}/\text{RBW in measurement}) = -5.23$


Power Spectral Density (dBm/3kHz) = Power Spectral Density (dBm/10kHz) - 5.23








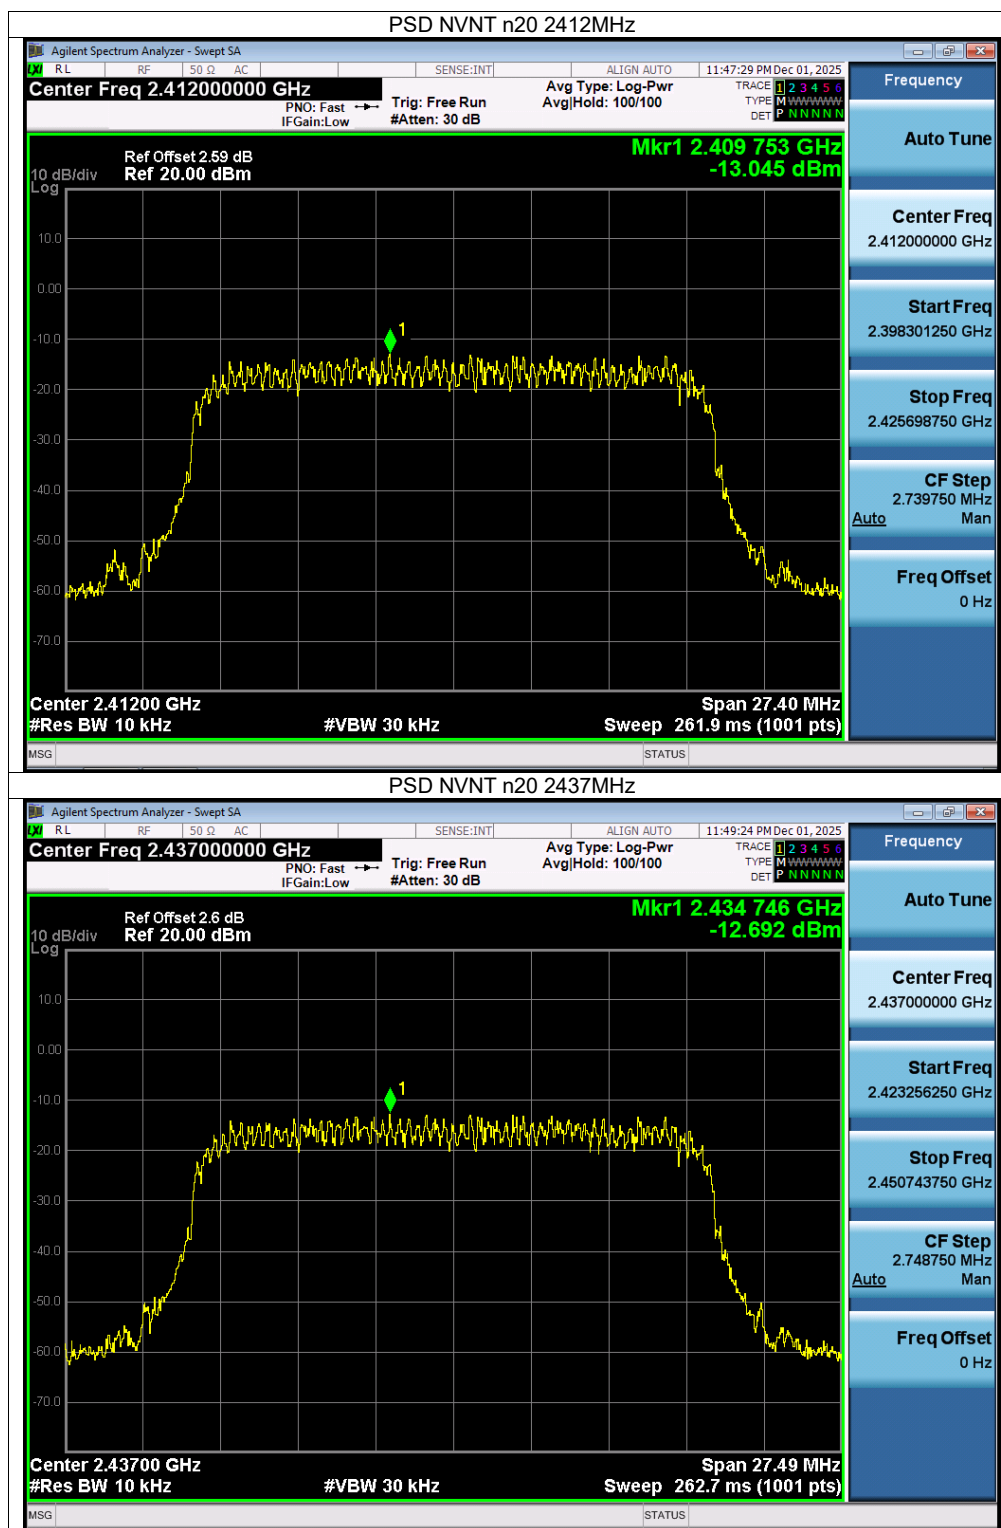

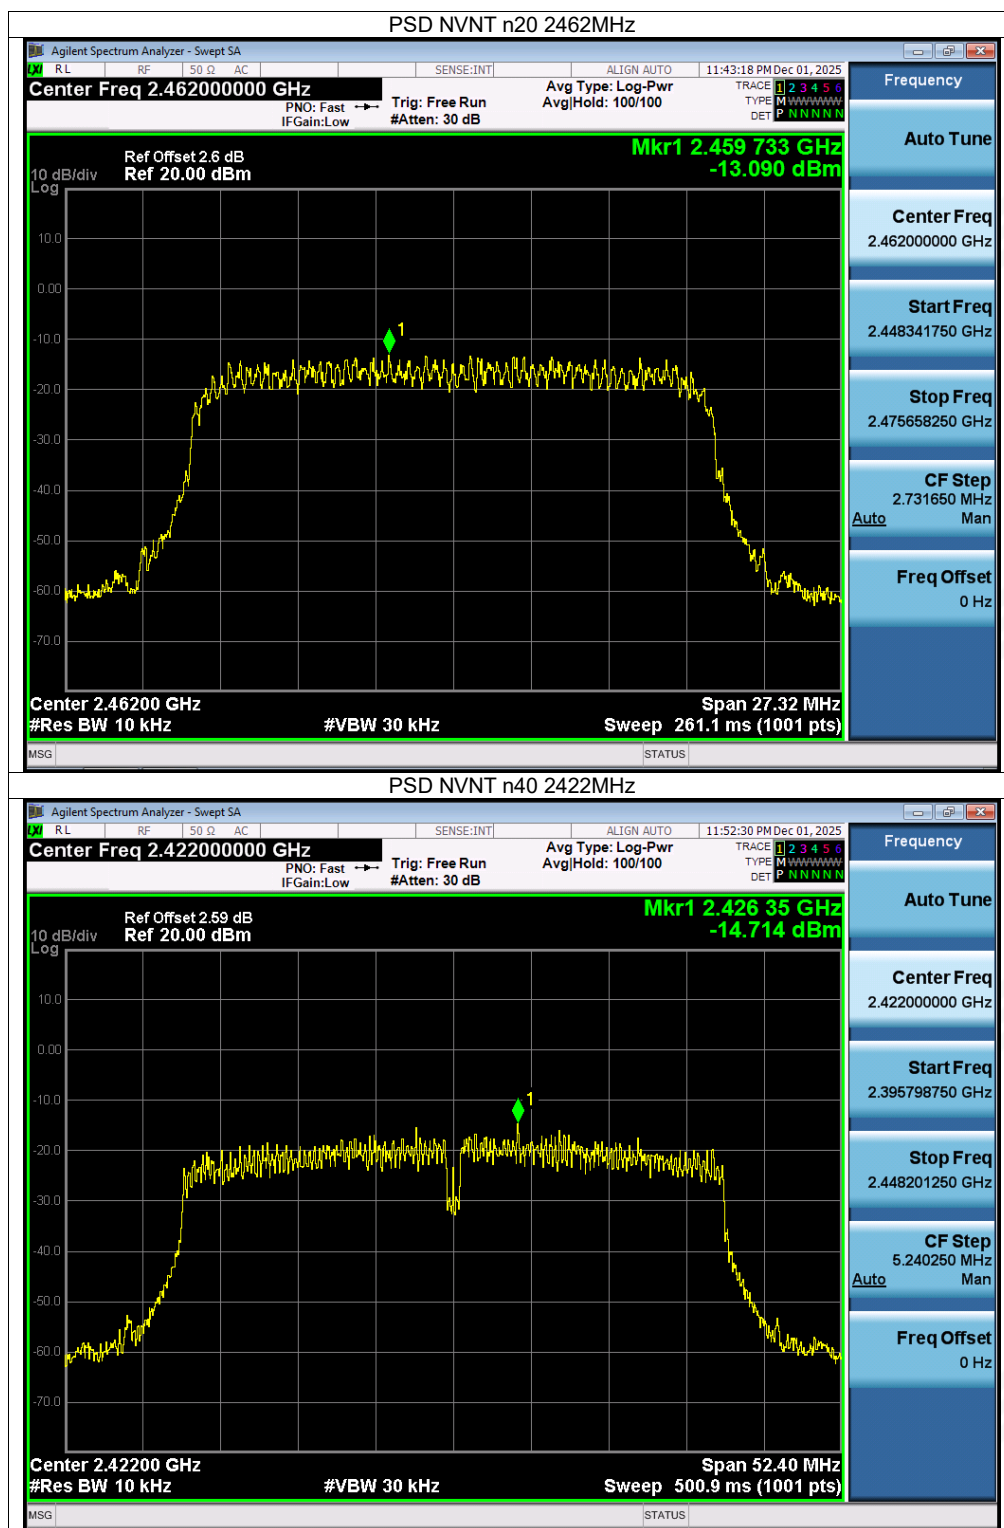


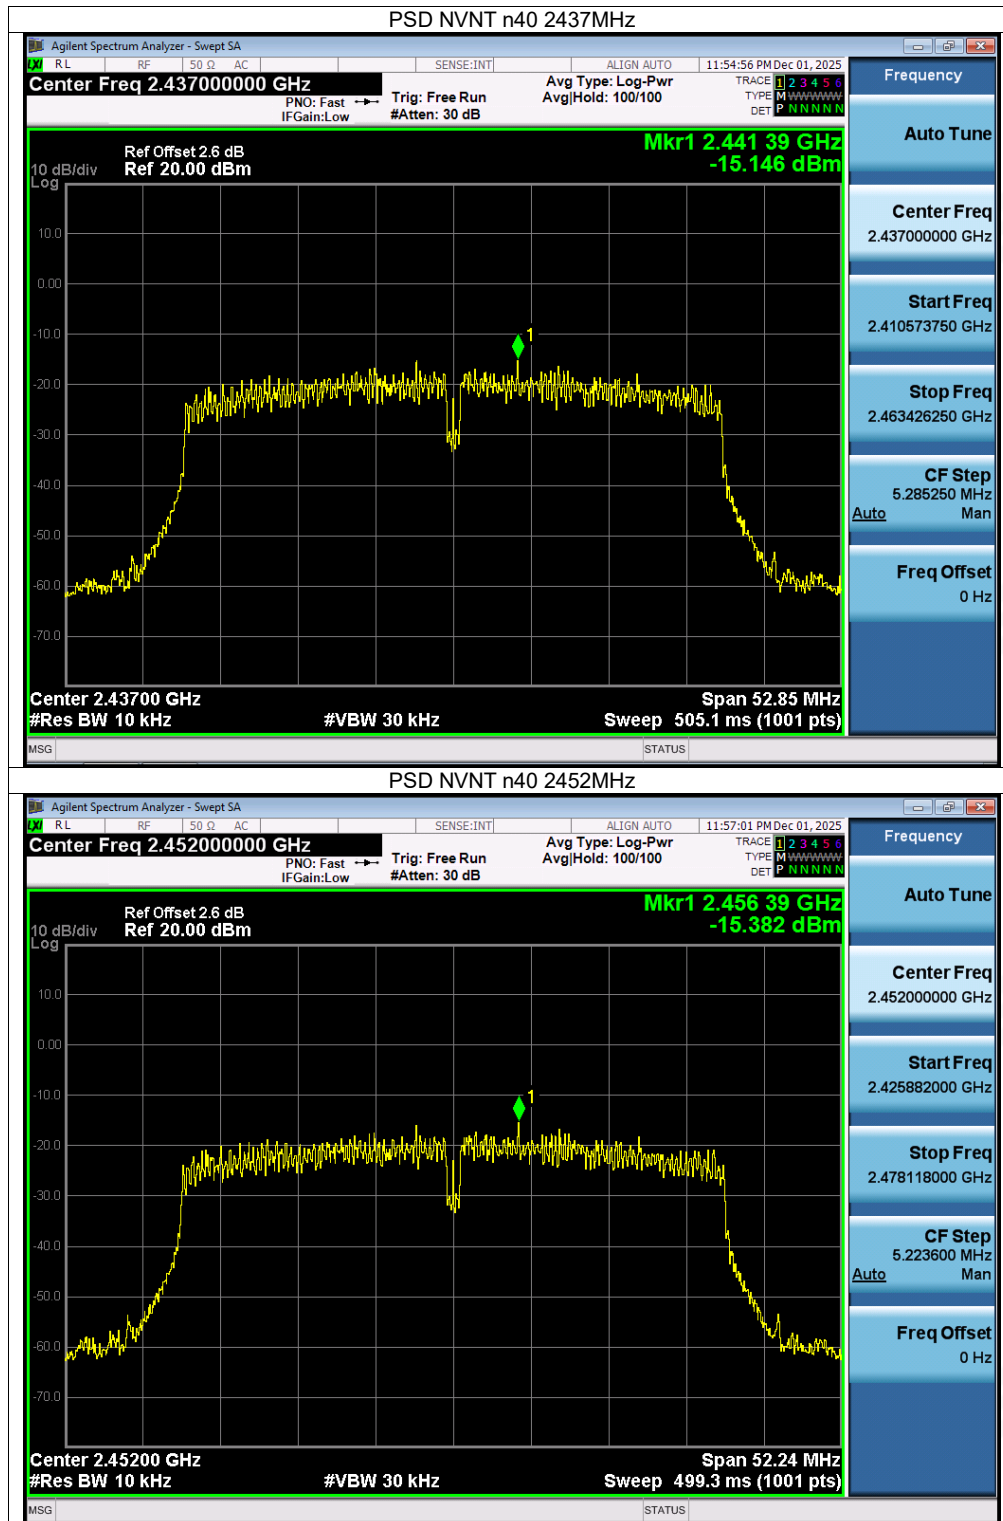






Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-44.47	-20	Pass
NVNT	b	2462	-55.73	-20	Pass
NVNT	g	2412	-42.05	-20	Pass
NVNT	g	2462	-51.52	-20	Pass
NVNT	n20	2412	-44.82	-20	Pass
NVNT	n20	2462	-52.15	-20	Pass
NVNT	n40	2422	-39.08	-20	Pass
NVNT	n40	2452	-44.96	-20	Pass

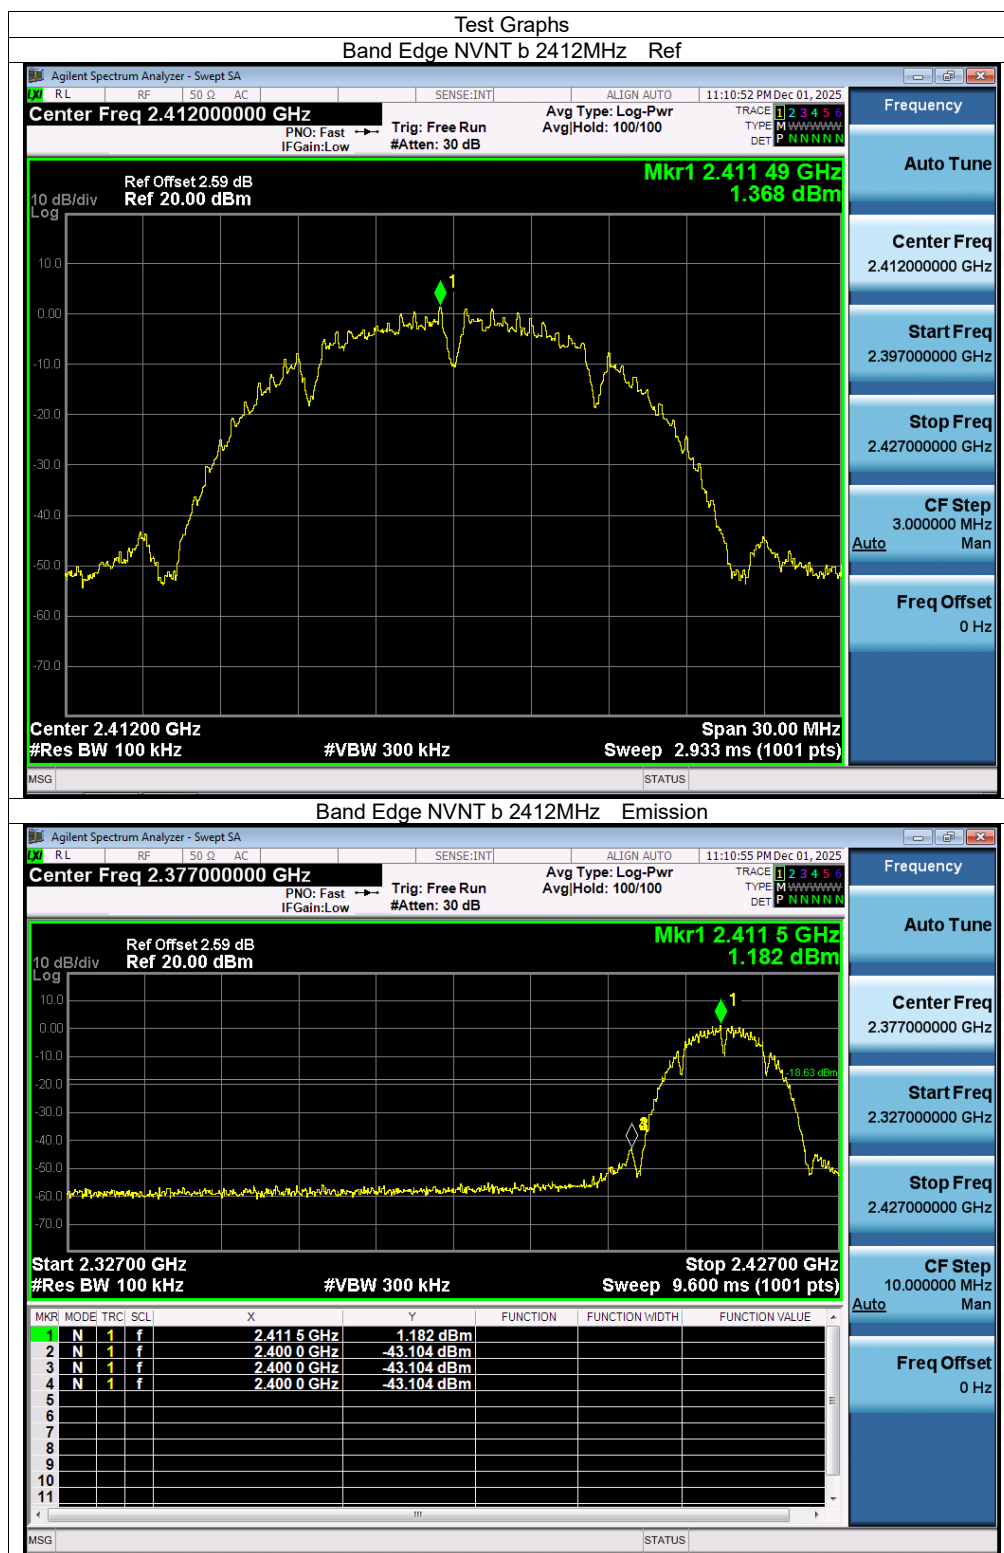


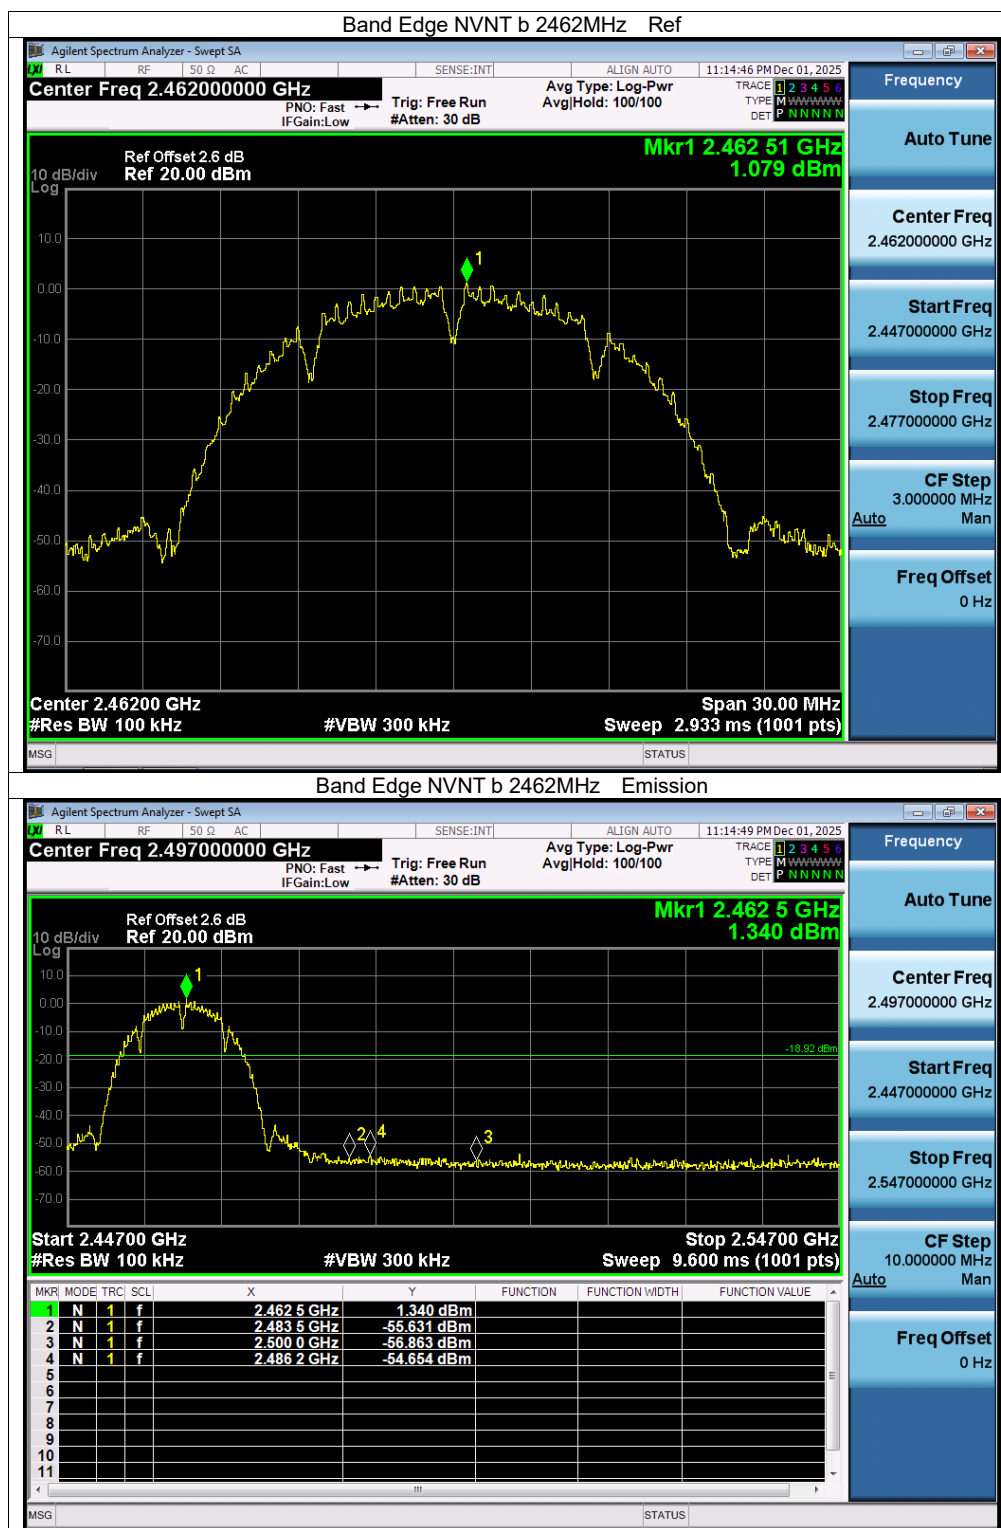


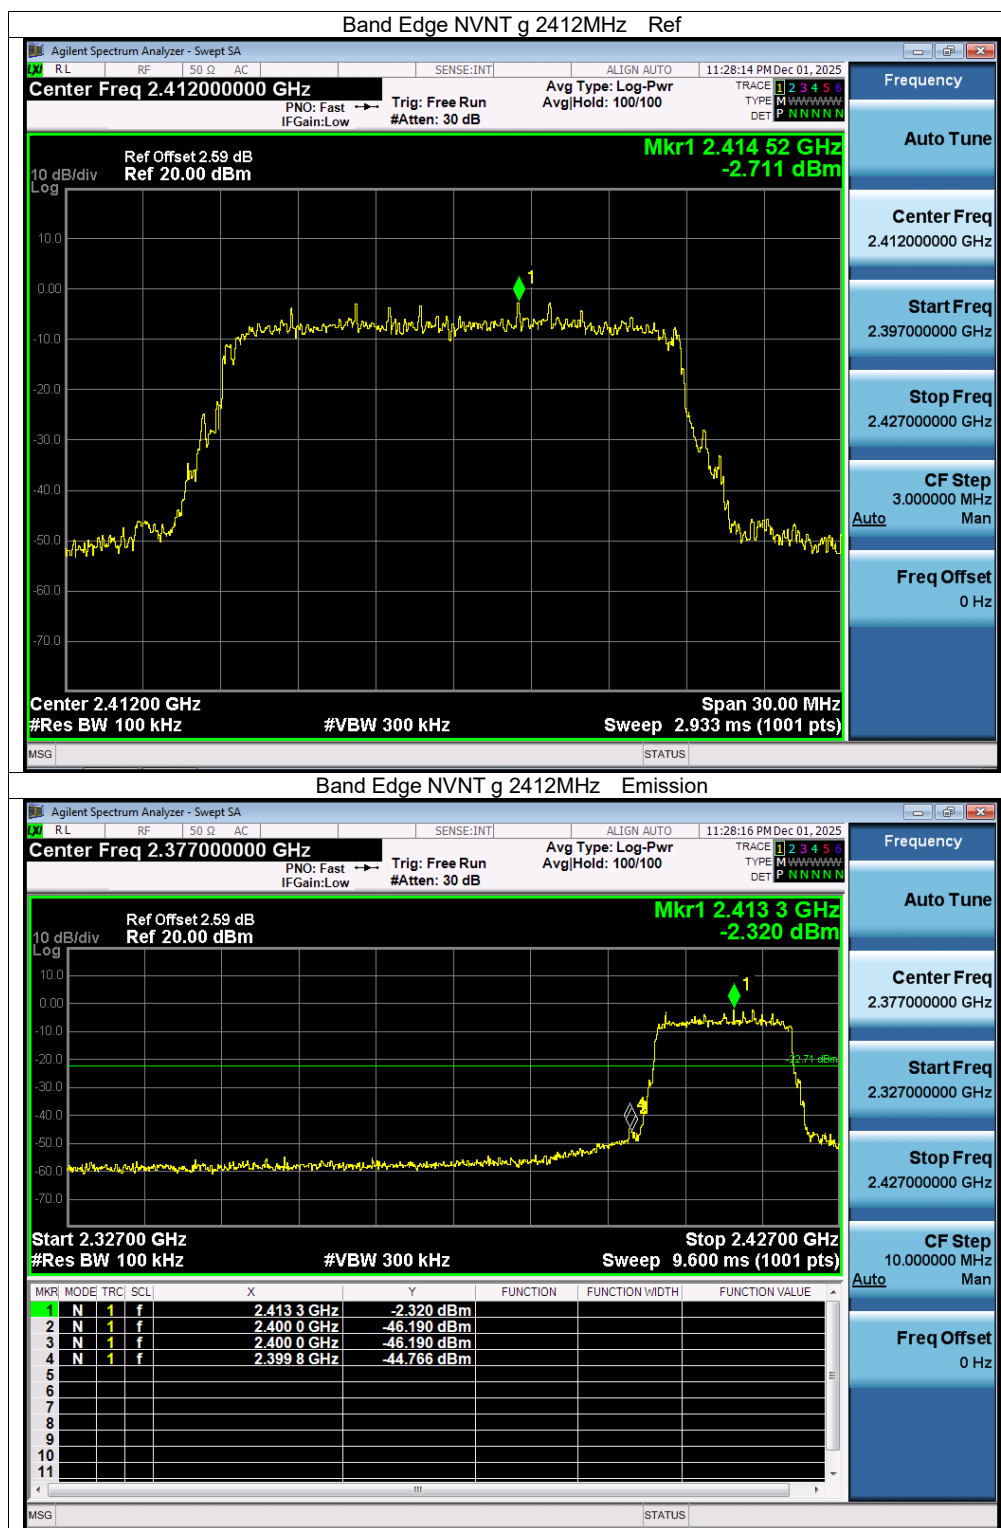


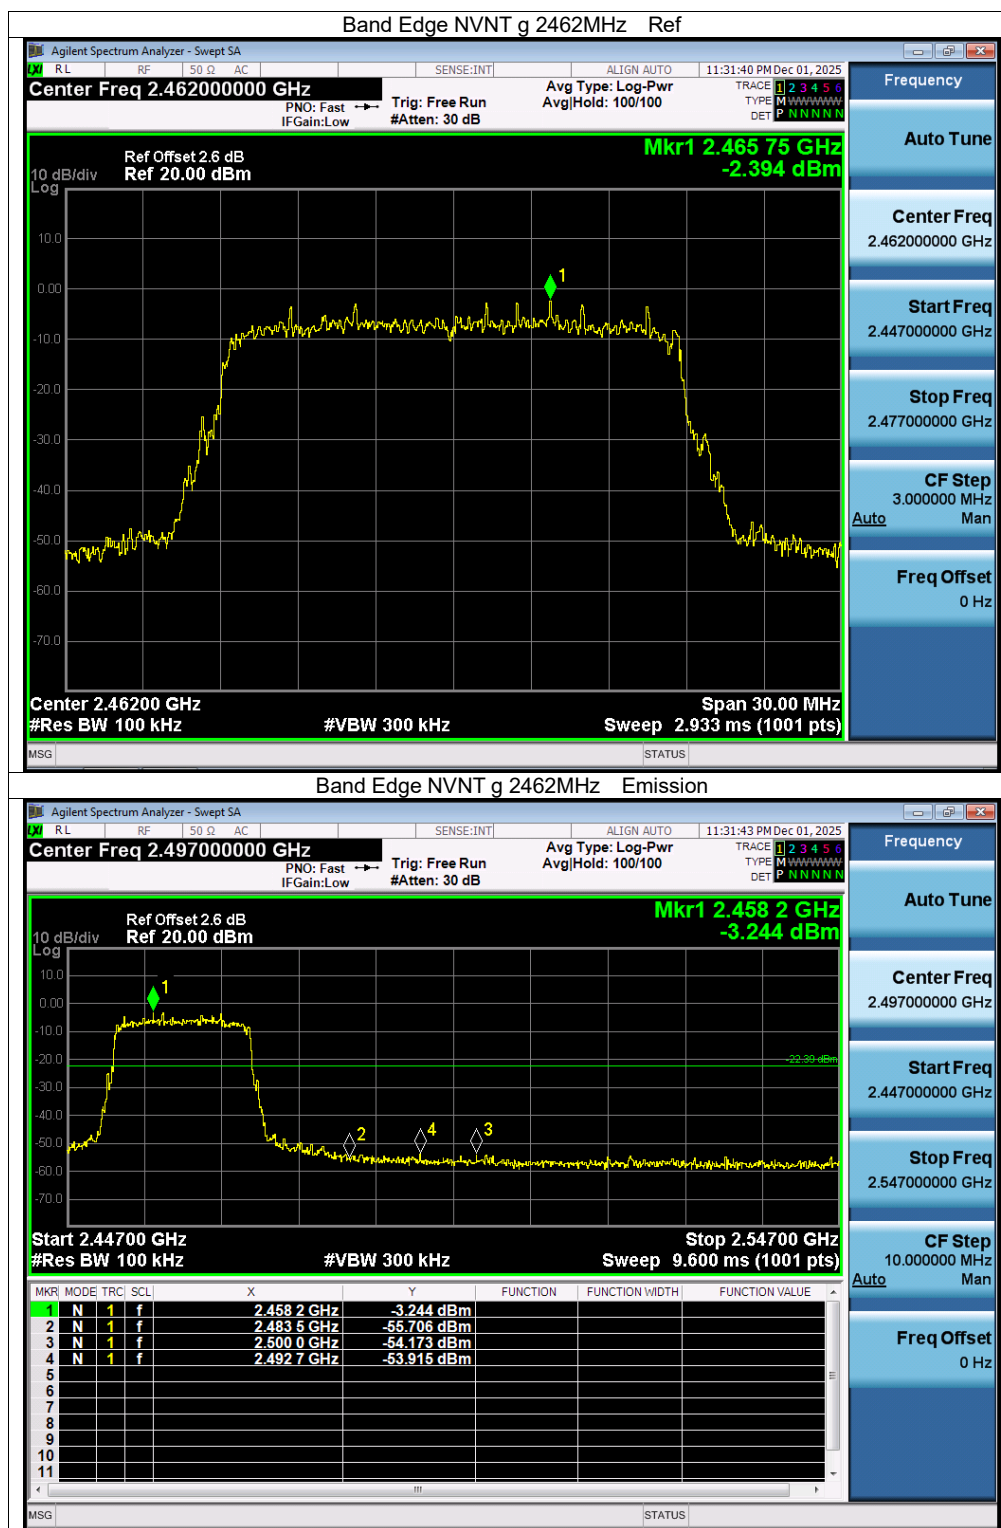

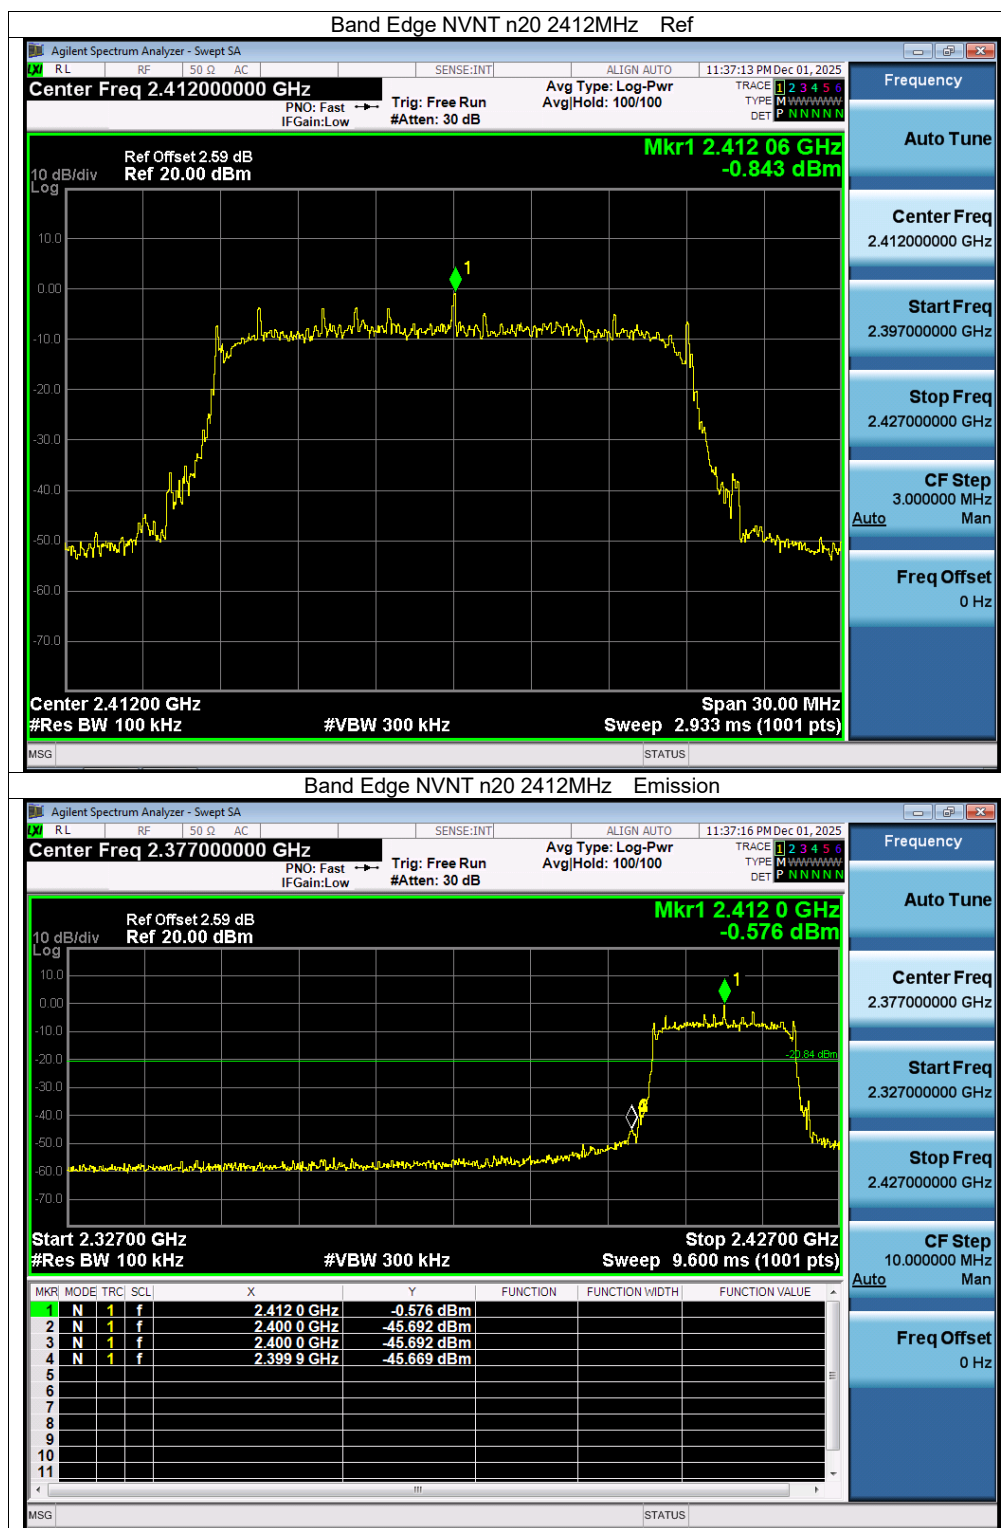

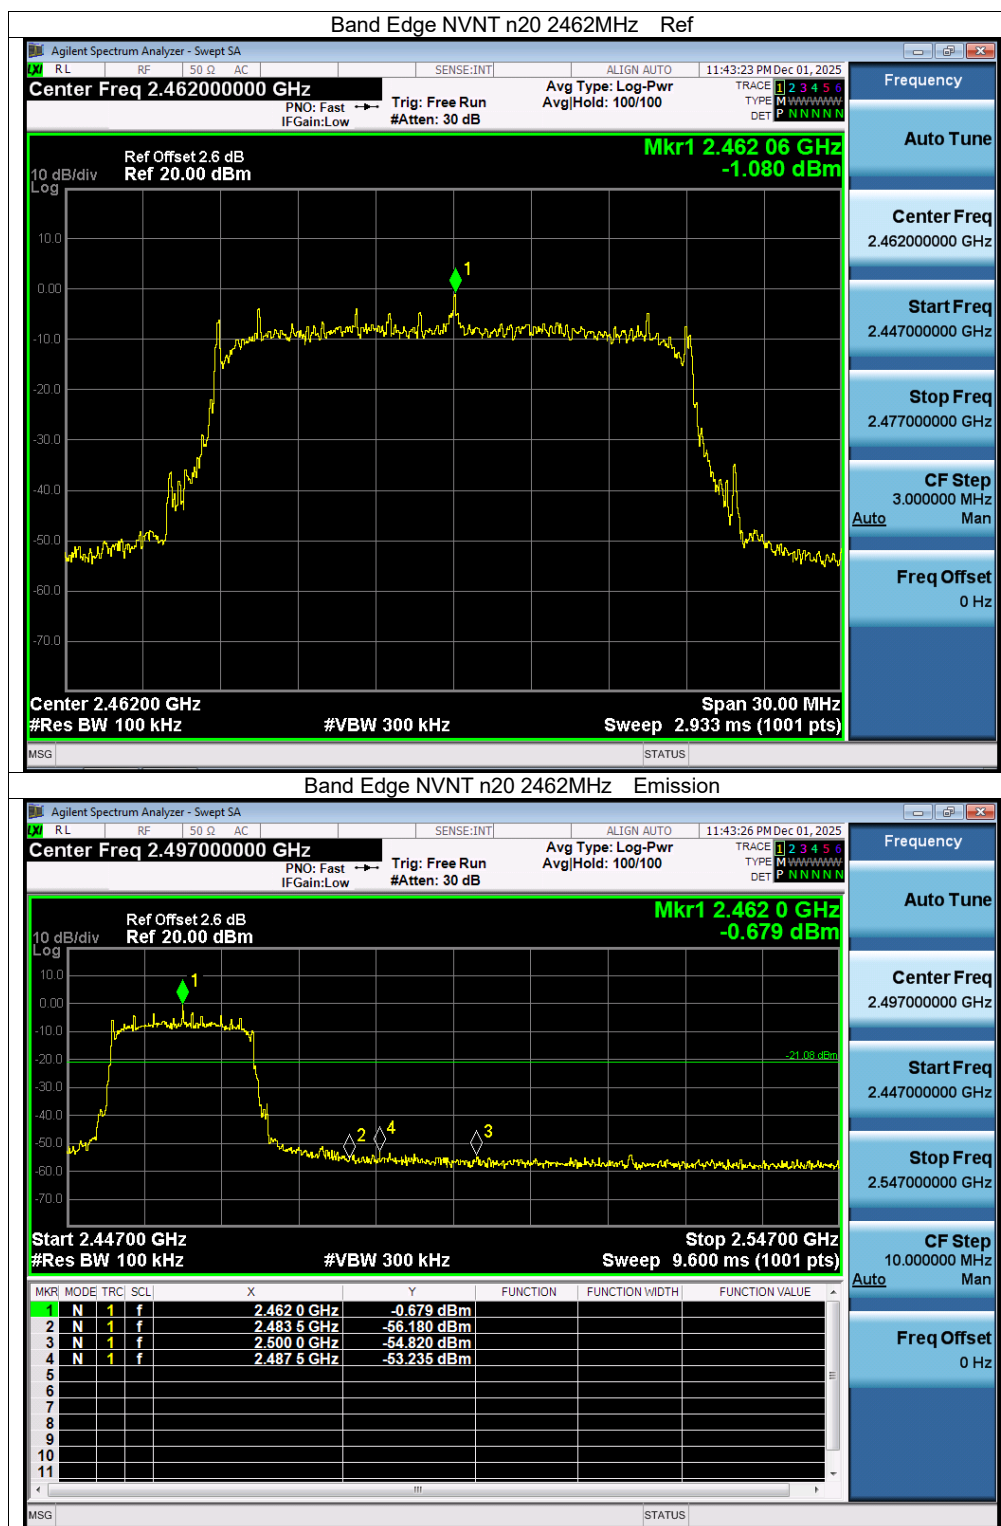

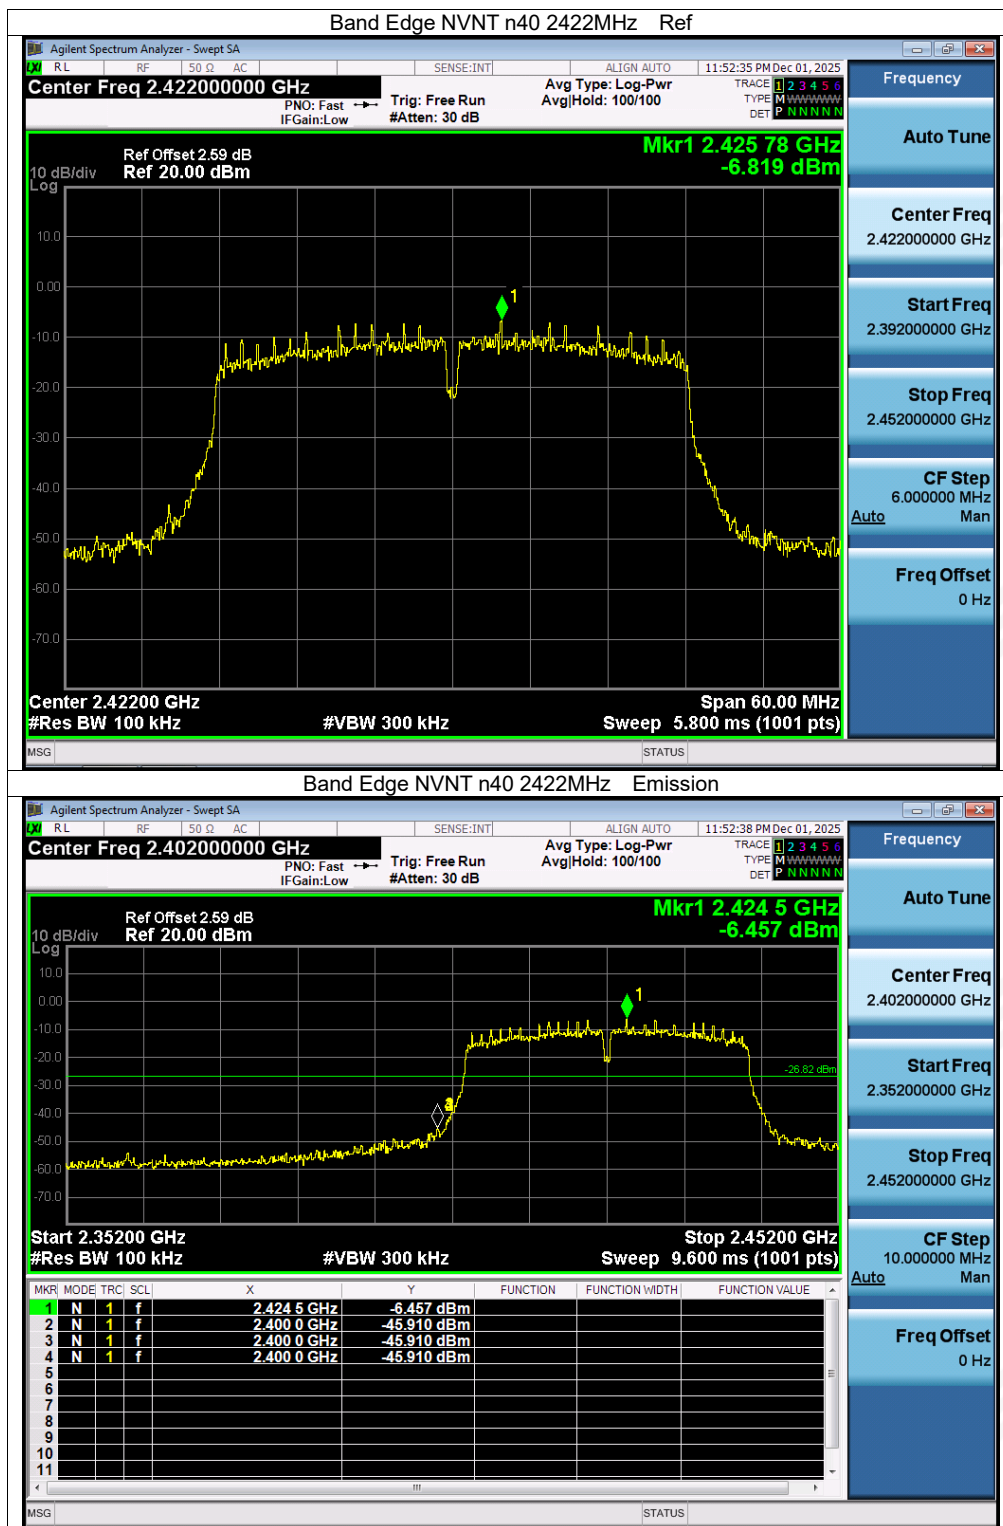


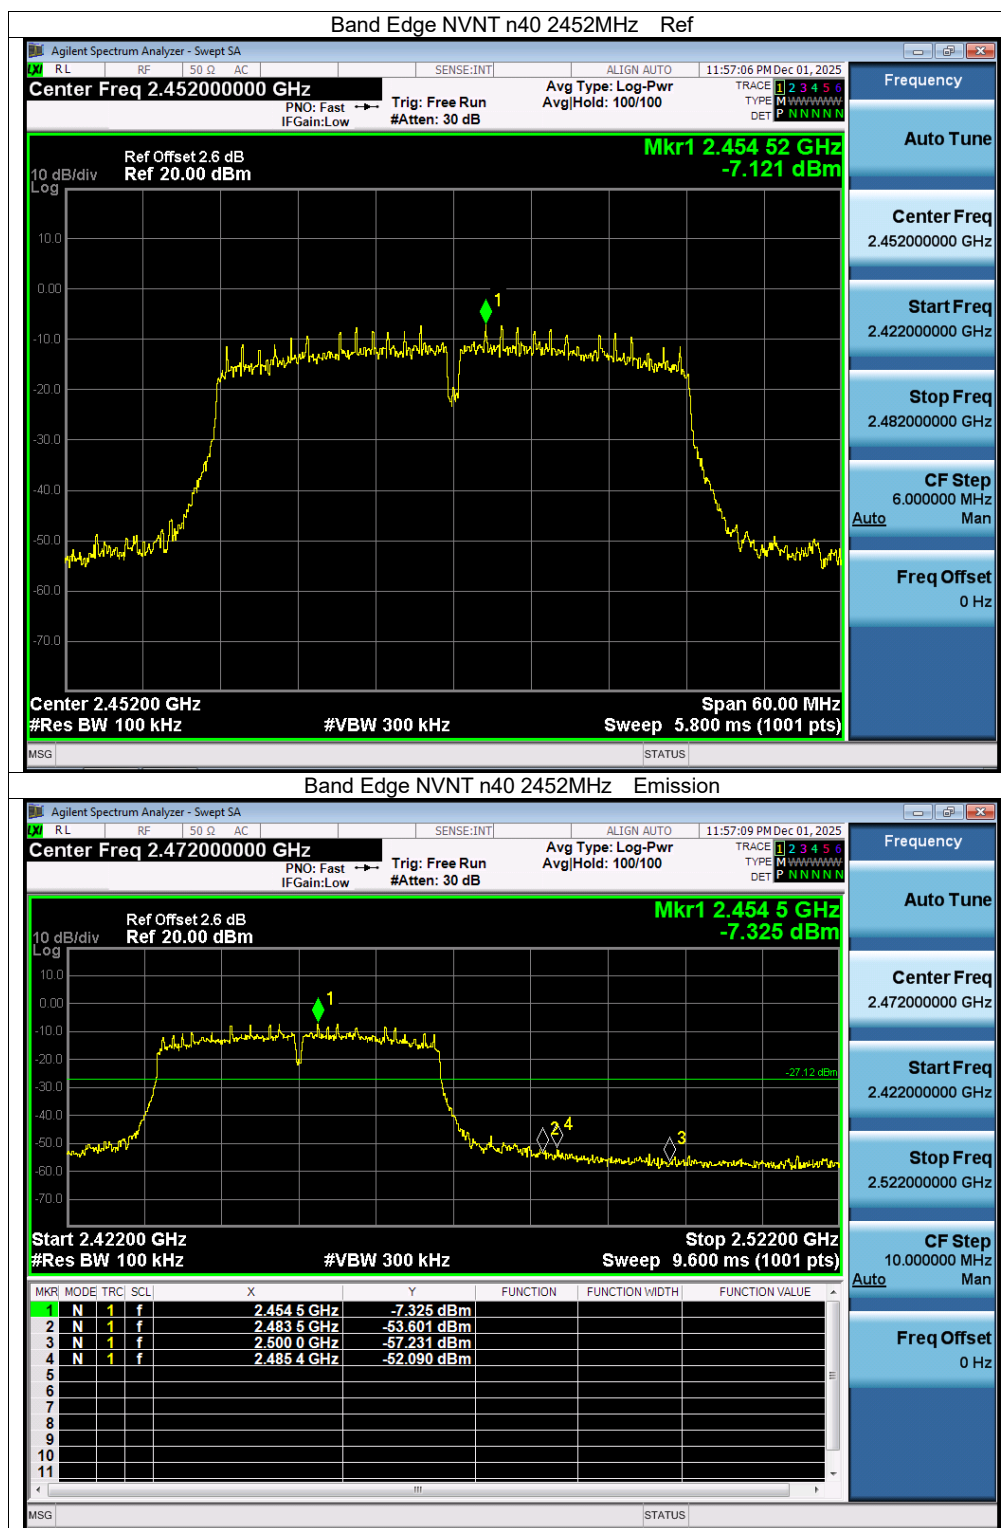





Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-40.26	-20	Pass
NVNT	b	2437	-40.18	-20	Pass
NVNT	b	2462	-40.21	-20	Pass
NVNT	g	2412	-35.35	-20	Pass
NVNT	g	2437	-36.6	-20	Pass
NVNT	g	2462	-36.18	-20	Pass
NVNT	n20	2412	-38.56	-20	Pass
NVNT	n20	2437	-38.25	-20	Pass
NVNT	n20	2462	-38.24	-20	Pass
NVNT	n40	2422	-32.61	-20	Pass
NVNT	n40	2437	-32.48	-20	Pass
NVNT	n40	2452	-32.24	-20	Pass

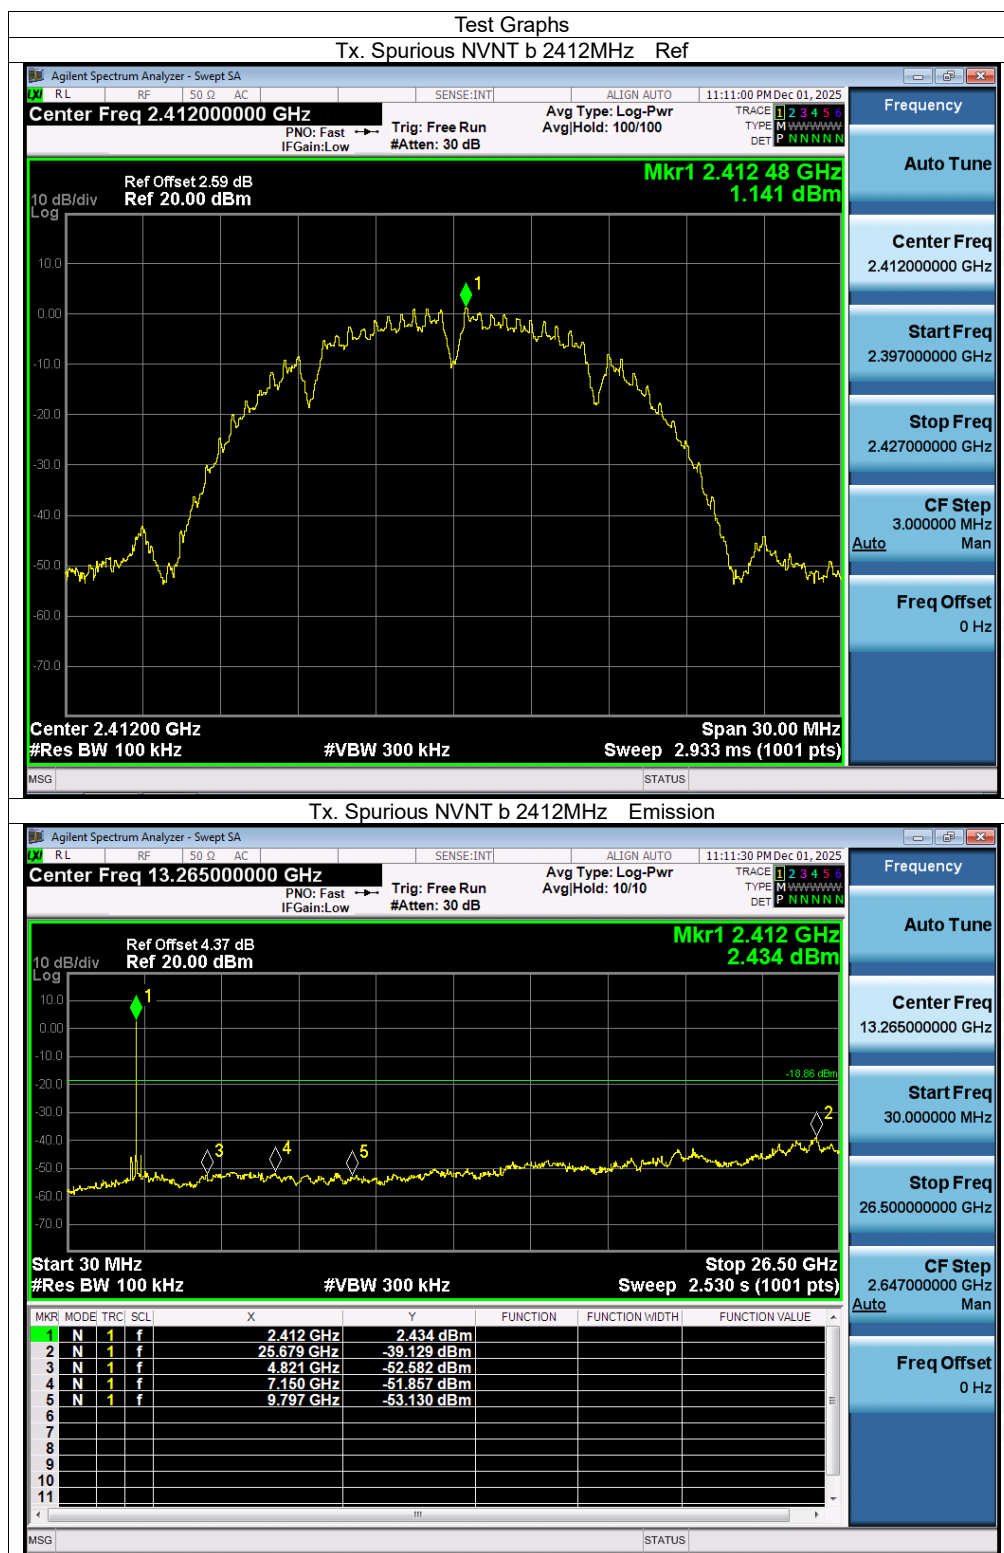


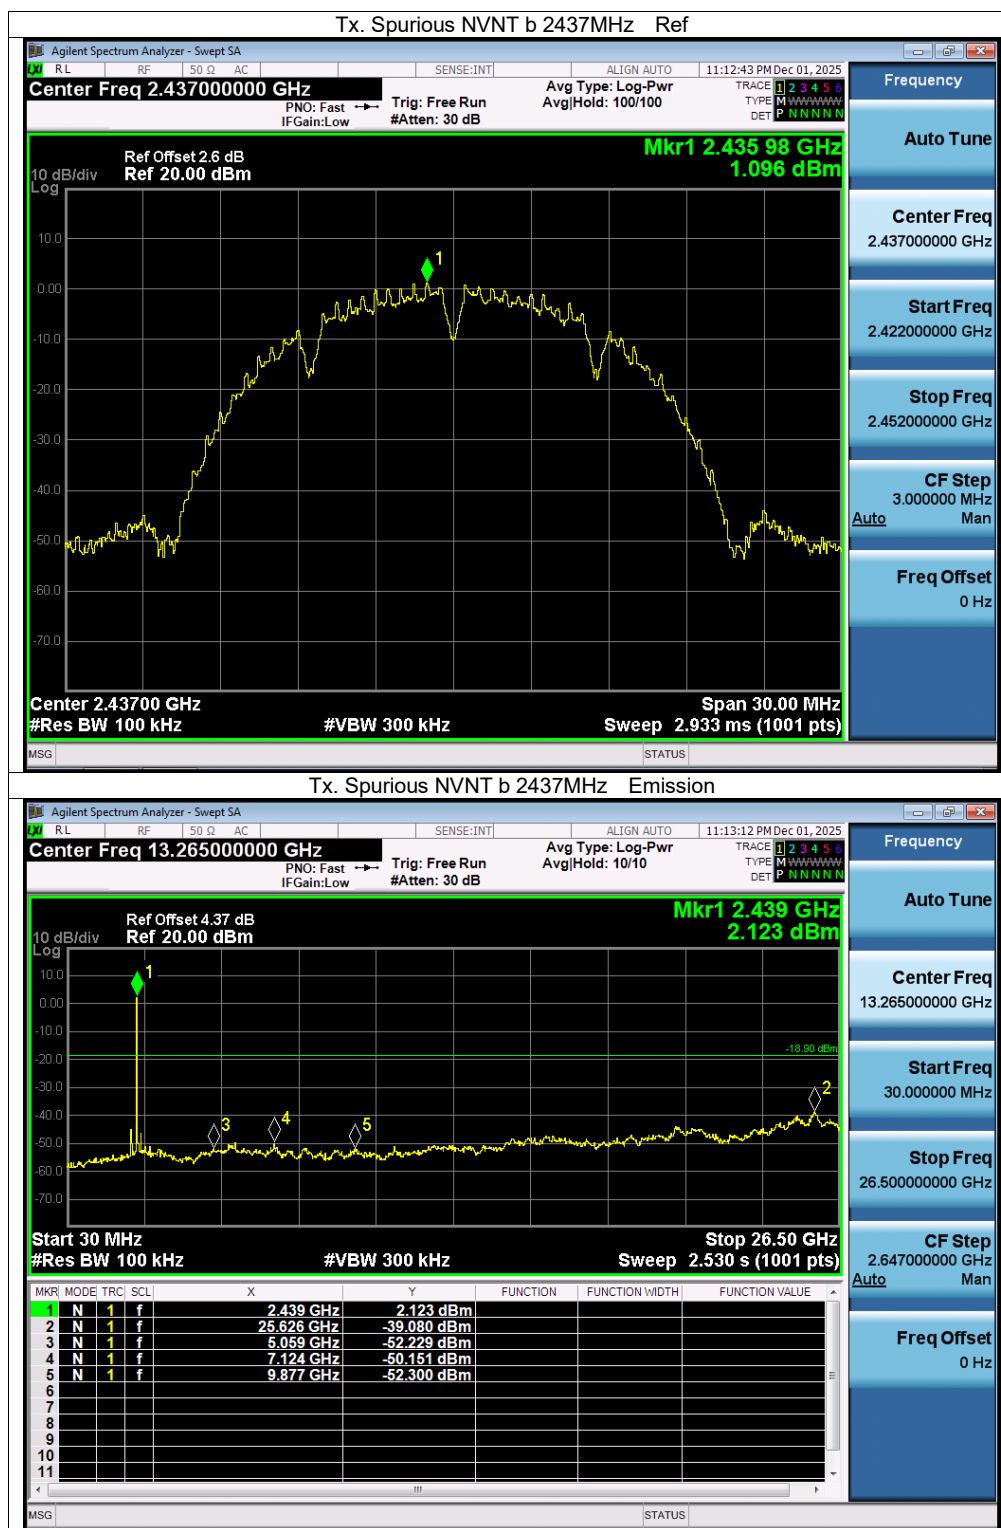

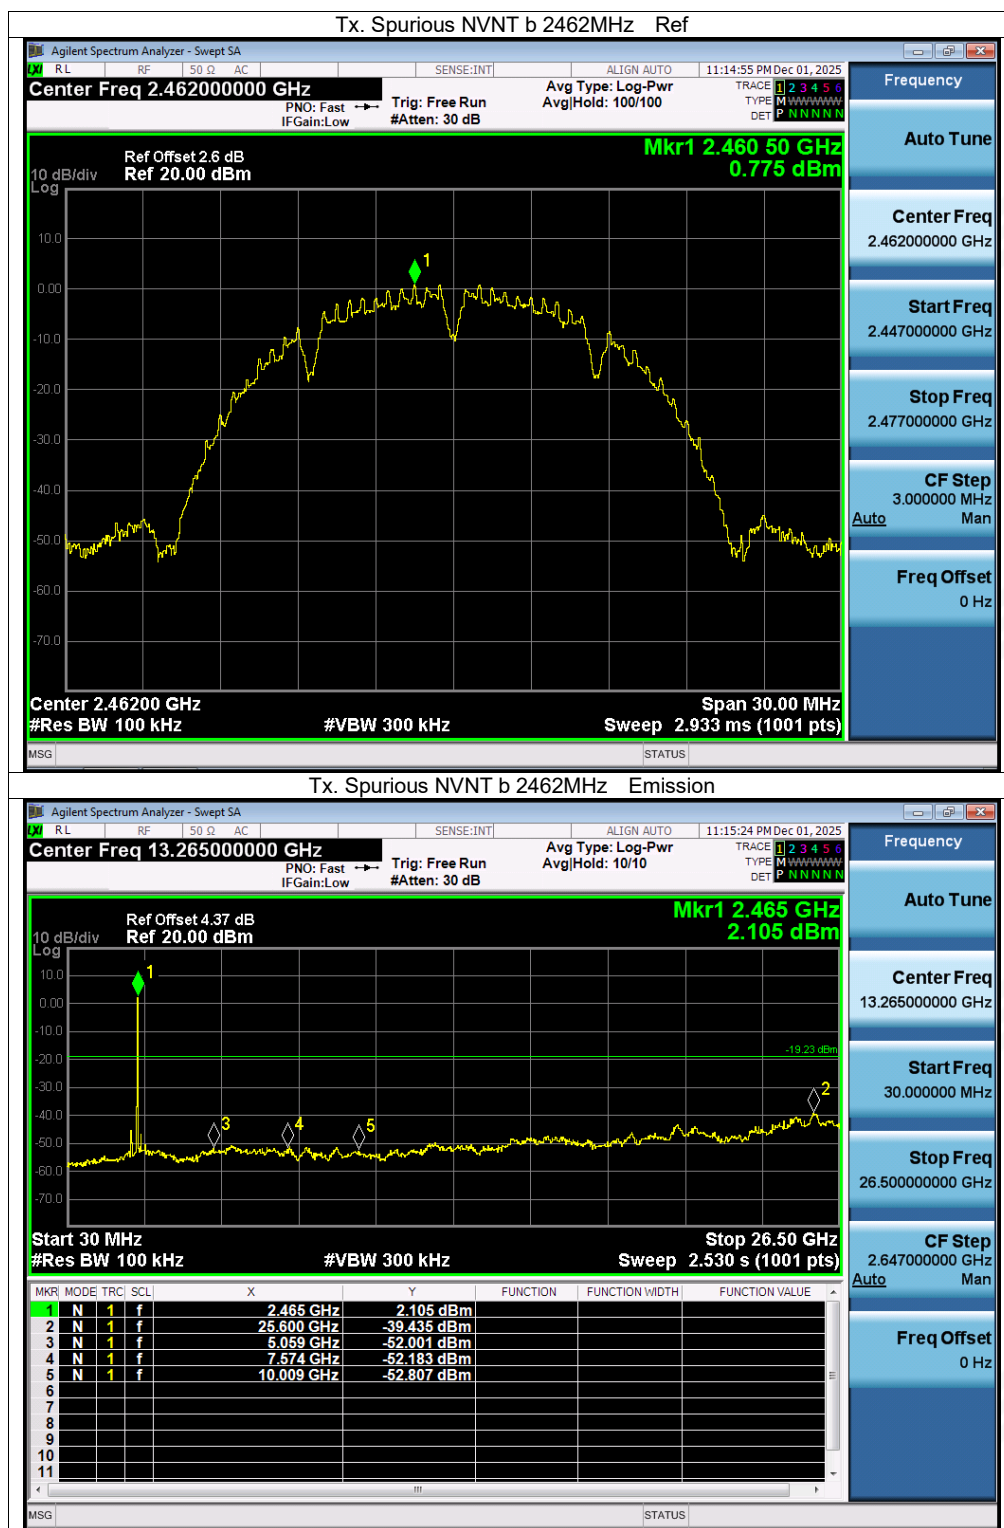




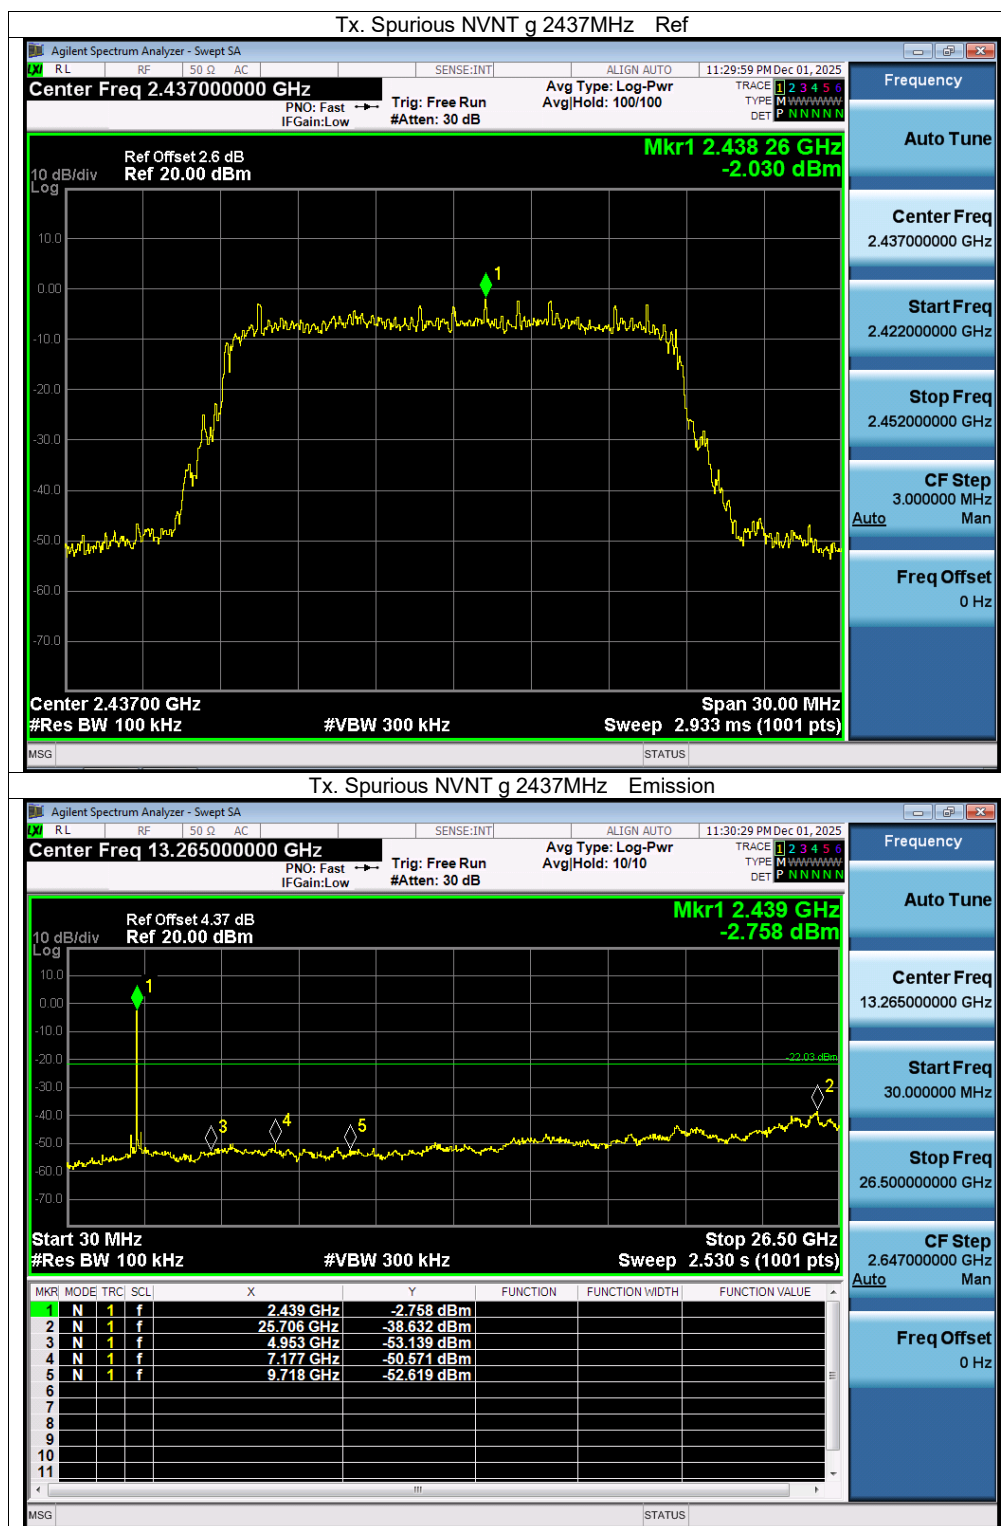


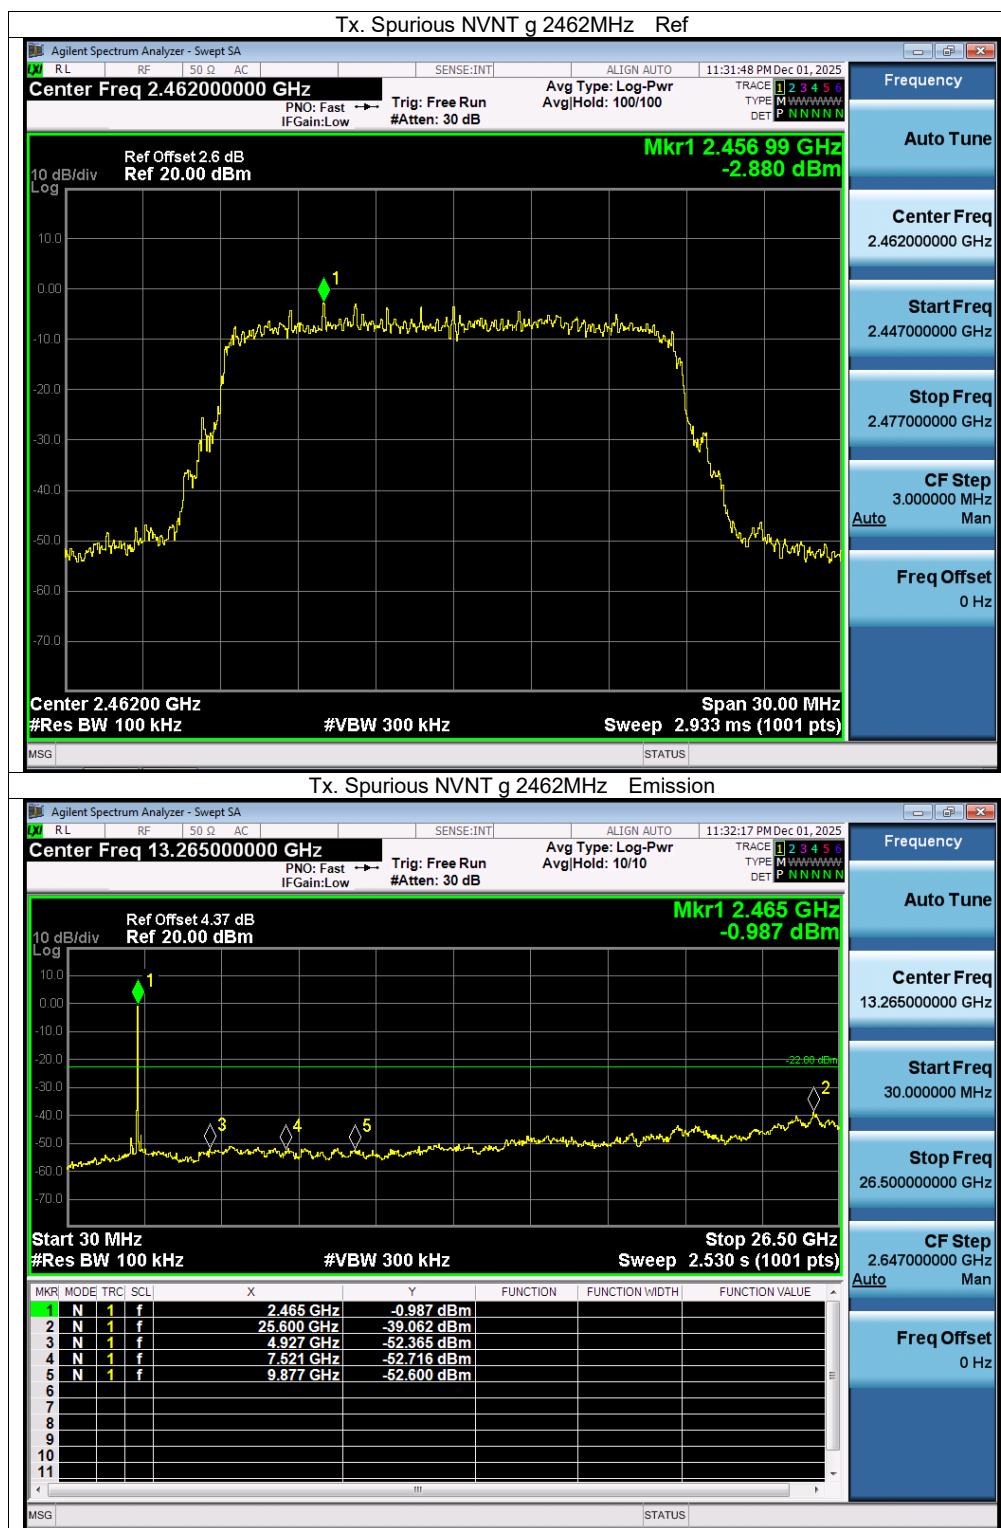







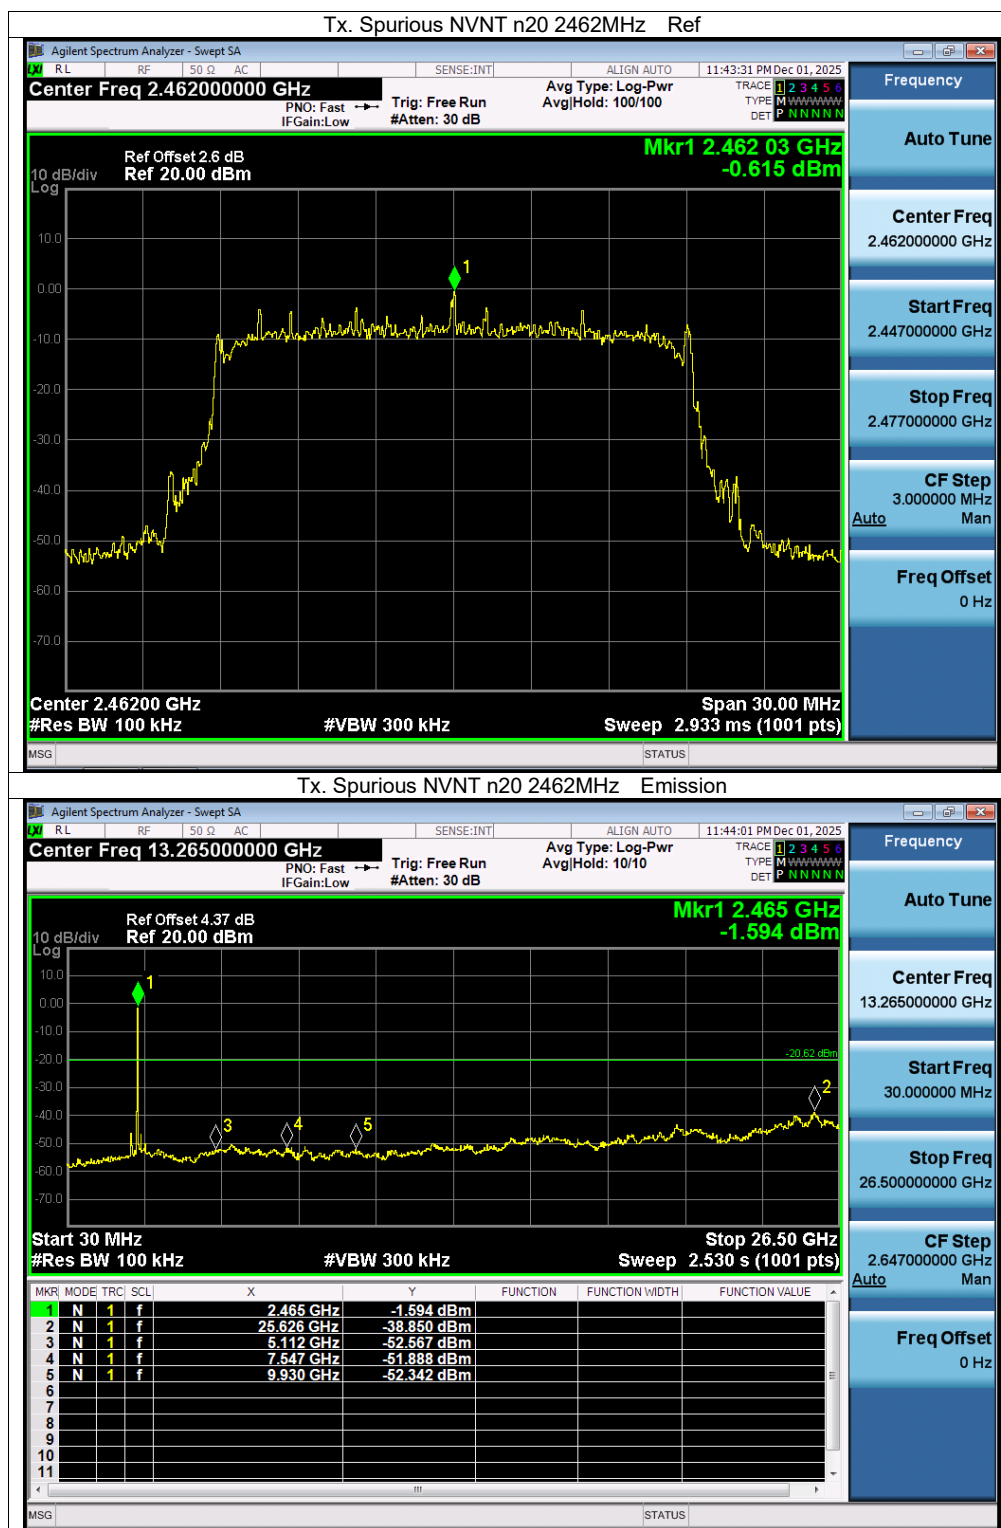

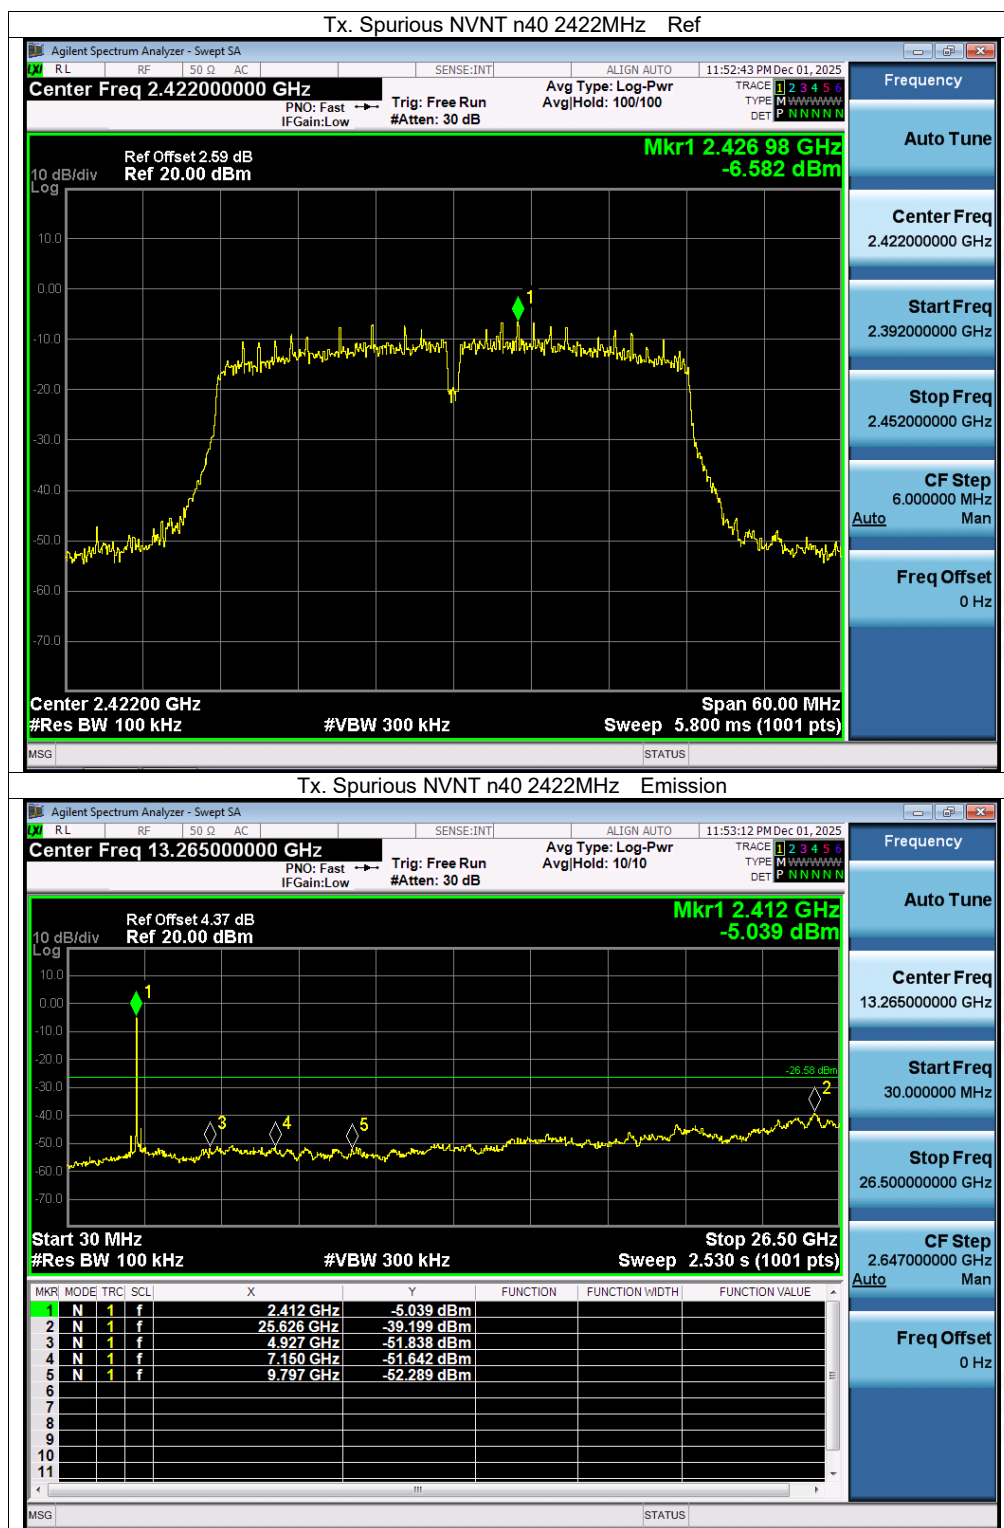

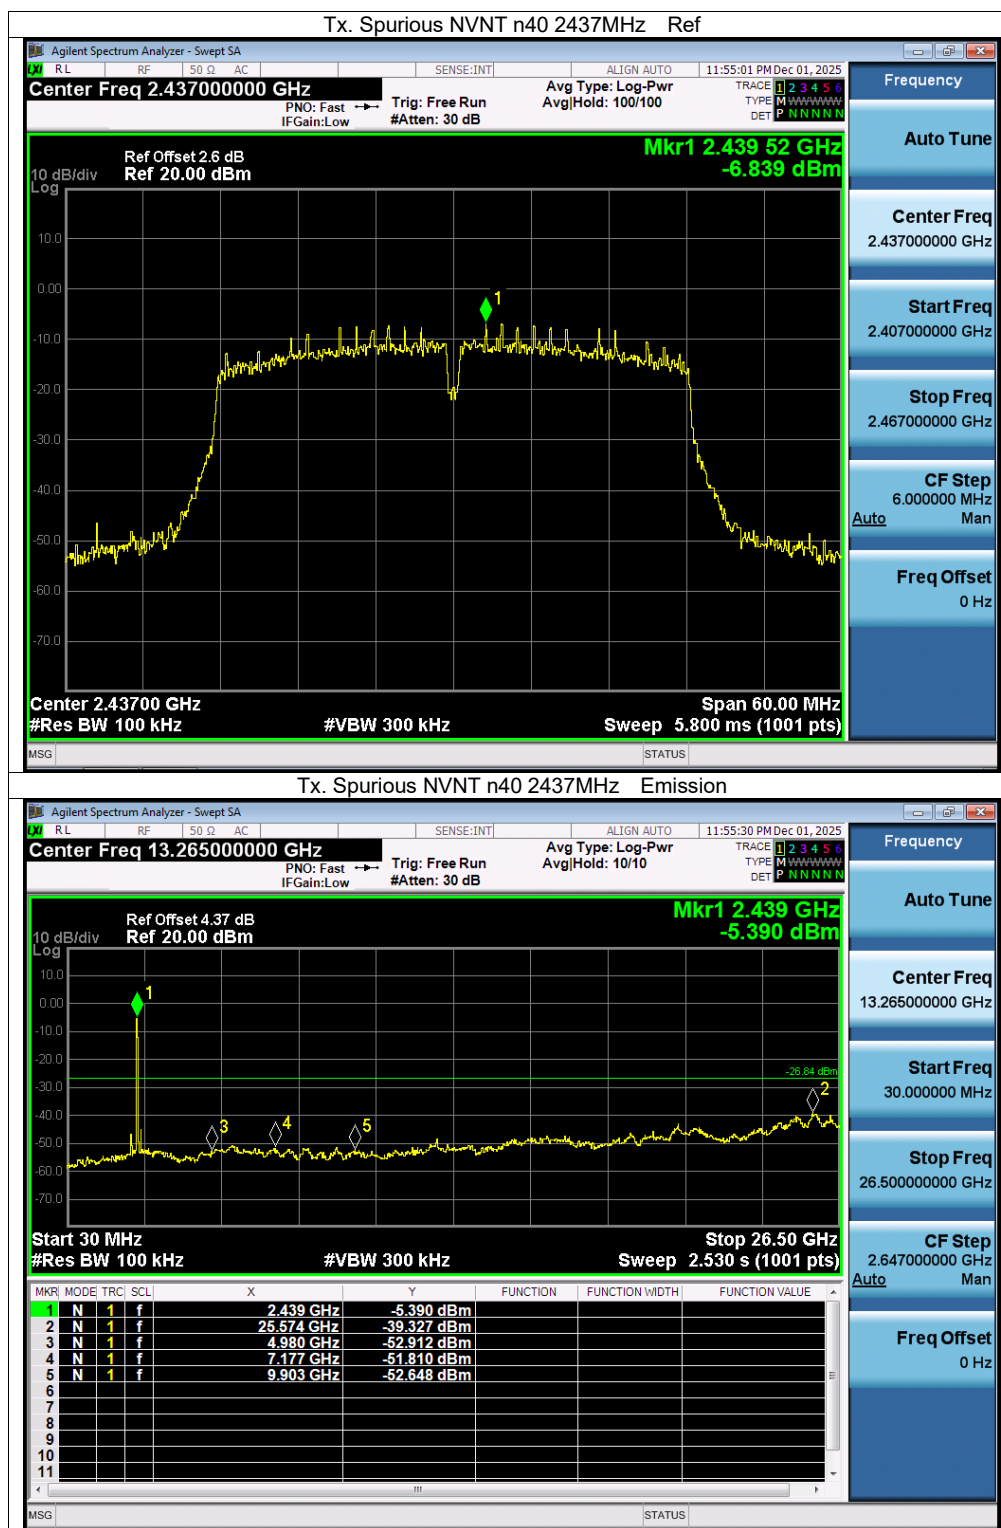

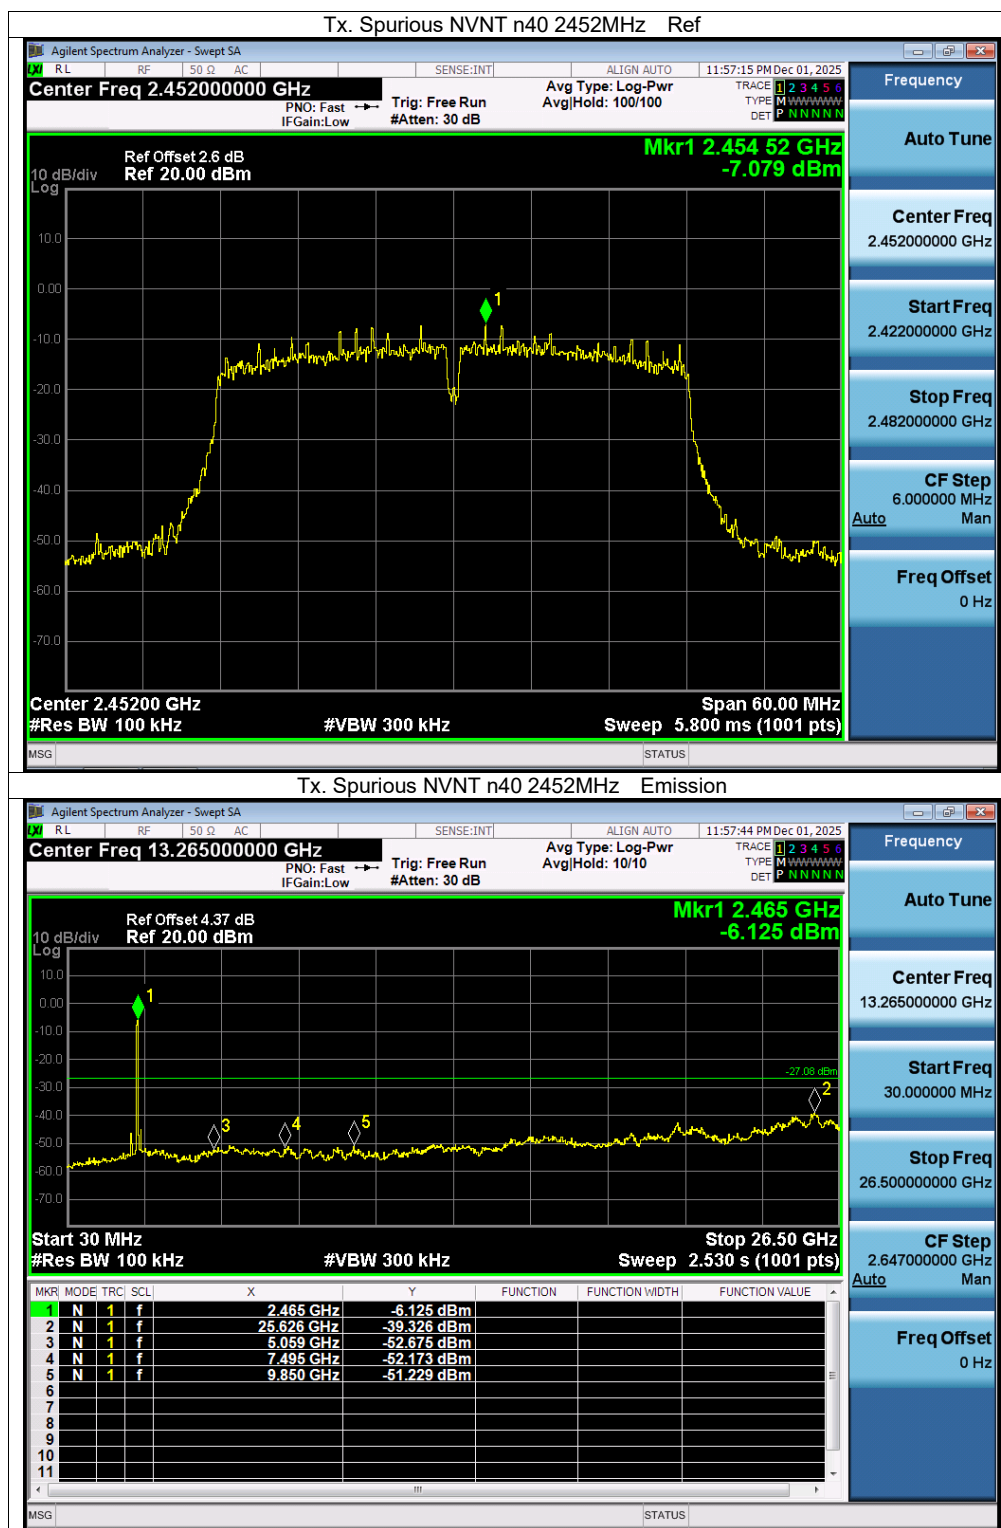



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****