

Sample acceptance certificate

SPECIFICATION FOR APP ROVAL

Admission of status	trial - produce		large cargo	
Supplier name	Shenzhen Tao Soft Electronics Co., LTD			
product model	A11			
code				
Assembly plant code				
name of material	All single coil			
Specifications	All coil, 6.3uH±10%, magnetic sheet diameter 50mm, thickness 1.0mm, central hole diameter 5.3mm magnetic tape wire groove wire diagram outer diameter 41mm wire diagram inner diameter 20.5mm wire wrapping 0.08*105P 10TS is attached with 2.5mm thick EVA foam wire drawing with a total thickness of 4.8mm, the wire drawing has a length of 15mm and a tin immersion of 3mm. R OHS			
Acknowledge the version				
Environmental requirements	ROHS			
Date of receipt	2023/8/4			
Suppliers address	701, Building 10, Zone B, Wulian Team Industrial Zone, Shangcun Community, Gongming Street, Guangming District, Shenzhen			
Suppliers telephone/fax				
Suppliers email address/web site				



The version has a revised resume


Version Change History

[illegible]

FY-GZ001



ISPECTFICATTON

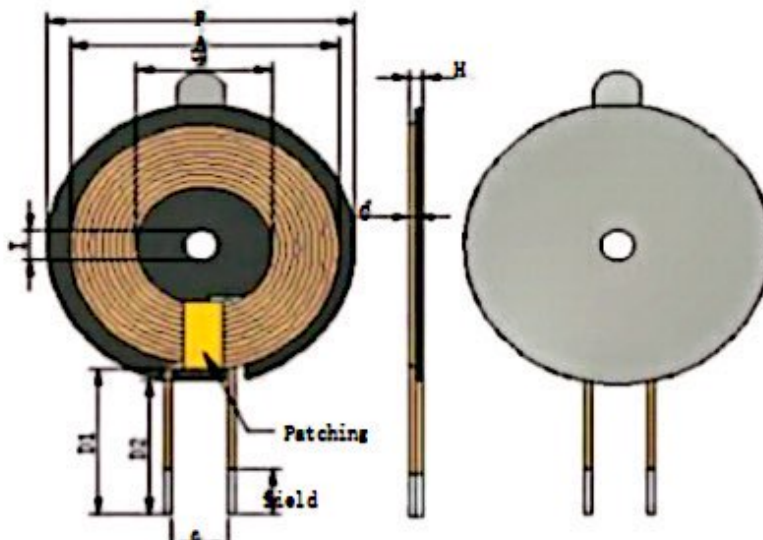product model : DESC	●2Q 5x41-10Ts-Q 08*105-15mm-CLB	edition Rev:A 0	client CUST:		
			Fine PN of Taoshuan material:		
			Customer part number CUST PIN:		
I. DIMENSION: (mm)			A	41.0±1	
			B	20.5±0.5	
			C	1.0+/-0.1	
			D1	17±2	
			D2	15±2	
			E	3-5mm	
			F	50±0.5	
			G	11.0 ref	
			H	4.8±0.2 Max	
			I	5.3 ref	
			pour :		
II. Schematic diagram:			1. The coil is attached with magnetic sheet, the size of which is 50±0.5mm, the inner hole is 5.3mm, the thickness is 1.0+/-0.1mm, and the double slot is used		
Winding Specifications:			2. Wrap the coil outlet position with 8mm ± 0.5 high temperature tape.		
			3. The back of the magnetic sheet is attached with a hand-tearable position with a circular diameter of 48mm (ref) and an inner hole of 7.0mm (Ref) 2.5mm thick EVA foam.		
order number NO	terminal TERMINAL		Wire diameter	number of turns Turns	direction of winding Winding Direction
—	S	F	Silk wrapping line 0.8*105P	10Ts	CCW

FY-GZ001




SPECIFICATION

product model : DESC	20.5*41-10Ts-0.08*105-15mm-CL	edition Rev.A0	client CUST:	
			Fine PN of Taoshuan material:	
			Customer part number CUST PN	

V. Packaging PACKING:

5.1 Packing pictures:

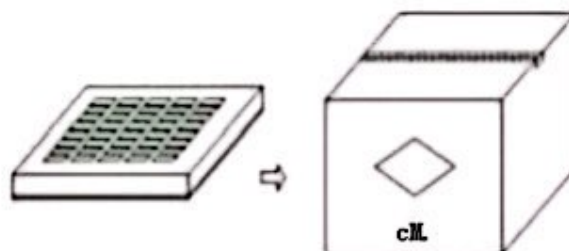

5.2 Quantity and Specifications of Packing:

project item	Quantity	Material specification Material	
box Box	350 Pcs	370*265*55mm	
Box Big Carton	1400 Pcs	390*270*245mm	

5.3 The packaging shall be based on the existing packaging tray as the reference standard and the actual shipping packaging shall be taken as the standard. If there is any special requirement, it can be customized.

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

VI. List of materials:

order number number	Material name Material name	Product description Description	manufacturer Manufacturer
1	silk-covered wire	Silk wrapping line 0.08*105P	Dongguan Jinjiesuan Electronic Material Co., LTD
2	Lead-free solder bars	Lead-free solder bars	Shenzhen Daoqin Tin Co., LTD
3	magnetic sheet	① 50*5.3*1.0 mm manganese zinc hard magnetic sheet	Guangzhou Ruijing New Material Technology Co., LTD
4	glue	201 glue	Dongguan Feiquan Electronic Material Co., LTD
5	High temperature tape	8mm wide high temperature tape	Dongguan Zhixing Tape New Material Co., LTD

FY-GZ001

