

TEST REPORT

FCC Rules Part 15.247

Report Reference No...... : **MTEB25020212-R1**

FCC ID..... : **2BDHG-Q1M**


Compiled by

(position+printed name+signature)...: File administrators Alisa Luo



Supervised by

(position+printed name+signature)...: Test Engineer Sunny Deng



Approved by

(position+printed name+signature)...: Manager Yvette Zhou



Date of issue..... : **Feb.28,2025**

Representative Laboratory Name : **Shenzhen Most Technology Service Co., Ltd.**

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,
Nanshan, Shenzhen, Guangdong, China.

Applicant's name..... : **SHENZHEN LESHIDA ELECTRONICS CO., LTD.**

Address.....: 501, Building A1, Weiye Innovation Industrial Zone, Nanchang
Baoyuan Road, Nanchang Community, Xixiang Street, Baoan District,
Shenzhen

Test specification/ Standard..... : **FCC Rules Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : Carplay AI BOX

Trade Mark : N/A

Model/Type reference..... : Q1

Listed Models : Q2, Q2S, Q2D, Q2M, Q2B, Q2F, Q2Y, Q2G, Q2A, Q2H, Q2J, Q2K, Q2L, Q2W, Q2E, Q2R,
Q2T, Q2Y, Q2U, Q2O, Q2C, Q2B, Q2N, A11, A11S, A11M, A11D, A11F, A11G, A11H, A11J,
A11K, A11L, A11Z, A11X, A11C, A11V, A11B, A11N, T11, T11S, T11D, T11M, T11N, T11Q,
T11W, T11E, T11R, T11Y, T11U, T11O, T11P, T11A, T11F, T11G, T11H, T11J, T11K, T11L,
T11Z, T11X, T11C, T11V, T11B, T11N, G8, G8S, G6225, G6225S, G8M, G8Q, G8W,
G8E, G8R, G8T, G8Y, G8U, G8I, G8O, G8P, G8A, G8D, G8F, G8H, G8J, G8K, G8L,
G8Z, G8X, G8C, G8V, G8B, G8M, G8N, Q1, Q1Y, Q1F, Q1S, Q1D, Q1M, Q1B,
Q1BS, Q1BC, Q1BM, Q1BG, Q1BZ, Q1H, Q1L, Q1J, Q1N, Q1O, Q1Q, Q1R, Q1T,
Q1U, Q1V, Q1W, Q1Z, Q1AS, Q1AD, Q1AF, Q1AG, Q1AH, Q1AJ, Q1AK, Q1AL,
Q1AW, Q1AR, Q1AT, Q1AY, Q1AU, Q1AO, Q1AP, Q1AZ, Q1AX, Q1AC, Q1AV, Q1AB,
Q1AN, Q1AM, Q1Y; Q1A Q1H; Q1K, Q1P, Q1X, Q1L, Q1BQ, Q1BW, Q1BE, Q1BR,
Q1BT, Q1BY, Q1BU, Q1BI, Q1BO, Q1BP, Q1BA, Q1BS, Q1BD, Q1BF, Q1BG, Q1BH,
Q1BJ, Q1BK, Q1BL, Q1BZ, Q1BX, Q1BC, Q1BV, Q1BN

Modulation Type : GFSK, $\pi/4$ DQPSK, 8DPSK

Operation Frequency..... : From 2402MHz to 2480MHz

Hardware Version..... : V1.0

Software Version..... : V1.0

Rating : DC 5V

Result..... : **PASS**

TEST REPORT

Equipment under Test	: Carplay AI BOX
Model /Type	: Q1
Listed Models	: Q2, Q2S, Q2D, Q2M,Q2B,Q2F,Q2Y,Q2G,Q2A,Q2H,Q2J,Q2K,Q2L,Q2W,Q2E,Q2R, Q2T,Q2Y,Q2U,Q2O,Q2C,Q2B,Q2N,A11, A11S, A11M, A11D, A11F,A11G,A11H,A11J, A11K,A11L,A11Z,A11X,A11C,A11V,A11B,A11N,T11, T11S, T11D, T11M,T11N,T11Q, T11W,T11E,T11R,T11Y,T11U,T11O,T11P,T11A,T11F,T11G,TTH,T11J,T11K,T11L, T11Z,T11X,T11C,T11V,T11B,T11N,G8, G8S, G6225, G6225S, G8M, G8Q.G8W, G8E,G8R,G8T,G8Y,G8U,G8I,G8O,G8P,G8A,G8D,G8F,G8H,G8J,G8K,G8L G8Z,G8X,G8C,G8V,G8B,G8M,G8N,Q1,Q1Y,Q1F, Q1S, Q1D, Q1M,Q1B, Q1BS, Q1BC, Q1BM, Q1BG, Q1BZ,Q1H, Q1L,Q1J, Q1N , Q1O, Q1Q, Q1R, Q1T, Q1U, Q1V, Q1W, Q1Z, Q1AS, Q1AD, Q1AF,Q1AG, Q1AH, Q1AJ, Q1AK, Q1AL, Q1AW, Q1AR, Q1AT, Q1AY, Q1AU, Q1AO, Q1AP, Q1AZ Q1AX, Q1AC Q1AV, Q1AB, Q1AN, Q1AM,Q1Y; Q1A Q1H; Q1K, Q1P,Q1X, Q1L,Q1BQ, Q1BW, Q1BE,Q1BR, Q1BT, Q1BY, Q1BU, Q1BI, Q1BO, Q1BP, Q1BA, Q1BS, Q1BD, Q1BF, Q1BG, Q1BH, Q1BJ, Q1BK, Q1BL, Q1BZ, Q1BX, Q1BC, Q1BV, Q1BN
Remark	Use Q1 for all tests. Only the model name is different.while other designs are the same.Internal electronic components, circuit layout and wiring are consistent.
Applicant	: SHENZHEN LESHIDA ELECTRONICS CO., LTD.
Address	: 501, Building A1, Weiye Innovation Industrial Zone, Nanchang Baoyuan Road, Nanchang Community, Xixiang Street, Baoan District, Shenzhen
Manufacturer	: SHENZHEN LESHIDA ELECTRONICS CO., LTD.
Address	: 501, Building A1, Weiye Innovation Industrial Zone, Nanchang Baoyuan Road, Nanchang Community, Xixiang Street, Baoan District, Shenzhen

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 REVISION HISTORY	4
2 TEST STANDARDS.....	5
3 SUMMARY	6
3.1 General Remarks	6
3.2 Product Description	6
3.3 Equipment Under Test	6
3.4 Short description of the Equipment under Test (EUT)	6
3.5 EUT operation mode	7
3.6 Block Diagram of Test Setup	7
3.7 Test Item (Equipment Under Test) Description*	7
3.8 Auxiliary Equipment (AE) Description	7
3.9 Antenna Information*	7
3.10 Related Submittal(s) / Grant (s).....	8
3.11 Modifications	8
3.12 EUT configuration	8
4 TEST ENVIRONMENT	9
4.1 Address of the test laboratory	9
4.2 Environmental conditions	9
4.3 Summary of measurement results	10
4.4 Statement of the measurement uncertainty	10
4.5 Equipments Used during the Test	11
5 TEST CONDITIONS AND RESULTS.....	12
5.1 AC Power Conducted Emission.....	12
5.2 Radiated Emission	13
5.3 Maximum Peak Output Power	19
5.4 20dB Bandwidth	20
5.5 Frequency Separation.....	21
5.6 Number of hopping frequency	22
5.7 Time of Occupancy (Dwell Time)	23
5.8 Spurious RF Conducted Emission	24
5.9 Pseudorandom Frequency Hopping Sequence	25
5.10 Antenna Requirement	26
6 TEST SETUP PHOTOS OF THE EUT	27
7 PHOTOS OF THE EUT	28
APPENDIX I. Conducted Output Power.....	30
APPENDIX II. 20dB Bandwidth	32
APPENDIX III. Carrier Frequencies Separation	34
APPENDIX IV. Conducted Out Of Band Emission.....	36
APPENDIX V. Duty Cycle	42
APPENDIX VI. Dwell Time	47
APPENDIX VII. Number Of Hopping Channel	50

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2025.02.28	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	2025.02.25
Testing commenced on	:	2025.02.26
Testing concluded on	:	2025.02.28

3.2 Product Description

Product Name:	Carplay AI BOX
Model/Type reference:	Q1
Power Supply:	DC 5V
Testing sample ID:	MTYP08348
Bluetooth :	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK ,8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0.72dBi

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 5V

3.4 Short description of the Equipment under Test (EUT)

This is a Carplay AI BOX For more details, refer to the user's manual of the EUT.


3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

3.6 Block Diagram of Test Setup

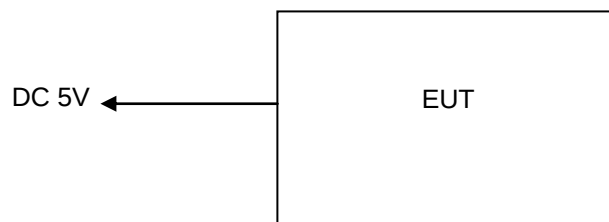

3.7 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	HMR18	Vehicle player		

3.9 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	0.72dBi
Antenna 2					

*: declared by the applicant.

3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3.11 Modifications

No modifications were implemented to meet testing criteria.

3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - Supplied by the lab

●	ADAPTER	M/N:	/
		Manufacturer:	/

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Designation No.: CN1315

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	☒ Full	GFSK	☒ Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.
1.	L.I.S.N.	R&S	ENV216	100093	/	2024/03/15
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2024/03/15
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2024/03/15
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2024/03/15
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2024/03/15
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2024/08/15
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2024/03/15
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2024/03/15
9	Horn antenna	R&S	OBH100400	26999002	/	2024/03/15
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2024/03/15
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2024/03/15
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2024/03/15
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2024/03/15
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2024/03/15
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2024/03/15
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2024/03/15
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2024/03/15
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2024/03/15
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2024/03/15
20	Power meter	R&S	NRVS	100444	/	2024/03/15

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

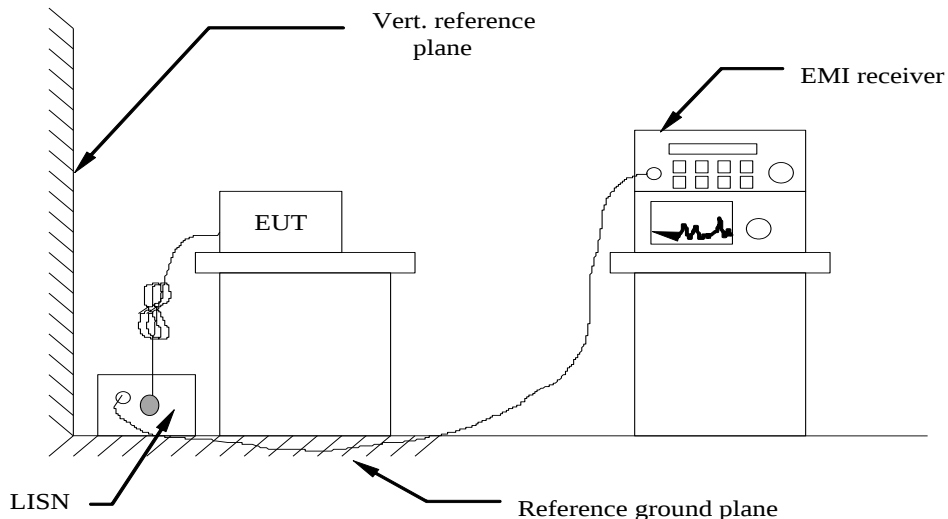

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

N/A


5.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

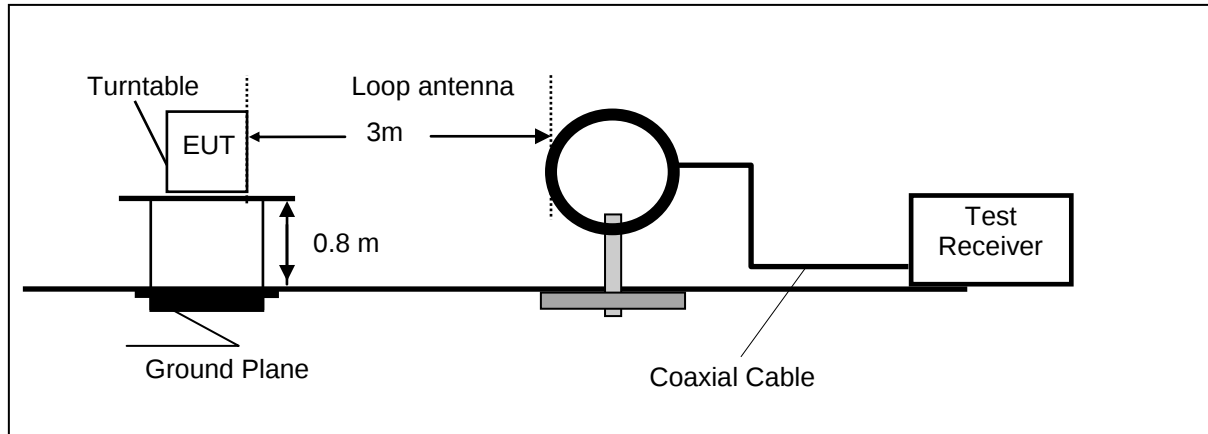

Frequency range 30MHz – 1000MHz

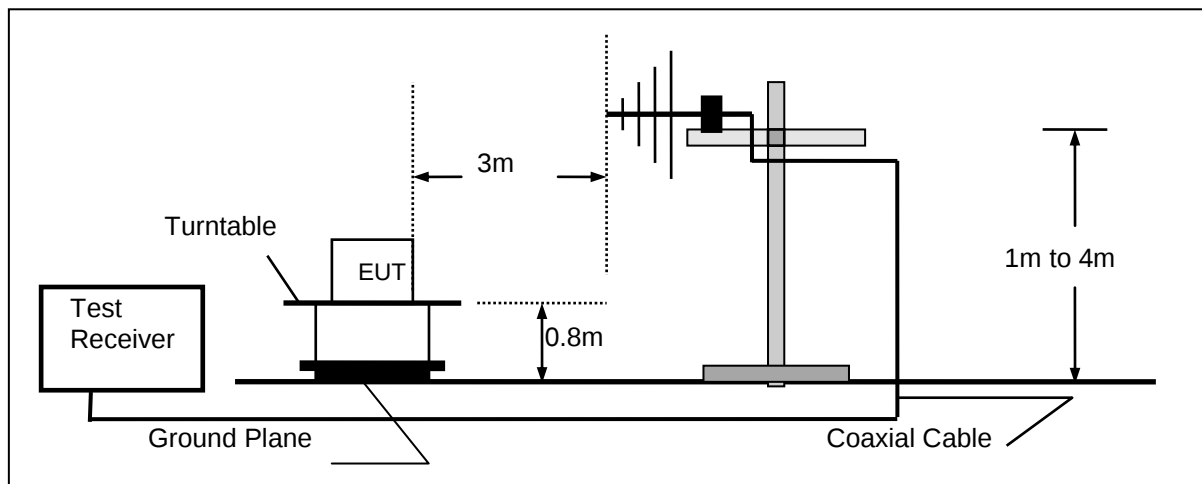

Frequency range above 1GHz-25GHz

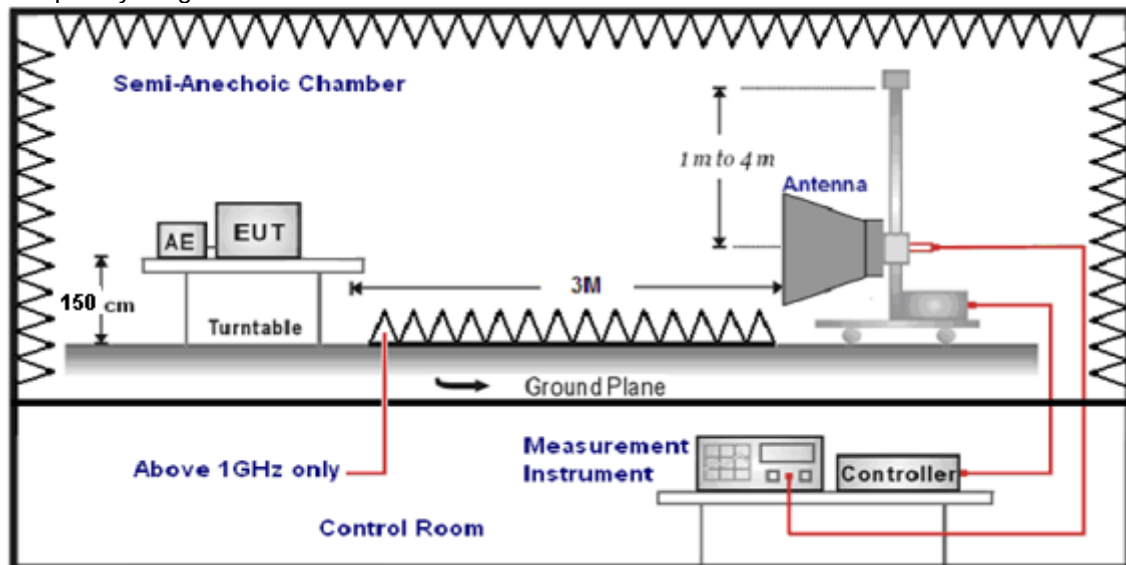

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.


The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK, 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

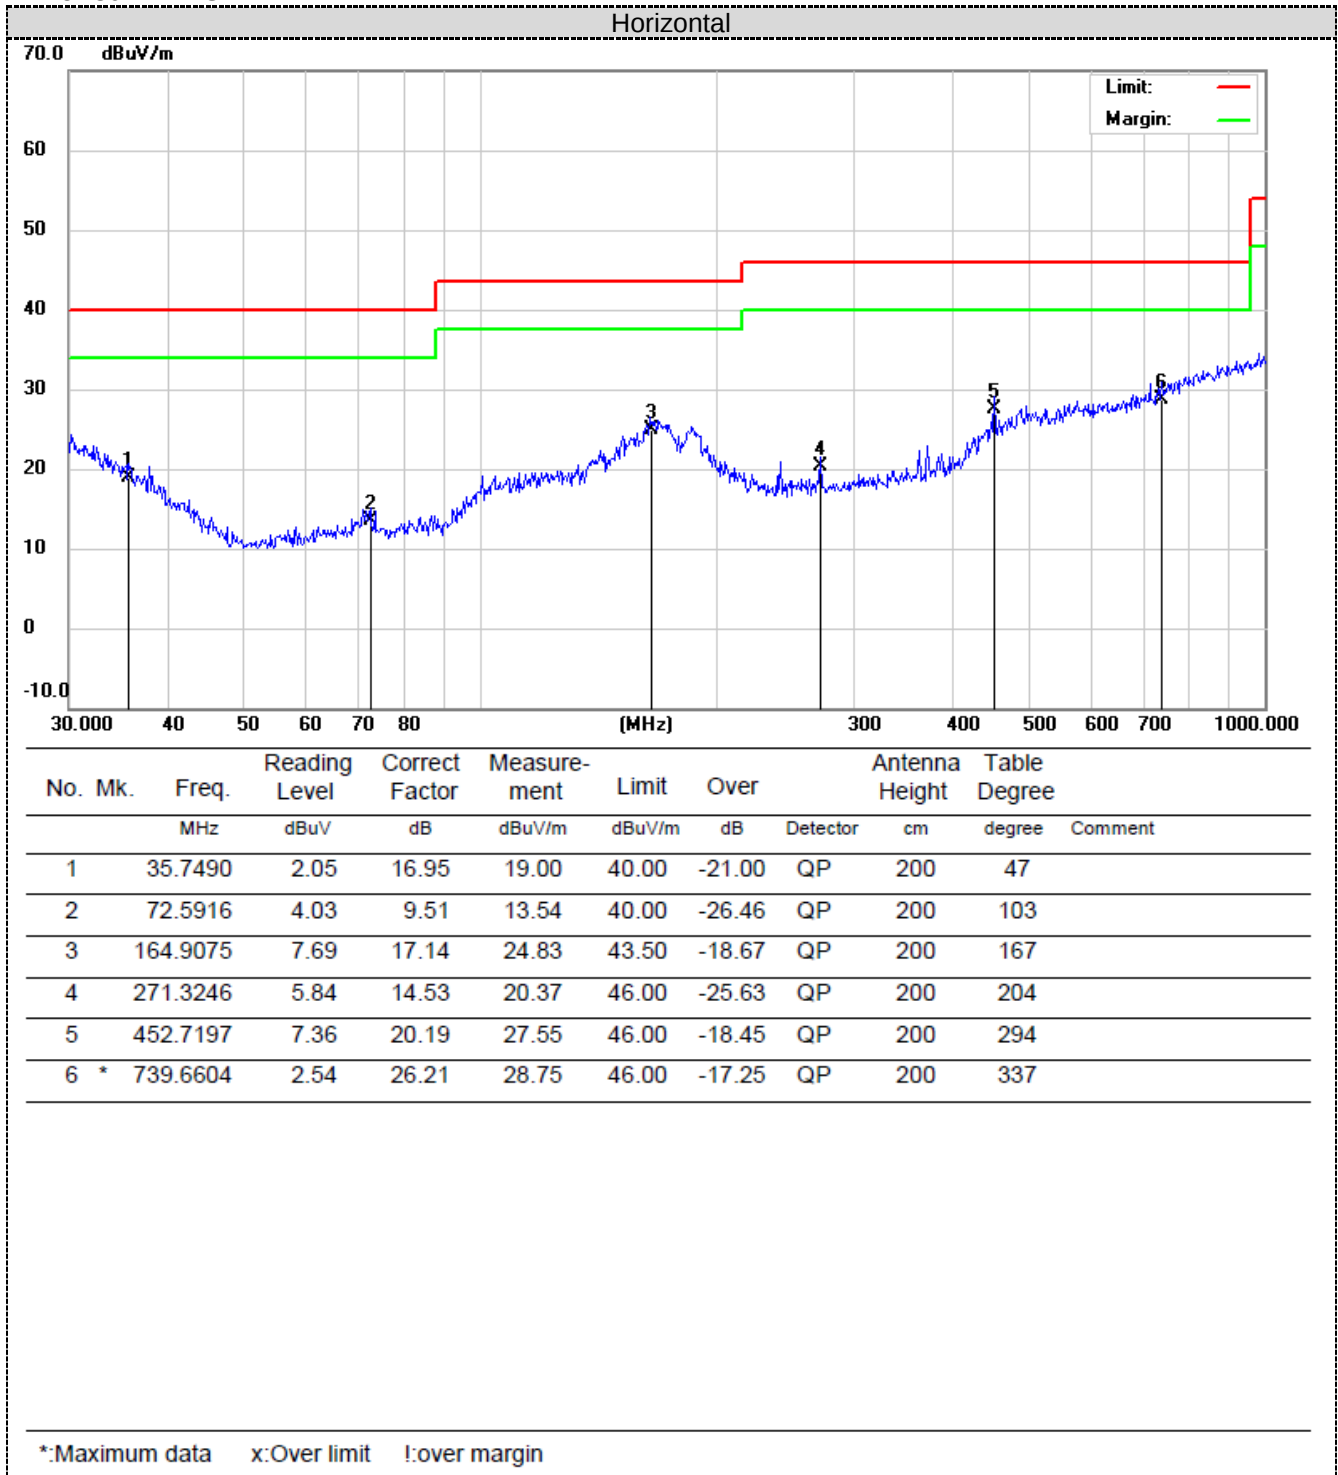For 30MHz-1GHz

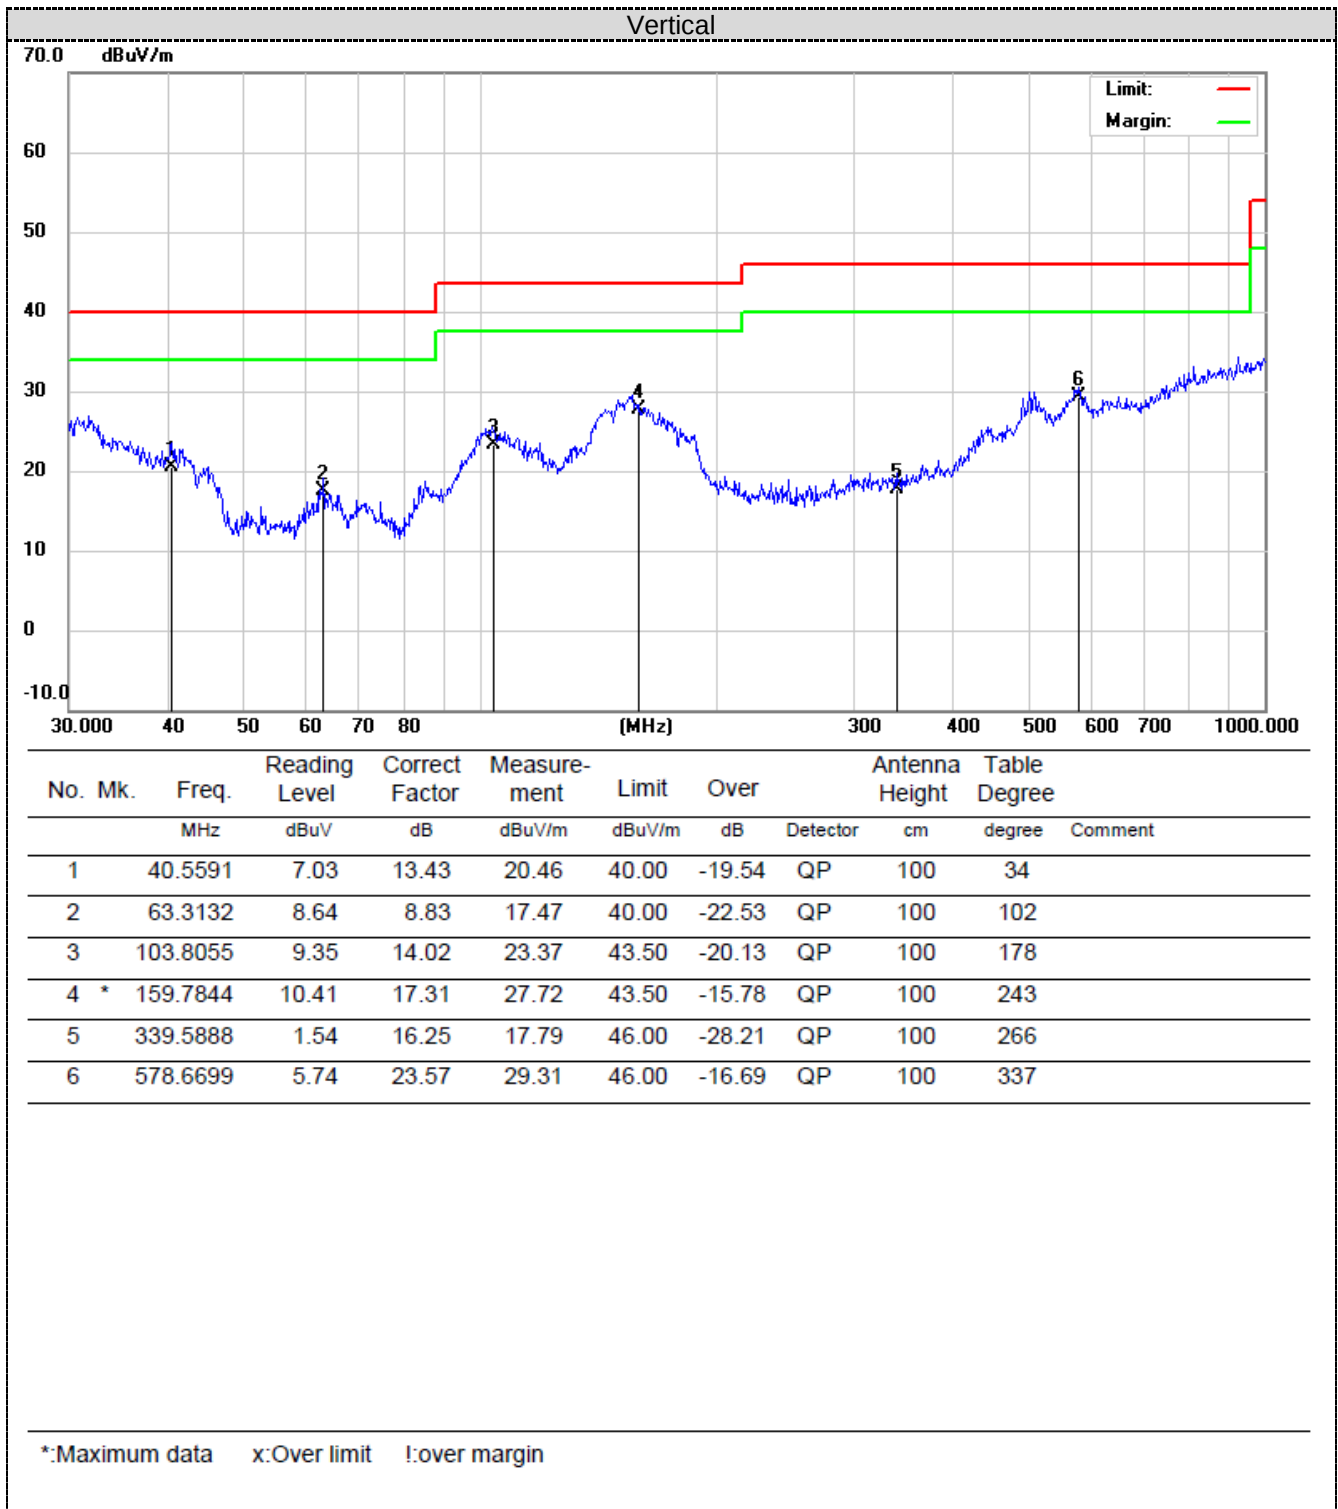

For 1GHz to 25GHz

Note: GFSK, $\pi/4$ DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	53.59	PK	74	20.41	51.69	31.42	6.98	36.5	1.9
4804	42.29	AV	54	11.71	40.39	31.42	6.98	36.5	1.9
7206	53.41	PK	74	20.59	42.81	37.03	8.87	35.3	10.6
7206	41.6	AV	54	12.4	31	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	57.49	PK	74	16.51	55.59	31.42	6.98	36.5	1.9
4804	45.49	AV	54	8.51	43.59	31.42	6.98	36.5	1.9
7206	51.71	PK	74	22.29	41.11	37.03	8.87	35.3	10.6
7206	41.41	AV	54	12.59	30.81	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	53.03	PK	74	20.97	50.97	30.98	7.58	36.5	2.06
4882	46.27	AV	54	7.73	44.21	30.98	7.58	36.5	2.06
7323	54.15	PK	74	19.85	43.23	37.66	8.56	35.3	10.92
7323	43.72	AV	54	10.28	32.8	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	56.9	PK	74	17.1	54.84	30.98	7.58	36.5	2.06
4882	43.8	AV	54	10.2	41.74	30.98	7.58	36.5	2.06
7323	51.64	PK	74	22.36	40.72	37.66	8.56	35.3	10.92
7323	42.39	AV	54	11.61	31.47	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	56.34	PK	74	17.66	53.27	31.47	7.8	36.2	3.07
4960	47.91	AV	54	6.09	44.84	31.47	7.8	36.2	3.07
7440	53.2	PK	74	20.8	41.46	38.32	8.72	35.3	11.74
7440	42.82	AV	54	11.18	31.08	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	58.8	PK	74	15.2	55.73	31.47	7.8	36.2	3.07
4960	44.77	AV	54	9.23	41.7	31.47	7.8	36.2	3.07
7440	55.34	PK	74	18.66	43.6	38.32	8.72	35.3	11.74
7440	42.12	AV	54	11.88	30.38	38.32	8.72	35.3	11.74

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Results of Band Edges Test (Radiated)

Note: GFSK, $\pi/4$ DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	57.72	PK	74	16.28	63.13	27.49	3.32	36.22	-5.41
2390	39.01	AV	54	14.99	44.42	27.49	3.32	36.22	-5.41
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	56.83	PK	74	17.17	62.24	27.49	3.32	36.22	-5.41
2390	39.69	AV	54	14.31	45.1	27.49	3.32	36.22	-5.41
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	57.27	PK	74	16.73	62.78	27.45	3.38	36.34	-5.51
2483.5	42.42	AV	54	11.58	47.93	27.45	3.38	36.34	-5.51
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	56.74	PK	74	17.26	62.25	27.45	3.38	36.34	-5.51
2483.5	42.44	AV	54	11.56	47.95	27.45	3.38	36.34	-5.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.

5.3 Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

Test Configuration



Test Results

See Appendix I

5.4 20dB Bandwidth

Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

See Appendix II

5.5 Frequency Separation


LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \cdot 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

See Appendix III

5.6 Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration



Test Results

See Appendix VII

5.7 Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration




Test Results

See Appendix VI

5.8 Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 25GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Test Results

See Appendix IV

5.9 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

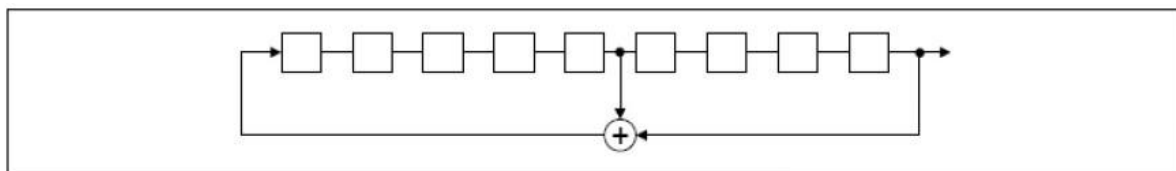

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

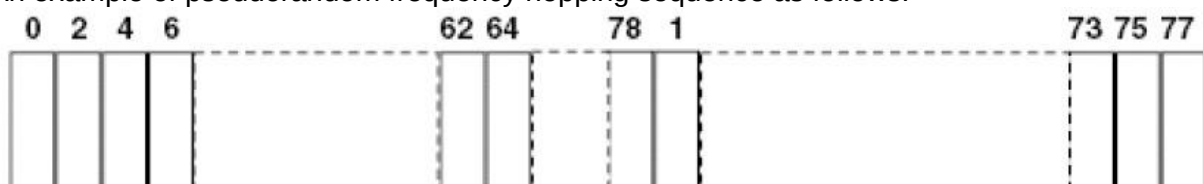

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

5.10 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The directional gains of antenna used for transmitting is 0.72dBi, and the antenna is an PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

6 Test Setup Photos of the EUT

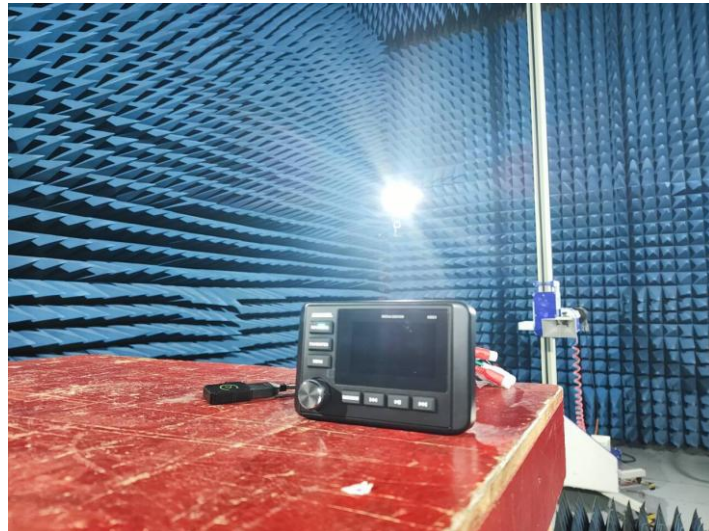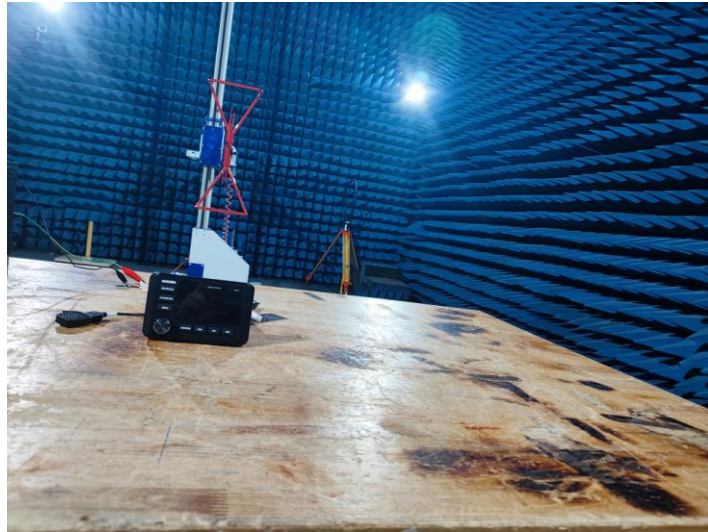

7 Photos of the EUT


See related photo report.


APPENDIX I. Conducted Output Power

Test Result

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH5	0	-0.810	0.830	None	≤20.97	PASS
		39	-0.444	0.903	None		PASS
		78	-0.464	0.899	None		PASS
$\pi/4$ DQPSK	2-DH5	0	1.477	1.405	None	≤20.97	PASS
		39	1.834	1.525	None		PASS
		78	1.809	1.517	None		PASS
8DPSK	3-DH5	0	1.865	1.536	None	≤20.97	PASS
		39	2.244	1.676	None		PASS
		78	2.253	1.680	None		PASS

Test Graphs

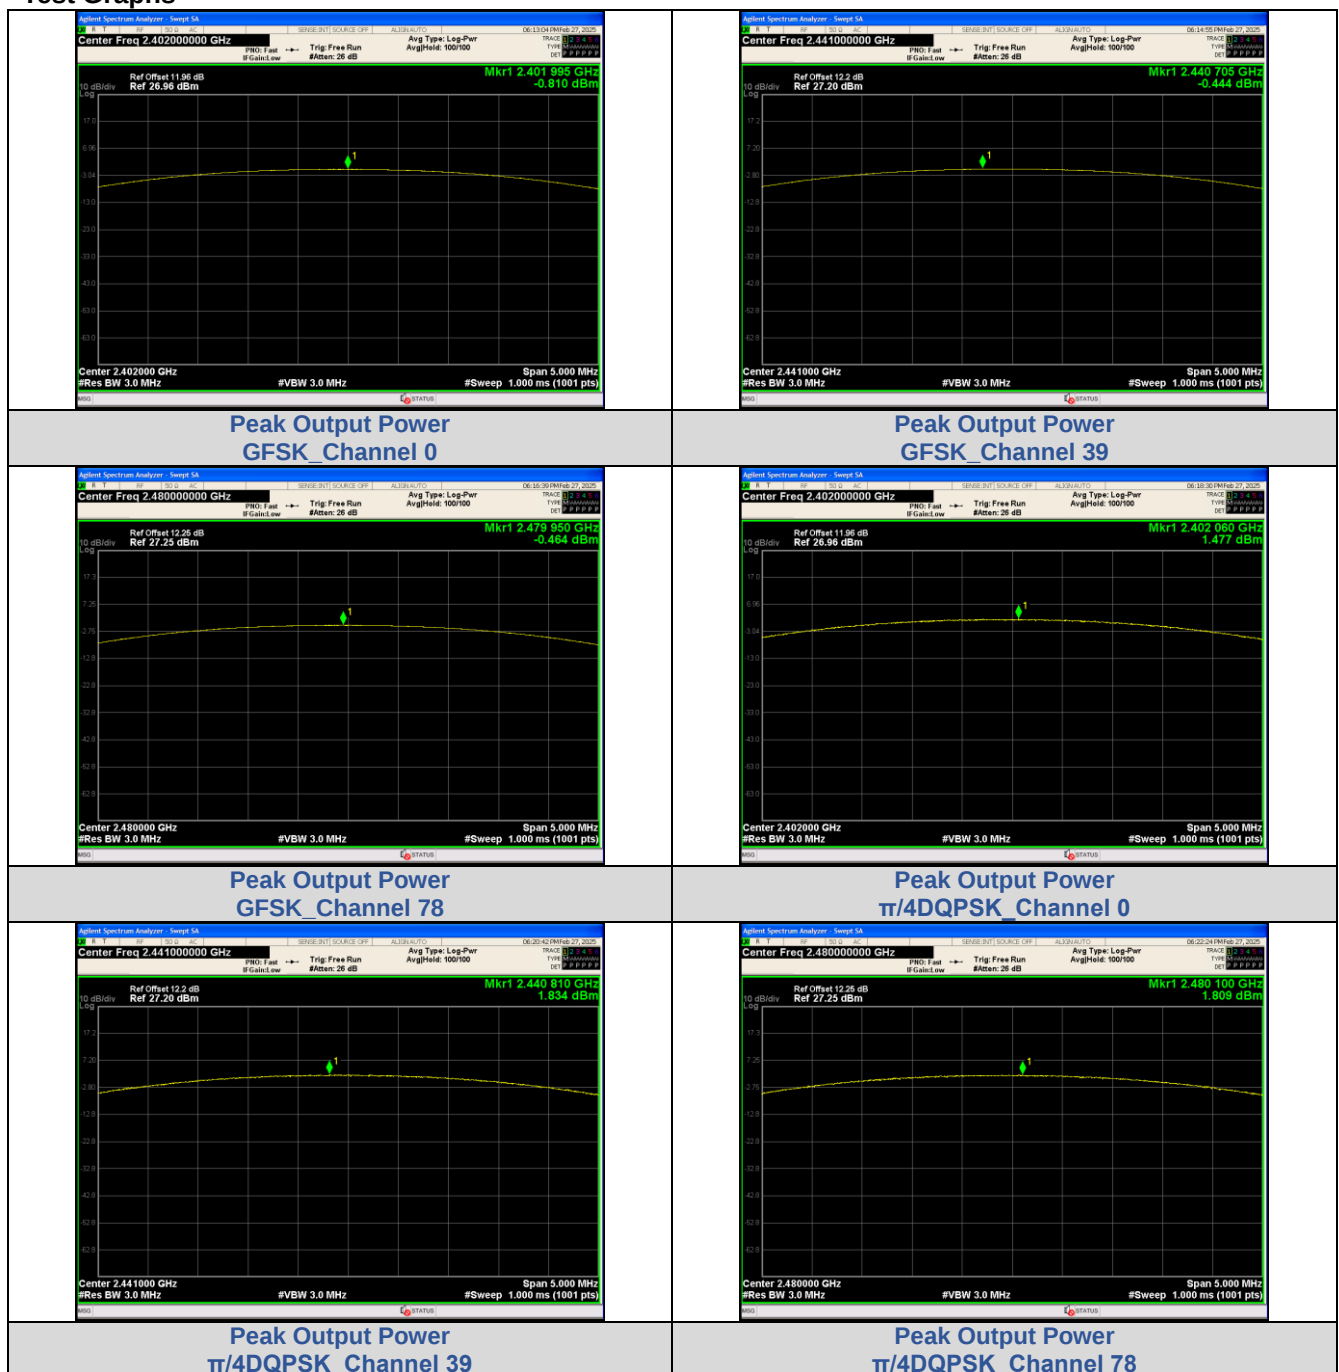

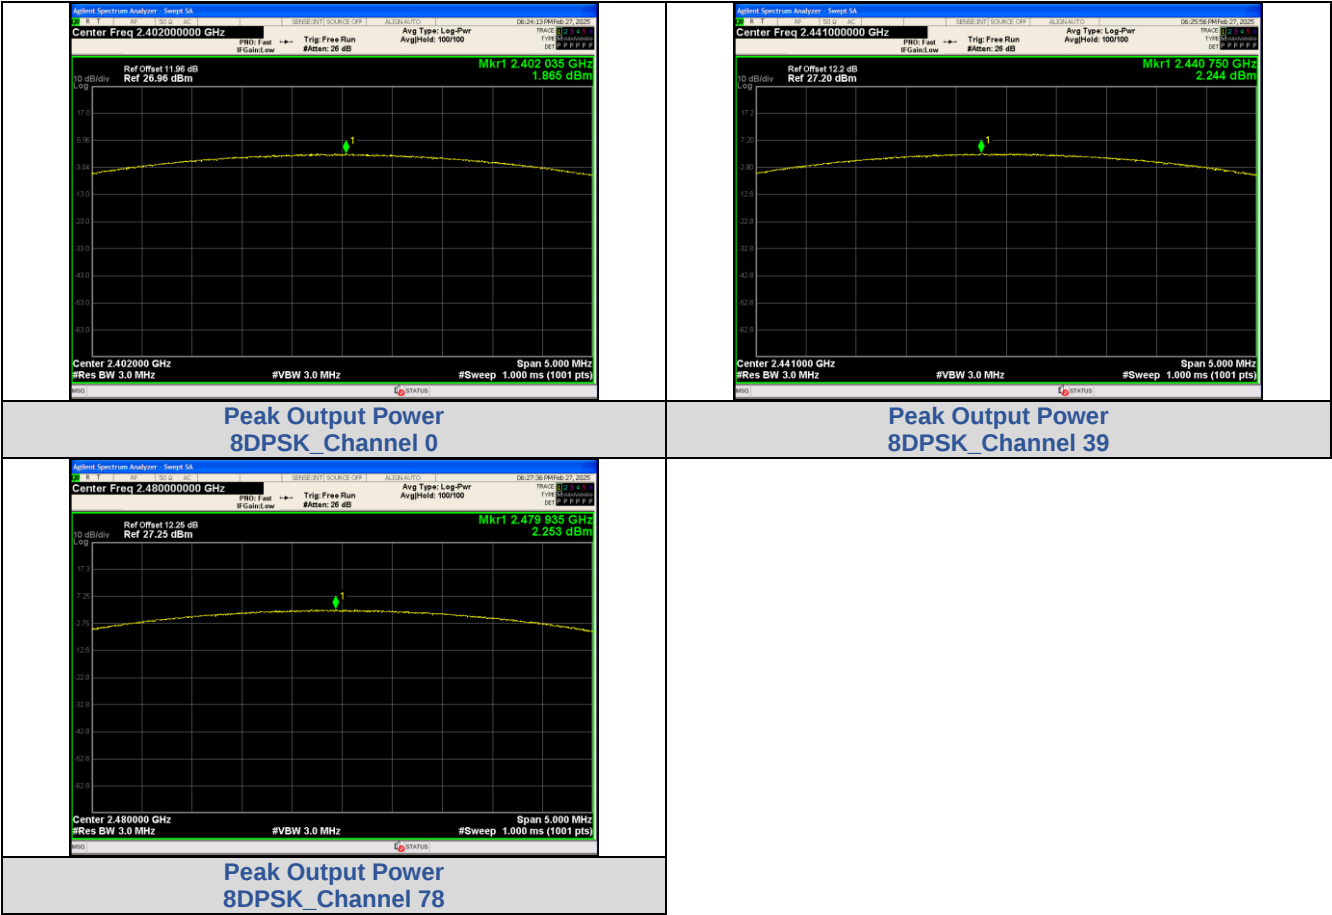



APPENDIX II. 20dB Bandwidth

Test Result


Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.9774
	39	2441 MHz	1.026
	78	2480 MHz	1.022
$\pi/4$ DQPSK	0	2402 MHz	1.357
	39	2441 MHz	1.358
	78	2480 MHz	1.360
8DPSK	0	2402 MHz	1.342
	39	2441 MHz	1.345
	78	2480 MHz	1.342

Test Graphs

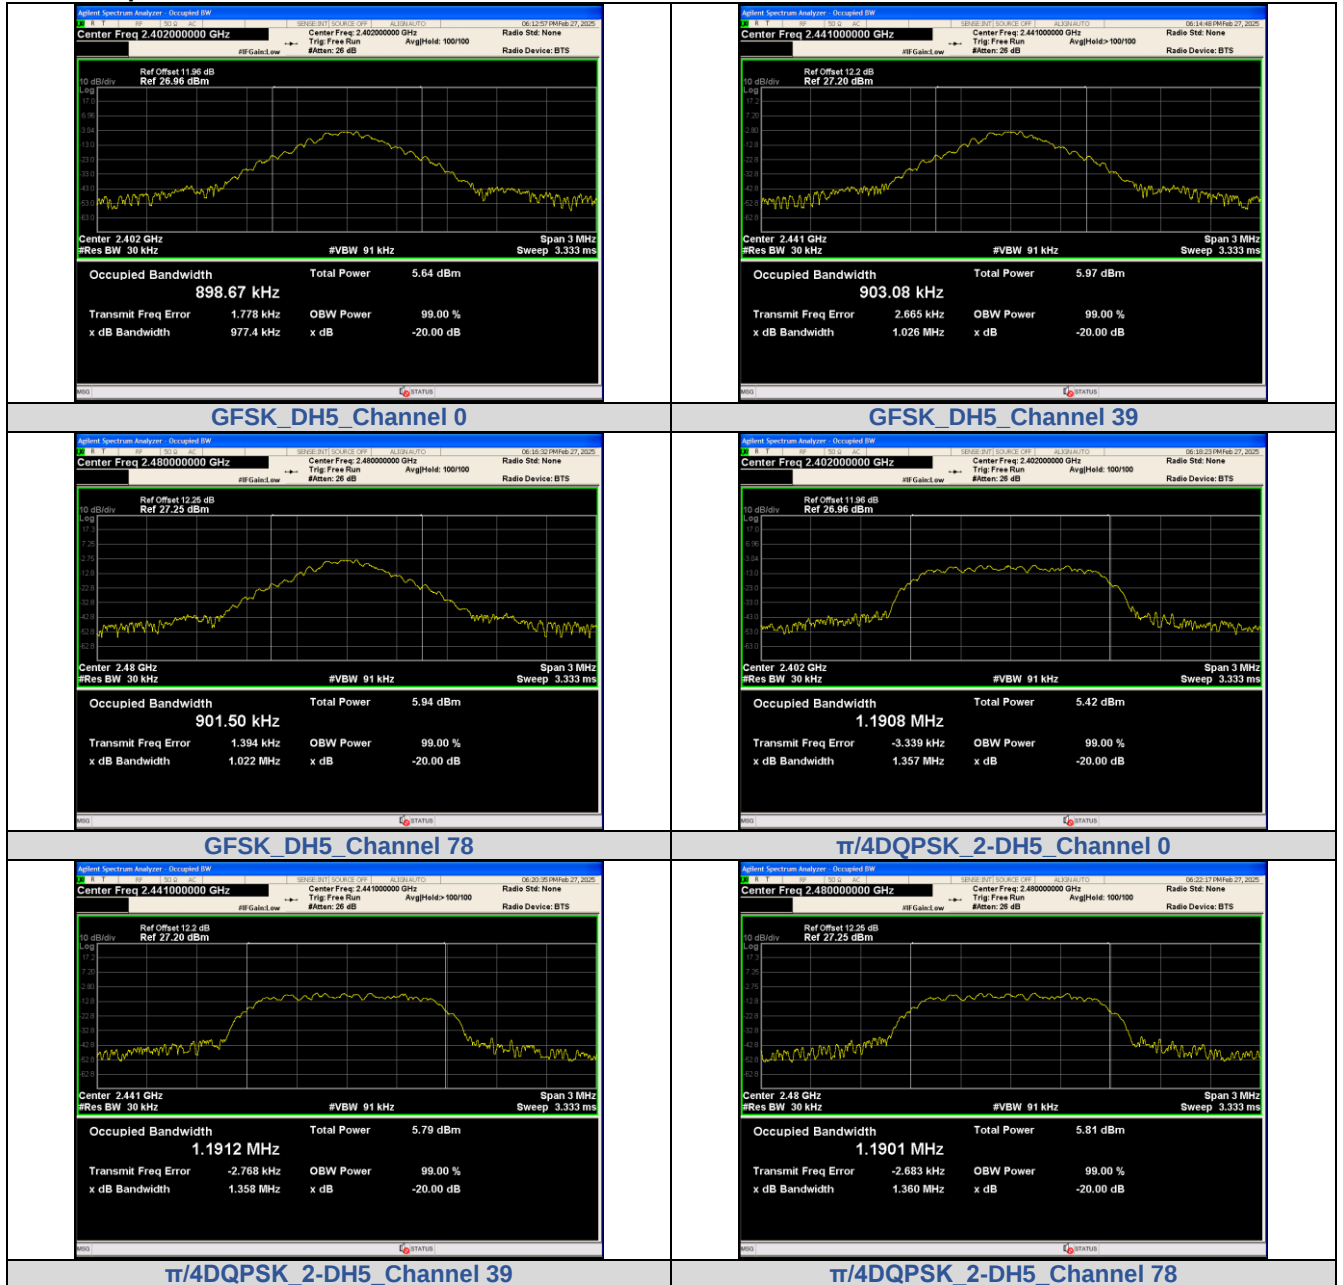


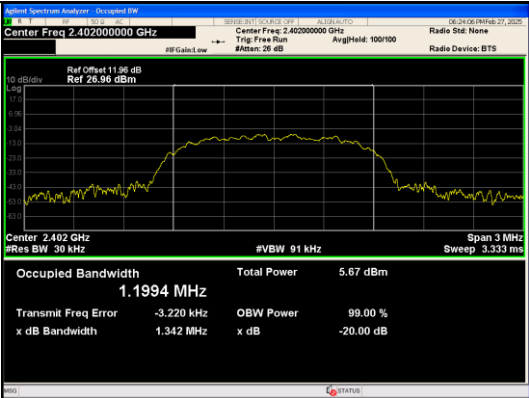

8DPSK 3-DH5 Channel 0

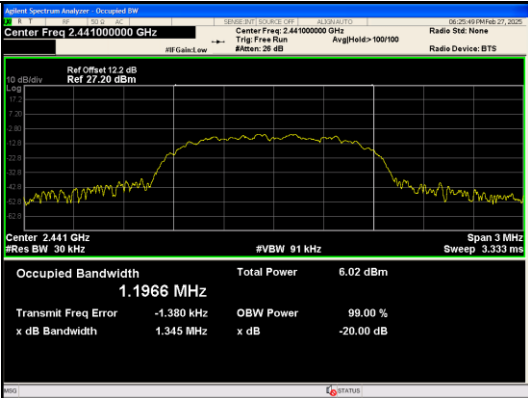

8DPSK 3-DH5 Channel 39

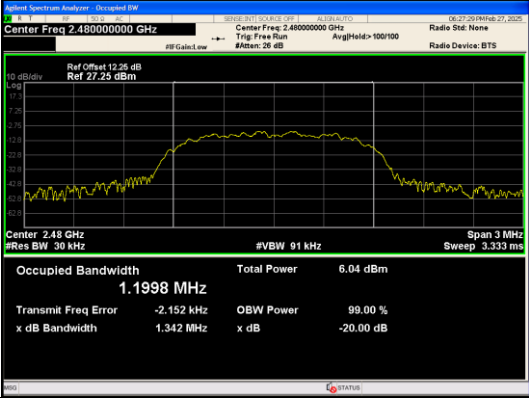


8DPSK 3-DH5 Channel 78


APPENDIX III. Carrier Frequencies Separation

Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2440.0636	2441.0033	0.9397	0.652	PASS
GFSK	DH5	2440.1623	2441.0261	0.8638	0.684	PASS
GFSK	DH5	2439.9937	2441.1833	1.1896	0.681	PASS
$\pi/4$ DQPSK	2-DH5	2439.8404	2441.0372	1.1968	0.905	PASS
$\pi/4$ DQPSK	2-DH5	2439.8452	2441.0405	1.1953	0.905	PASS
$\pi/4$ DQPSK	2-DH5	2440.0384	2441.0588	1.0204	0.907	PASS
8DPSK	3-DH5	2439.9676	2440.9292	0.9616	0.895	PASS
8DPSK	3-DH5	2440.0969	2441.0972	1.0003	0.897	PASS
8DPSK	3-DH5	2440.0936	2441.0885	0.9949	0.895	PASS

Test Graphs

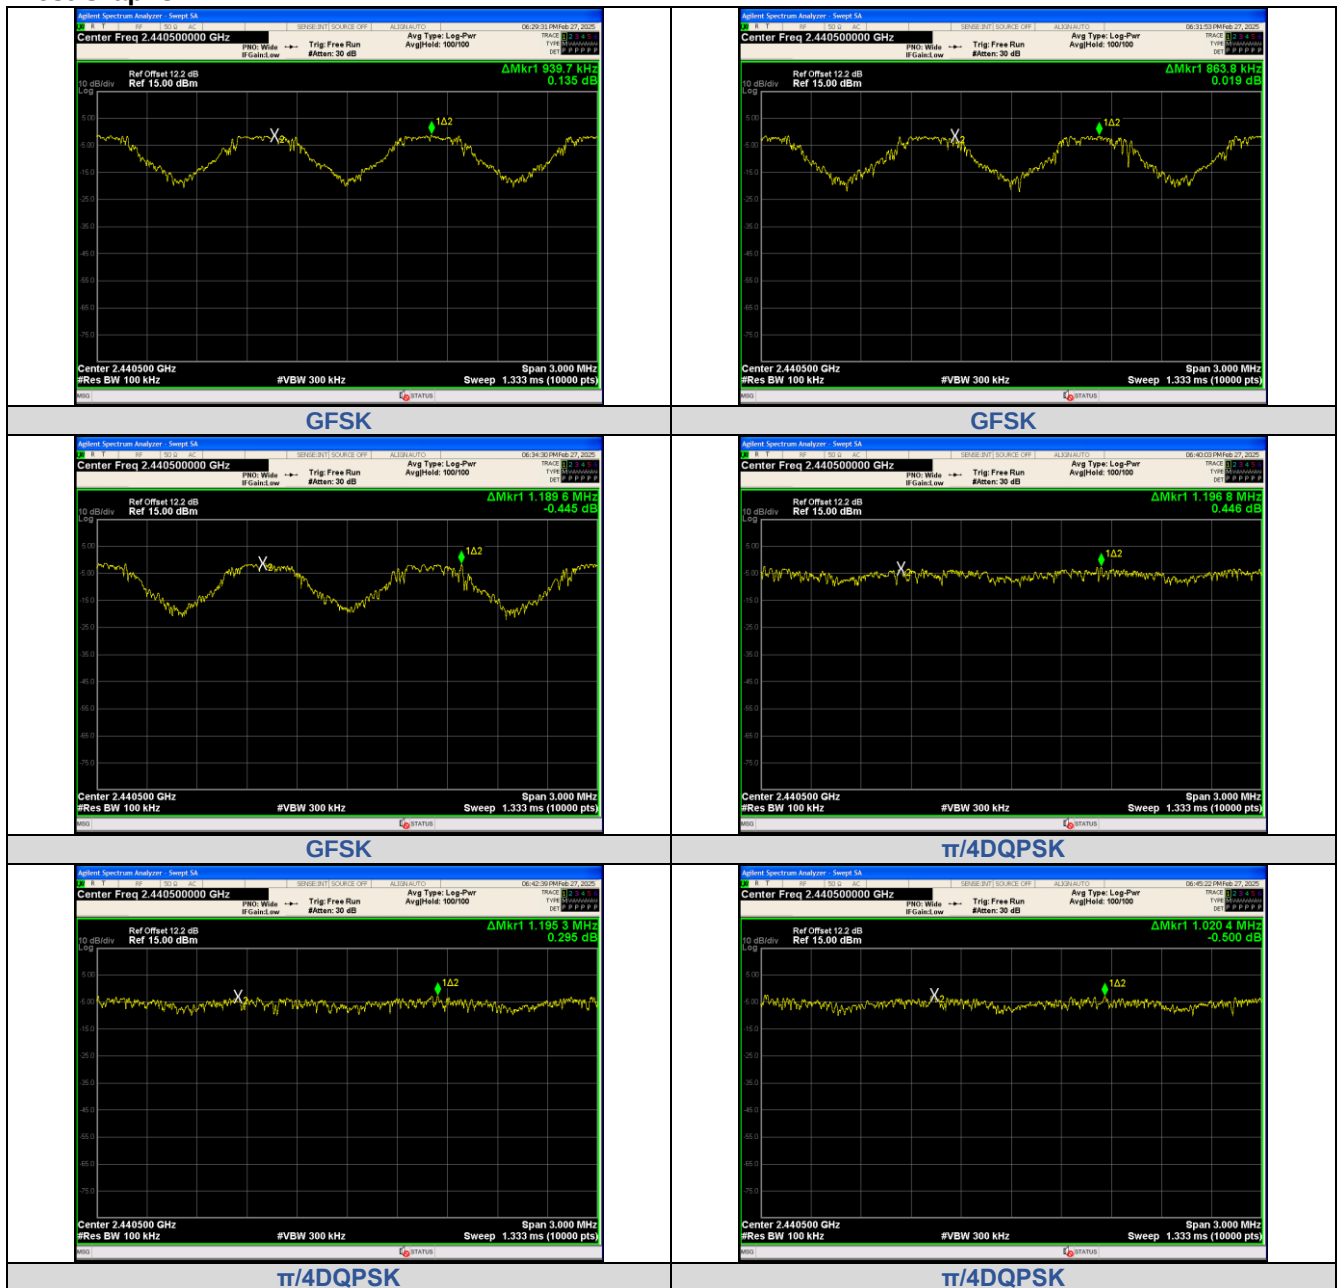

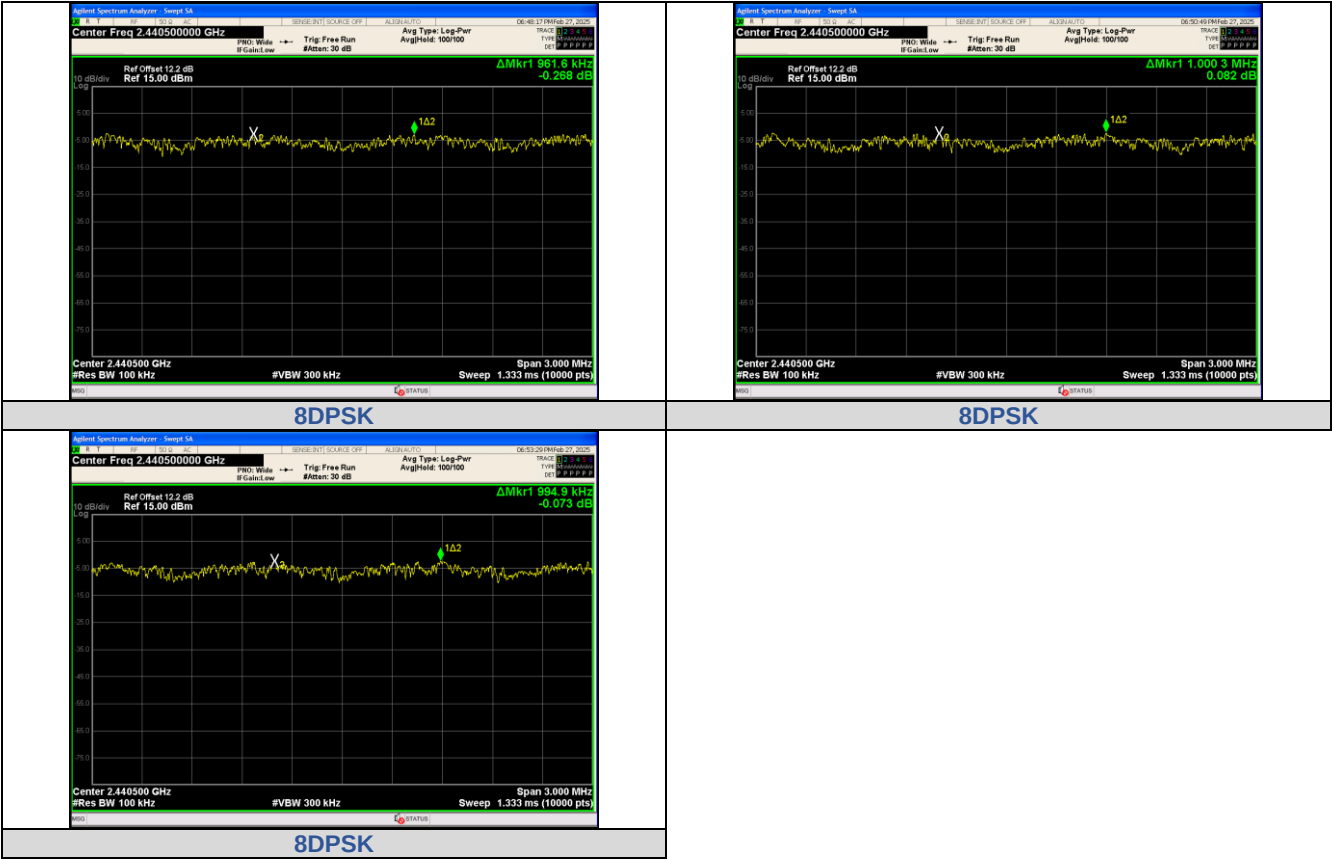

APPENDIX IV. Conducted Out Of Band Emission**Test Result****Non-Hopping**


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-46.194	-21.24	-24.954	PASS
			4003.35	-40.916	-21.24	-19.676	PASS
			4804.26	-44.794	-21.24	-23.554	PASS
			7205.75	-57.580	-21.24	-36.340	PASS
			9607.87	-51.671	-21.24	-30.431	PASS
		39	4882.30	-39.320	-20.87	-18.450	PASS
			7323.11	-57.455	-20.87	-36.585	PASS
			9763.93	-50.106	-20.87	-29.236	PASS
		78	2483.50	-50.632	-20.98	-29.652	PASS
			4133.20	-42.413	-20.98	-21.433	PASS
			4960.33	-44.377	-20.98	-23.397	PASS
			7439.85	-55.862	-20.98	-34.882	PASS
			9919.99	-52.320	-20.98	-31.340	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-41.965	-22.52	-19.445	PASS
			4003.35	-42.844	-22.52	-20.324	PASS
			4804.26	-45.305	-22.52	-22.785	PASS
			7206.38	-57.229	-22.52	-34.709	PASS
			9607.87	-51.608	-22.52	-29.088	PASS
		39	4882.30	-42.534	-22.1	-20.434	PASS
			7323.11	-58.874	-22.1	-36.774	PASS
			9763.93	-50.538	-22.1	-28.438	PASS
		78	2483.50	-50.947	-22.06	-28.887	PASS
			4959.70	-43.514	-22.06	-21.454	PASS
			7439.85	-58.921	-22.06	-36.861	PASS
			9919.99	-51.646	-22.06	-29.586	PASS
8DPSK	3-DH5	0	2398.99	-47.775	-22.43	-25.345	PASS
			2400.00	-49.485	-22.43	-27.055	PASS
			4003.40	-42.449	-22.43	-20.019	PASS
			4804.30	-47.239	-22.43	-24.809	PASS
			7205.80	-57.608	-22.43	-35.178	PASS
			9607.90	-51.699	-22.43	-29.269	PASS
		39	4882.30	-42.727	-22.0	-20.727	PASS
			7322.49	-59.735	-22.0	-37.735	PASS
			9763.93	-50.520	-22.0	-28.520	PASS
		78	2483.50	-51.357	-22.02	-29.337	PASS
			4959.70	-41.447	-22.02	-19.427	PASS
			7439.85	-56.276	-22.02	-34.256	PASS
			9919.99	-51.748	-22.02	-29.728	PASS


Hopping

Hopping							
Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	Hopping	2398.71	-48.891	-21.41	-27.481	PASS
			2400.00	-50.737	-21.41	-29.327	PASS
			2483.50	-51.446	-21.11	-30.336	PASS
			2395.56	-49.483	-21.38	-28.103	PASS
			2400.00	-51.788	-21.38	-30.408	PASS
			2483.50	-50.456	-21.07	-29.386	PASS
			2398.75	-50.099	-21.51	-28.589	PASS
			2400.00	-51.784	-21.51	-30.274	PASS
π/4DQPSK	2-DH5		2483.50	-49.987	-21.18	-28.807	PASS
			2395.04	-49.821	-22.99	-26.831	PASS
			2400.00	-50.896	-22.99	-27.906	PASS
			2483.50	-50.400	-22.47	-27.930	PASS
			2398.95	-49.988	-22.63	-27.358	PASS
			2400.00	-52.168	-22.63	-29.538	PASS
			2483.50	-50.476	-22.12	-28.356	PASS
			2395.87	-50.138	-22.52	-27.618	PASS


			2400.00	-50.970	-22.52	-28.450	PASS
			2483.50	-51.035	-22.0	-29.035	PASS
8DPSK	3-DH5		2395.20	-49.469	-22.38	-27.089	PASS
			2400.00	-51.615	-22.38	-29.235	PASS
			2483.50	-50.338	-22.66	-27.678	PASS
			2396.53	-50.124	-22.66	-27.464	PASS
			2400.00	-51.827	-22.66	-29.167	PASS
			2483.50	-51.097	-22.6	-28.497	PASS
			2395.93	-50.129	-22.59	-27.539	PASS
			2400.00	-51.782	-22.59	-29.192	PASS
			2483.50	-51.285	-22.25	-29.035	PASS

Test Graphs

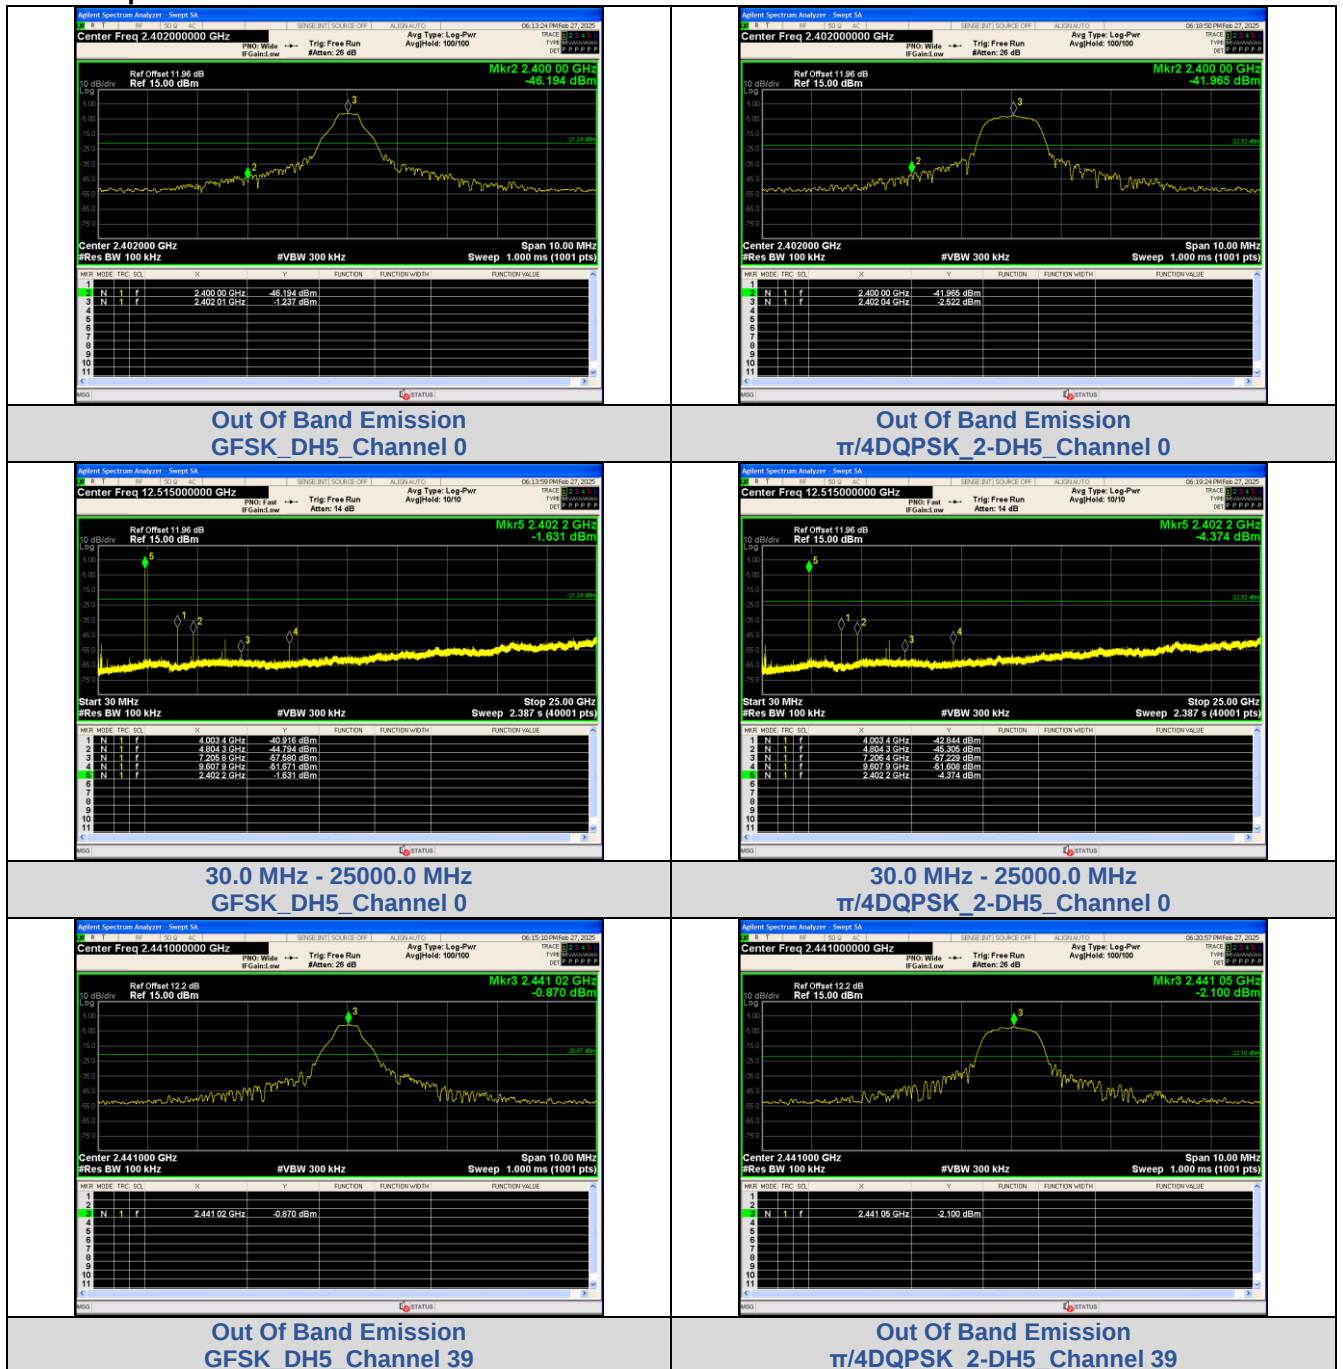


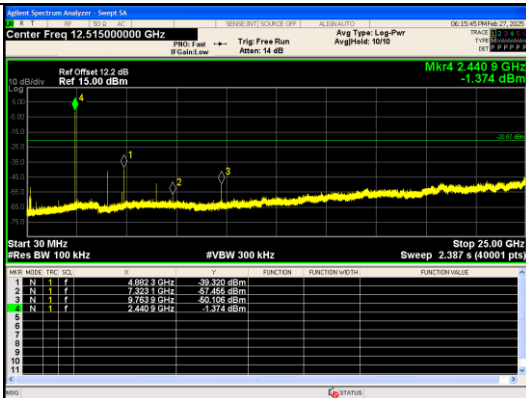


30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 39

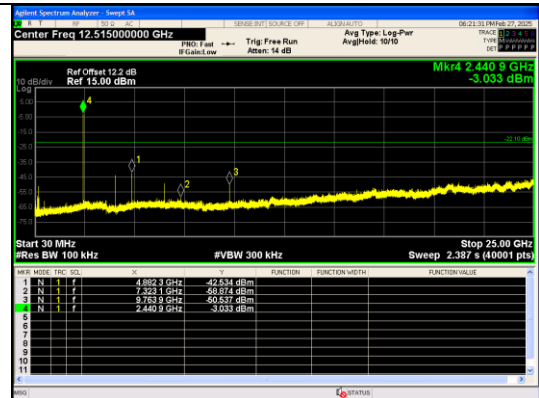


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 39

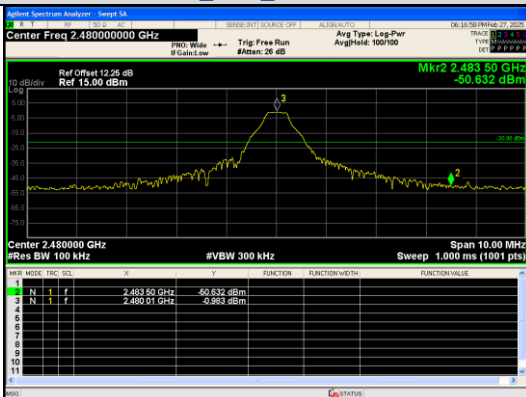


Out Of Band Emission
GFSK_DH5_Channel 78

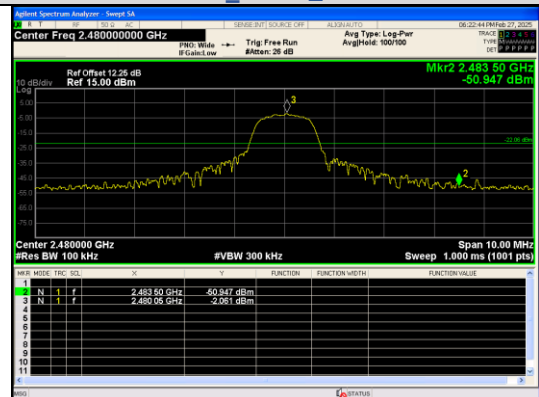


Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 78

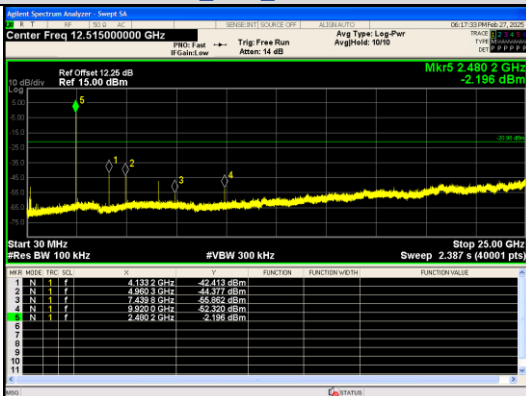


30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 78

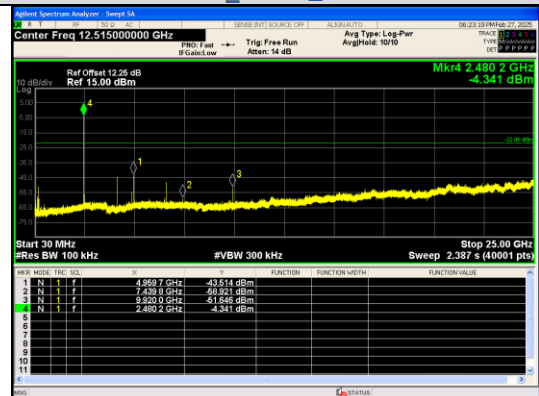


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 78

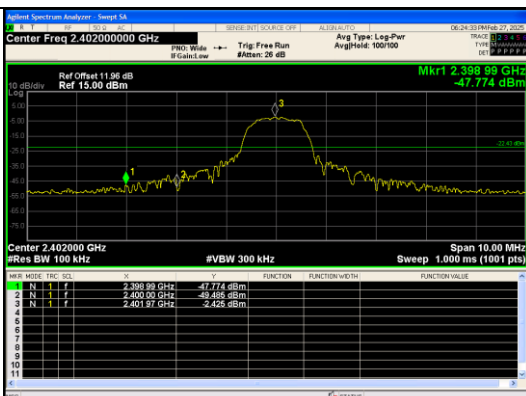


Out Of Band Emission
8DPSK_3-DH5_Channel 0

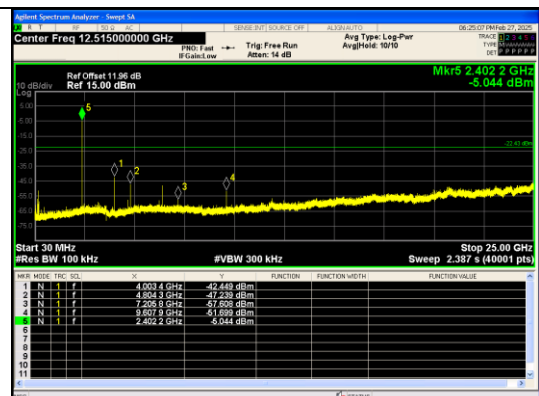


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 0

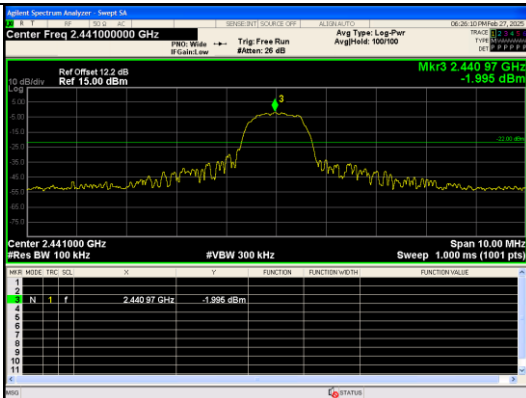


**Out of Band Emission
8DPSK_3-DH5_Channel 39**

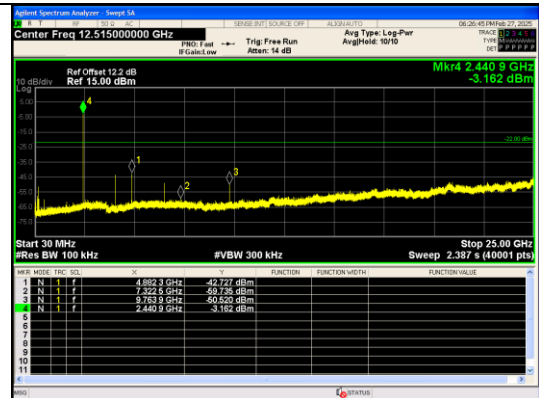


**30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 39**

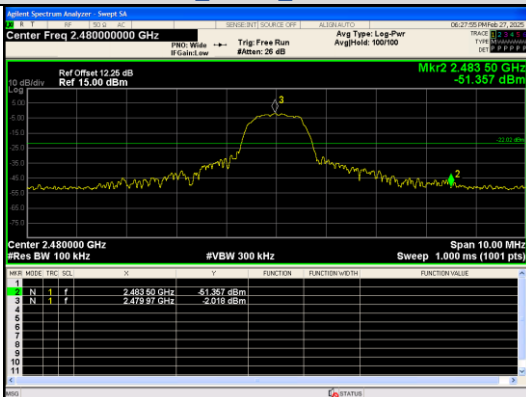


**Out of Band Emission
8DPSK_3-DH5_Channel 78**

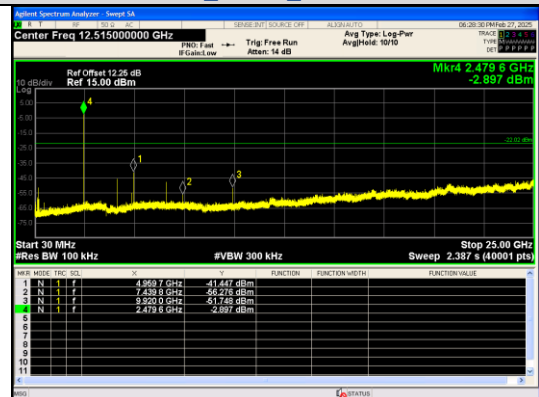

**30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 78**

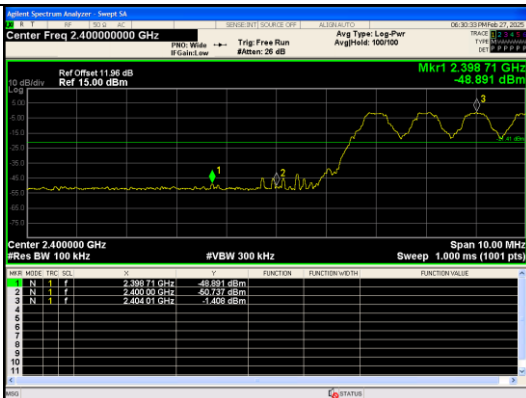

**Out of Band Emission(Left)
GFSK_DH5_Channel Hopping**

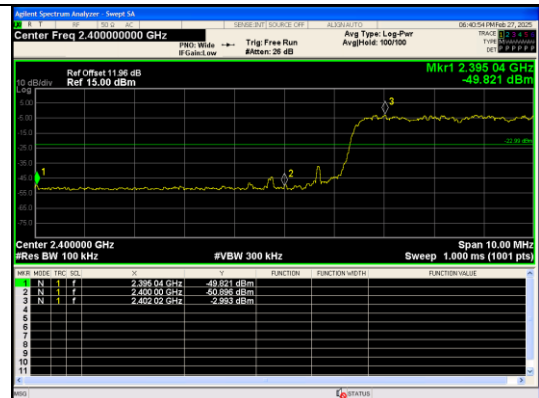







**Out of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping**




**Out of Band Emission(Right)
GFSK_DH5_Channel Hopping**




**Out of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping**

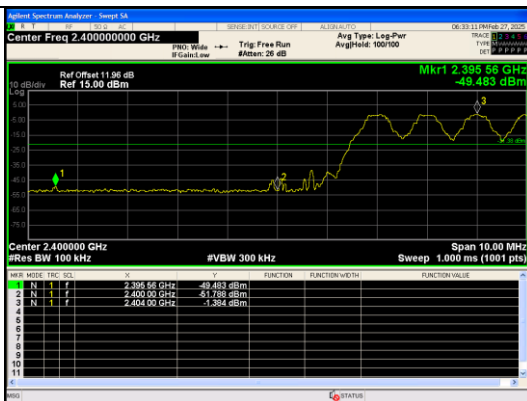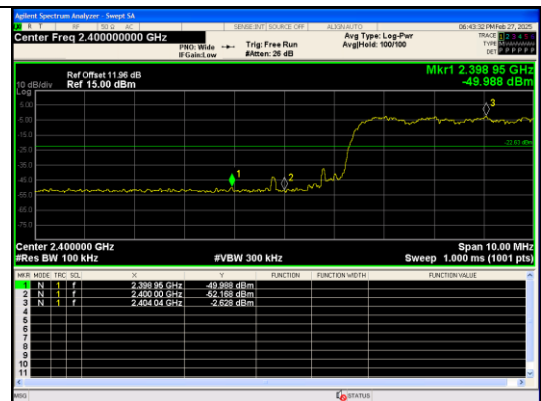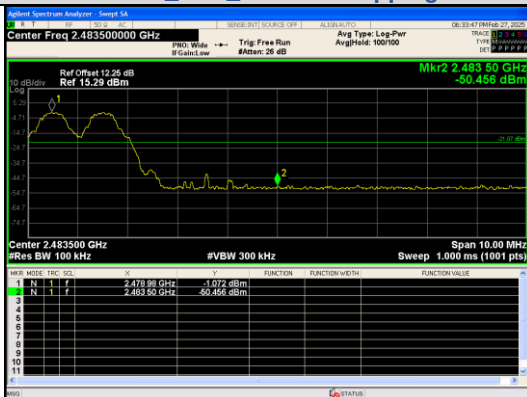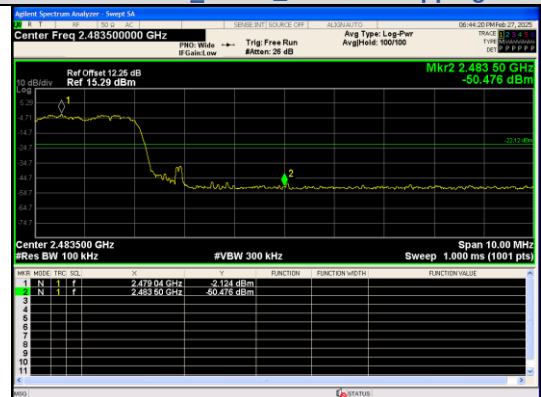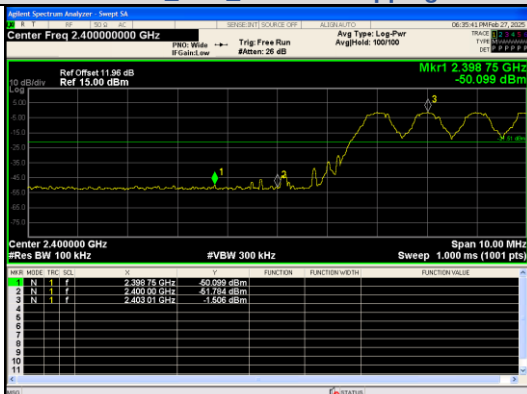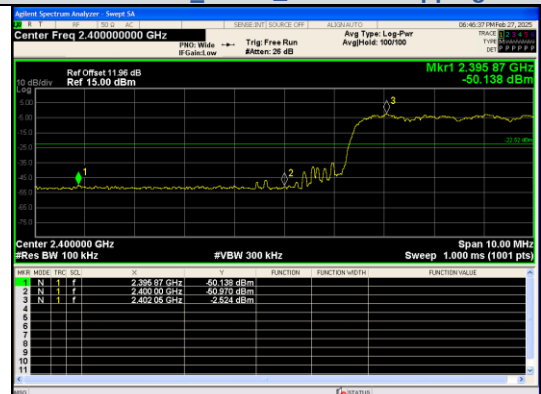Out Of Band Emission(Left)
GFSK_DH5_Channel HoppingOut Of Band Emission(Left)
pi/4DQPSK_2-DH5_Channel HoppingOut Of Band Emission(Right)
GFSK_DH5_Channel HoppingOut Of Band Emission(Right)
pi/4DQPSK_2-DH5_Channel HoppingOut Of Band Emission(Left)
GFSK_DH5_Channel HoppingOut Of Band Emission(Left)
pi/4DQPSK_2-DH5_Channel HoppingOut Of Band Emission(Right)
GFSK_DH5_Channel HoppingOut Of Band Emission(Right)
pi/4DQPSK_2-DH5_Channel Hopping

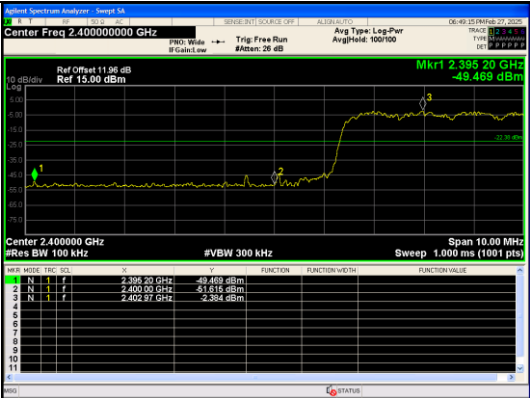


Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

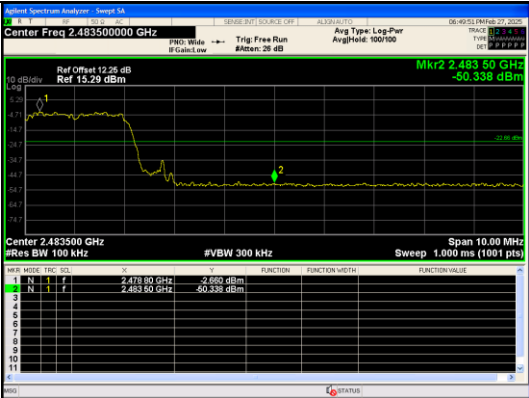


Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping




Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

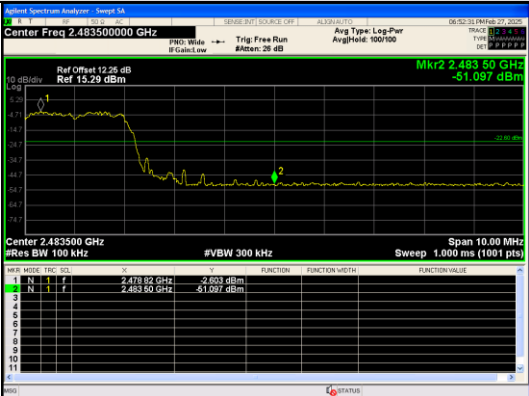

Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping

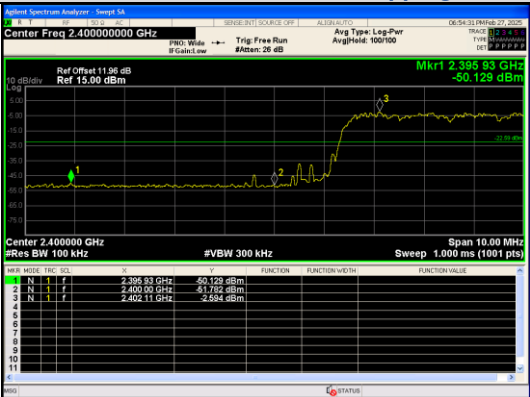

Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

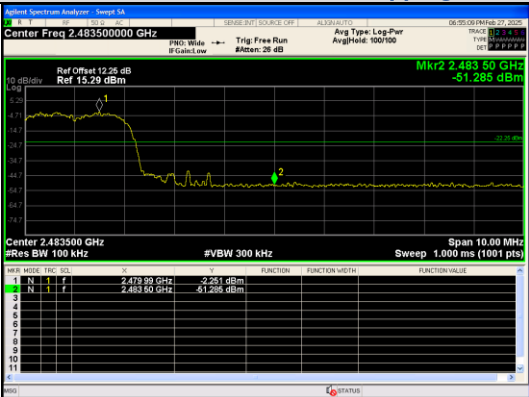


Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping


APPENDIX V. Duty Cycle

Test Result


Modulation	Packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
GFSK	DH5	0	2.928	3.808	76.89	0.7689	1.1413
		39	2.920	3.820	76.44	0.7644	1.1668
		78	2.928	3.826	76.53	0.7653	1.1617
$\pi/4$ DQPSK	2-DH5	0	2.910	3.813	76.32	0.7632	1.1736
		39	2.930	3.793	77.25	0.7725	1.121
		78	2.910	3.773	77.13	0.7713	1.1278
8DPSK	3-DH5	0	2.930	3.793	77.25	0.7725	1.121
		39	2.930	3.793	77.25	0.7725	1.121
		78	2.910	3.813	76.32	0.7632	1.1736

Test Graphs

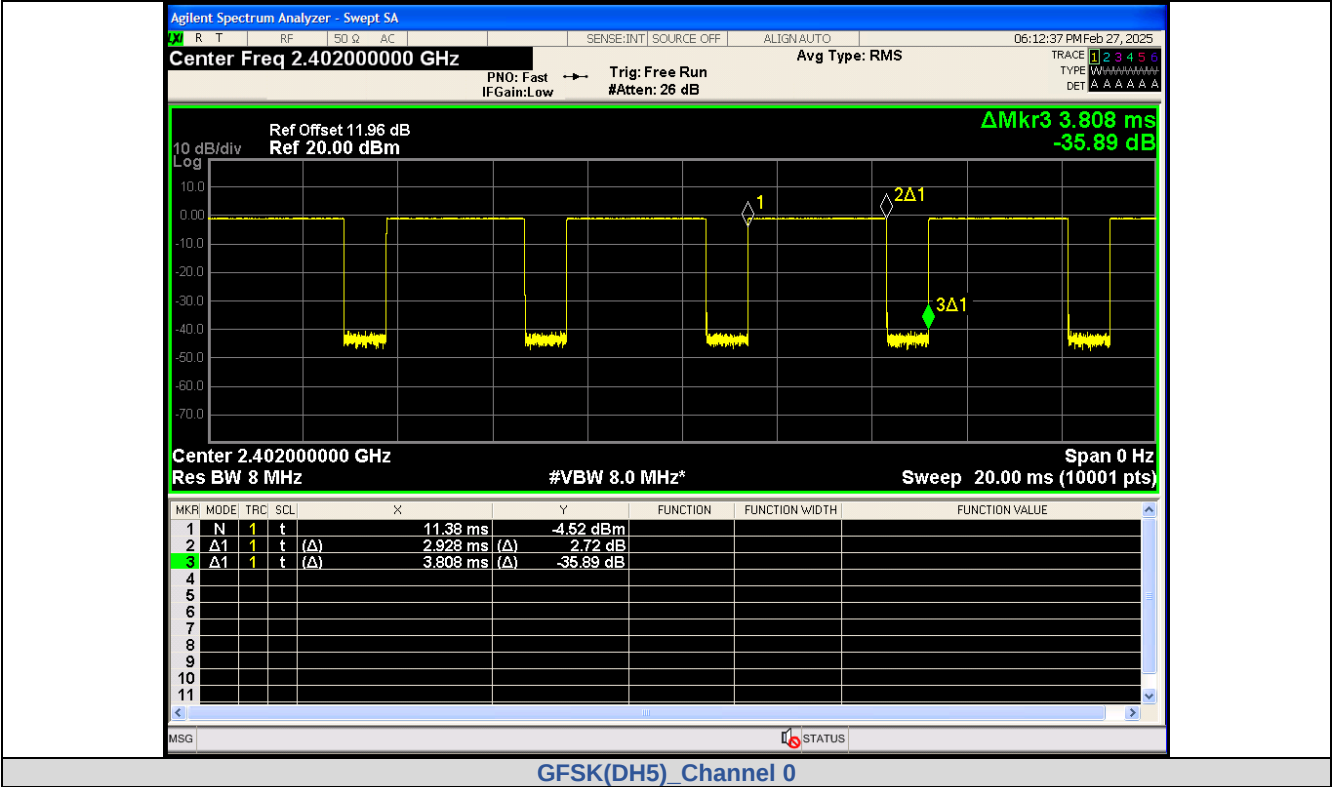


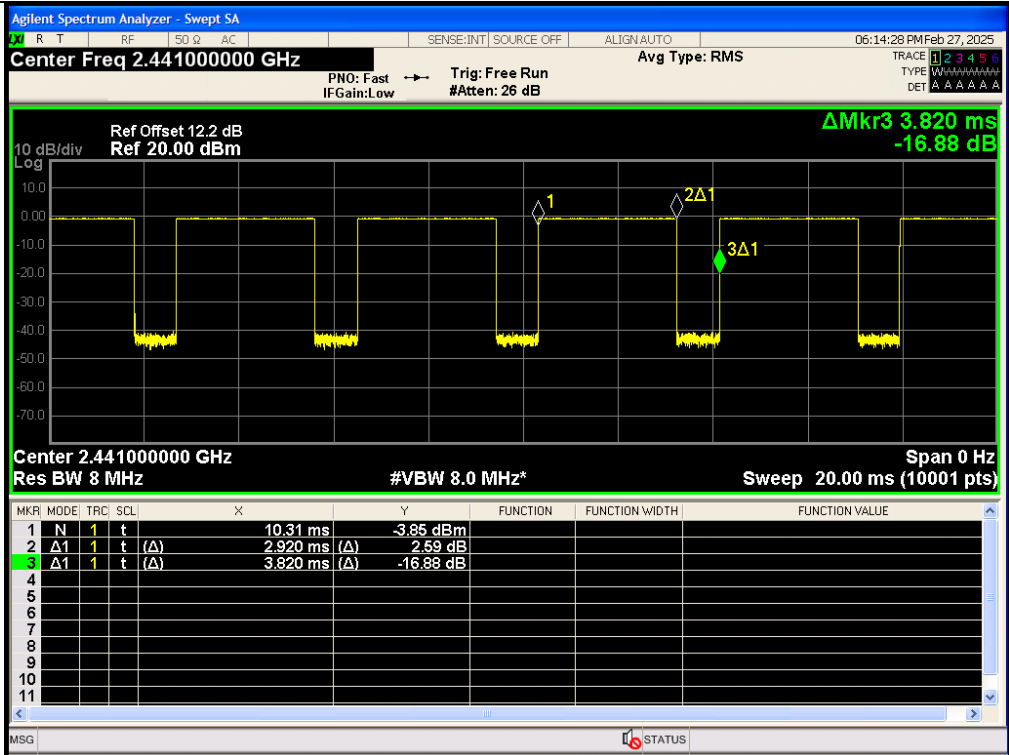


GFSK(DH5)_Channel 39

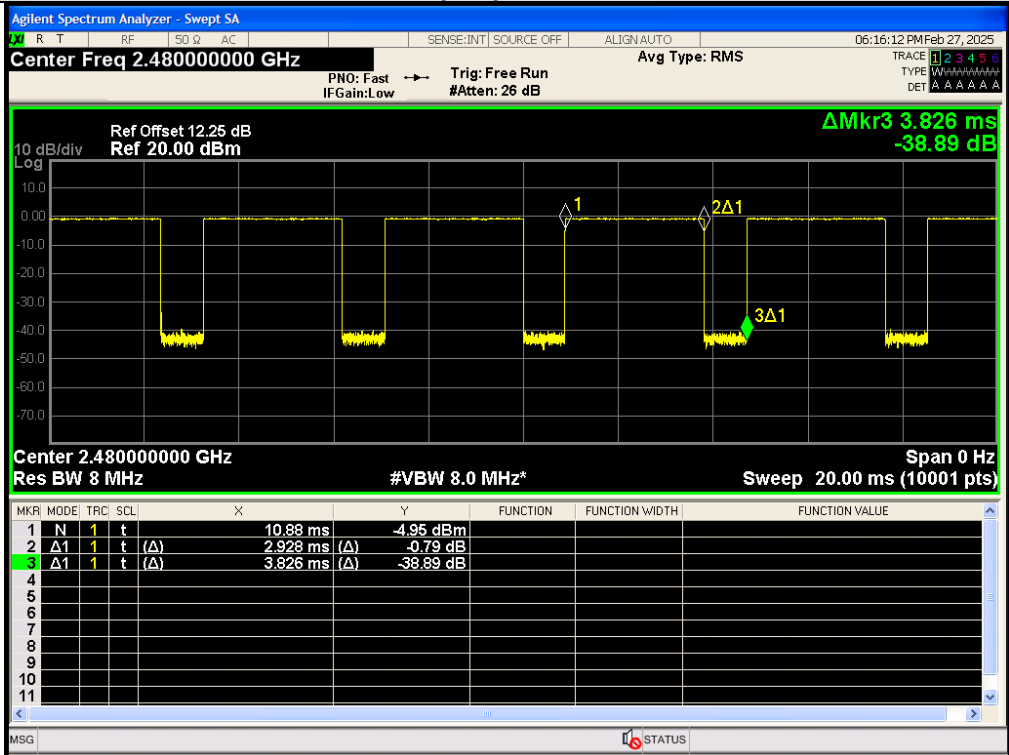


GFSK(DH5)_Channel 78

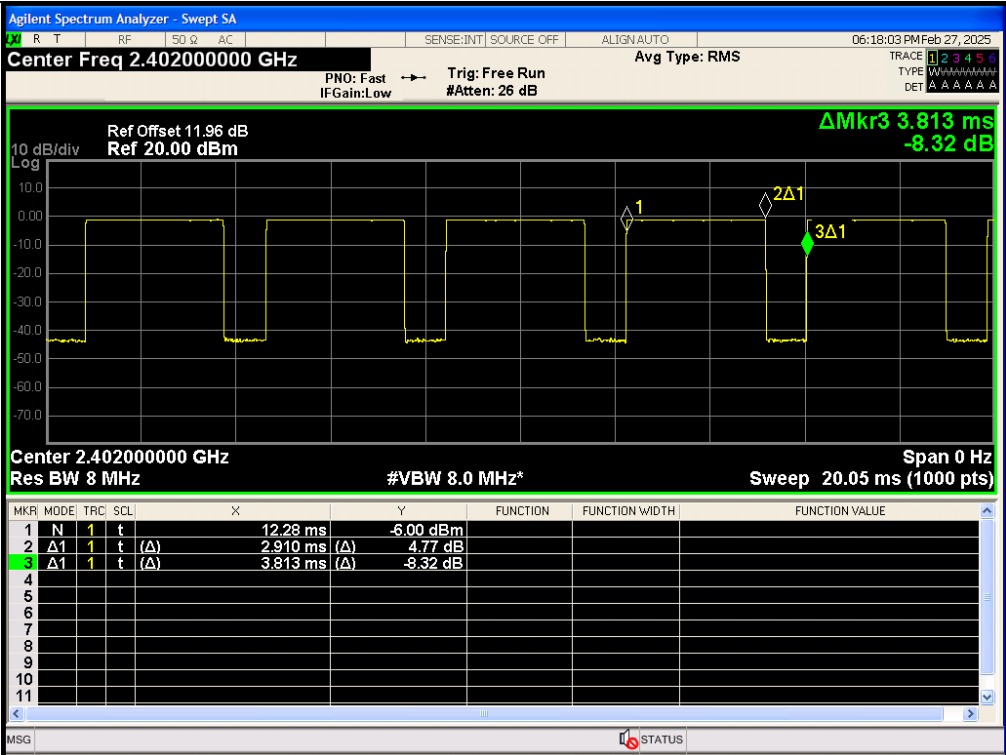


π/4DQPSK(2-DH5)_Channel 0

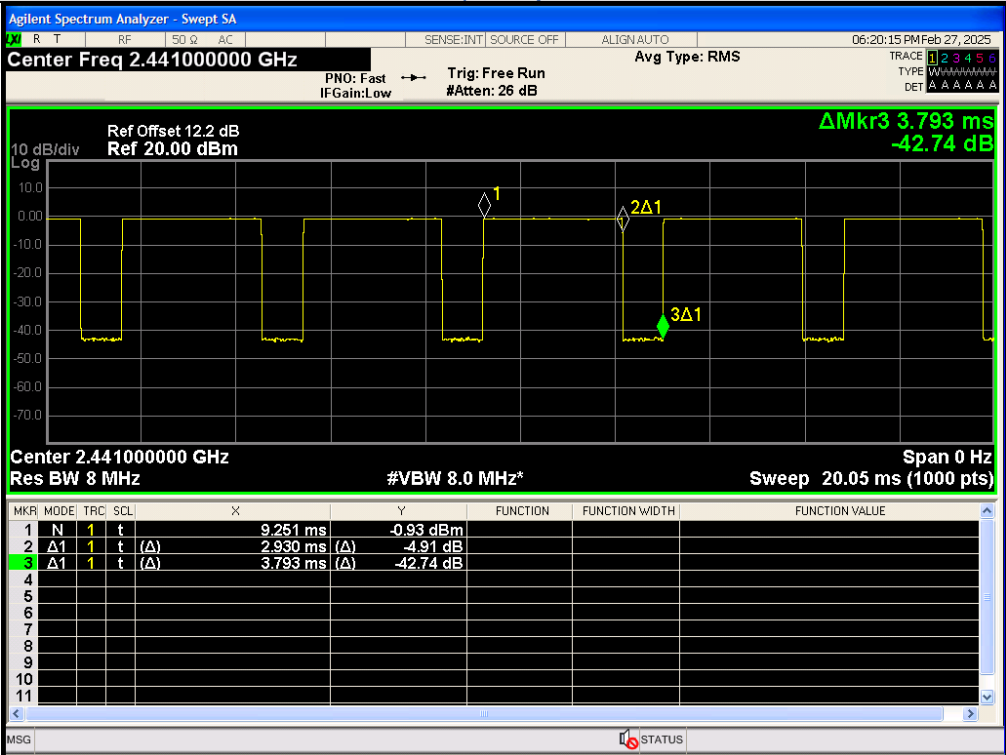


π/4DQPSK(2-DH5)_Channel 39

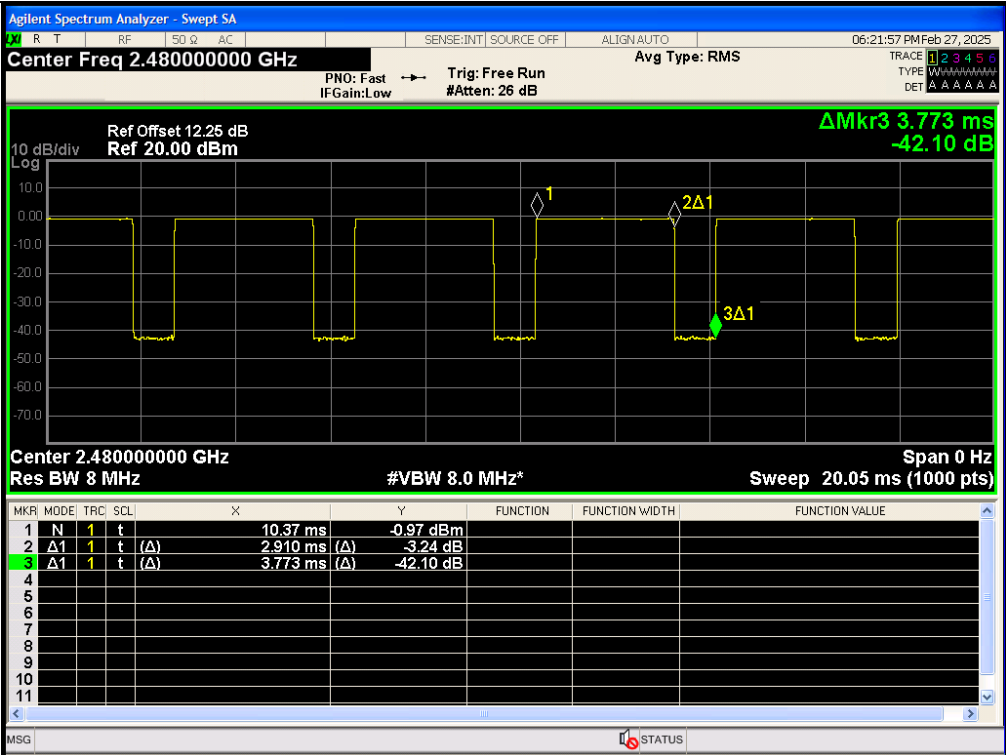


π/4DQPSK(2-DH5)_Channel 78

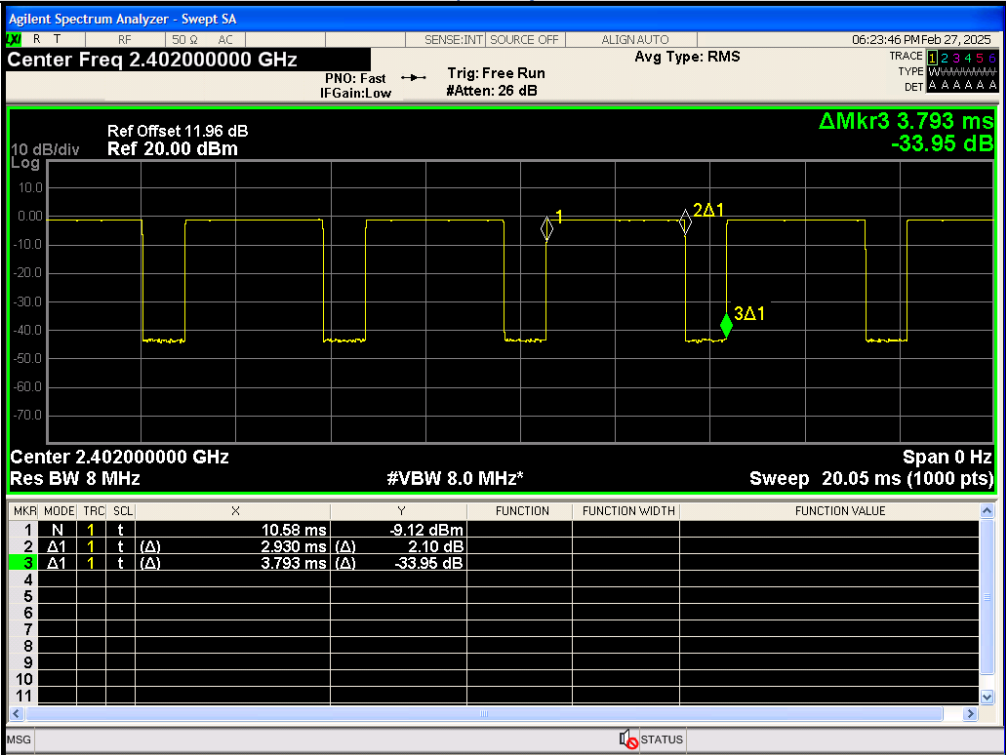

8DPSK(3-DH5)_Channel 0

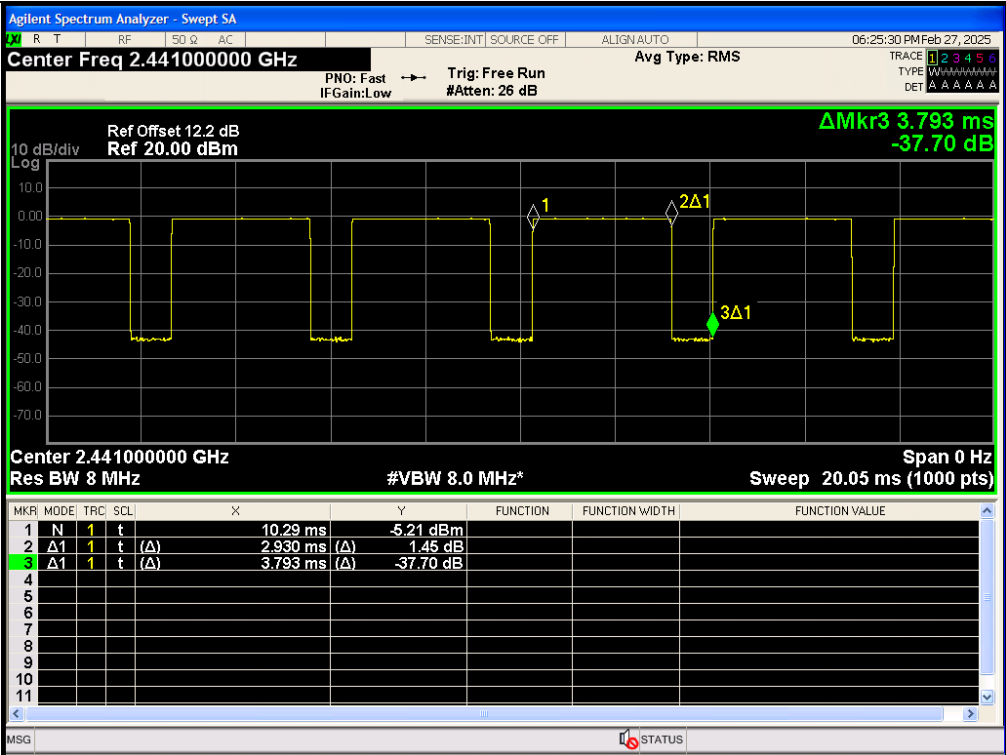

8DPSK(3-DH5)_Channel 39

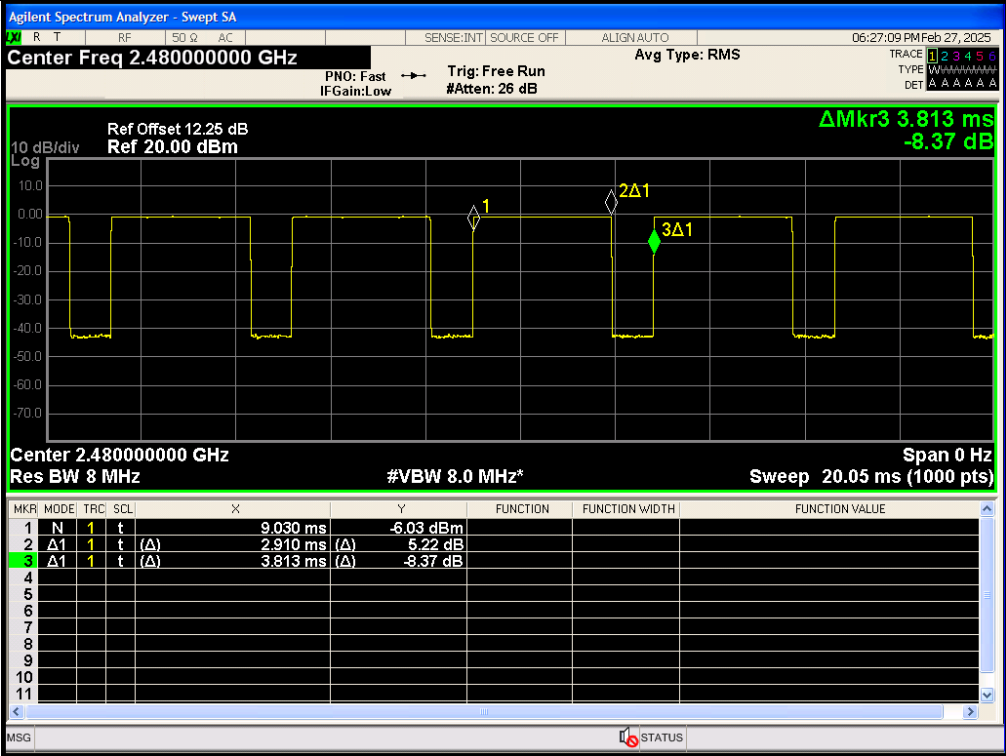



8DPSK(3-DH5)_Channel 78

APPENDIX VI. Dwell Time Test Result


Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	CH39 (2441MHz)	0.3756	310	116.44	< 400	PASS
	DH3		1.656	156	258.34		PASS
	DH5		2.928	104	304.51		PASS
$\pi/4$ DQPSK	2-DH1		0.3672	311	114.2		PASS
	2-DH3		1.680	155	260.4		PASS
	2-DH5		2.912	103	299.94		PASS
8DPSK	3-DH1		0.3744	310	116.06		PASS
	3-DH3		1.656	155	256.68		PASS
	3-DH5		2.928	103	301.58		PASS

Test Graphs

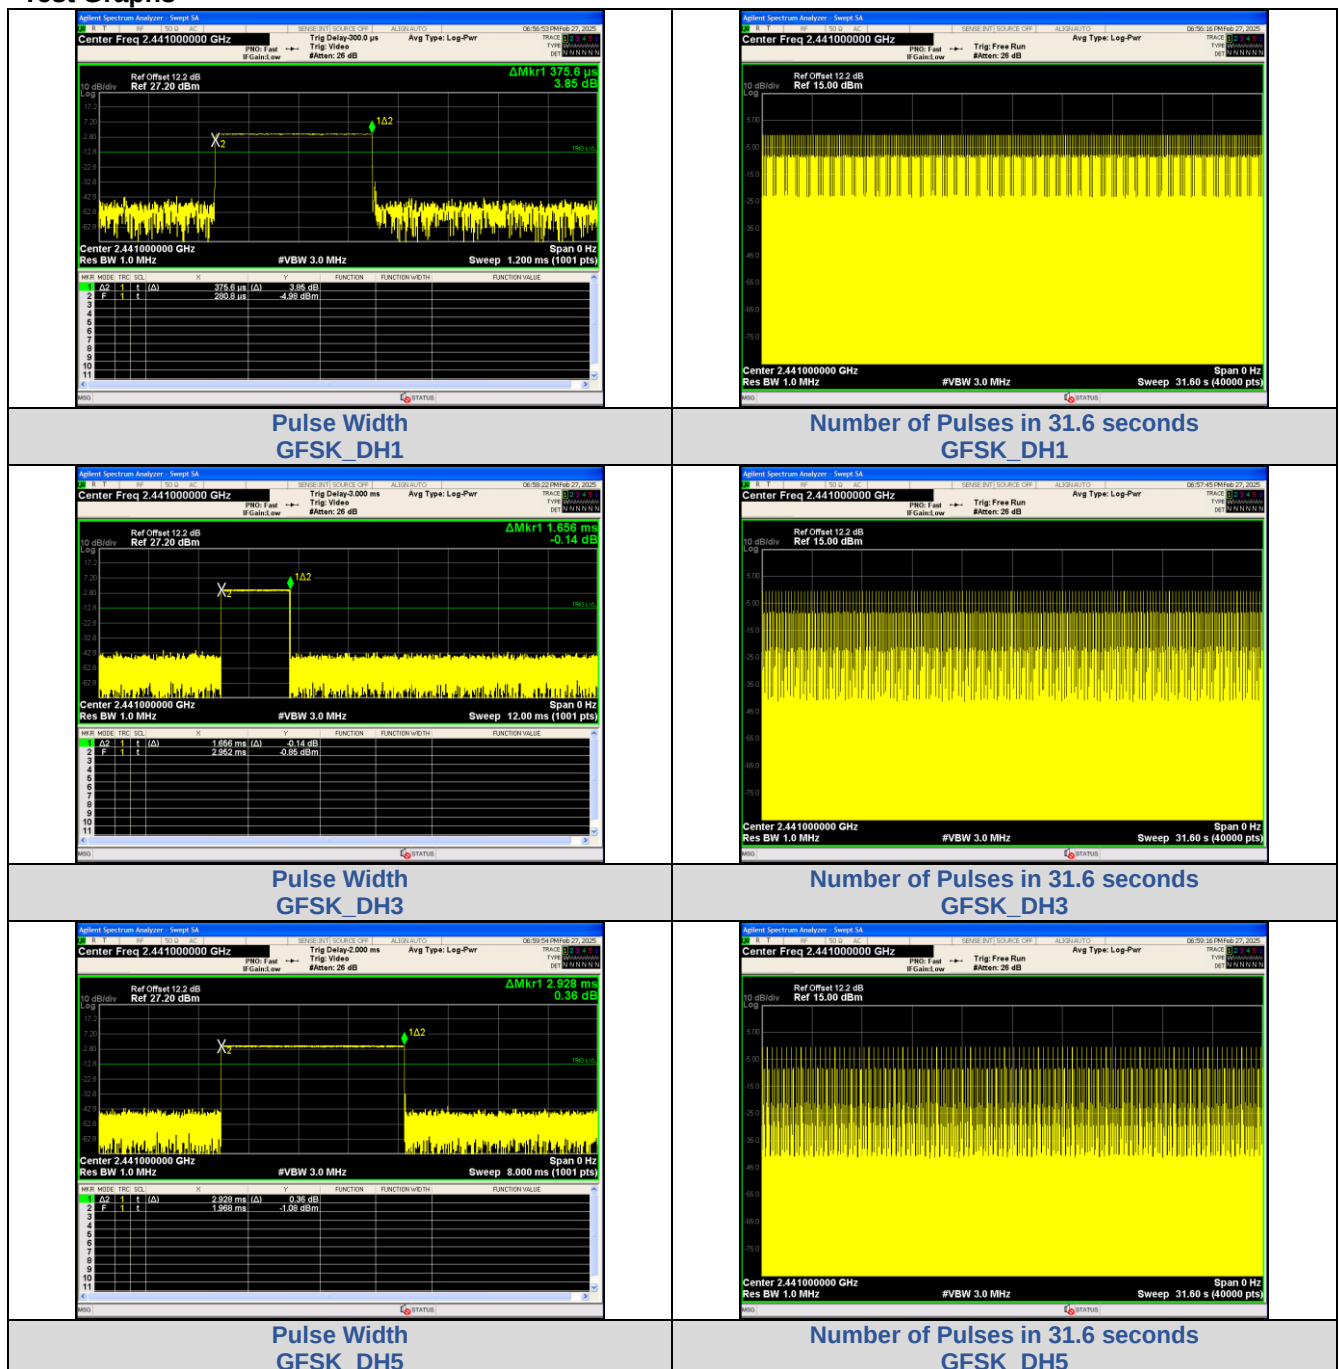


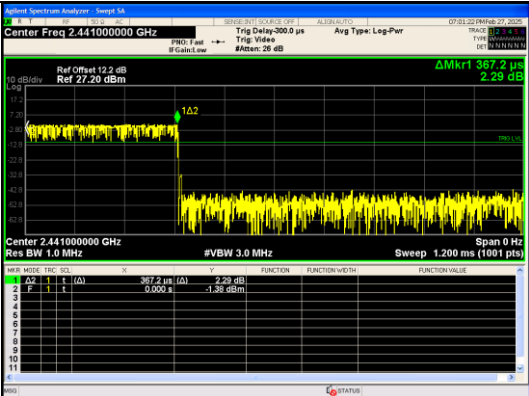


Pulse Width
 $\pi/4$ DQPSK_2-DH1

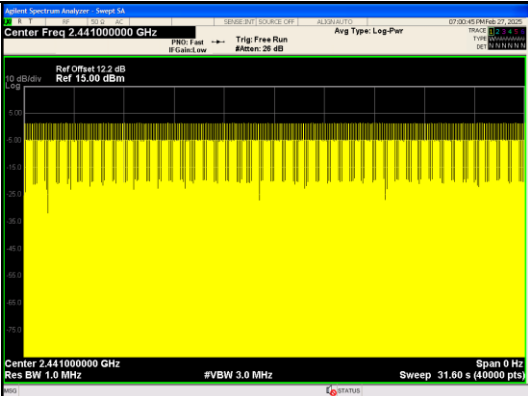


Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK_2-DH1

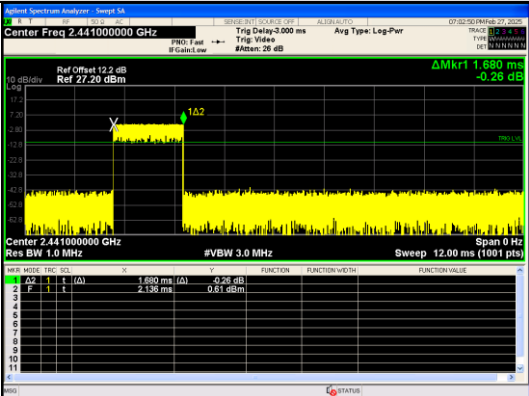


Pulse Width
 $\pi/4$ DQPSK_2-DH3

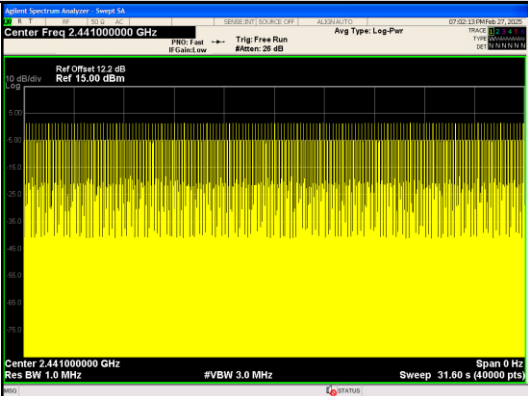


Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK_2-DH3

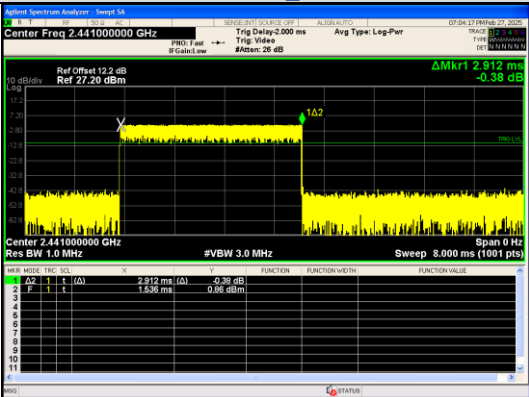


Pulse Width
 $\pi/4$ DQPSK_2-DH5

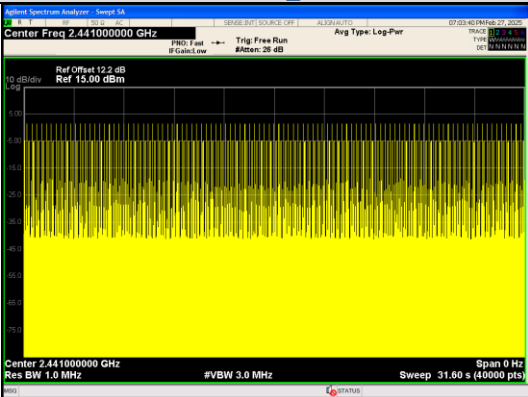

Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK_2-DH5

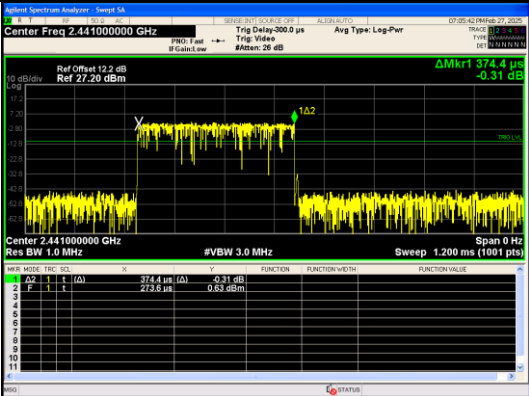

Pulse Width
8DPSK_3-DH1

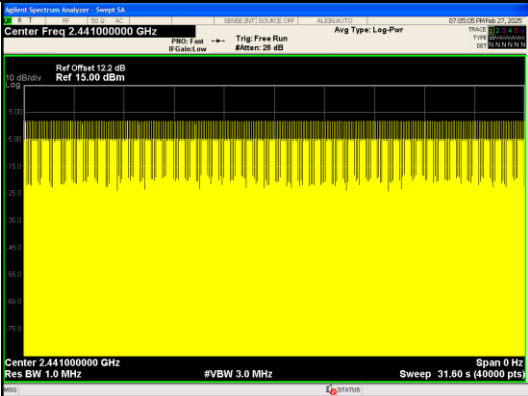


Number of Pulses in 31.6 seconds
8DPSK_3-DH1


APPENDIX VII. Number Of Hopping Channel

Test Result

Modulation	Packet	Number of Hopping Channel	Limit	Result
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS

Test Graphs

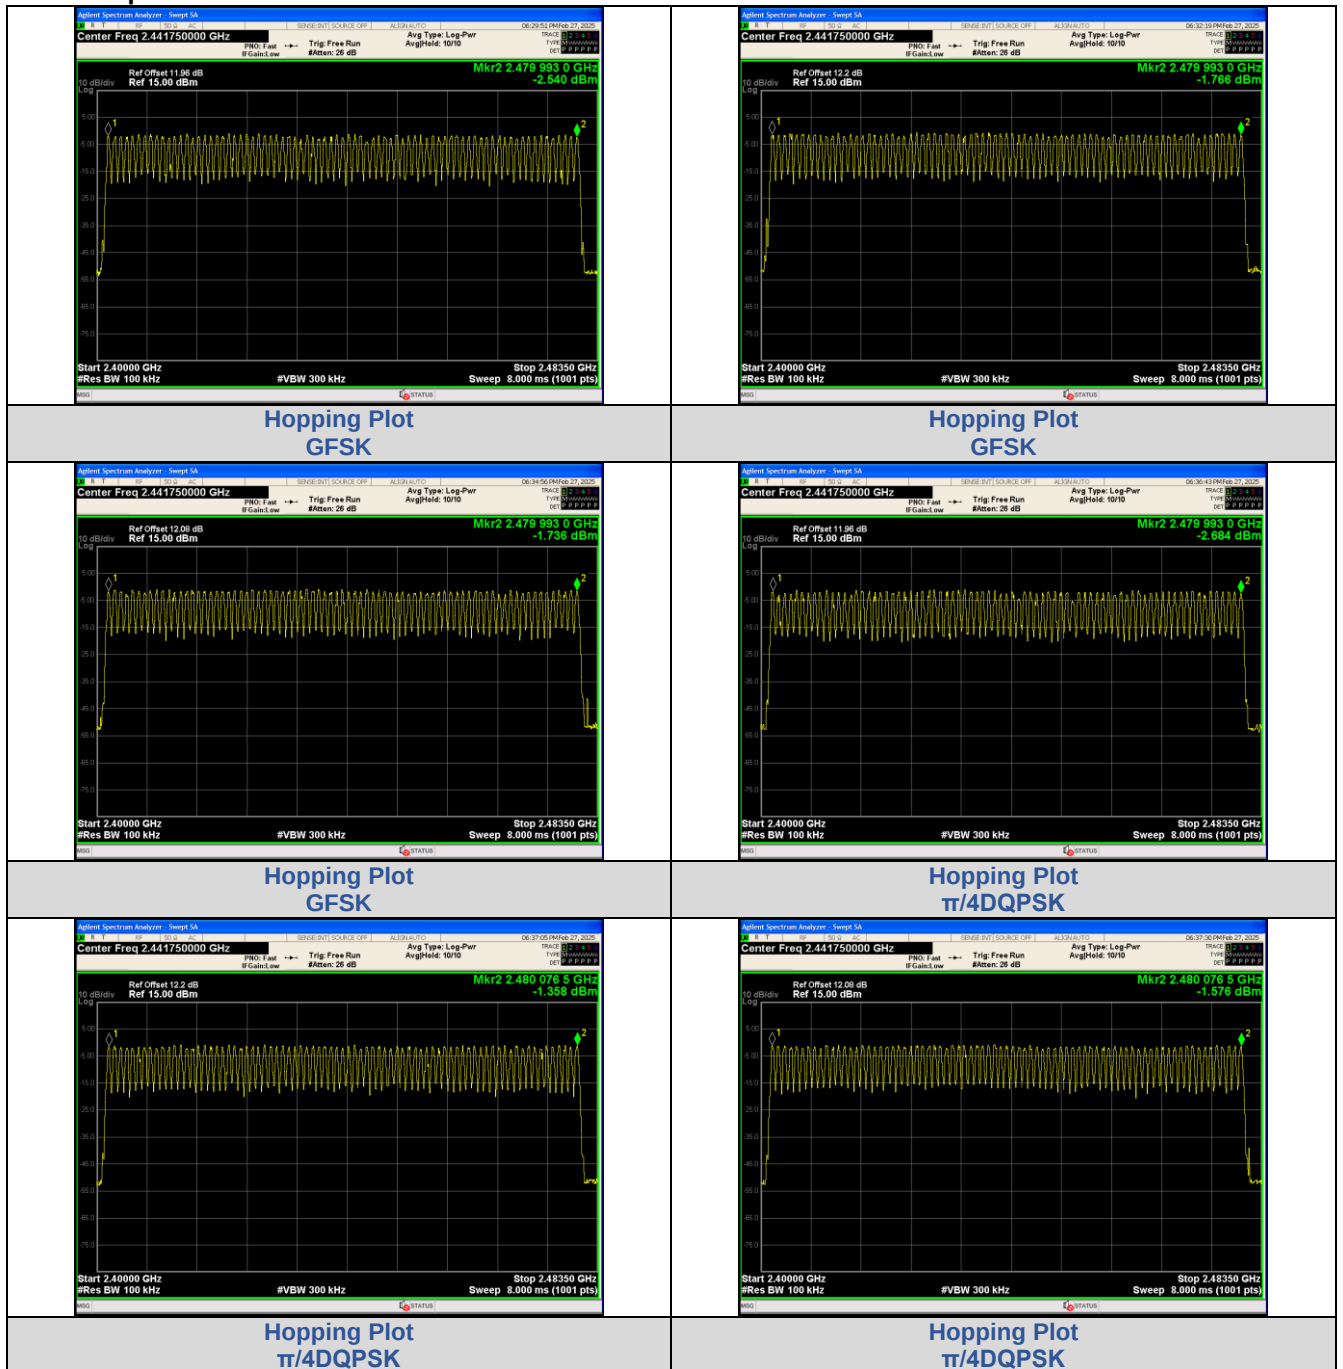

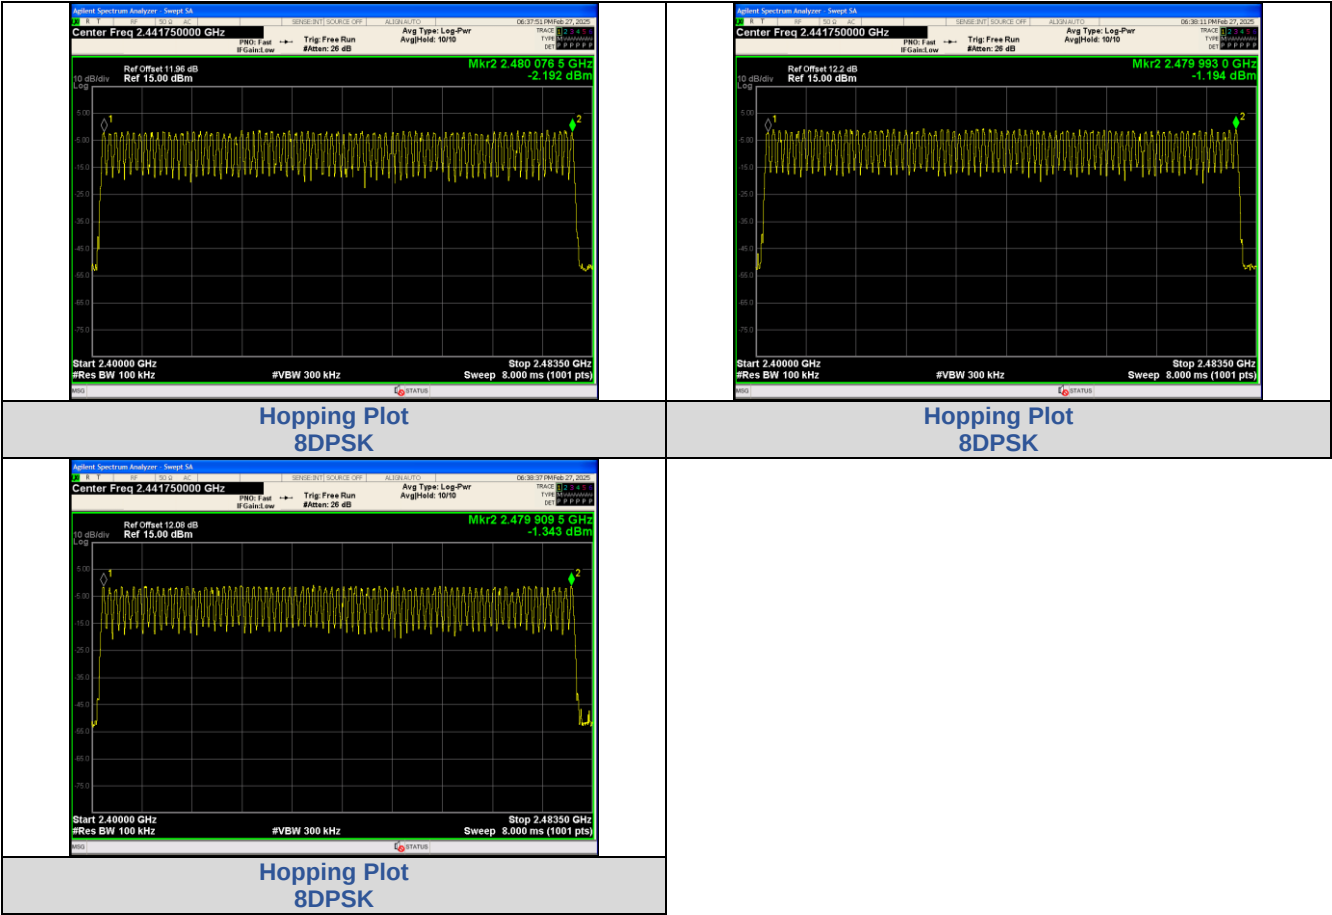

***** End of Report *****