



样 品 承 认 书

Room 501, 5th Floor, Building 1, Taohuayuan Science and Technology Innovation Park, No. 11,
Gaixin North 6th Road, Songpingshan Community, Xili Street, Nanshan District, Shenzhen,
Guangdong, China

Part Approval Sheet

Version: V1.0

Customer:	Shenzhen Haikangsheng Intelligent Co., Ltd
Project:	Bluetooth antenna
Part Name:	Conducting wire
Part Color:	Black
Part Number:	
Sample Delivery Date:	April 3, 2021
Sample Quantity:	5PCS
Sample type:	Built-in Bluetooth wire
Reason for Sample Delivery:	☐ New tooling ☐ New supplier ☐ Tooling change ☐ Engineering change ☐ Other:
Remark:	

Supplier sample production confirmation: (stamp required)

Formulate	Confirm	Approve	Quality	Stamp
代庆蓉	龙超群	傅梁成	曹光平	

Customer approval:

Project confirmation	Project approval	Quality confirmation	Quality approval	Confirmation date



1.Graphic for reference



Figure 2 0.8*20mmBT

Name	ANTENNA
Model	LT13
Frequency	2.4Ghz
Input impedance	50Ω
Allowed power	5mW
Working temp.	-25 ~ +65 °C
Storage temp.	-40 ~ +85 °C
Weight	0.25g
Antenna gain天线增益	-1dBi


2.OTA(Free Space)

Channel	TRP (dBm)	TIS (dBm)
0	6.3	-91.1
39	6.5	-91.3
78	6.6	-91.2




3.Field


Bluetooth 0 TRP

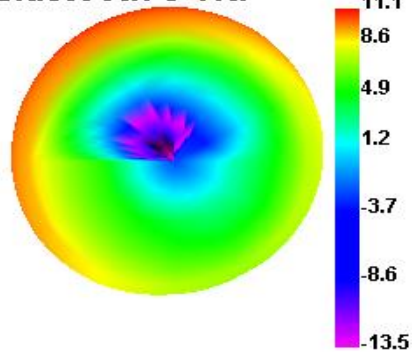


Bluetooth 0 TRP H

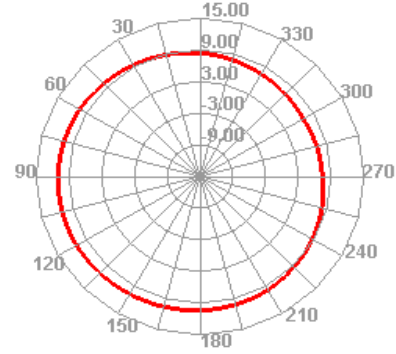


Bluetooth 39 TRP

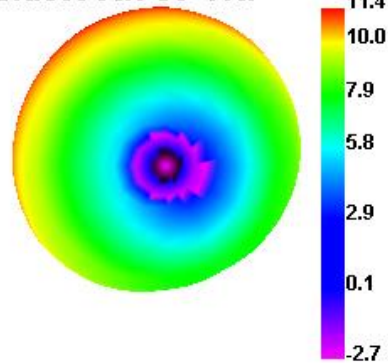


Bluetooth 39 TRP H

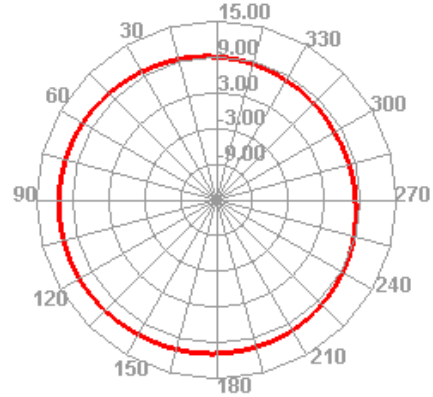

Bluetooth 78 TRP

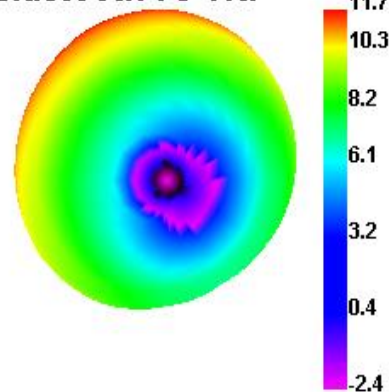

Bluetooth 78 TRP H

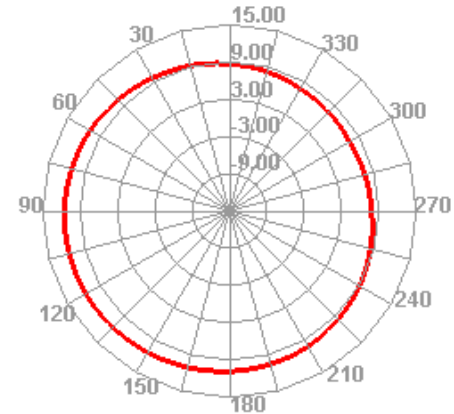

4. BT Test

Test term	Environment	Max pairing distance	BT Call distance	
BT	Office	16-18m	10-12m	



5. Blueprint

