Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Model Name	IBM 2.4 GHz	
Center Frequency	2402 MHz 2441 MHz 2480 MHz	2.34 dBi 2.07dBi 1.45 dBi
MAX. GAIN	2.34 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Type	PCB Antenna	

Antenna Photo & Length (mm)

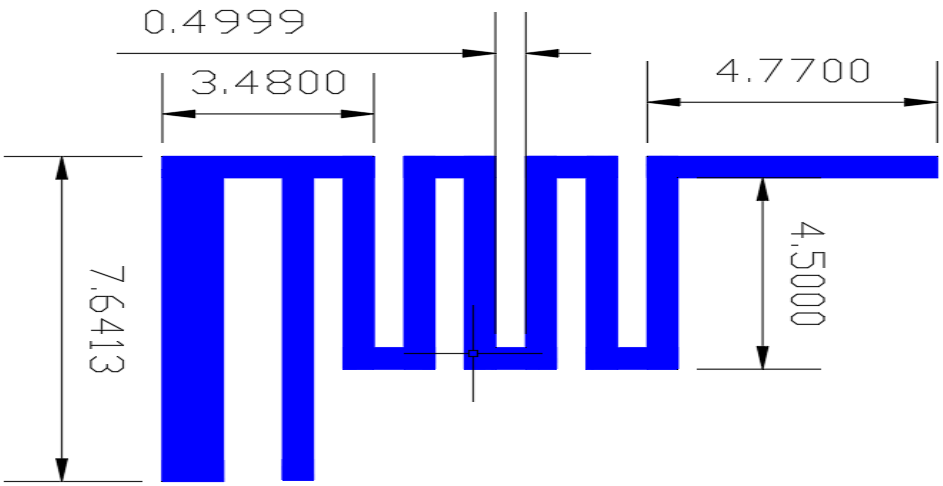

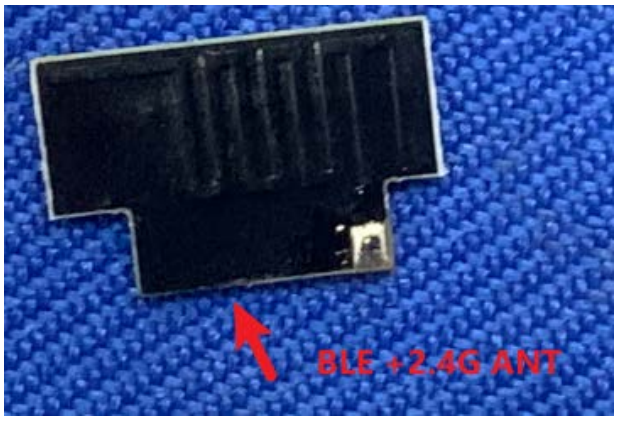

Test Address	**16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan**
Test Date	**2012-03-19**
Test Instrument	**vector network analyzer - R&S ZVB20**

Manufacturer: Shenzhen Beike Micro Technology Co., LTD
Address: Floor 205, Building A, Getailong Industrial Park Complex Building, 227 Bulong Road, Ma 'an Tang Community, Bantian Street, Longgang District, Shenzhen

1. Main antenna : 2402 MHz

1.1 Horizontal

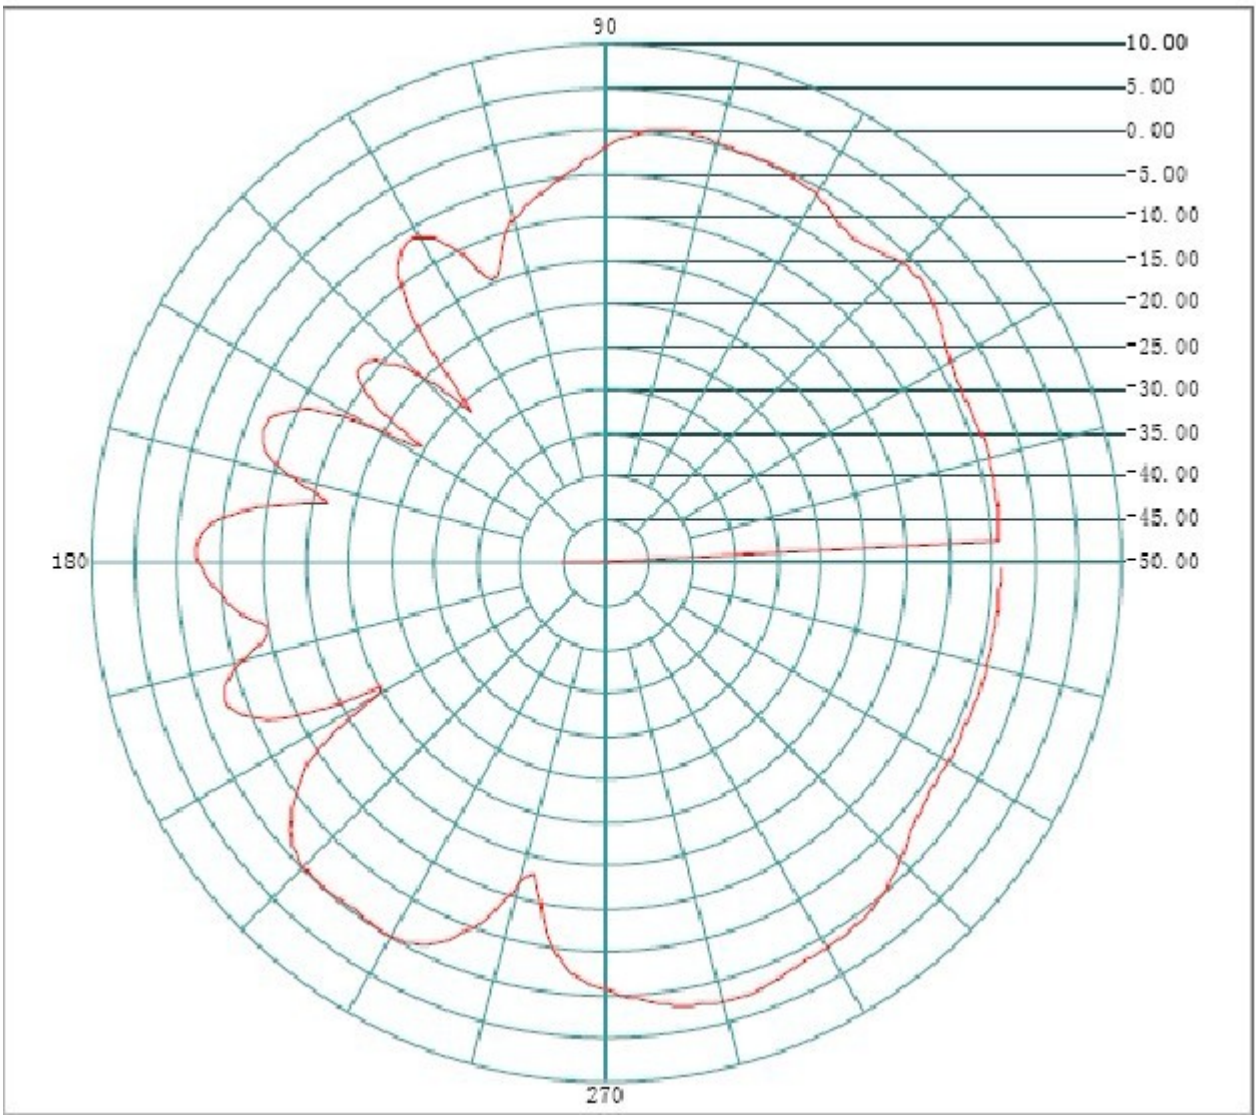

Frequency(MHZ): **2402** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **2.34**

Average Gain(dBi) : **-2.48**

Minimum Gain(dBi): **-55.18**

1.2 Vertical

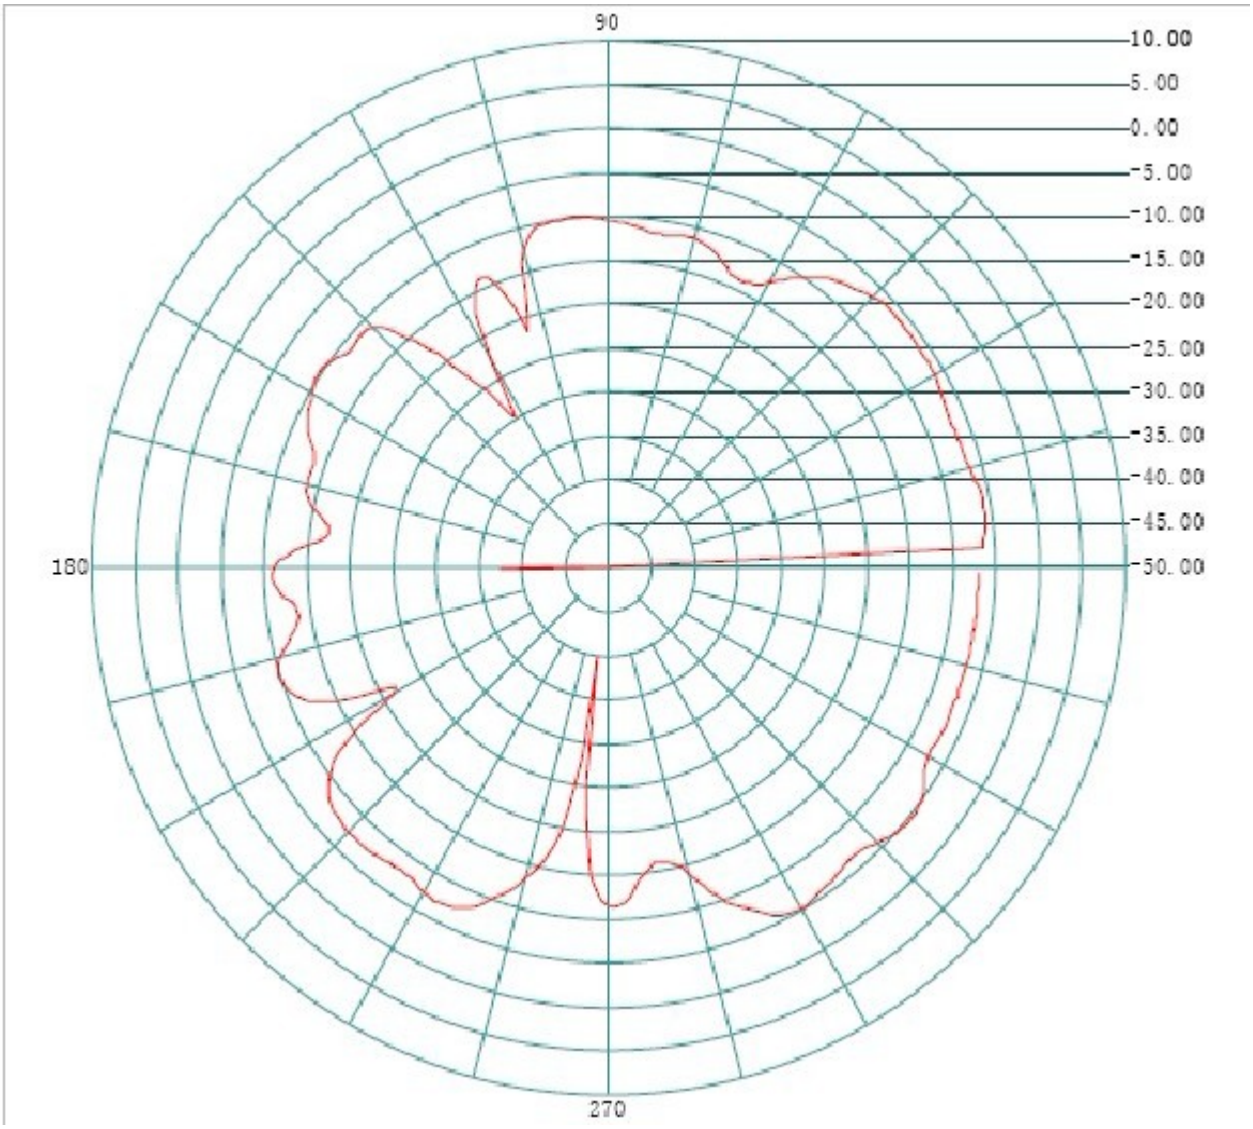

Frequency(MHZ): **2402** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**

2. Main antenna : 2441 MHz

2.1 Horizontal

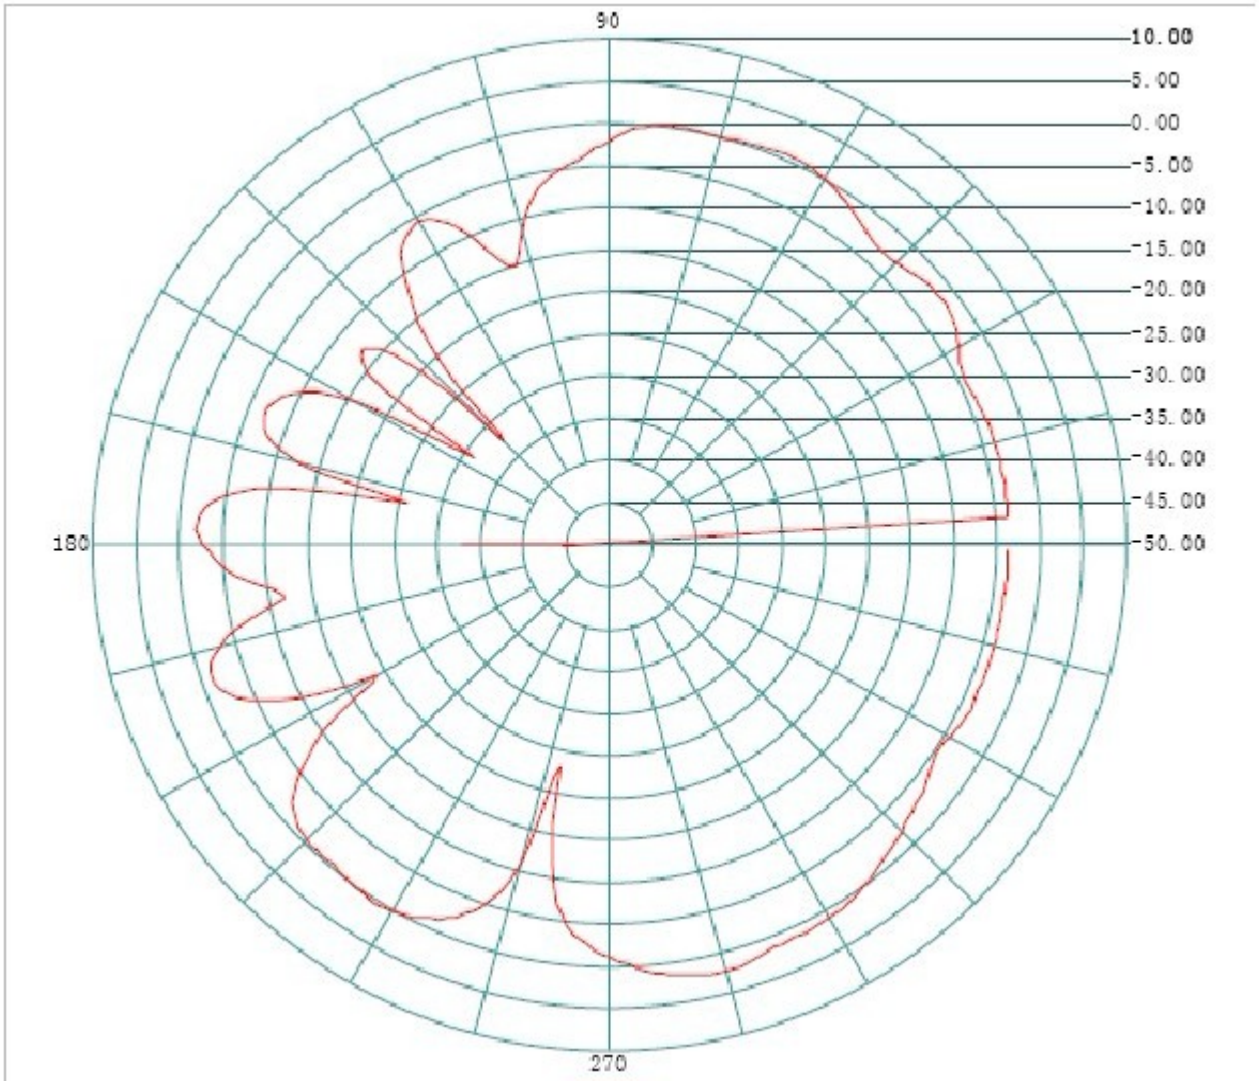

Frequency(MHZ): **2441** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): 2.07

Average Gain(dBi) : **-2.54**

Minimum Gain(dBi): **-66.98**

2.2 Vertical

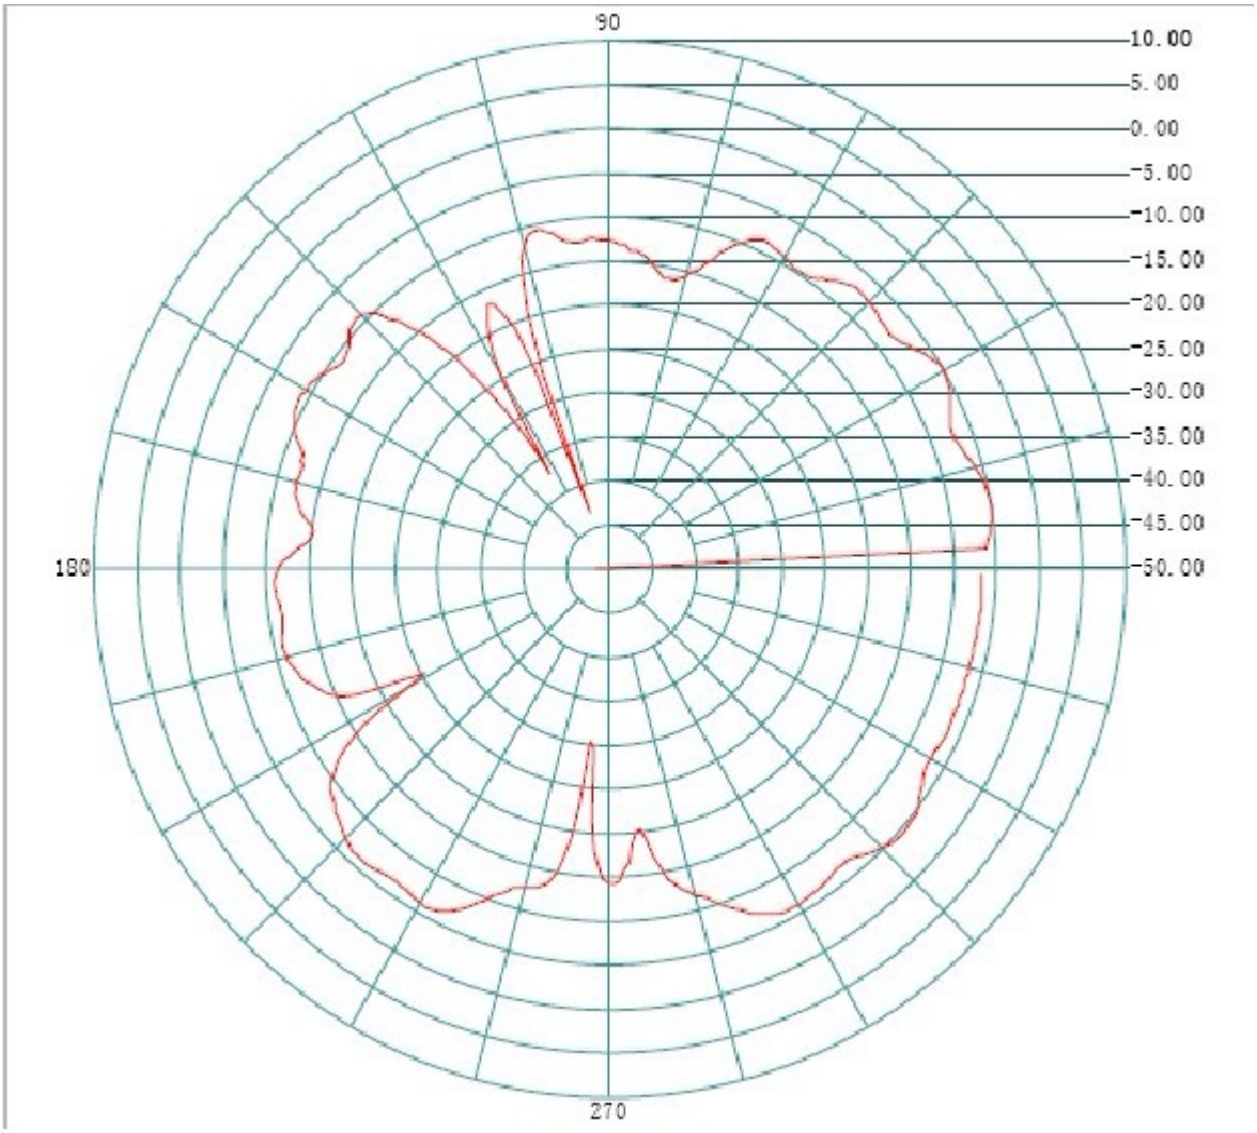

Frequency(MHZ): **2441** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.29**

Average Gain(dBi) : **-8.81**

Minimum Gain(dBi): **-51.4**

2. Main antenna : 2480 MHz

2.1 Horizontal

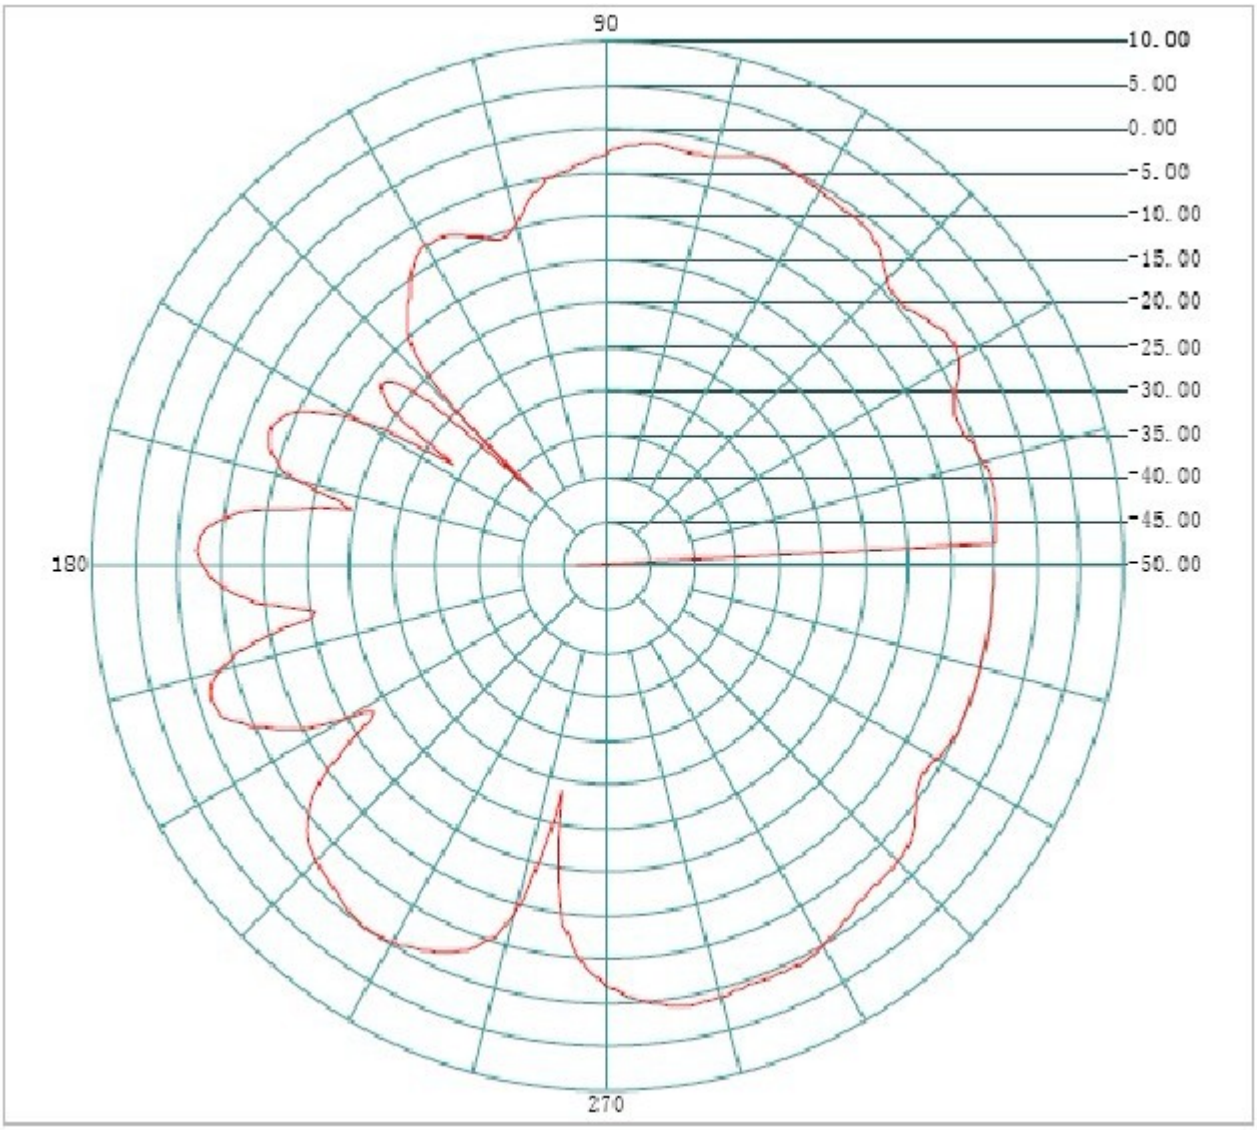

Frequency(MHZ): **2480** Antenna Polarity: **Horizontal**

Maximum Gain(dBi): **1.45**

Average Gain(dBi) : **-3.34**

Minimum Gain(dBi): **-53.4**

2.2 Vertical

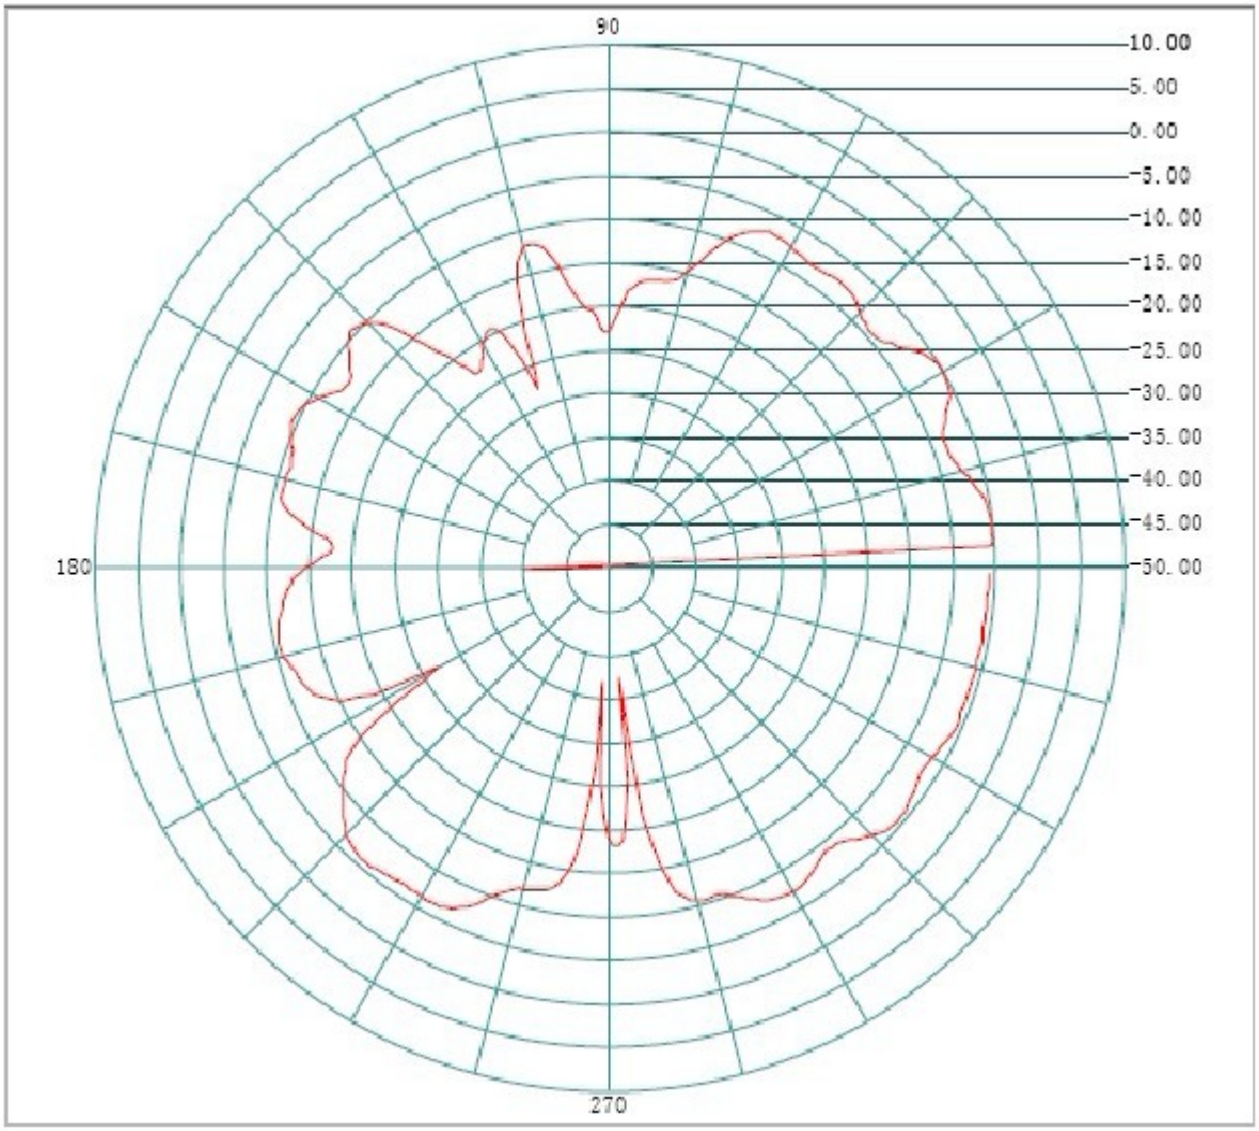

Frequency(MHZ): **2480** Antenna Polarity: **Vertical**

Maximum Gain(dBi): **-4.95**

Average Gain(dBi) : **-9.06**

Minimum Gain(dBi): **-60.00**