

产品规格书
PRODUCT SPECIFICATION

客 户:	Zhongli Guanda
CUSTOMER:	
客户料号:	A1-0486
CUST P/N:	
德弗力料号:	ZLGD-Y20.5*39.5-10-FR
K C P/N:	
产品型号:	20.5*39.5*10*0.08mm*80P*11TS
D E S E :	
日 期:	2025.05.20
D A T E :	
版 本:	A.0
VERSION :	

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
XiaoXian Zeng			Zhihui Qiu

版 本 变 更 履 历 Version Change History	客户料号: CUST P/N	A1-0486
	德弗力料号: DFL P/N	ZLGD-Y20. 5*39. 5-10-FR

版本 Rev.	变更前 Before Change	变更后内容 DESCRIPTION(Content Or Reason ForChanged)	日期 Date	修订者 Revisor
A. 0	--	新发行 (Initial Release)	2025/03/01	XiaoXian Zeng

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY

规格内容
Specification


客户料号:
CUST P/N

A1-0486

德弗力料号:
DFL P/N

ZLGD-Y20.5*39.5-10-FR

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

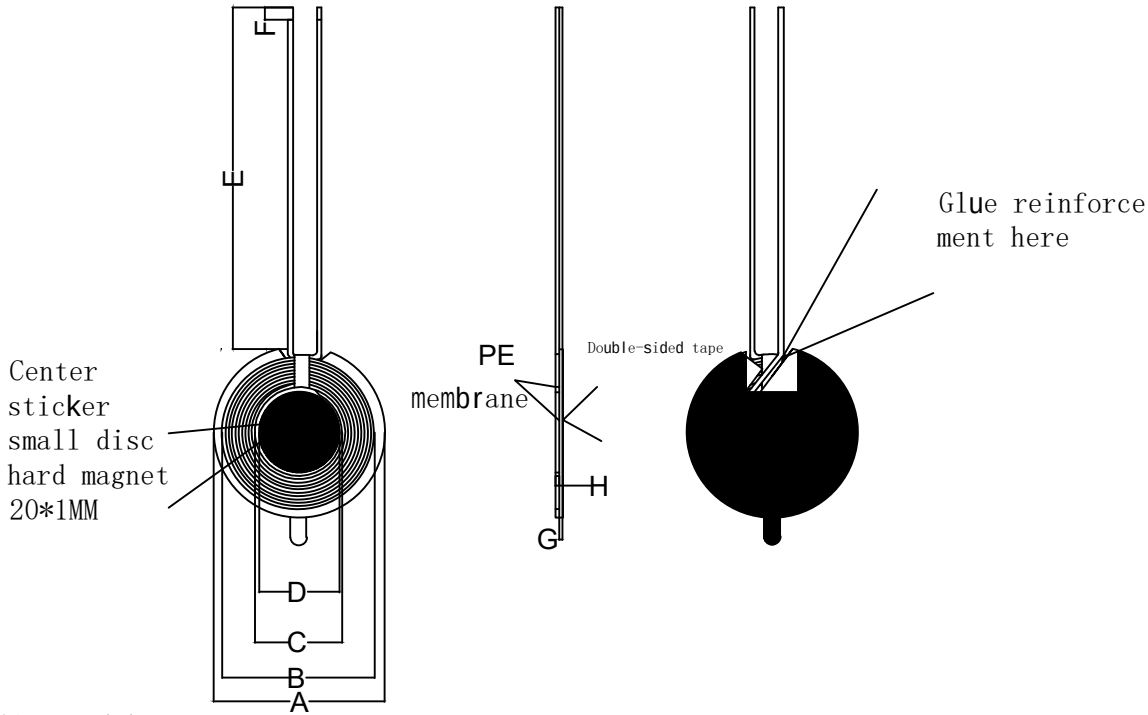

2. 单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H	I1/I2
42.5±0.5	39.5±1.0	20.5±0.5	20±0.5	10±2.0	3±2	0.8±0.2	1±0.2	
J	K	L	M	N1/N2	O	P		

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY

规格内容
Specification

客户料号:
CUST P/N

A1-0486

德弗力料号:
DFL P/N

ZLGD-Y20.5*39.5-10-FR

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08MM*80P热风线 (Silk-Covered Wire)	密绕 (Close)	逆时针 (Anticlockwise)	相交 (Yes)	反贴 (Anti/-Paste)

所有材料要求合格 ROHS 标准/All materials must comply with ROHS standards

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	inductance: 7.9uH±0.3	100kHz/V	SHDA 1062
2	DCR	S-F	resistance value:	100kHz/V	SHDA 1062
3	Q 值	S-F	Q 值: 85	100kHz/V	SHDA 1062

拟制
PREPARED BY

工程审核
ENGINEER CHECKED BY

地址:东莞市石碣镇新风西路107号Tel: 86-076986016320

Fax: 86-076986372427

Address : 107 Xinfeng West Road, Shijie Town, Dongguan City

Http://www.hartai.com

东莞市德弗力五金电子材料有限公司
Dongguan city DFL Electronic Technology Co.,LTD

规 格 内 容 Specification	客户料号: CUST P/N	A1-0486
	德弗力料号: DFL P/N	ZLGD-Y20.5*39.5-10-FR

3. 材料清单 (BILL OF MATERIAIS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	wire	0.08MM * 80P hot air line	/	RS
2	disk	42.5 * 0.8MM perforated alien slot hard magnetic plate+20 * 1 hard magnetic plate	/	ZH
3	black film	Outer diameter 42, no holes or ears	/	/
4	Double-sided tape	Outer diameter 42, with no holes and ears	/	/
5	tin bar	Environmentally friendly lead-free solder bars	Lead free high- temperature tin strip	YX
6	Golden finger adhesive tape	5MM wide	/	
7	glue	Environmentally friendly universal adhesive	/	/
8	casing	/		

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY

地址:东莞市石碣镇新风西路107号 Tel: 86-076986016320 Fax: 86-076986372427
Address : 107 Xinfeng West Road, Shijie Town, Dongguan City
Http://www.hartai.com