Antenna Specification

Part No.:PCB-2.4GBK

Specifications

Summary

ITEM	SPEC.	
Antenna Type	PCB Antenna	
Center Frequency	2400 MHz 2441 MHz 2500 MHz	2.34 dBi 2.07dBi 1.45 dBi
MAX. GAIN	2.34 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	3.1cm	

Antenna Photo & Length (mm)

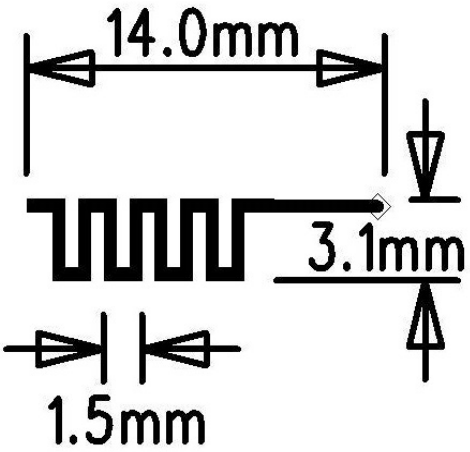

Test Address	**16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan**
Test Date	**2018-04-14**
Test Instrument	**vector network analyzer - R&S ZVB20**

Manufactuer:Asian Creation Communication CO.,LTD

1. Main antenna : 2400 MHz

1.1 Horizontal

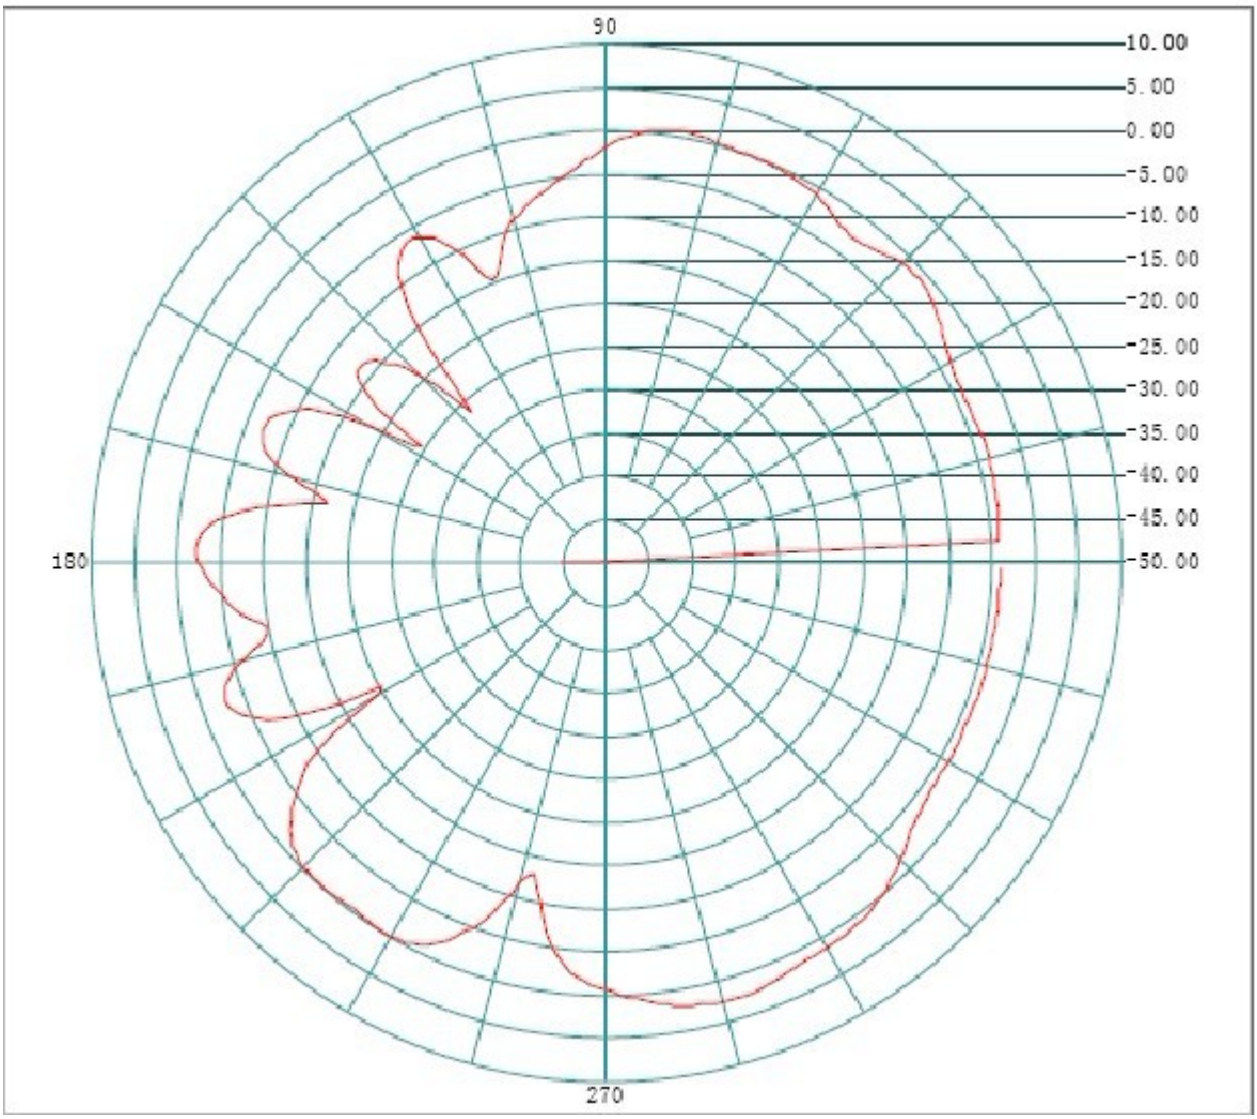

Frequency(MHZ): **2400** Antenna Polarity: **Horizontal**

Maximum Value(dBi): **2. 34**

Average Gain(dBi) : **-2.48**

Minimum Gain(dBi): **-55.18**

1.2 Vertical

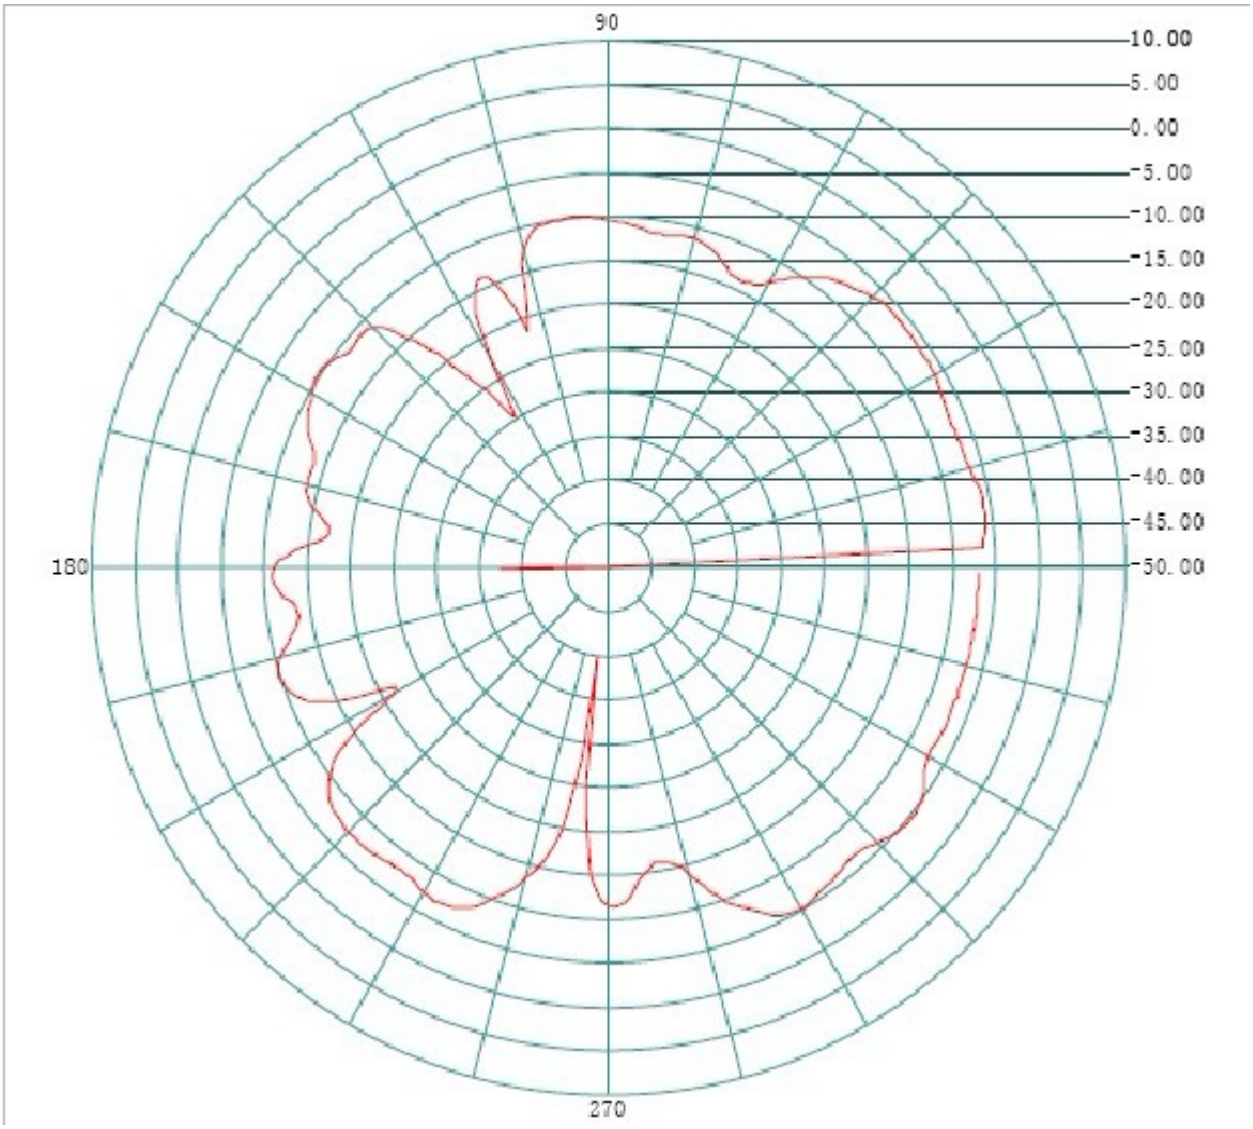

Frequency(MHZ): **2400** Antenna Polarity: **Vertical**

Maximum Value(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**

2. Main antenna : 2441 MHz

2.1 Horizontal

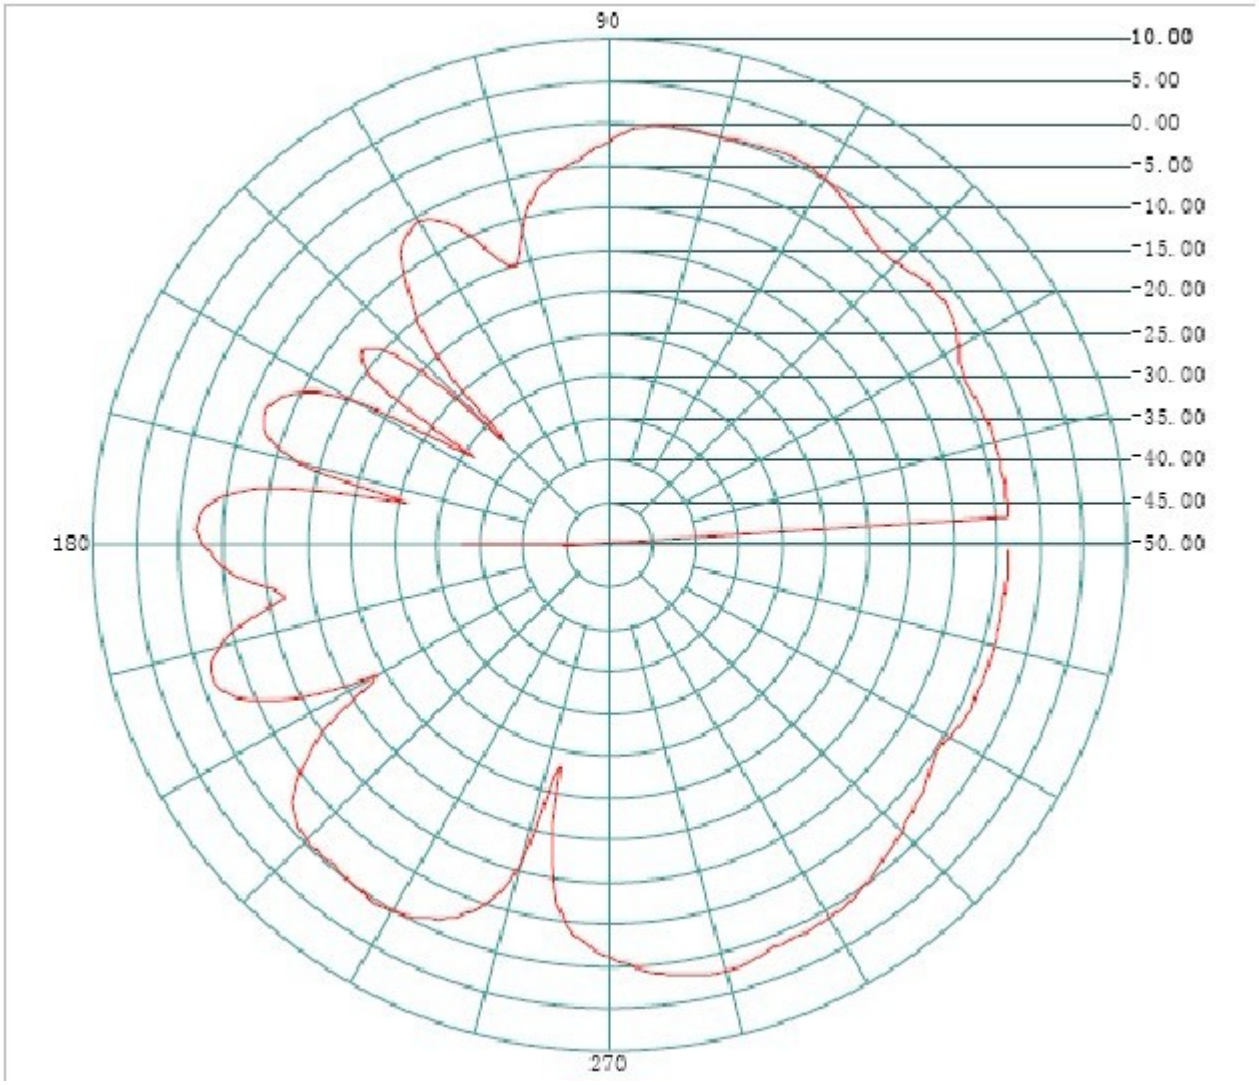

Frequency(MHZ): **2441** Antenna Polarity: **Horizontal**

Maximum Value(dBi): 2.07

Average Gain(dBi) : **-2.54**

Minimum Gain(dBi): **-66.98**

2.2 Vertical

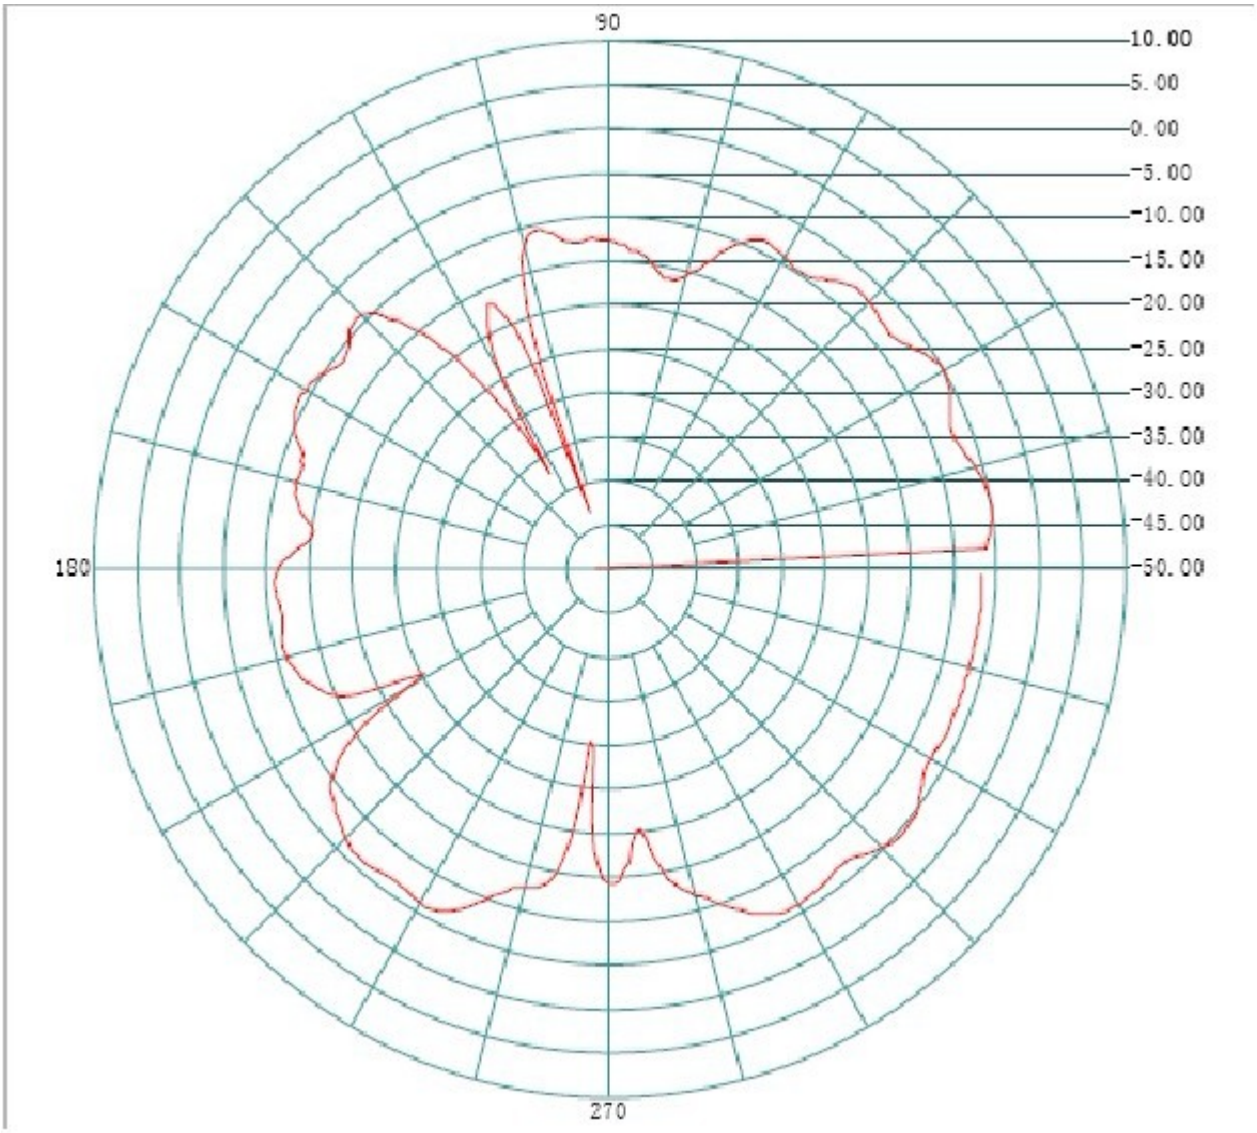

Frequency(MHZ): **2441** Antenna Polarity: **Vertical**

Maximum Value(dBi): **-4.29**

Average Gain(dBi) : **-8.81**

Minimum Gain(dBi): **-51.4**

2. Main antenna : 2500 MHz

2.1 Horizontal

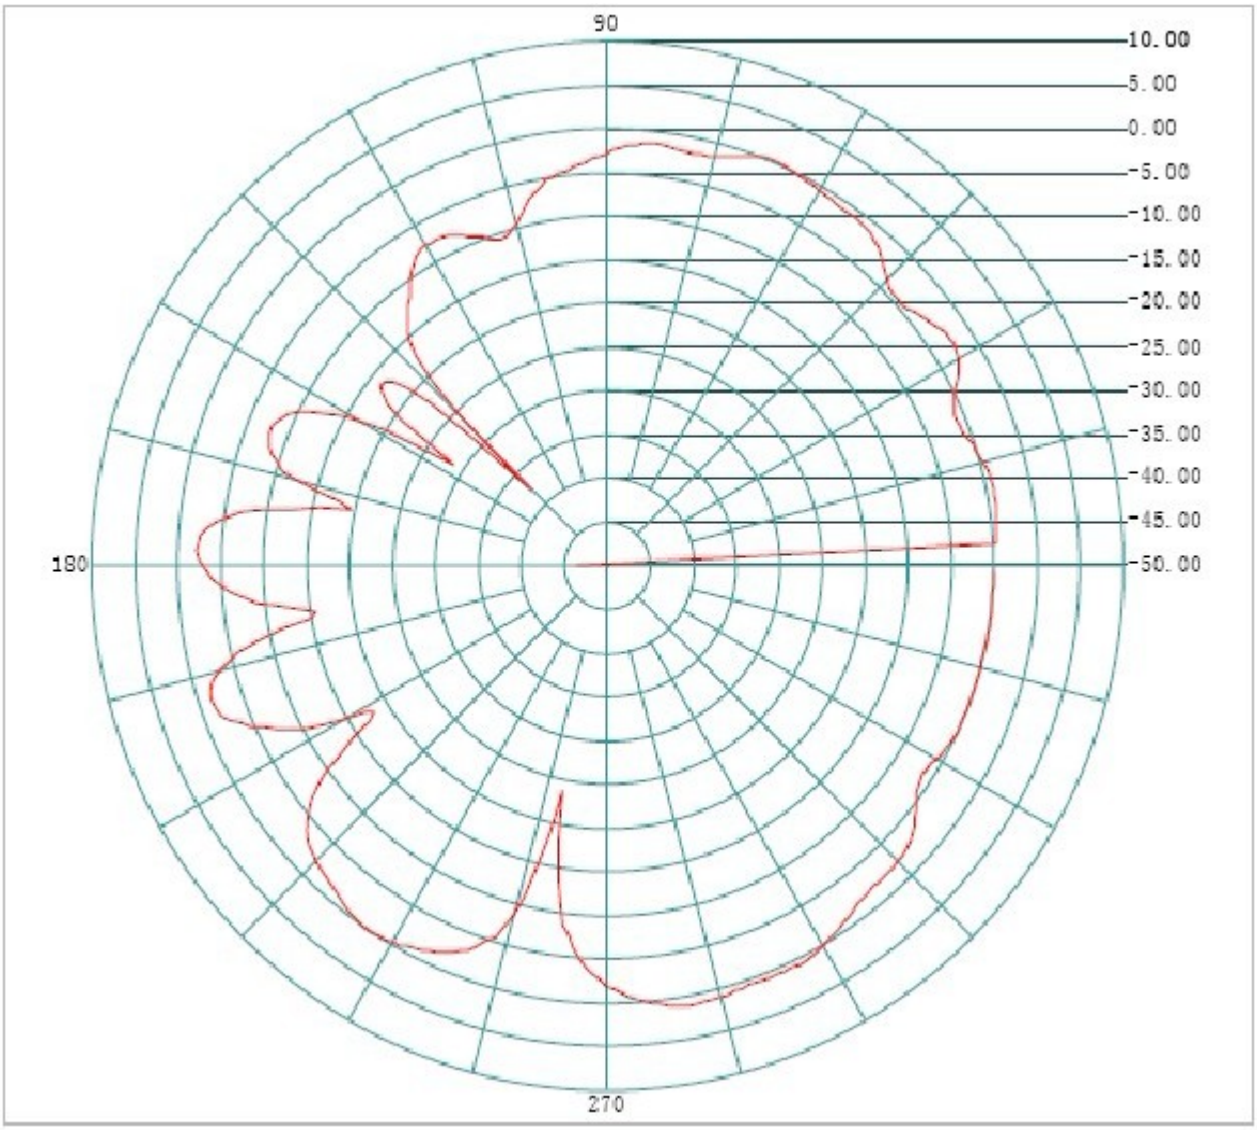

Frequency(MHZ): **2500** Antenna Polarity: **Horizontal**

Maximum Value(dBi): **1.45**

Average Gain(dBi) : **-3.34**

Minimum Gain(dBi): **-53.4**

2.2 Vertical

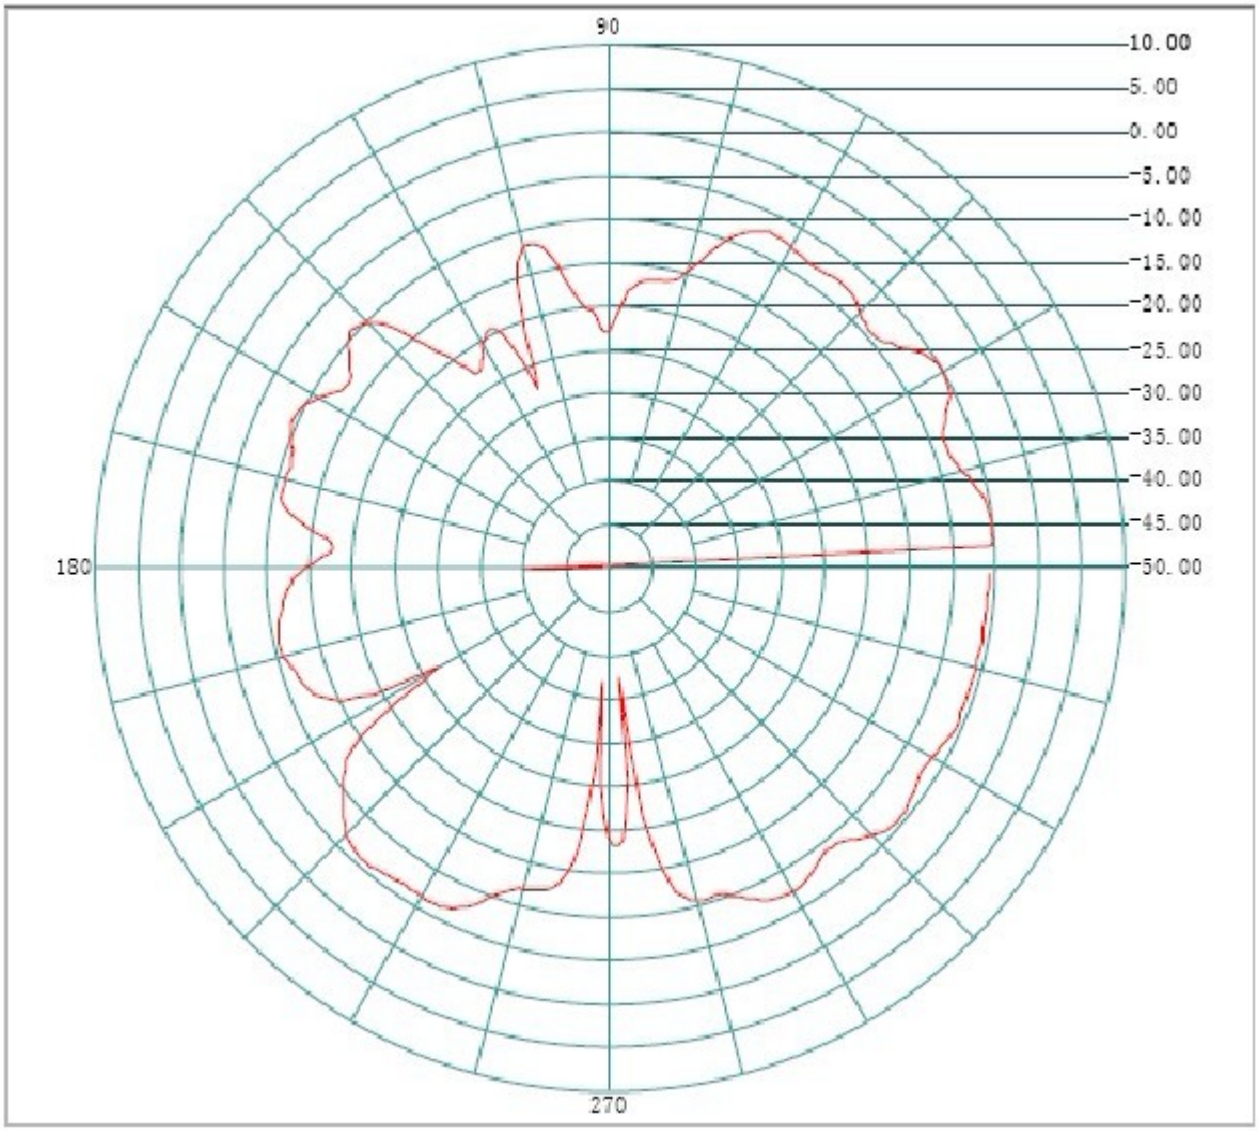

Frequency(MHZ): **2500** Antenna Polarity: **Vertical**

Maximum Value(dBi): **-4.95**

Average Gain(dBi) : **-9.06**

Minimum Gain(dBi): **-60.00**