


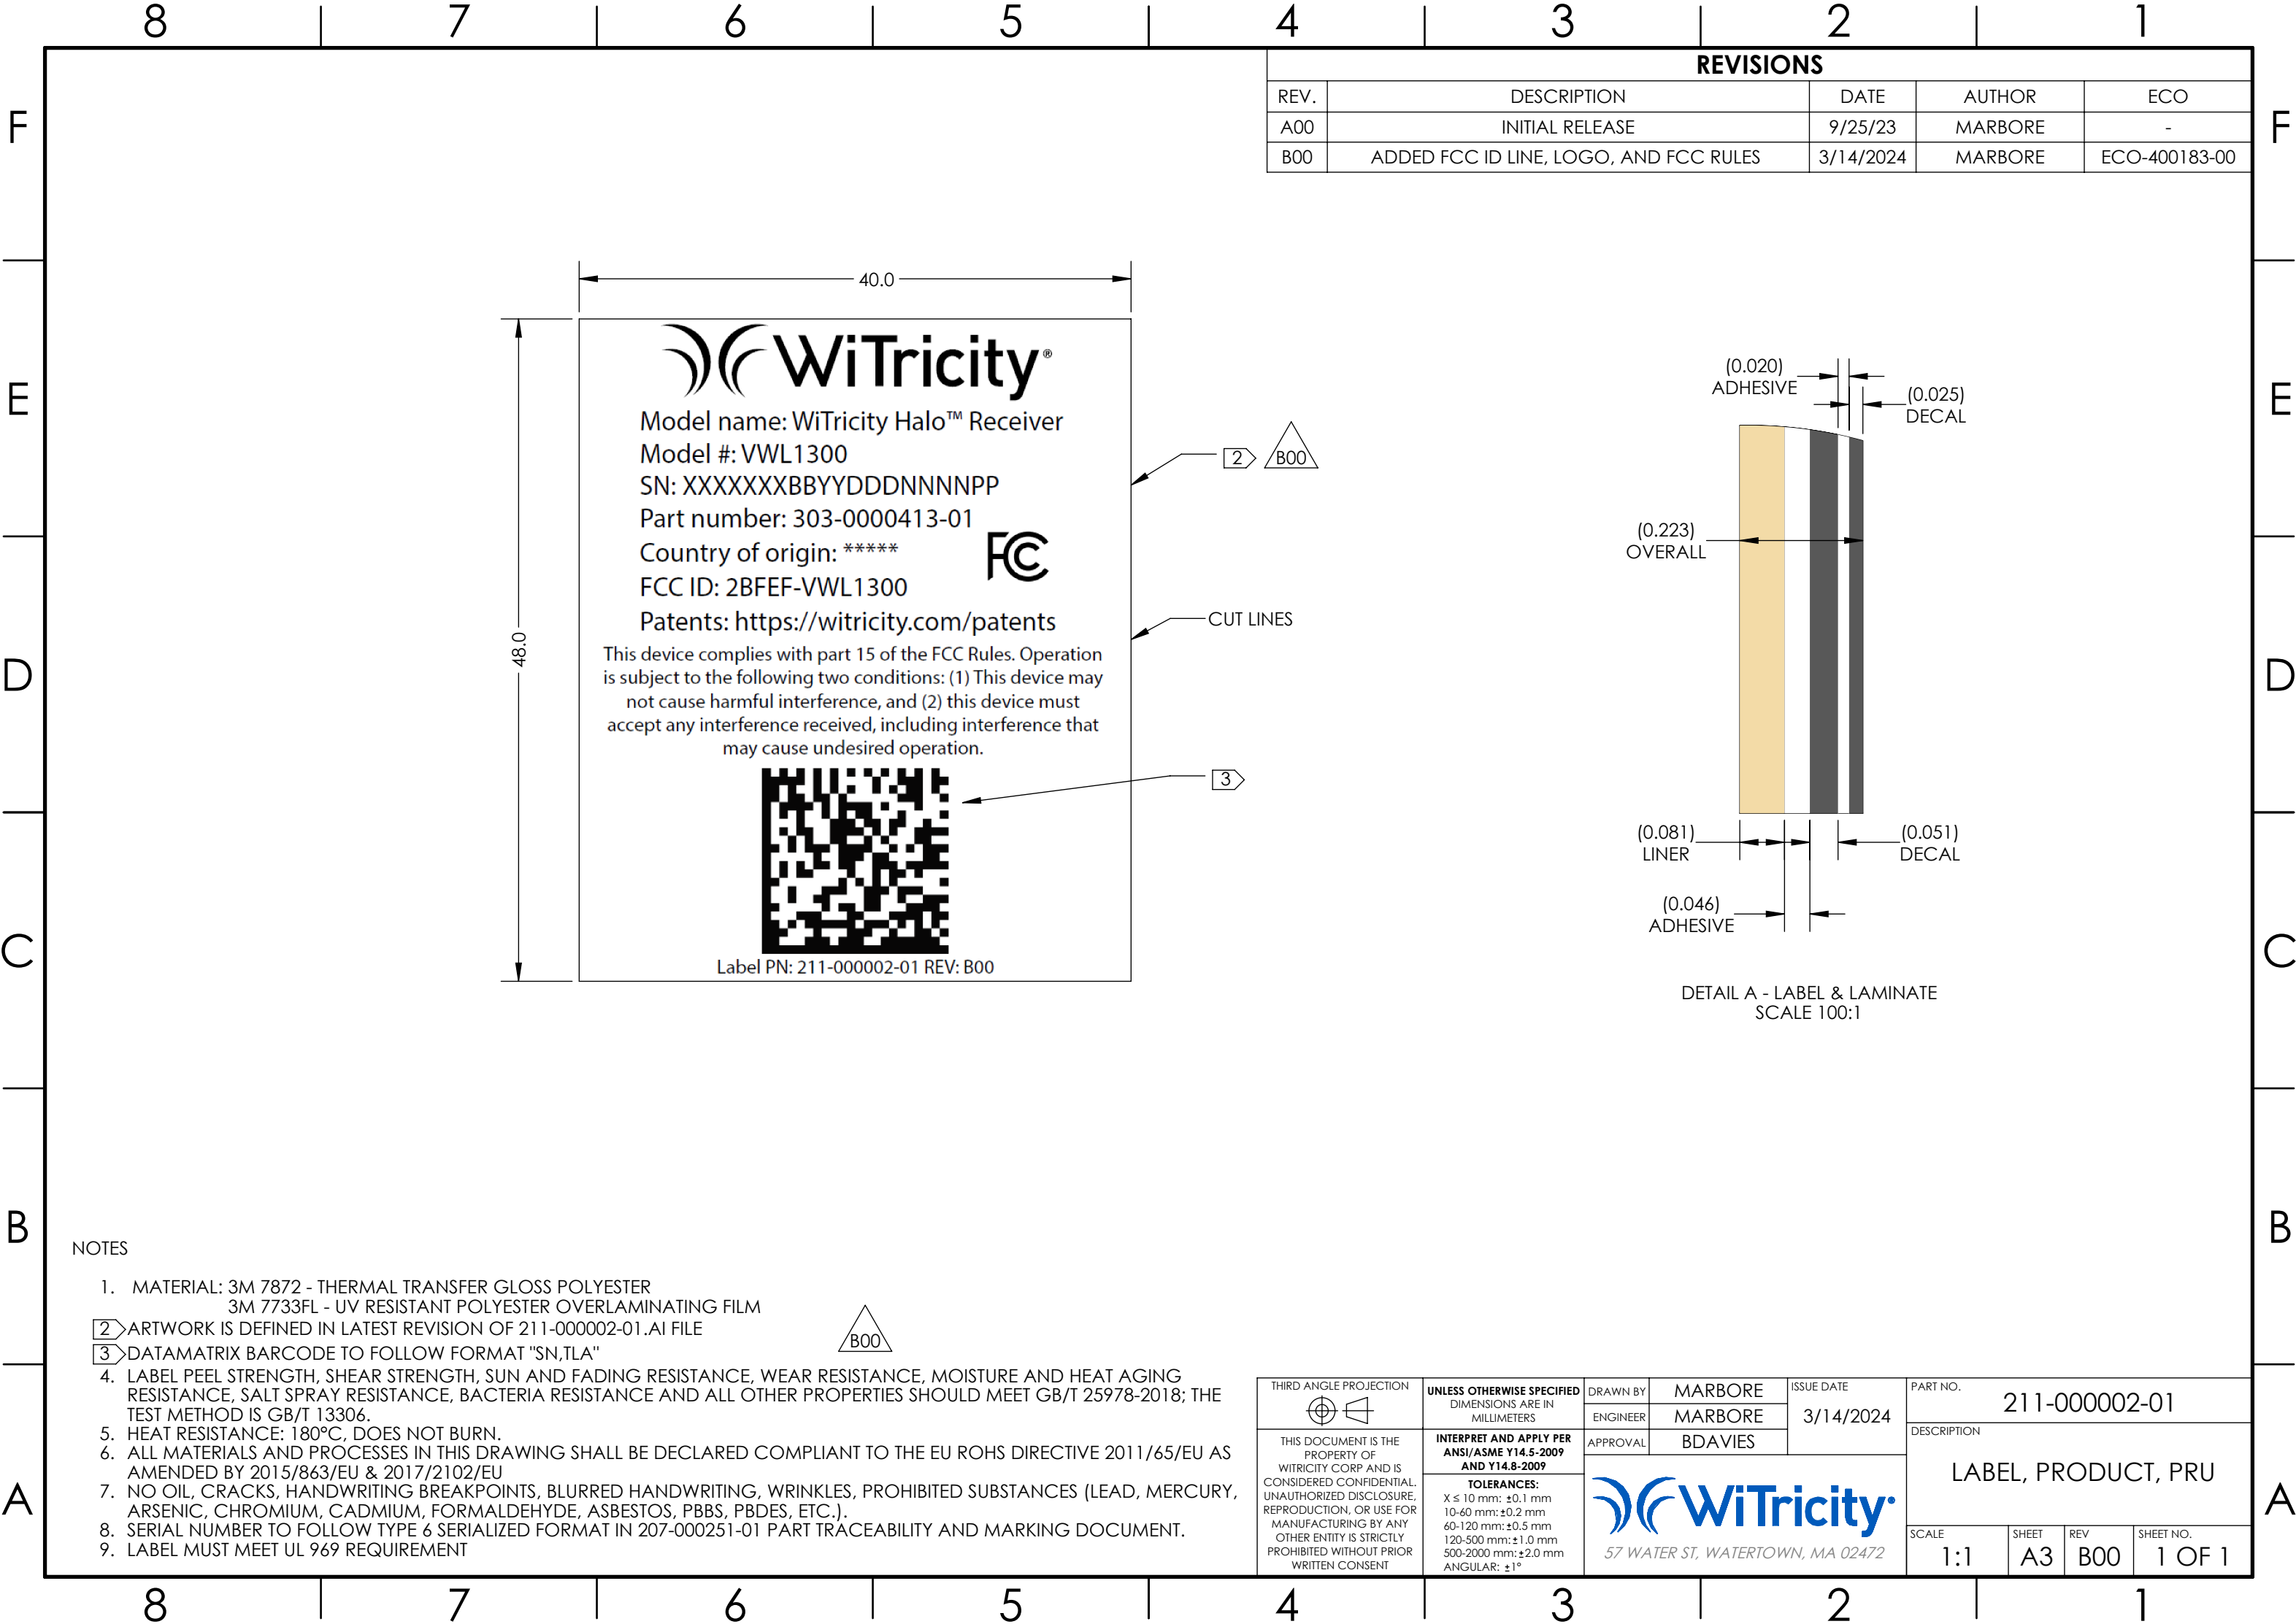

REVISIONS				
REV.	DESCRIPTION	DATE	AUTHOR	ECO
A00	INITIAL RELEASE	9/25/23	MARBORE	-
B00	ADDED FCC ID LINE, LOGO, AND FCC RULES	3/14/2024	MARBORE	ECO-400183-00

NOTES

- MATERIAL: 3M 7872 - THERMAL TRANSFER GLOSS POLYESTER
3M 7733FL - UV RESISTANT POLYESTER OVERLAMINATING FILM
- ARTWORK IS DEFINED IN LATEST REVISION OF 211-000002-01.AI FILE
- DATAMATRIX BARCODE TO FOLLOW FORMAT "SN,TLA"
- LABEL PEEL STRENGTH, SHEAR STRENGTH, SUN AND FADING RESISTANCE, WEAR RESISTANCE, MOISTURE AND HEAT AGING RESISTANCE, SALT SPRAY RESISTANCE, BACTERIA RESISTANCE AND ALL OTHER PROPERTIES SHOULD MEET GB/T 25978-2018; THE TEST METHOD IS GB/T 13306.
- HEAT RESISTANCE: 180°C, DOES NOT BURN.
- ALL MATERIALS AND PROCESSES IN THIS DRAWING SHALL BE DECLARED COMPLIANT TO THE EU ROHS DIRECTIVE 2011/65/EU AS AMENDED BY 2015/863/EU & 2017/2102/EU
- NO OIL, CRACKS, HANDWRITING BREAKPOINTS, BLURRED HANDWRITING, WRINKLES, PROHIBITED SUBSTANCES (LEAD, MERCURY, ARSENIC, CHROMIUM, CADMIUM, FORMALDEHYDE, ASBESTOS, PBBs, PBDEs, ETC.).
- SERIAL NUMBER TO FOLLOW TYPE 6 SERIALIZED FORMAT IN 207-000251-01 PART TRACEABILITY AND MARKING DOCUMENT.
- LABEL MUST MEET UL 969 REQUIREMENT

THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	DRAWN BY	MARBORE	ISSUE DATE	PART NO. 211-000002-01			
		ENGINEER	MARBORE					
		APPROVAL	BDAVIES	DESCRIPTION LABEL, PRODUCT, PRU				
THIS DOCUMENT IS THE PROPERTY OF WITRICITY CORP AND IS CONSIDERED CONFIDENTIAL. UNAUTHORIZED DISCLOSURE, REPRODUCTION, OR USE FOR MANUFACTURING BY ANY OTHER ENTITY IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT	INTERPRET AND APPLY PER ANSI/ASME Y14.5-2009 AND Y14.8-2009 TOLERANCES: X ≤ 10 mm: ±0.1 mm 10-60 mm: ±0.2 mm 60-120 mm: ±0.5 mm 120-500 mm: ±1.0 mm 500-2000 mm: ±2.0 mm ANGULAR: ±1°	 57 WATER ST, WATERTOWN, MA 02472						SCALE
					1:1	A3	B00	1 OF 1