


Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/5.27


Test Graph

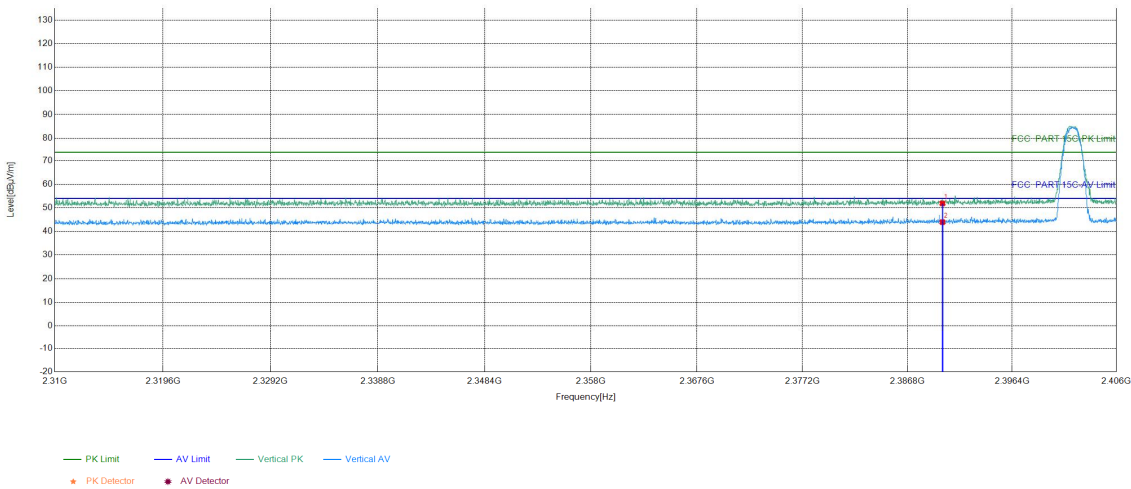

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.94	51.90	74.00	22.10	PASS	Vertical	PK
2	2390	15.96	28.00	43.96	54.00	10.04	PASS	Vertical	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/5.27


Test Graph

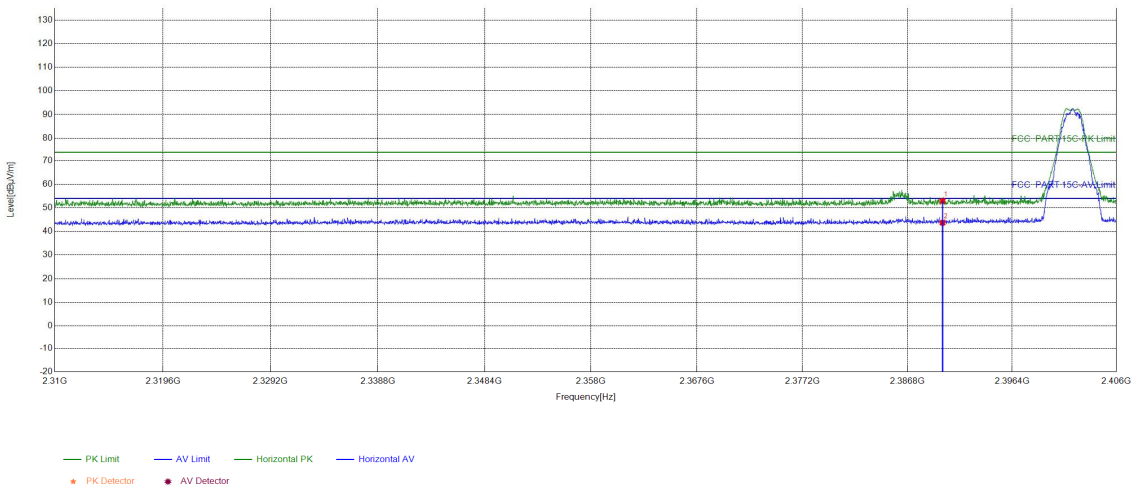

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.97	52.93	74.00	21.07	PASS	Horizont	PK
2	2390	15.96	27.69	43.65	54.00	10.35	PASS	Horizont	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/5.27


Test Graph

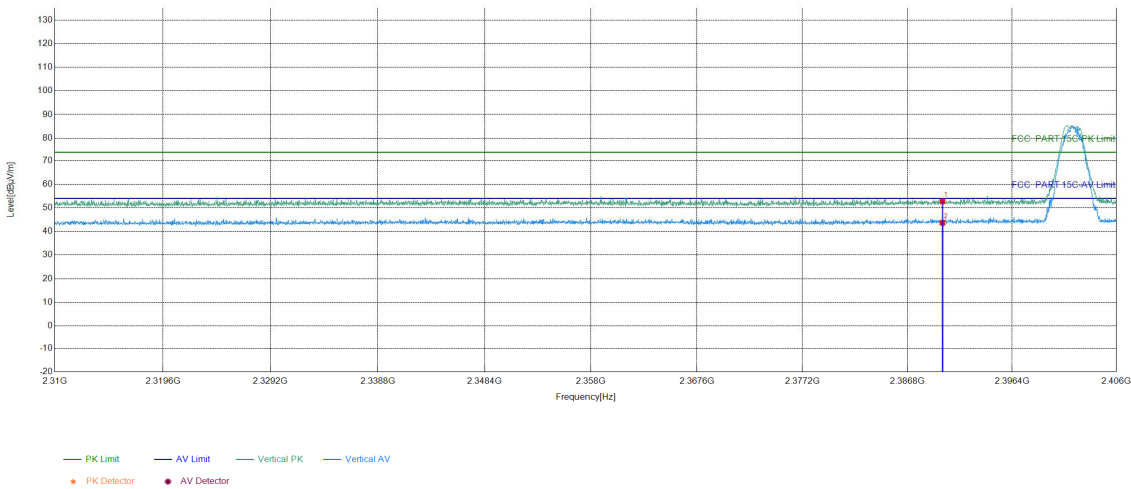

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.81	52.77	74.00	21.23	PASS	Vertical	PK
2	2390	15.96	27.72	43.68	54.00	10.32	PASS	Vertical	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/5.27


Test Graph

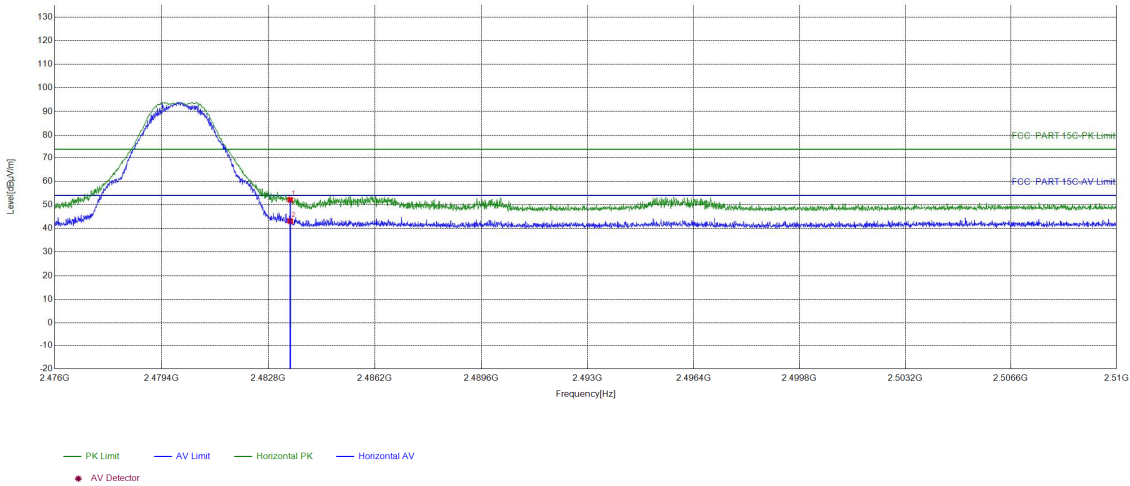

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.84	52.13	74.00	21.87	PASS	Horizont	PK
2	2483.5	16.29	26.83	43.12	54.00	10.88	PASS	Horizont	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/5.27

Test Graph

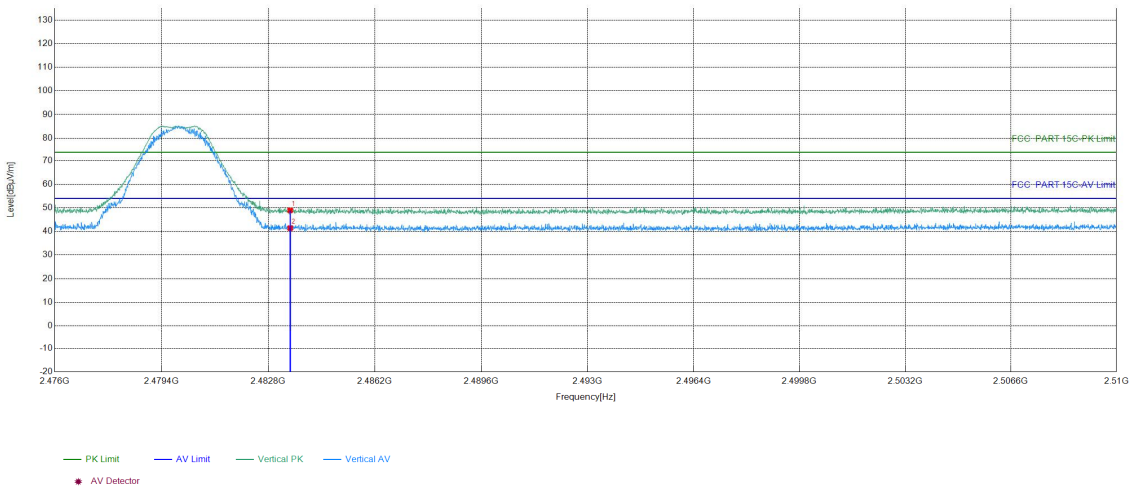

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.67	48.96	74.00	25.04	PASS	Vertical	PK
2	2483.5	16.29	25.10	41.39	54.00	12.61	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth LE of EED32S809407

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S809407.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***