



TEST REPORT

Product Name: Avatar HD Goggles X
FCC ID: 2BHG9-WN02
Trademark: Walksnail
Model Number: WN02-FP003
Prepared For: Caddx Technology (Shenzhen) Co., Ltd.
Address: 13/F, Minrray Building, No. 5 Ganli Sixth Road, Jihua Street, Longgang District, Shenzhen City, Guangdong Province, China.
Manufacturer: Caddx Technology (Shenzhen) Co., Ltd.
Address: 13/F, Minrray Building, No. 5 Ganli Sixth Road, Jihua Street, Longgang District, Shenzhen City, Guangdong Province, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Feb. 29, 2024
Sample tested Date: Feb. 29, 2024 to Jun. 17, 2024
Issue Date: Jun. 17, 2024
Report No.: CTB220621001RFX
Test Standards: 47 CFR Part 15 Subpart E KDB 789033 V02r01
Test Results: PASS
Remark: This is 5G NII radio test report.
Compiled by: Reviewed by: Approved by:

Zhou kui

Arron Liu

Zhou KuiArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope

TABLE OF CONTENT

TestReportDeclaration	Page
1. VERSION	4
2. TESTSUMMARY	5
3. MEASUREMENTUNCERTAINTY	6
4. PRODUCT INFORMATION AND TESTSETUP	7
4.1 ProductInformation	7
4.2 TestSetupConfiguration	8
4.3 SupportEquipment	8
4.5 TestMode	9
4.6 TestEnvironment	9
5. TEST FACILITY AND TESTINSTRUMENTUSED	10
5.1 TestFacility	10
5.2 TestInstrumentUsed	10
6. AC POWER LINECONDUCTEDEMISSION	12
6.1 Block Diagram OfTestSetup	12
6.2 Limit	12
6.3 Testprocedure	12
6.4 TestResult	14
7. RADIATED SPURIOUS EMISSIONS	15
7.1 Block Diagram OfTestSetup	15
7.2 Limit	15
7.3 Testprocedure	16
7.4 TestResult	18
8. BANEDGE	21
8.1 Block Diagram OfTestSetup	21
8.2 Limit	21
8.3 Testprocedure	21
8.4 TestResult	22
9. CONDUCTED PEAKOUTPUTPOWER	23
9.1 Block Diagram OfTestSetup	23
9.2 Limit	23

9.3	Testprocedure	24
9.4	TestResult.....	26
10.	EMISSION BANDWIDTH&OCCUPIEDBANDWIDTH	28
10.1	Block Diagram OfTestSetup.....	28
10.2	Limits	28
10.3	TestProcedure	29
10.4	TestResults.....	31
11.	POWERSPECTRALDENSITY	33
11.1	Block Diagram OfTestSetup.....	33
11.2	Limit	33
11.3	Testprocedure	34
11.4	TestResult.....	35
12.	FREQUENCYSTABILITY.....	37
12.1	Block Diagram OfTestSetup.....	37
12.2	Limit	37
12.3	Testprocedure	37
12.4	TestResult.....	37
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT ...	38
13.1	Requirement	38
13.2	TestResults.....	38
14.	ANTENNAREQUIREMENT	39
15.	EUT TESTSETUPPHOTOGRAPHS	40

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220621001RFX	Jun. 17, 2024	Original	Valid

2. TESTSUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033v02r01	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033v02r01	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	47 CFR Part 15.203	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
2	Adjacent channel power	$U=\pm 1.3\text{dB}$
3	Conducted Adjacent channel power	$U=\pm 1.38\text{dB}$
4	Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
5	Conducted output power below 1G	$U=\pm 0.9\text{dB}$
6	Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
7	Conduction spurious emissions	$U=\pm 2.8\text{dB}$
8	Out of band emission	$U=\pm 54\text{Hz}$
9	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
10	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
11	humidity uncertainty	$U=\pm 5.3\%$
12	Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
13	Supply volyages	$U=\pm 3\%$
14	Time	$U=\pm 5\%$
15	Conducted Emission (150KHz-30MHz)	3.2 dB
16	3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
17	3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB

4. PRODUCT INFORMATION AND TESTSETUP

4.1 ProductInformation

Model(s):	WN02-FP003
Model Description:	N/A
Hardware Version:	4.0
Software Version:	35.41.2
Operation Frequency:	5660-5695MHz 5735-5839MHz
Max. RF output power:	11.93dBm
Type of Modulation:	OFDM
Antenna installation:	External antenna
Antenna Gain:	5.6GHz: 2.61dBi 5.8GHz: 2.97dBi
Ratings:	DC 7~26V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series	Note
1.	Wireless charge receiver	Leinuo	S2	/	/
2	Adapter	JIYIN	JY-05100C	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Operation in the 5660MHz ~5695MHz band			
Channel	Frequency	Channel	Frequency
1	5660MHz	2	5695MHz
Operation in the 5735MHz ~5839MHz band			
Channel	Frequency	Channel	Frequency
3	5735MHz	4	5770MHz
5	5839MHz		

NOTE: Duty cycle > 98%.

4.5 TestMode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
5.6GHz	5660MHz ~5695MHz	Channel 1	/	Channel 2
		5660MHz	/	5695MHz

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
5.8GHz	5735MHz ~5839 MHz	Channel 3	Channel 4	Channel 6
		5735MHz	5770MHz	5839MHz

4.6 TestEnvironment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):NV	7~26V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENTUSED

5.1 TestFacility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test InstrumentUsed

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


AC Charger:

Test Specification: Neutral

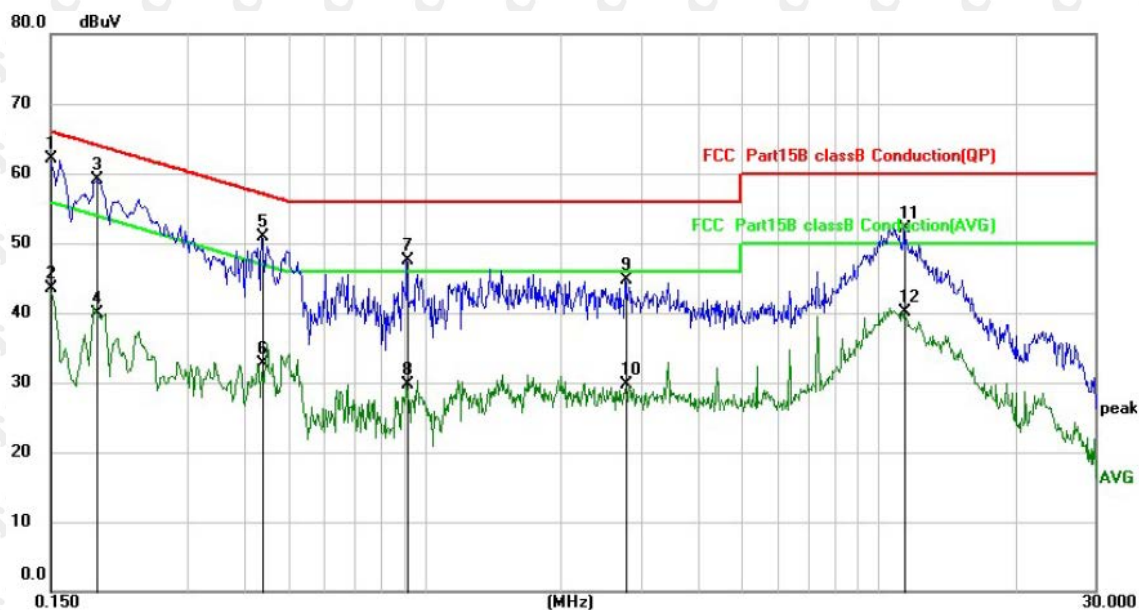

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1500	51.20	10.89	62.09	66.00	-3.91	QP
2		0.1500	32.71	10.89	43.60	56.00	-12.40	AVG
3		0.1900	48.30	10.75	59.05	64.04	-4.99	QP
4		0.1900	29.16	10.75	39.91	54.04	-14.13	AVG
5		0.4380	40.39	10.54	50.93	57.10	-6.17	QP
6		0.4380	22.24	10.54	32.78	47.10	-14.32	AVG
7		0.9140	36.55	10.88	47.43	56.00	-8.57	QP
8		0.9140	18.84	10.88	29.72	46.00	-16.28	AVG
9		2.7740	33.03	11.75	44.78	56.00	-11.22	QP
10		2.7740	17.96	11.75	29.71	46.00	-16.29	AVG
11		11.3900	38.90	13.27	52.17	60.00	-7.83	QP
12		11.3900	26.83	13.27	40.10	50.00	-9.90	AVG

Test Specification: Line

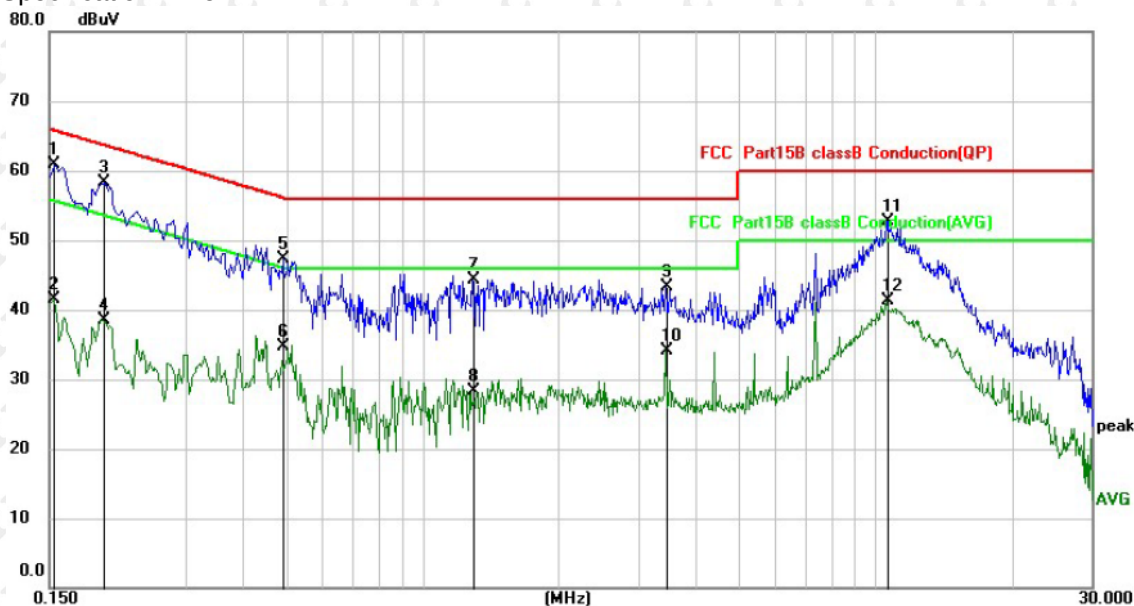

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	50.12	10.88	61.00	65.79	-4.79	QP
2		0.1539	30.57	10.88	41.45	55.79	-14.34	AVG
3		0.1980	47.54	10.72	58.26	63.69	-5.43	QP
4		0.1980	27.74	10.72	38.46	53.69	-15.23	AVG
5		0.4940	36.73	10.50	47.23	56.10	-8.87	QP
6		0.4940	24.30	10.50	34.80	46.10	-11.30	AVG
7		1.2900	33.16	11.13	44.29	56.00	-11.71	QP
8		1.2900	17.20	11.13	28.33	46.00	-17.67	AVG
9		3.4380	31.46	11.90	43.36	56.00	-12.64	QP
10		3.4380	22.15	11.90	34.05	46.00	-11.95	AVG
11		10.6140	39.51	13.25	52.76	60.00	-7.24	QP
12		10.6140	27.98	13.25	41.23	50.00	-8.77	AVG

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

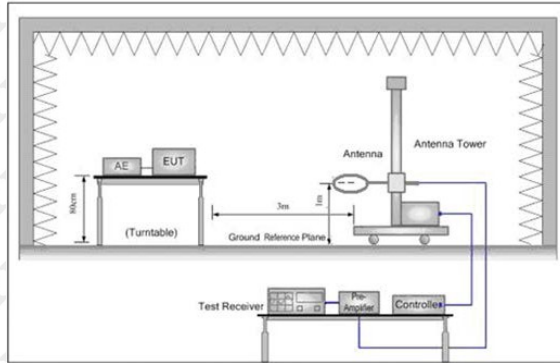


Figure 1. Below 30 MHz

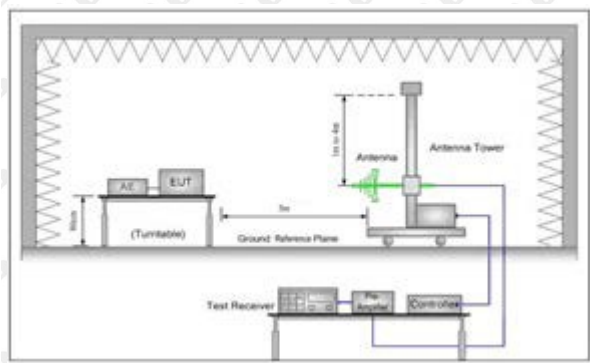


Figure 2. 30 MHz to 1 GHz

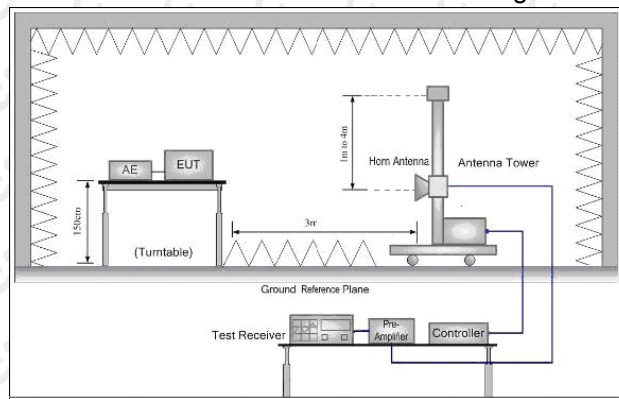


Figure 3. Above 1 GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$(i) \text{ EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$\text{EIRP[dBm]} = E[\text{dB}\mu\text{V/m}] + 20 \log(d[\text{meters}]) - 104.77$$

(iii) Or, if d is 3 meters:

$$\text{EIRP[dBm]} = E[\text{dB}\mu\text{V/m}] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the highest channel.
- j. Repeat above procedures until all frequencies measured were complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 TestResult

30MHz-1GHzTest Results:

Modulation : 5.6GHz (the worst data)

Test Channel : 5695MHz

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.3534	31.81	-5.40	26.41	40.00	-13.59	QP
2		77.3210	29.95	-8.80	21.15	40.00	-18.85	QP
3	!	147.9214	42.93	-3.42	39.51	43.50	-3.99	QP
4	!	298.2681	47.17	-4.81	42.36	46.00	-3.64	QP
5	!	446.4140	43.06	-1.13	41.93	46.00	-4.07	QP
6	*	742.2587	37.23	5.34	42.57	46.00	-3.43	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.1200	39.33	-5.54	33.79	40.00	-6.21	QP
2	!	147.9214	43.26	-3.42	39.84	43.50	-3.66	QP
3	!	298.2681	46.18	-4.81	41.37	46.00	-4.63	QP
4	!	446.4139	43.37	-1.13	42.24	46.00	-3.76	QP
5	*	596.1771	40.37	2.53	42.90	46.00	-3.10	QP
6	!	742.2586	37.50	5.34	42.84	46.00	-3.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 5.6GHz (theworst)

Radiated Spurious Emission (Above 1GHz):

Modulation : (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5660MHz									
11320	40.74	16.39	57.13	74	-16.87	PK	1.11	263	H
11320	25.07	16.39	41.46	54	-12.54	AV	1.06	148	H
11320	41.68	16.39	58.07	74	-15.93	PK	1.15	256	V
11320	25.34	16.39	41.73	54	-12.27	AV	1.23	146	V
Channel:5695MHz									
11320	39.21	16.39	55.60	74	-18.40	PK	1.31	259	H
11320	26.29	16.39	42.68	54	-11.32	AV	1.09	140	H
11320	40.79	16.39	57.18	74	-16.82	PK	1.19	93	V
11320	25.58	16.39	41.97	54	-12.03	AV	1.50	243	V
Channel:5735MHz									
11490	41.28	16.39	57.67	74	-16.33	PK	1.42	282	H
11490	27.16	16.39	43.55	54	-10.45	AV	1.43	56	H
11490	41.07	16.39	57.46	74	-16.54	PK	1.38	244	V
11490	26.28	16.39	42.67	54	-11.33	AV	1.53	271	V
Channel:5839MHz									
11490	40.85	16.39	57.24	74	-16.76	PK	1.19	329	H
11490	27.26	16.39	43.65	54	-10.35	AV	1.09	5	H
11490	40.87	16.39	57.26	74	-16.74	PK	1.54	249	V
11490	27.35	16.39	43.74	54	-10.26	AV	1.40	210	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result+Factor, Margin
= Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data wasreported.
- 3.Testingiscarriedoutwithfrequencyrang9kHztothetenthharmonics,otherthanlistedinthetableaboveare
attenuated more than 20dB below the permissible limits or the field strength is too small to bemeasured.

8. BANDEGE

8.1 Block Diagram Of TestSetup

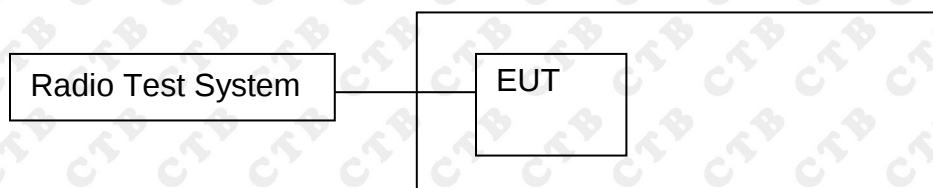

8.2 Limit

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

8.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.

4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


5. Repeat above procedures until all measured frequencies were complete.

8.4 TestResult

5.6GHz


Test Graph

5660-5695MHz

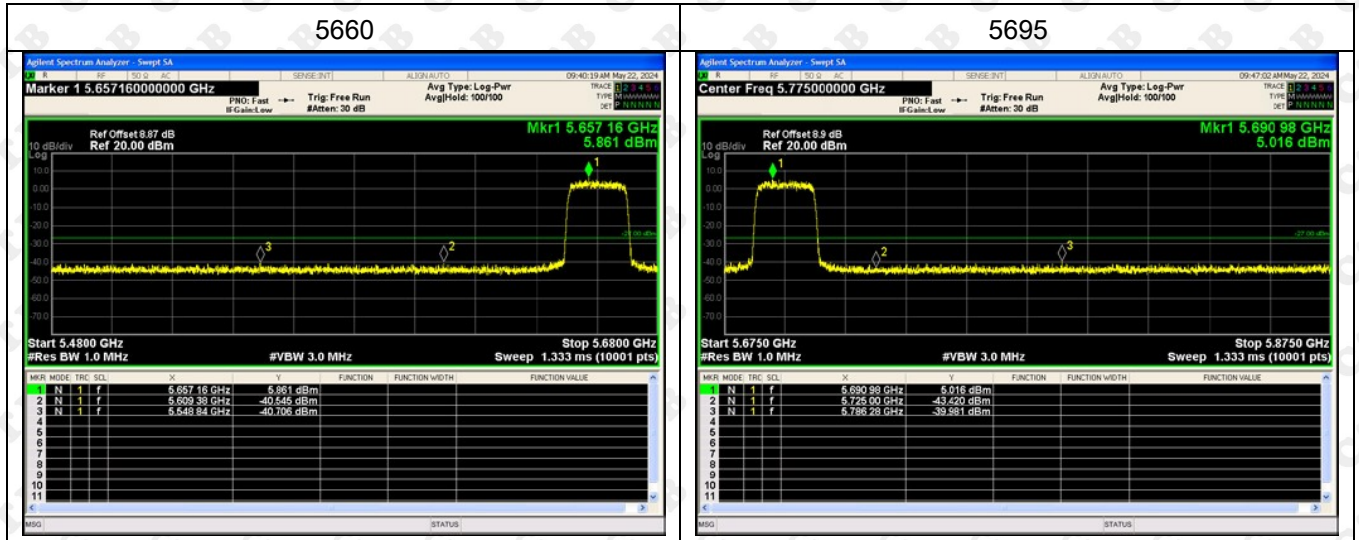


5.8GHz

5735-5839MHz

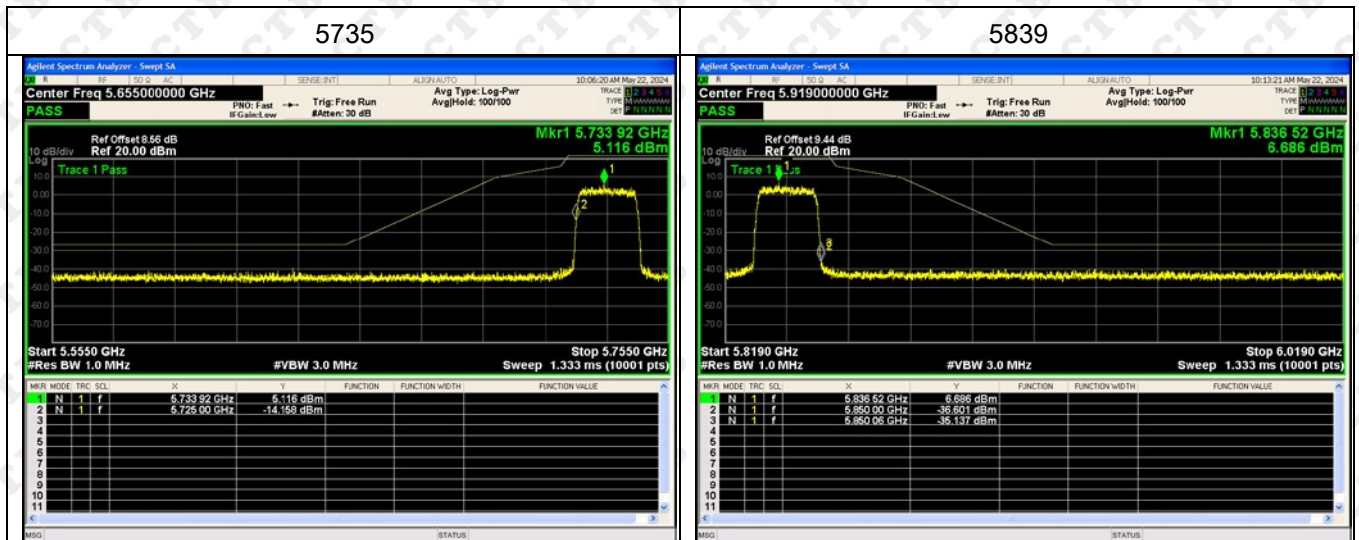

9. CONDUCTED PEAK OUTPUTPOWER

9.1 Block Diagram Of TestSetup

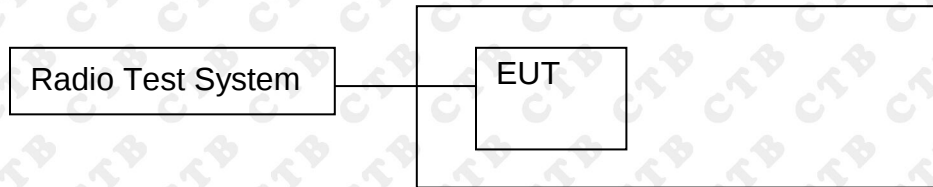

9.2 Limit

(1) For the band 5.15-5.25GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz

band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 section E, the following is the measurement procedure.

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW $\geq$ 3 MHz.

(iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full

power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”

(viii) Trace average at least 100 traces in power averaging (rms) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result

5.6GHz


Test model	Test Channel (MHz)	Output Power dBm	Limit dBm
5.6GHz	5660	11.35	17.93
	/	/	/
	5695	11.68	17.93

5.8GHz

Test model	Test Channel (MHz)	Output Power dBm	Limit dBm
5.8GHz	5735	11.93	30
	5770	11.10	30
	5839	10.99	30

5.6GHz

5660-5695MHz-Power

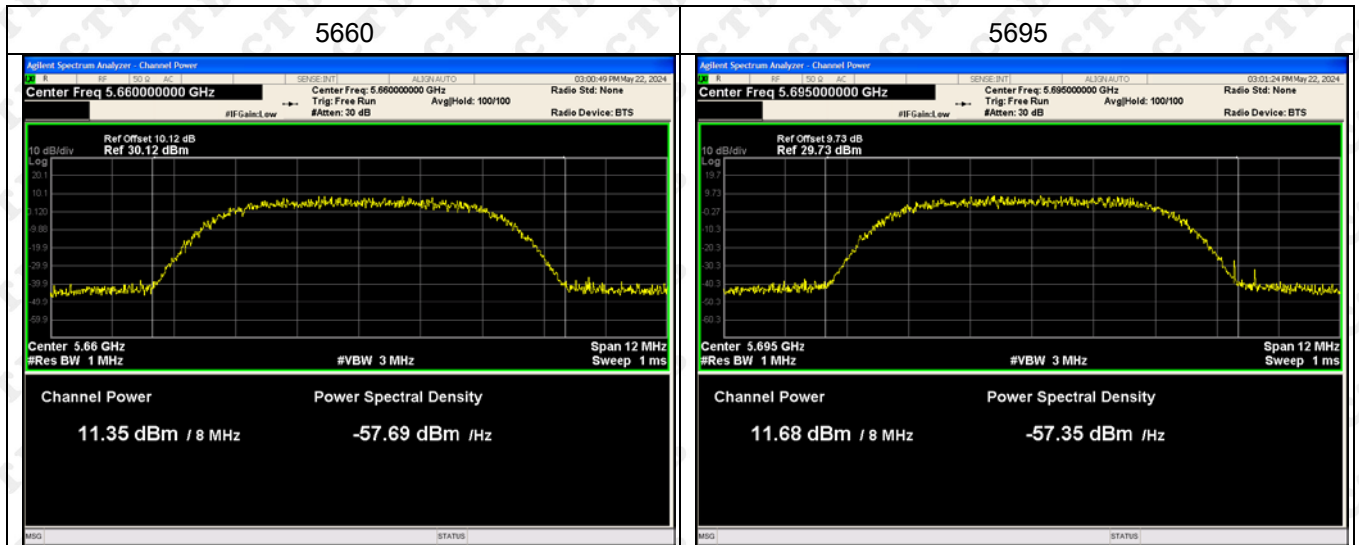


5.8GHz

5735-5839MHz-Power



10. EMISSION BANDWIDTH& OCCUPIEDBANDWIDTH

10.1 Block Diagram Of TestSetup

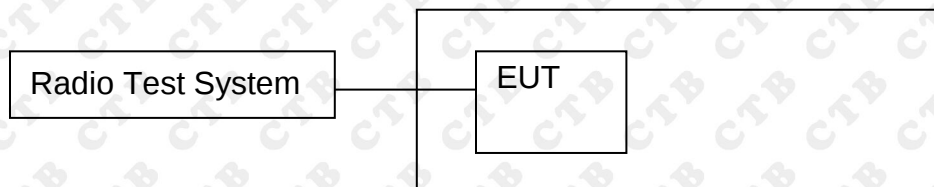

10.2 Limits

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 TestProcedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth(EBW)

- a) Set RBW = approximately 1% of the emissionbandwidth.
- b) Set the VBW >RBW.
- c) Detector =Peak.
- d) Trace mode = maxhold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \cdot \text{RBW}$.
- c) Detector =Peak.
- d) Trace mode = maxhold.
- e) Sweep = auto couple.
- f) Allow the trace tostabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamentalemission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% OccupiedBandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurementtechniquesdescribedinII.G.3.d).Measurements of99%occupiedbandwidthmayalsooptionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel centerfrequency.
2. Set span = 1.5 times to 5.0 times theOBW.
3. Set RBW = 1% to 5% of theOBW

4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, as a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

5.6GHz


Test mode	Test Channel (MHz)	26dB Bandwidth (MHz)
5.6GHz	5660	4.942
	/	/
	5695	4.935

5.8GHz

Test mode	Test Channel (MHz)	6dB Bandwidth (MHz)
5.8GHz	5735	4.914
	5770	4.957
	5839	4.938


Test Graph

5660-5695MHz

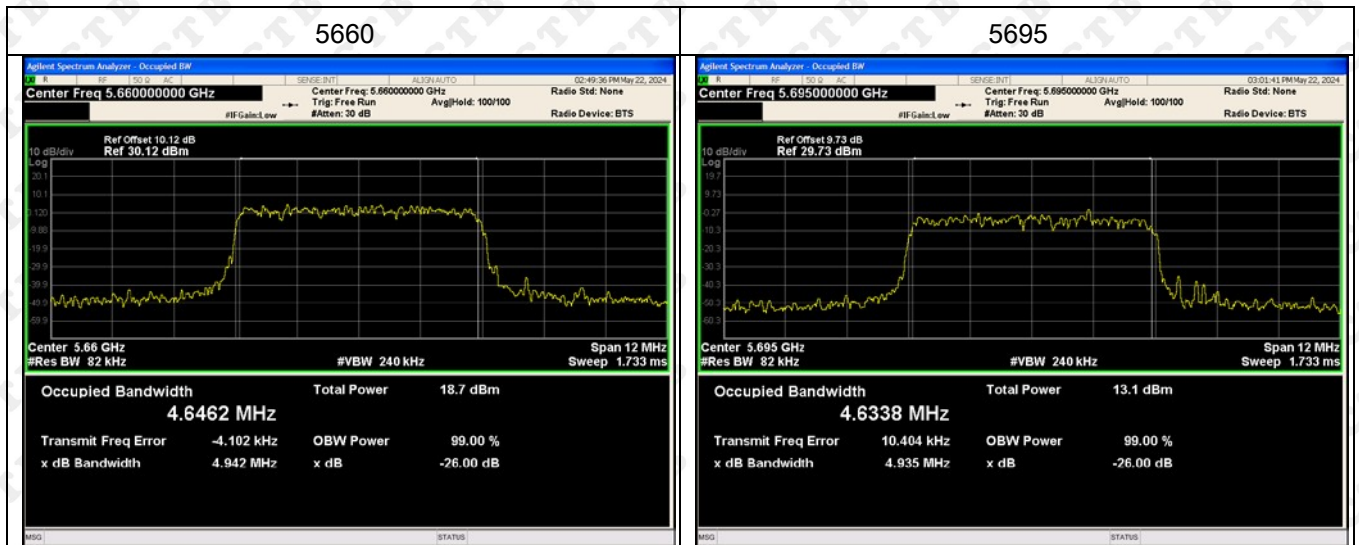


5.8GHz

5735-5839MHz

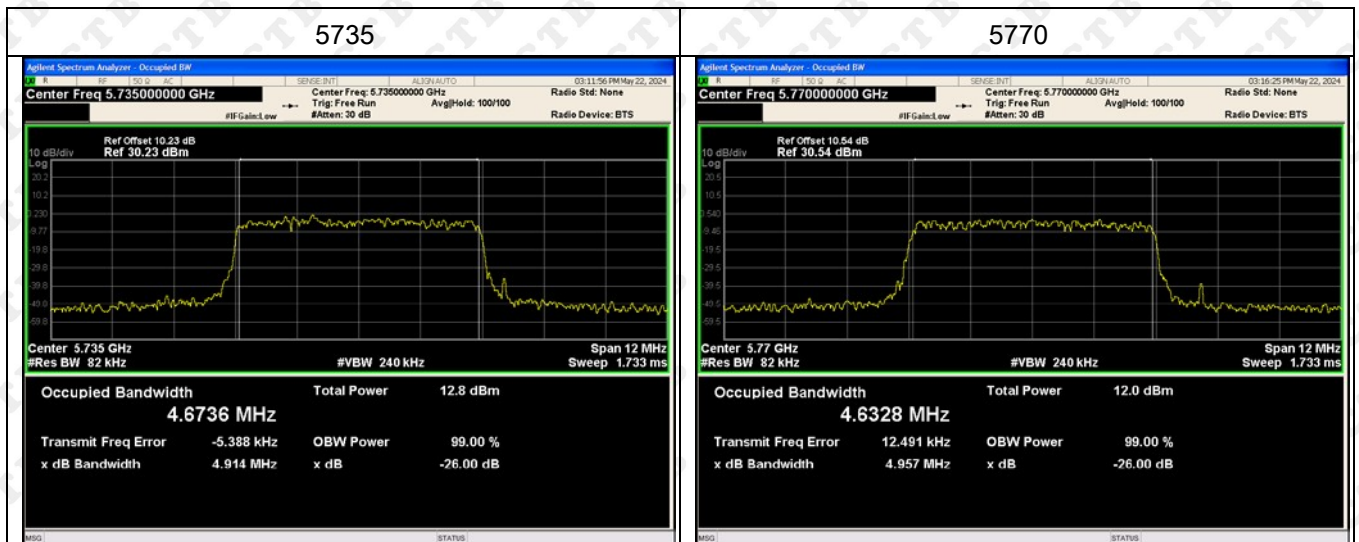


5839

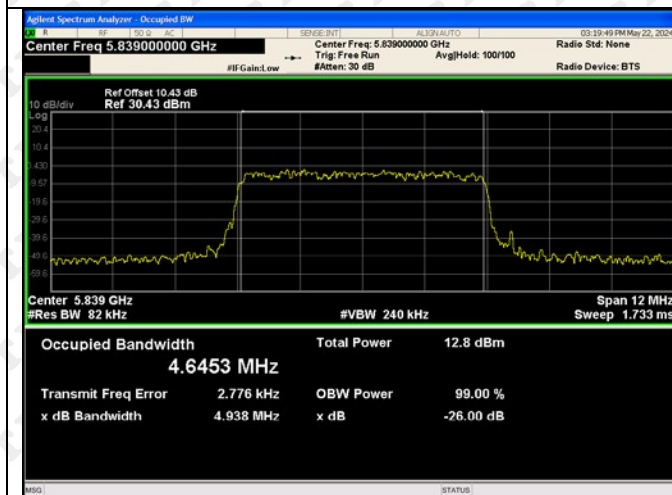

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

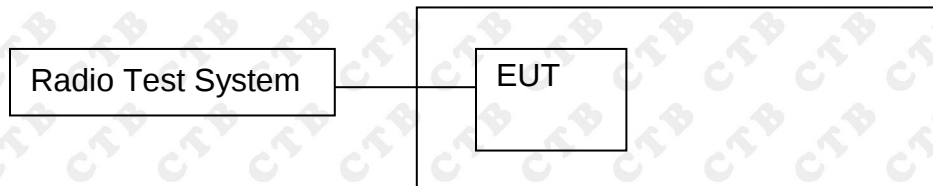

11.2 Limit

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 section E, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in II.B.1.a).
- b) Set $VBW \geq 3RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

11.4 Test Result

5.6GHz:


Test mode	Test Channel (MHz)	PSD [dBm/MHz]	Limit [dBm/MHz]	Result
5.6GHz	5660	-3.008	11	Pass
	/	/	/	/
	5695	-7.629	11	Pass

5.8GHz:

Test mode	Test Channel (MHz)	PSD [[dBm/500KHz]	Limit [dBm/500KHz]	Result
5.8GHz	5735	-9.377	30	Pass
	5770	-7.115	30	Pass
	5839	-8.342	30	Pass


5.6GHz

5660-5695MHz

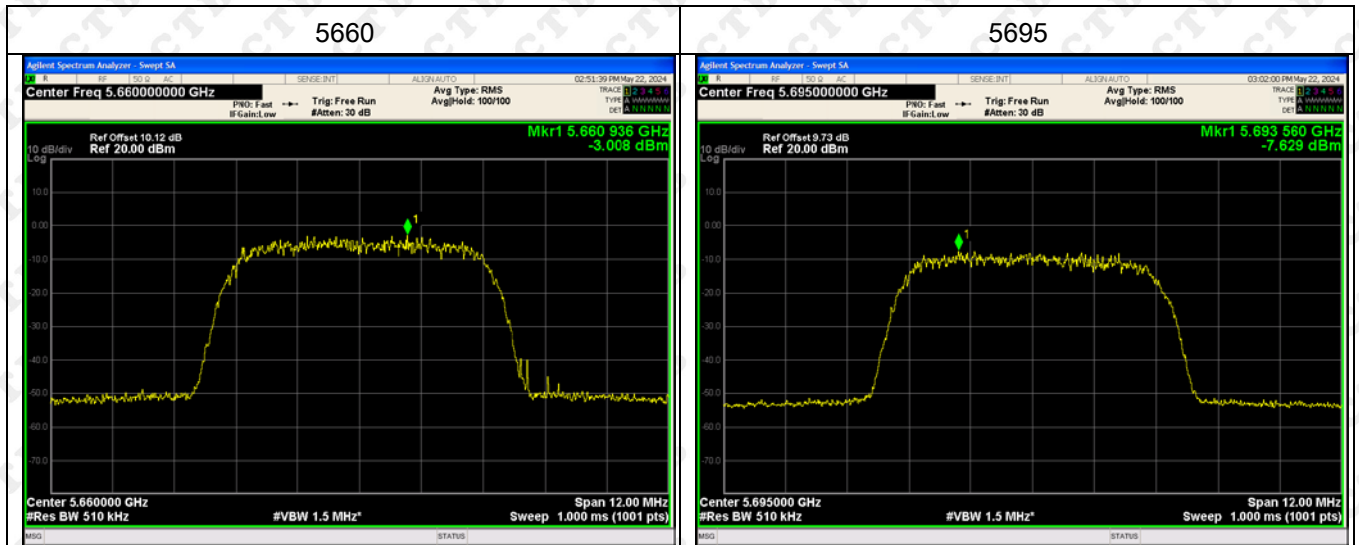


5.8GHz

5735-5839MHz

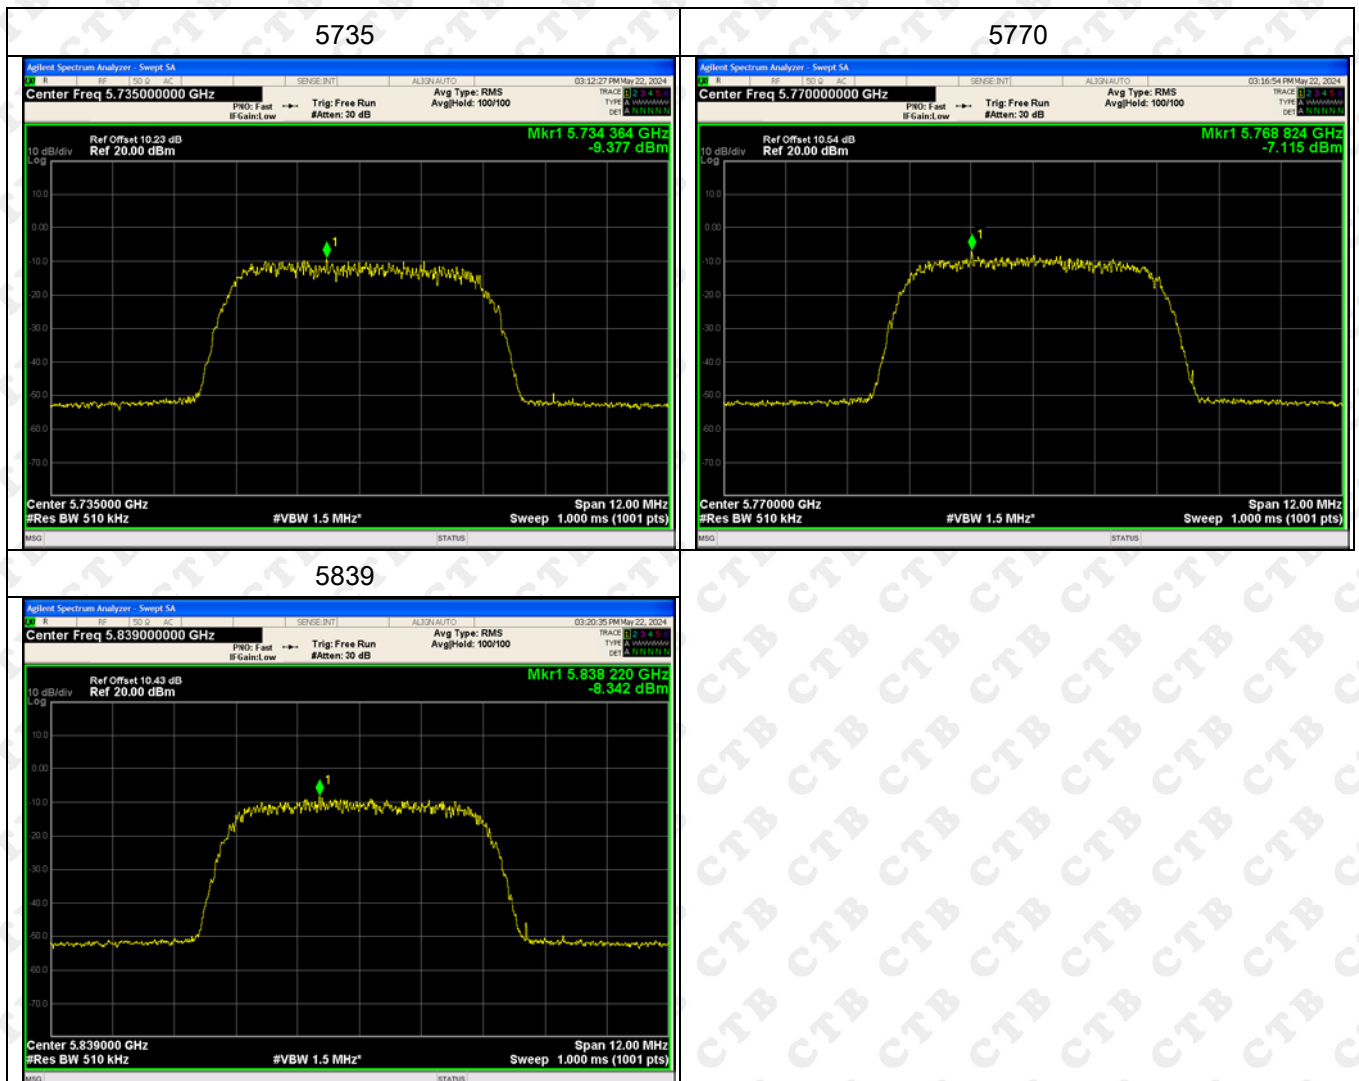

12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

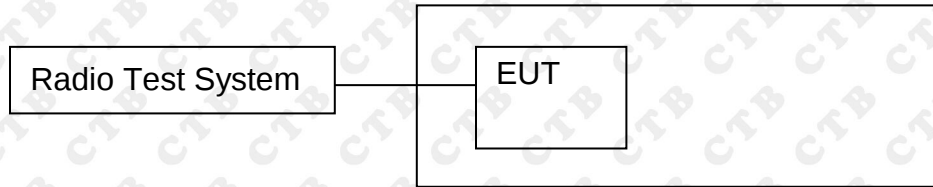

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

Pass

13. OPERATION IN THE ABSENCE OF INFORMATION TO THETRANSMIT

13.1 Requirement

15.407(c)requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 TestResults

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of WLAN message transmitting from remote device and verify whether it shall reconnect. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is 5.6GHz: 2.61dBi, 5.8GHz: 2.97dBi.


15. EUT TEST SETUPPHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

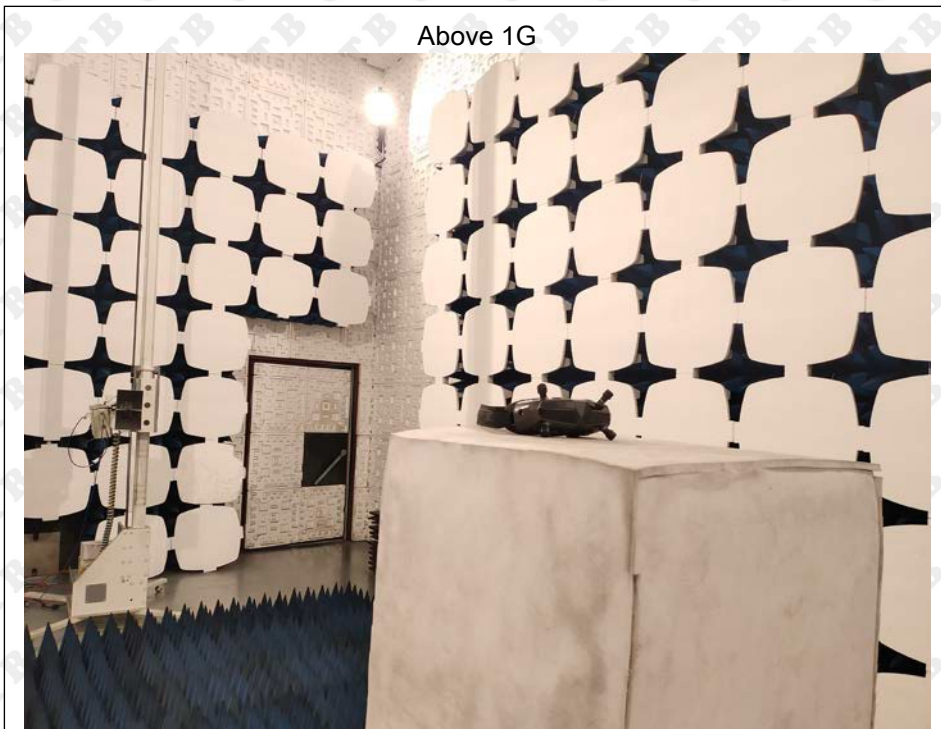

Conducted emissions



***** END OF REPORT *****