

**L:**

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.966	2401.517	2402.483	---	---
DH5	Ant1	2441	0.966	2440.511	2441.477	---	---
DH5	Ant1	2480	0.957	2479.523	2480.480	---	---
2DH5	Ant1	2402	1.320	2401.325	2402.645	---	---
2DH5	Ant1	2441	1.323	2440.325	2441.648	---	---
2DH5	Ant1	2480	1.326	2479.322	2480.648	---	---
3DH5	Ant1	2402	1.305	2401.349	2402.654	---	---
3DH5	Ant1	2441	1.329	2440.334	2441.663	---	---
3DH5	Ant1	2480	1.275	2479.364	2480.639	---	---

R:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.960	2401.511	2402.471	---	---
DH5	Ant1	2441	0.966	2440.520	2441.486	---	---
DH5	Ant1	2480	0.966	2479.508	2480.474	---	---
2DH5	Ant1	2402	1.278	2401.361	2402.639	---	---
2DH5	Ant1	2441	1.272	2440.364	2441.636	---	---
2DH5	Ant1	2480	1.266	2479.361	2480.627	---	---
3DH5	Ant1	2402	1.308	2401.343	2402.651	---	---
3DH5	Ant1	2441	1.284	2440.355	2441.639	---	---
3DH5	Ant1	2480	1.302	2479.343	2480.645	---	---



Test Graphs:

L:





2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480



Report No.: PTC25090819601E-FC01



R:

DH5-Ant1-2402



DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480






10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



L:


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.992	≥ 0.966	PASS
2DH5	Ant1	Hop	1.31	≥ 0.884	PASS
3DH5	Ant1	Hop	1.01	≥ 0.886	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.348	≥ 0.966	PASS
2DH5	Ant1	Hop	1	≥ 0.852	PASS
3DH5	Ant1	Hop	1.01	≥ 0.872	PASS

Test Graphs:

L:

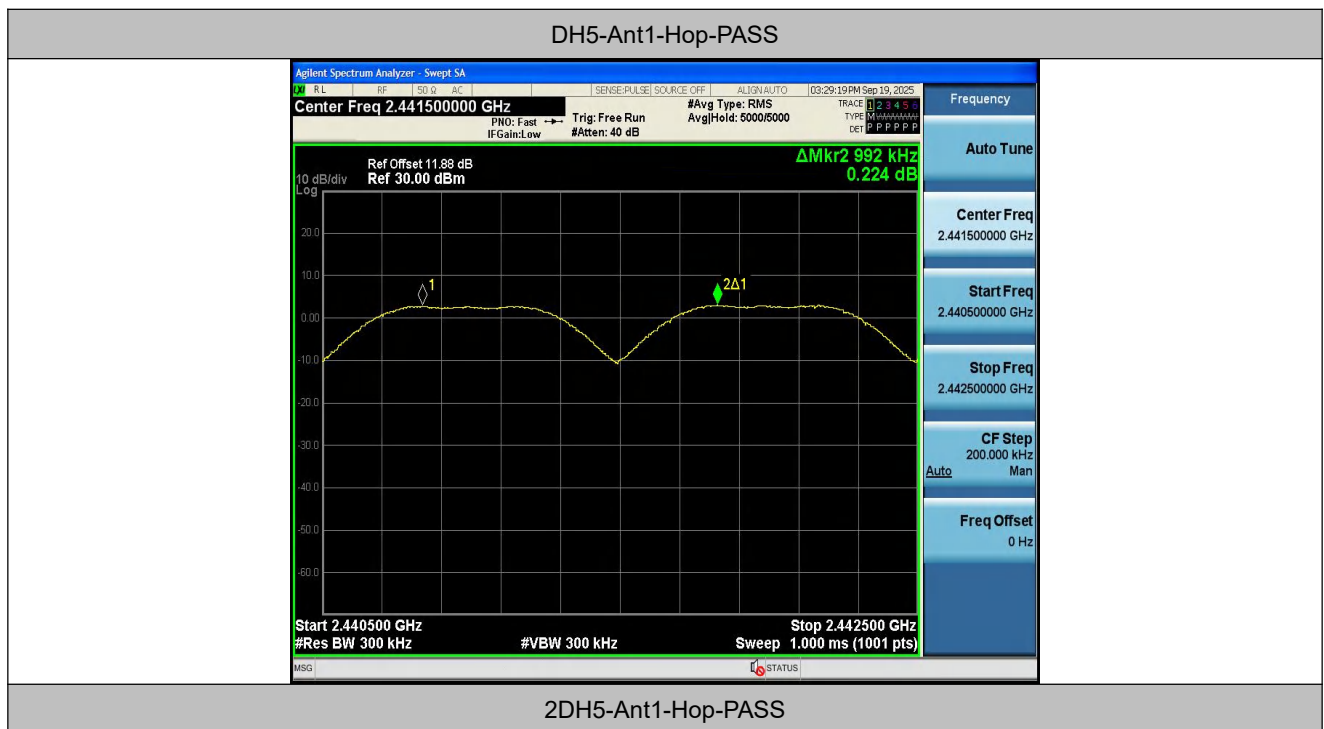



3DH5-Ant1-Hop-PASS





R:

DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS






11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

L:


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Test Graphs:

L:

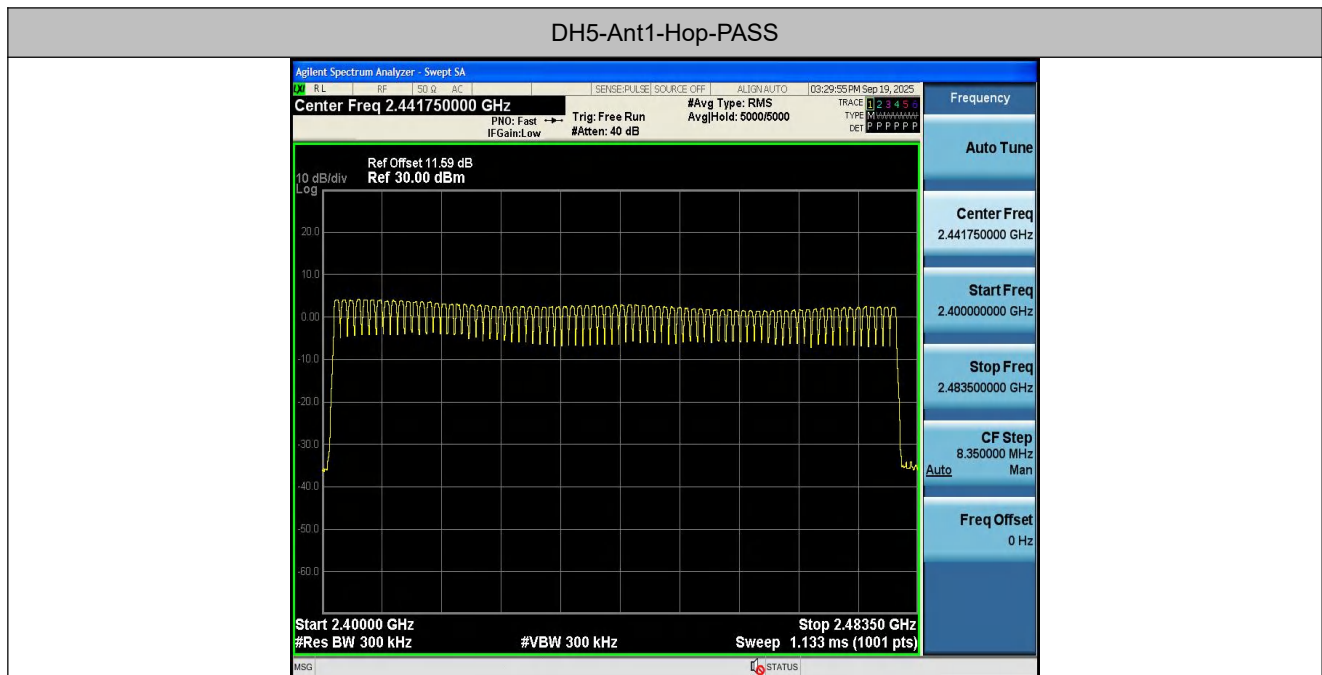




2DH5-Ant1-Hop-PASS

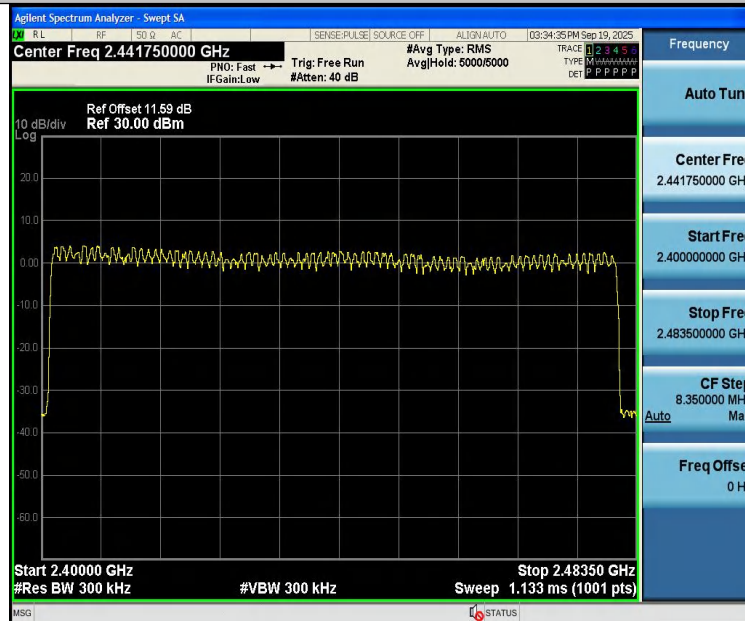


3DH5-Ant1-Hop-PASS

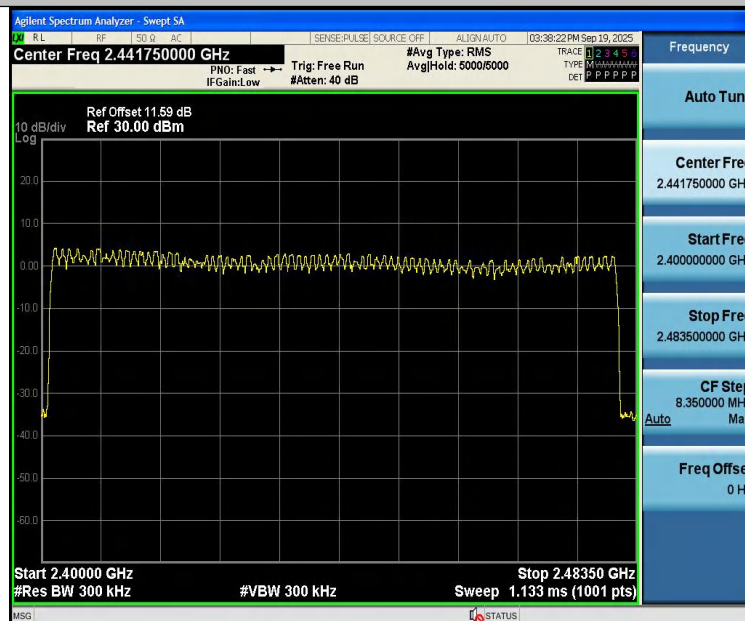



R:

DH5-Ant1-Hop-PASS

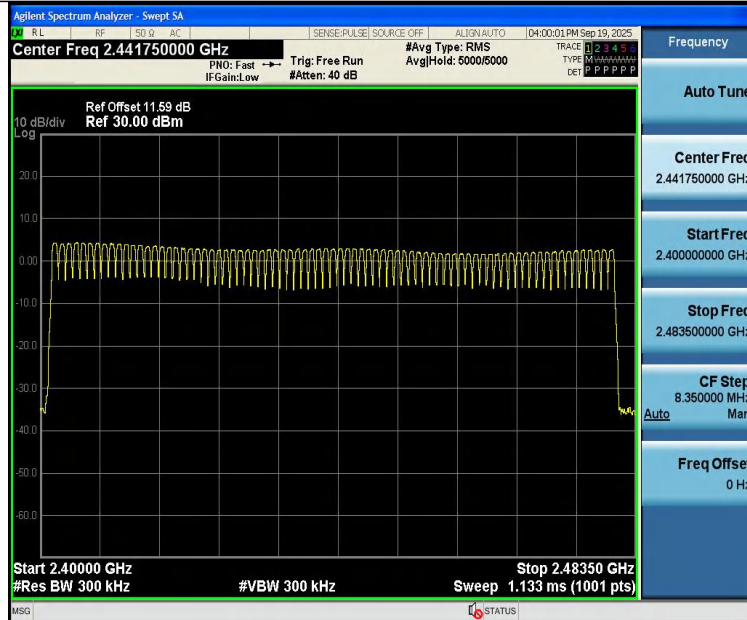


2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS



Report No.: PTC25090819601E-FC01

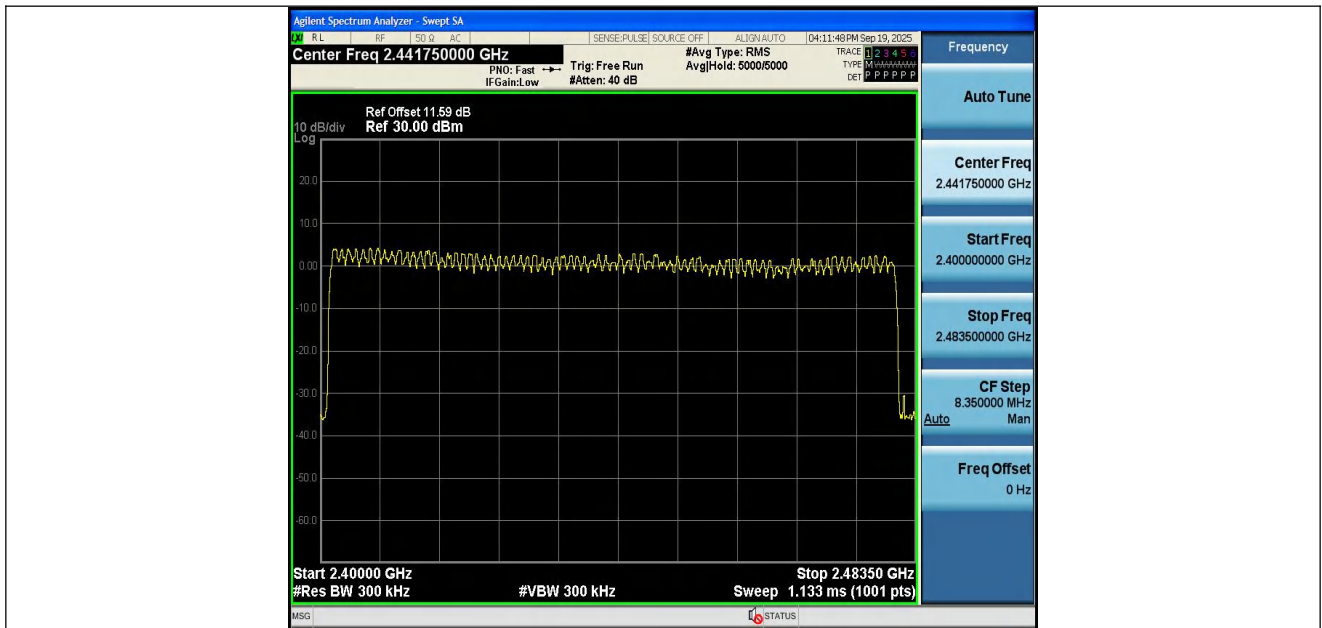




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

**12.4 Test Data**

Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24.5℃
Test Result	: PASS	Humidity	: 55%RH

L:


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.908	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.916	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.918	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
2DH1	Ant1	Hop	0.414	320	0.132	≤0.4	PASS
3DH1	Ant1	Hop	0.417	320	0.133	≤0.4	PASS
DH3	Ant1	Hop	1.661	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

R:


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.910	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.914	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.918	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
2DH1	Ant1	Hop	0.415	320	0.133	≤0.4	PASS
3DH1	Ant1	Hop	0.417	320	0.133	≤0.4	PASS
DH3	Ant1	Hop	1.662	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

Note:

- 1.DH1/2DH1 Dwell Time: Reading * (1600/2)*31.6/(channel number).
- 2.DH3/2DH3 Dwell Time: Reading * (1600/4)*31.6/(channel number).
- 3.DH5/2DH5 Dwell Time: Reading * (1600/6)*31.6/(channel number).




L:







DH1-Ant1-Hop-PASS

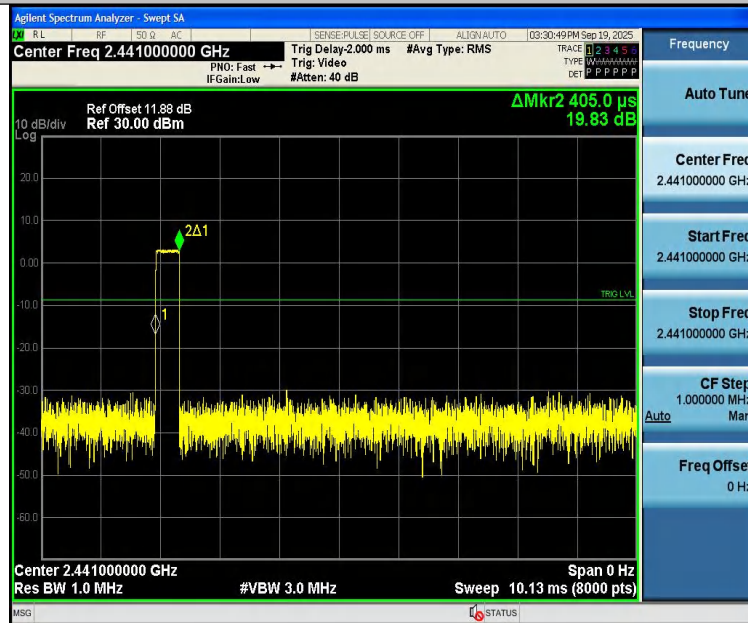


2DH1-Ant1-Hop-PASS

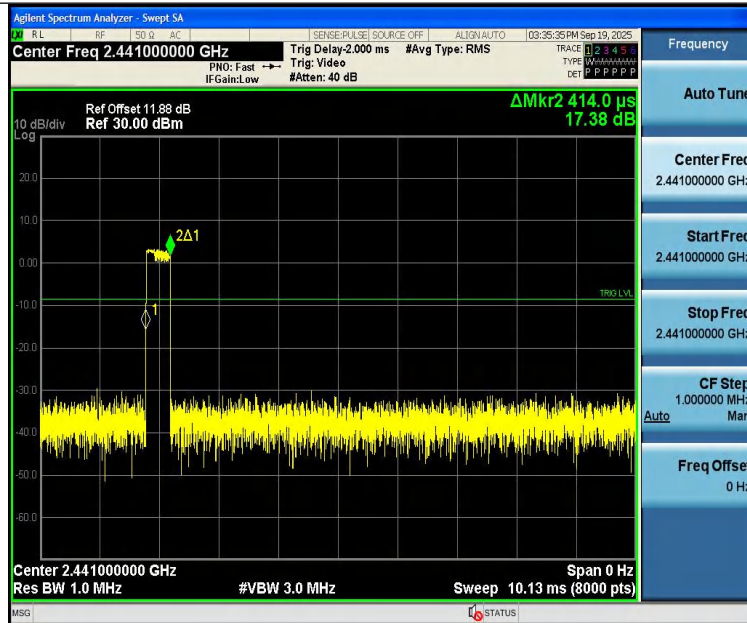

3DH1-Ant1-Hop-PASS

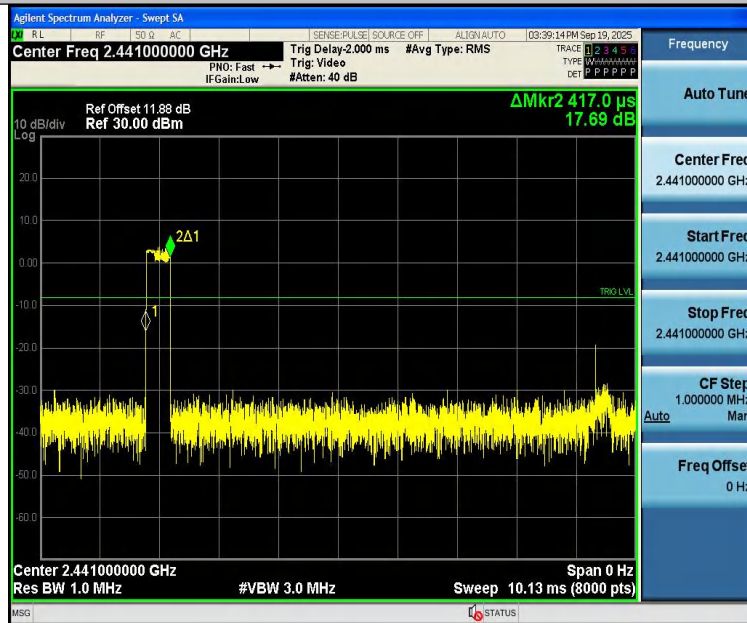

DH3-Ant1-Hop-PASS

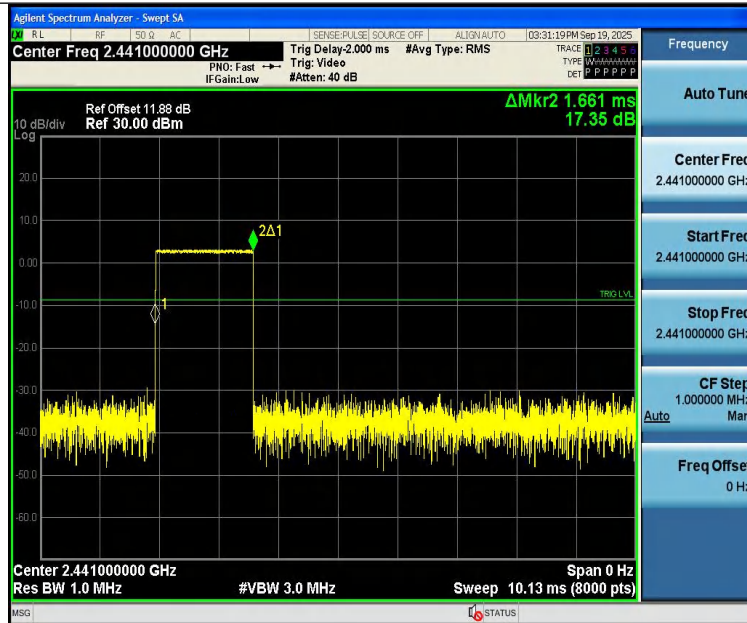

2DH3-Ant1-Hop-PASS




3DH3-Ant1-Hop-PASS





R:


DH5-Ant1-Hop-PASS

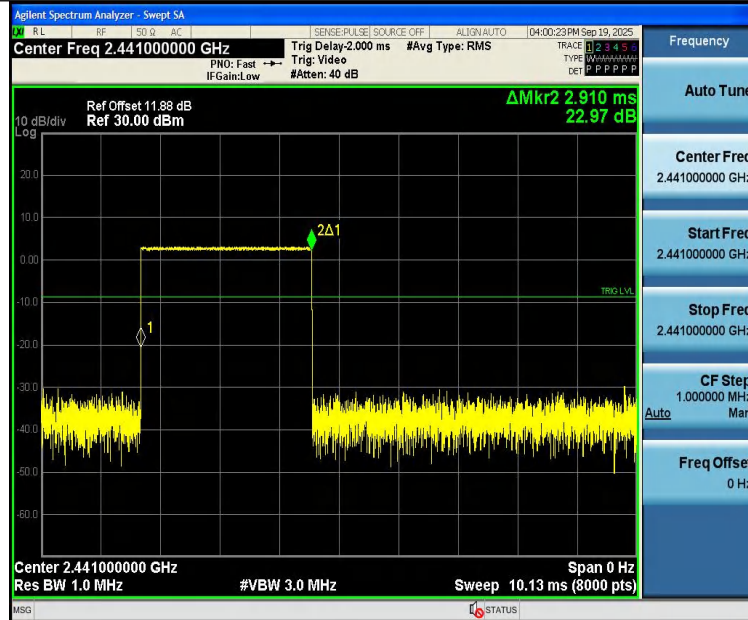


2DH5-Ant1-Hop-PASS




3DH5-Ant1-Hop-PASS

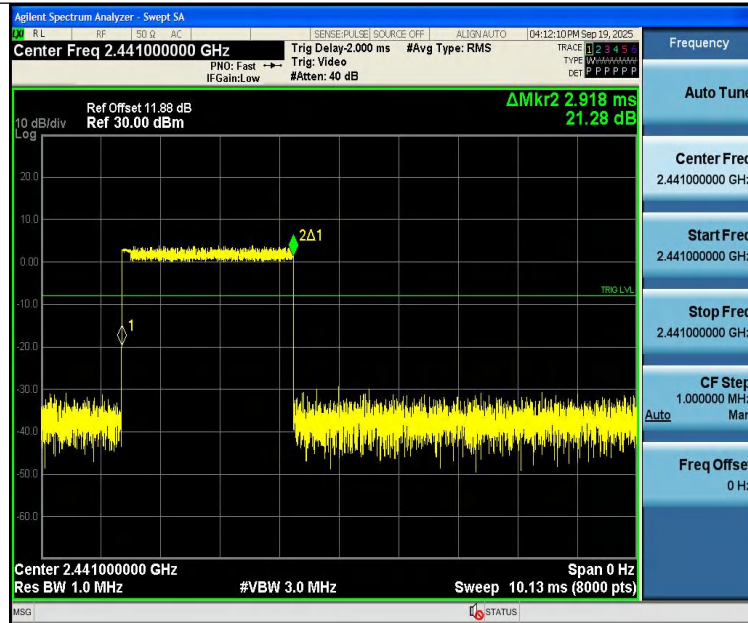


DH1-Ant1-Hop-PASS

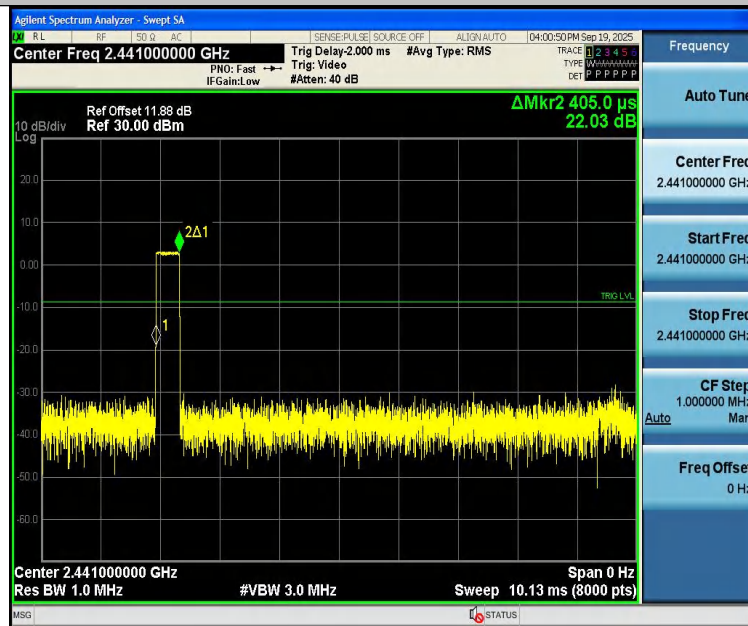


2DH1-Ant1-Hop-PASS

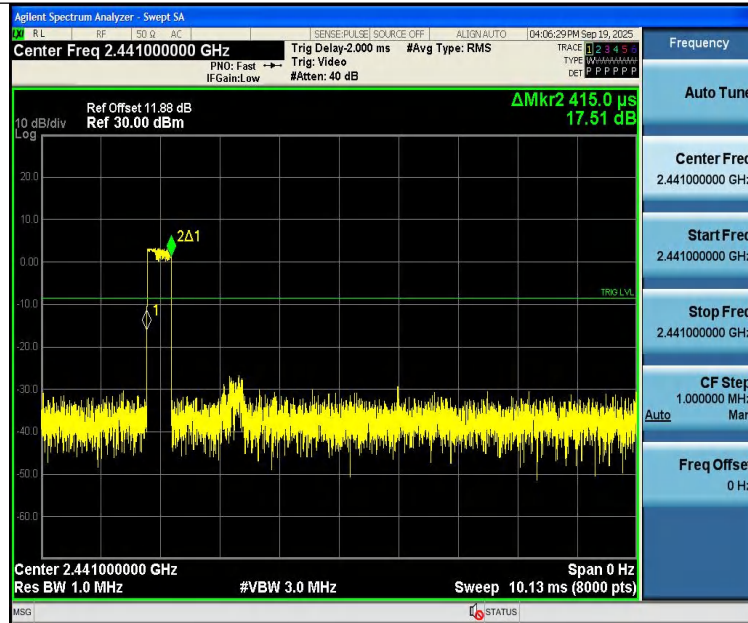


3DH1-Ant1-Hop-PASS

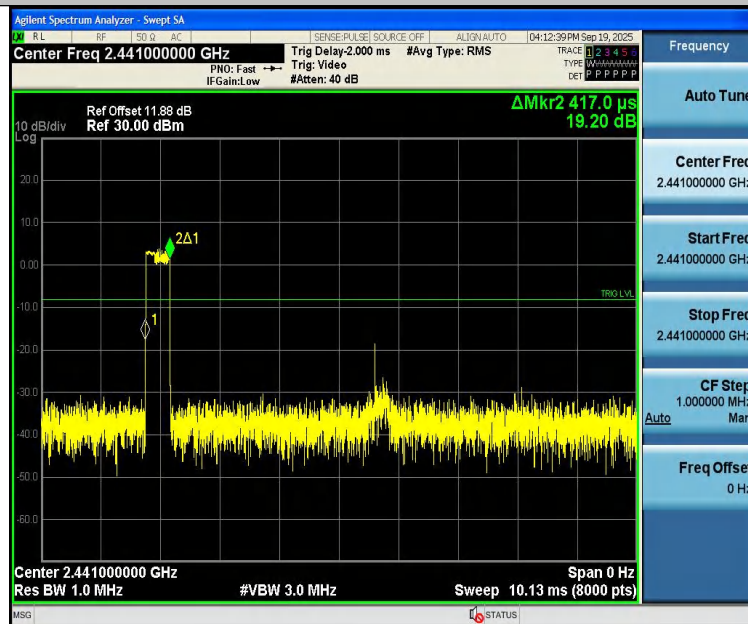

DH3-Ant1-Hop-PASS

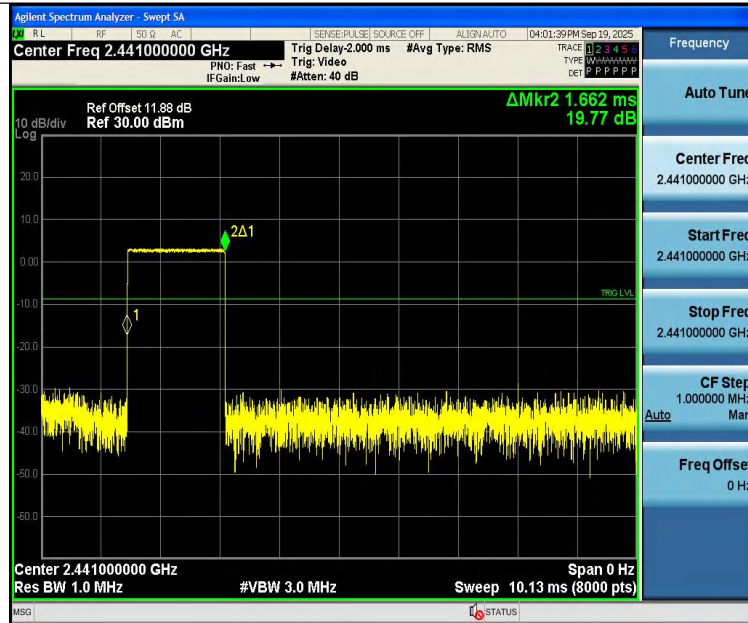

2DH3-Ant1-Hop-PASS

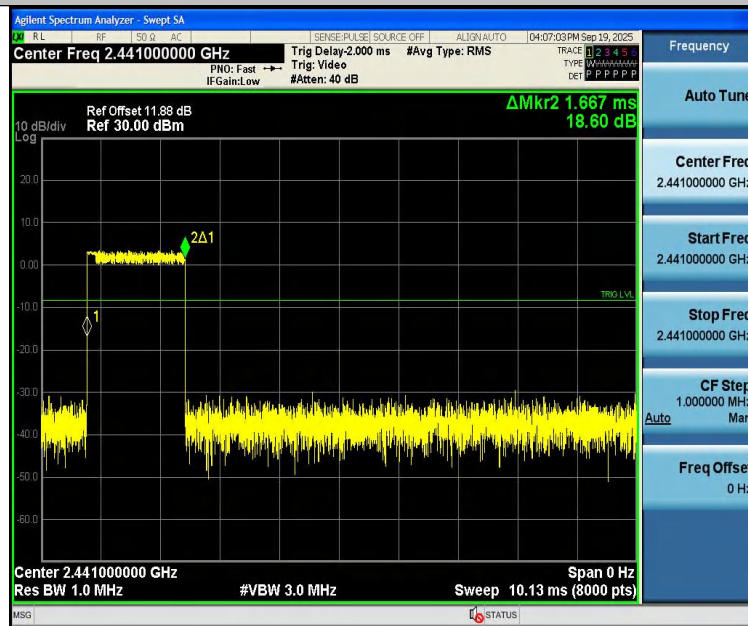

3DH3-Ant1-Hop-PASS

