TEST REPORT

Applicant Name:	Shenzhen Ameta Technology Co., Ltd.
Address:	501, BLDG 4, Pingshan MinQi Technology Park, No. 65 Lishan Road,Pingshan Community, Taoyuan Street ,Nanshan District, Shenzhen,Guangdong China
Report Number:	2401X30305E-RF-00A
FCC ID:	2BHJX-ATS20BT2424

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type:	R/C QUADCOPTER
Model No.:	DR-ATS20B
Multiple Model(s) No.:	DR-UHF20B
Trade Mark:	N/A
Date Received:	2024/09/09
Issue Date:	2025/01/11

Test Result:	Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko. Wu

Ekko Wu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked# is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **4**

GENERAL INFORMATION **5**

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5
OBJECTIVE 5
TEST METHODOLOGY 5
MEASUREMENT UNCERTAINTY 6
TEST FACILITY 6

SYSTEM TEST CONFIGURATION **7**

DESCRIPTION OF TEST CONFIGURATION 7
EQUIPMENT MODIFICATIONS 7
EUT EXERCISE SOFTWARE 7
SUPPORT EQUIPMENT LIST AND DETAILS 7
EXTERNAL I/O CABLE 8
BLOCK DIAGRAM OF TEST SETUP 8

SUMMARY OF TEST RESULTS **9**

TEST EQUIPMENT LIST **10**

FCC §15.247 (I) &§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) **11**

APPLICABLE STANDARD 11
RESULT 11

FCC §15.203 - ANTENNA REQUIREMENT **12**

APPLICABLE STANDARD 12
ANTENNA CONNECTOR CONSTRUCTION 12

FCC §15.209, §15.205 & §15.247(D) – UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS13

APPLICABLE STANDARD 13
EUT SETUP 13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP 14
TEST PROCEDURE 15
FACTOR & OVER LIMIT/MARGIN CALCULATION 15
TEST DATA 15

FCC §15.247(A) (2) - 6 DB EMISSON BANDWIDTH **43**

STANDARD APPLICABLE 43
TEST PROCEDURE 43
TEST DATA 44

FCC §15.247(B) (3) - PEAK OUTPUT POWER MEASUREMENT **45**

APPLICABLE STANDARD 45
TEST PROCEDURE 45
TEST DATA 45

FCC §15.247(E) - POWER SPECTRAL DENSITY **46**

APPLICABLE STANDARD 46
TEST PROCEDURE 46
TEST DATA 46

FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 47
APPLICABLE STANDARD 47
TEST PROCEDURE 47
TEST DATA 48
C63.10 §11.6- DUTY CYCLE 49
TEST PROCEDURE 49
TEST DATA 49
EUT PHOTOGRAPHS 50
TEST SETUP PHOTOGRAPHS 51
APPENDIX 52
APPENDIX A: DTS BANDWIDTH 52
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH 56
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER 59
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY 62
APPENDIX E: BAND EDGE MEASUREMENTS 65
APPENDIX F: DUTY CYCLE 67

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401X30305E-RF-00A	Original Report	2025/01/11

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	R/C QUADCOPTER
Tested Model	DR-ATS20B
Multiple Model(s)	DR-UHF20B
Frequency Range	BLE: 2402-2480MHz
Maximum Conducted Peak Output Power	BLE:8.43dBm
Modulation Technique	BLE: GFSK
Antenna Specification#	-8dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery
Sample serial number	2RE6-2 for Radiated Emissions Test 2RE6-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The Multiple models are electrically identical with the test model except for model name and sales channels. Please refer to the declaration letter# for more detail, which was provided by manufacturer.	

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.247 rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1℃
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

"SecureCRT#" exercise software was used and power level is Default#. The software and power level was provided by the applicant.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From/Port	To
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions:

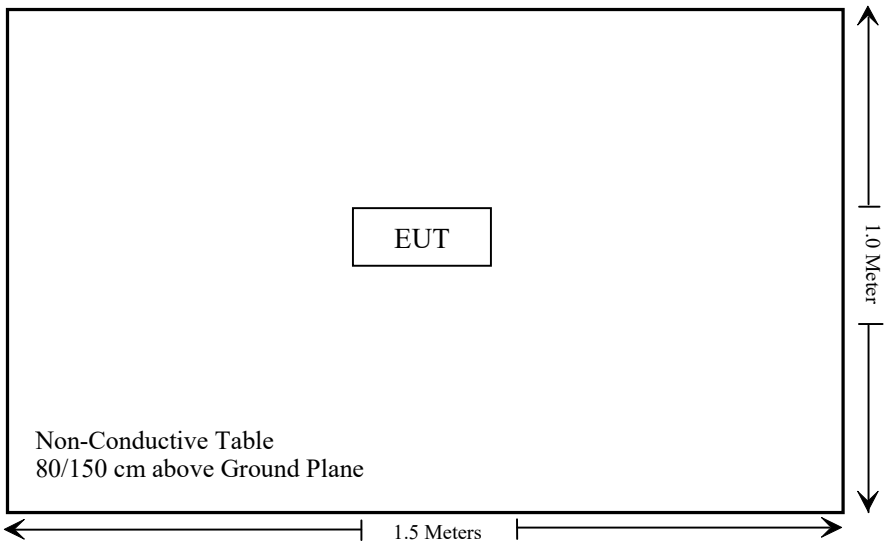

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
C63.10 §11.6	Duty Cycle	/

Not Applicable, the device was powered by battery when operating.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde &Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) &§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	**Electric Field Strength (V/m)**	**Magnetic Field Strength (A/m)**	**Power Density (mW/cm^2)**	**Averaging Time (minutes)**
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*($180/f^2$)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density
According to §1.1310 and §2.1091 RF exposure is calculated.

Result

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit
$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm^2);
P = power input to the antenna (in appropriate units, e.g., mW);
G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;
R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

For worst case:

Mode	Frequency (MHz)	Antenna Gain#		Max Tune-up Power#		Evaluation Distance (cm)	Power Density (mW/cm^2)	MPE Limit (mW/cm^2)
		(dBi)	(numeric)	(dBm)	(mW)			
BLE	2402-2480	-8.0	0.16	8.5	7.08	20	0.0002	1.0
5.8G Wi-Fi	5745-5825	2.44	1.75	15.5	35.48	20	0.0124	1.0

Note: 1) The tune up conducted power and antenna gain was declared by the applicant.
2) The BLE and 5G Wi-Fi cannot Simultaneous transmitting.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain# is -8dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant

FCC §15.209, §15.205 & §15.247(D) – UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

EUT Setup

9 kHz-30MHz:

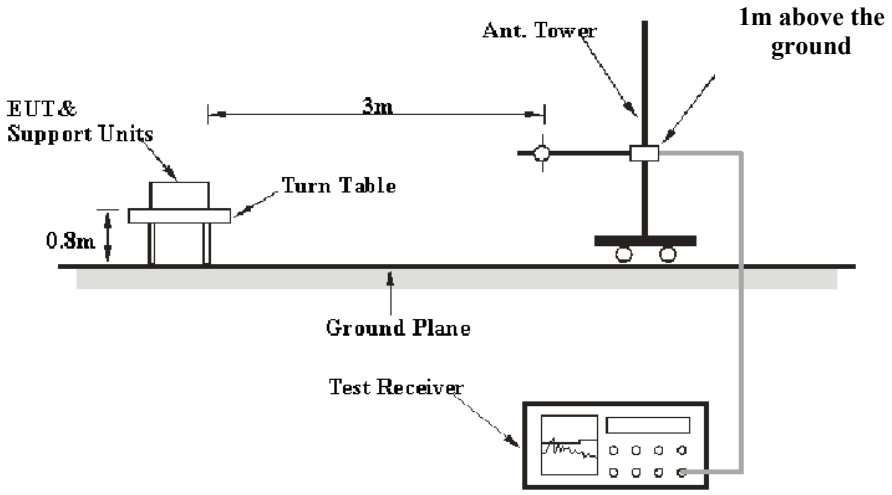

30MHz-1GHz:

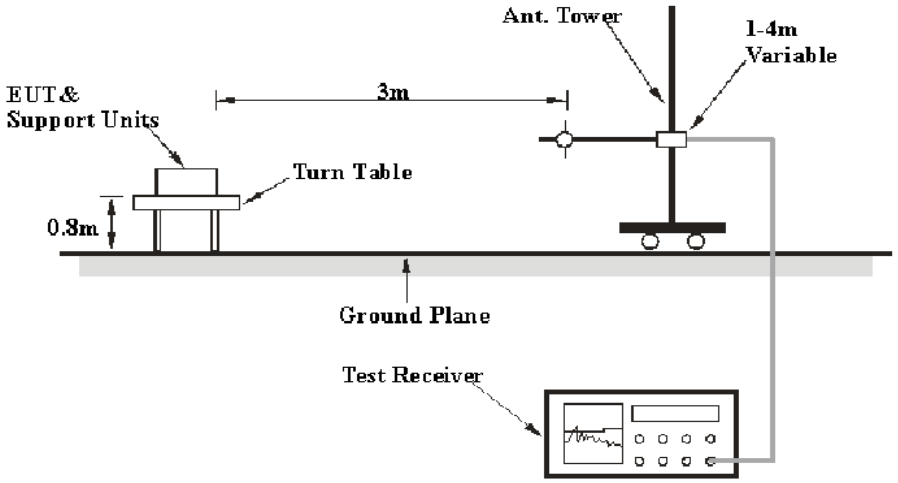

Above 1GHz:

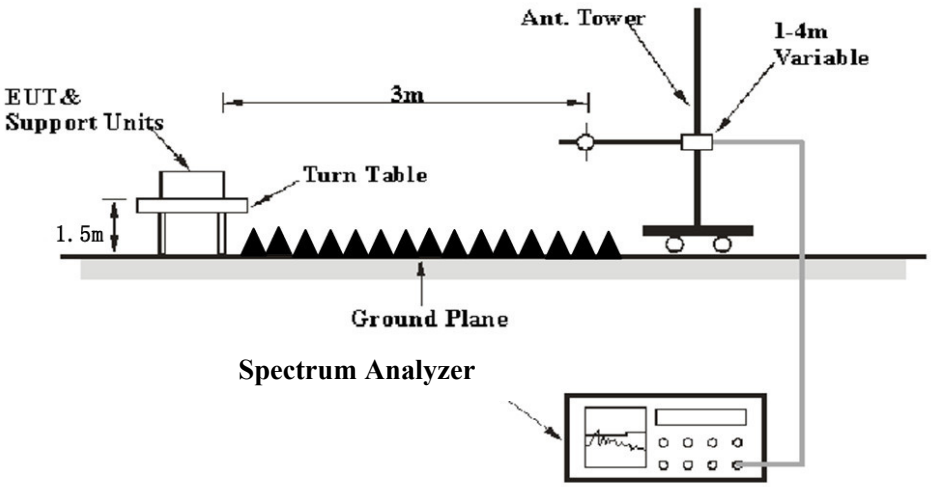

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25 GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Average	>98%	1MHz	≥10 Hz Note 1
	<98%	1MHz	≥1/Ton Note 2
Note 1: The detail test parameters please refer to duty cycle section. Note 2: Ton is minimum transmission duration.			

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over Limit/Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level / Corrected Amplitude – Limit
Level / Corrected Amplitude = Read Level + Factor

Test Data

Environmental Conditions

Temperature:	22~25.3 °C
Relative Humidity:	51~54 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-09-26 for below 1GHz and Dylan Yang from 2024-10-09 to 2024-10-31 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.

9 kHz-30MHz: *(Maximum output power mode, BLE 1M High Channel)*

Parallel (worst case)

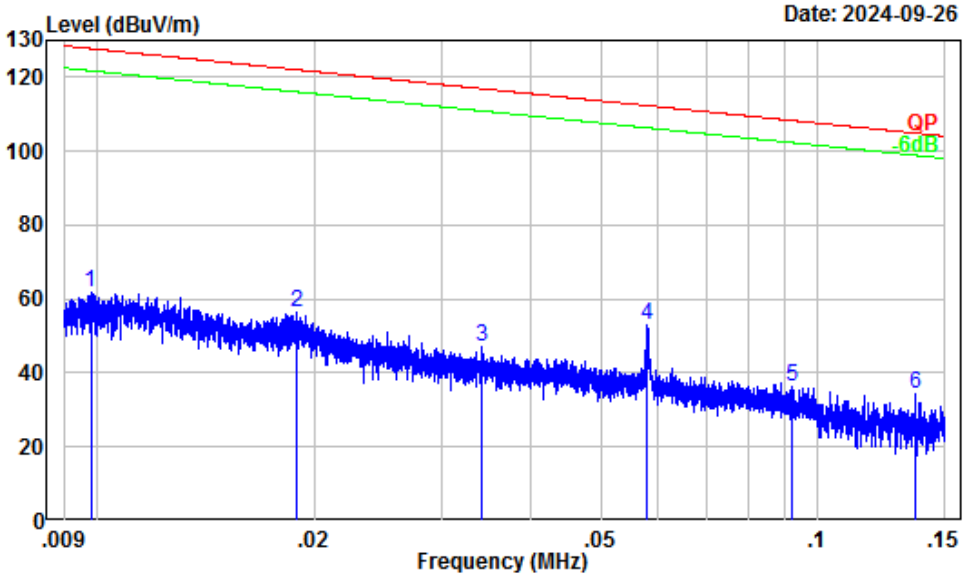

Site : Chamber A
Condition : 3m
Project Number: 2401X30305E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.84	23.95	61.79	127.77	-65.98	Peak
2	0.02	33.14	23.07	56.21	122.07	-65.86	Peak
3	0.03	26.55	20.33	46.88	116.92	-70.04	Peak
4	0.06	21.99	31.19	53.18	112.34	-59.16	Peak
5	0.09	17.82	18.43	36.25	108.30	-72.05	Peak
6	0.14	15.34	19.00	34.34	104.89	-70.55	Peak

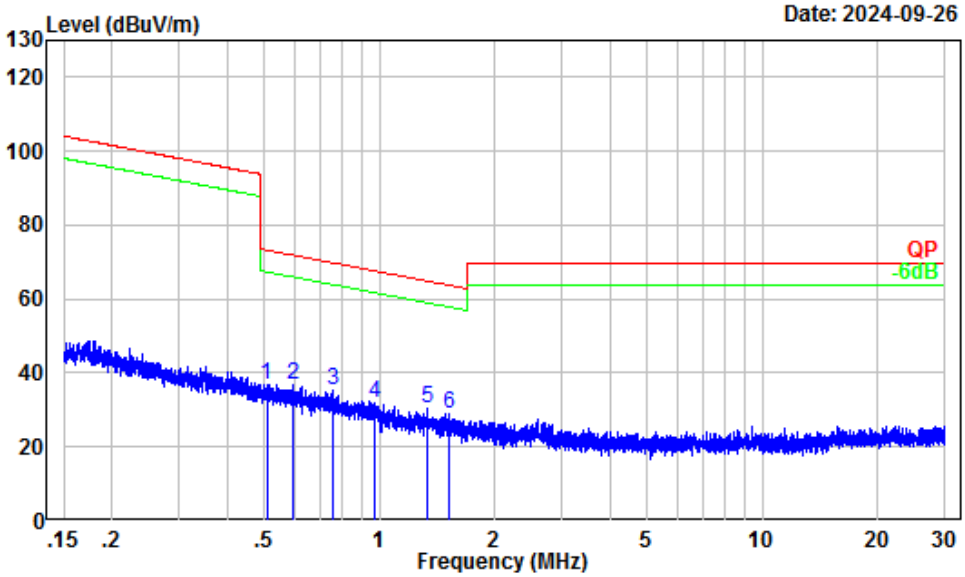

Site : Chamber A
Condition : 3m
Project Number: 2401X30305E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.51	3.38	33.57	36.95	73.48	-36.53	Peak
2	0.59	2.35	34.33	36.68	72.09	-35.41	Peak
3	0.75	0.44	34.72	35.16	69.97	-34.81	Peak
4	0.97	-1.38	33.44	32.06	67.73	-35.67	Peak
5	1.34	-2.76	33.07	30.31	64.90	-34.59	Peak
6	1.53	-3.42	32.29	28.87	63.72	-34.85	Peak

30MHz-1GHz: *(Maximum output power mode, BLE 1M High Channel)*

Horizontal

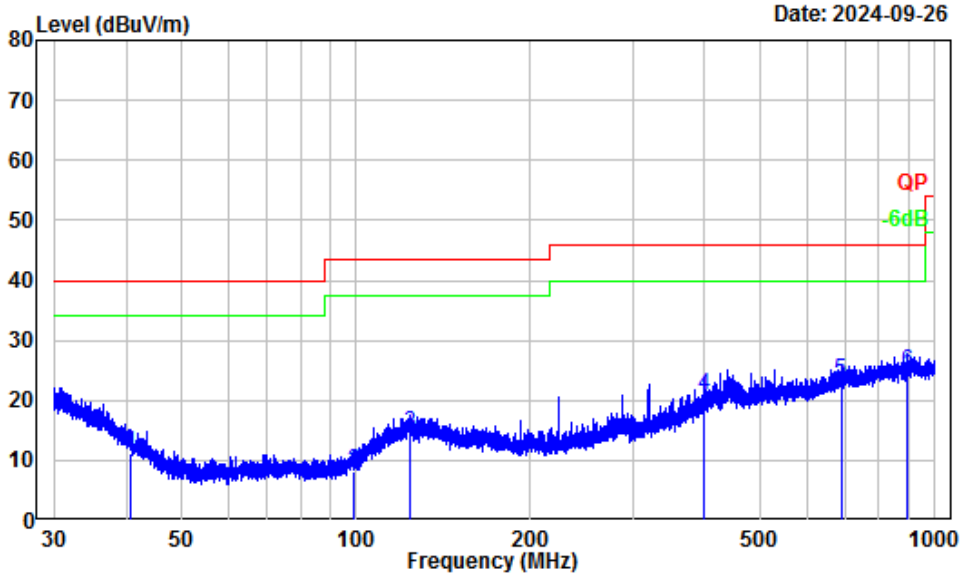

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401X30305E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.68	-12.85	23.90	11.05	40.00	-28.95	QP
2	99.01	-16.20	24.29	8.09	43.50	-35.41	QP
3	123.64	-11.14	25.56	14.42	43.50	-29.08	QP
4	400.08	-8.41	29.24	20.83	46.00	-25.17	QP
5	688.05	-3.67	26.89	23.22	46.00	-22.78	QP
6	897.39	-1.31	26.08	24.77	46.00	-21.23	QP

Vertical

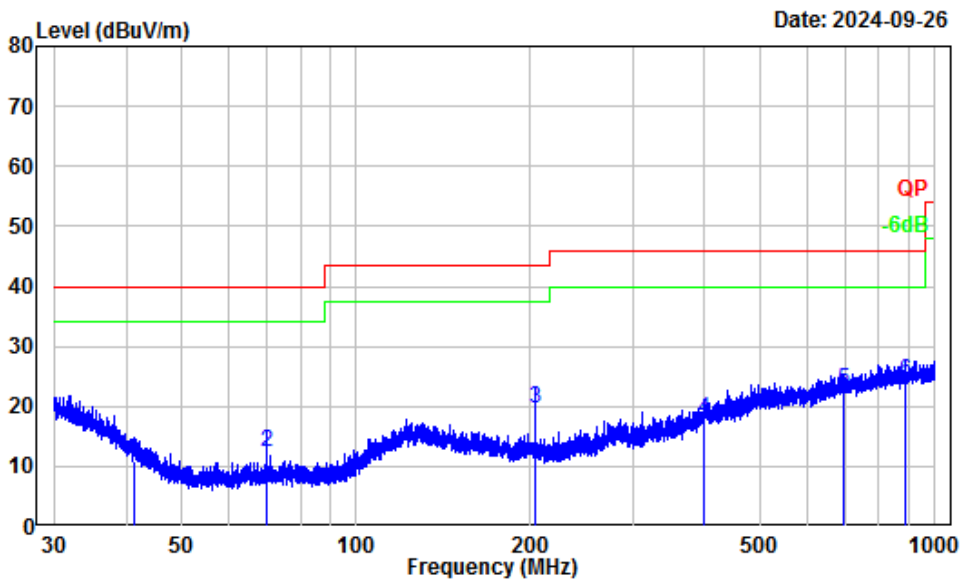

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401X30305E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.17	-13.20	24.09	10.89	40.00	-29.11	QP
2	69.84	-17.87	30.38	12.51	40.00	-27.49	QP
3	204.33	-13.39	33.07	19.68	43.50	-23.82	QP
4	400.08	-8.41	26.35	17.94	46.00	-28.06	QP
5	696.55	-3.53	26.10	22.57	46.00	-23.43	QP
6	888.78	-1.42	25.71	24.29	46.00	-21.71	QP

1-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/AV					
BLE 1M							
Low Channel 2402MHz							
4804.00	55.96	PK	H	2.42	58.38	74	-15.62
4804.00	50.21	AV	H	2.42	52.63	54	-1.37
4804.00	50.86	PK	V	2.42	53.28	74	-20.72
4804.00	47.63	AV	V	2.42	50.05	54	-3.95
Middle Channel 2440MHz							
4880.00	55.06	PK	H	2.58	57.64	74	-16.36
4880.00	49.33	AV	H	2.58	51.91	54	-2.09
4880.00	50.27	PK	V	2.58	52.85	74	-21.15
4880.00	45.62	AV	V	2.58	48.20	54	-5.80
High Channel 2480MHz							
4960.00	54.54	PK	H	2.68	57.22	74	-16.78
4960.00	48.42	AV	H	2.68	51.10	54	-2.90
4960.00	50.52	PK	V	2.68	53.20	74	-20.80
4960.00	43.04	AV	V	2.68	45.72	54	-8.28
BLE 2M							
Low Channel 2402MHz							
4804.00	55.74	PK	H	2.42	58.16	74	-15.84
4804.00	47.59	AV	H	2.42	50.01	54	-3.99
4804.00	50.97	PK	V	2.42	53.39	74	-20.61
4804.00	41.21	AV	V	2.42	43.63	54	-10.37
Middle Channel 2440MHz							
4880.00	54.63	PK	H	2.58	57.21	74	-16.79
4880.00	46.32	AV	H	2.58	48.90	54	-5.10
4880.00	50.31	PK	V	2.58	52.89	74	-21.11
4880.00	39.27	AV	V	2.58	41.85	54	-12.15
High Channel 2480MHz							
4960.00	51.95	PK	H	2.68	54.63	74	-19.37
4960.00	42.41	AV	H	2.68	45.09	54	-8.91
4960.00	48.33	PK	V	2.68	51.01	74	-22.99
4960.00	38.16	AV	V	2.68	40.84	54	-13.16

Note:
Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Corrected. Amplitude - Limit
The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

BLE 1M			
Test Channel:	**2402MHz**	**Ant. Polar. :**	**Horizontal**

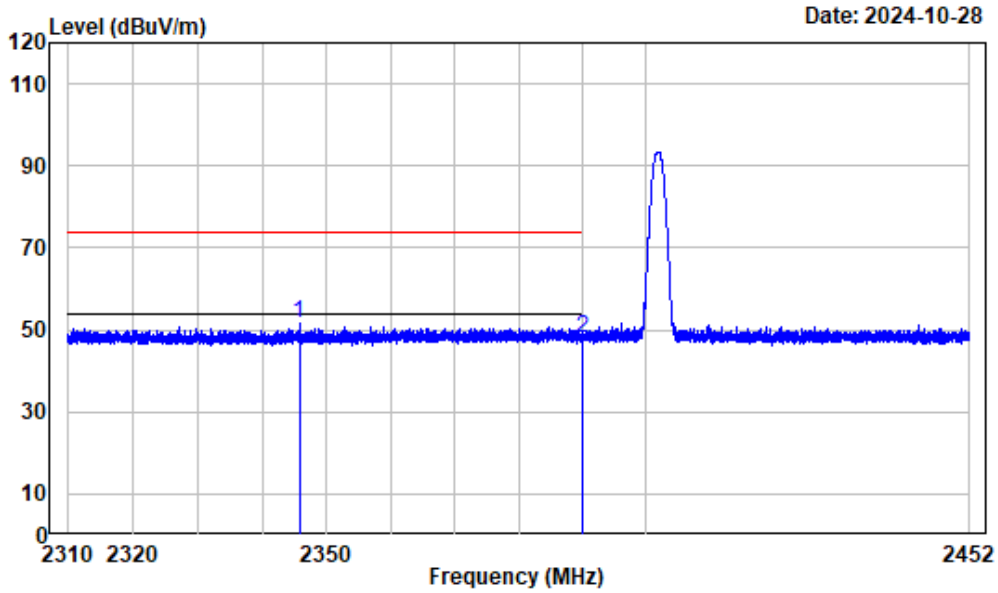

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2345.700	-3.14	54.54	51.40	74.00	-22.60	peak
2	2390.000	-3.20	51.39	48.19	74.00	-25.81	Peak

BLE 1M			
Test Channel:	**2402MHz**	**Ant. Polar. :**	**Vertical**

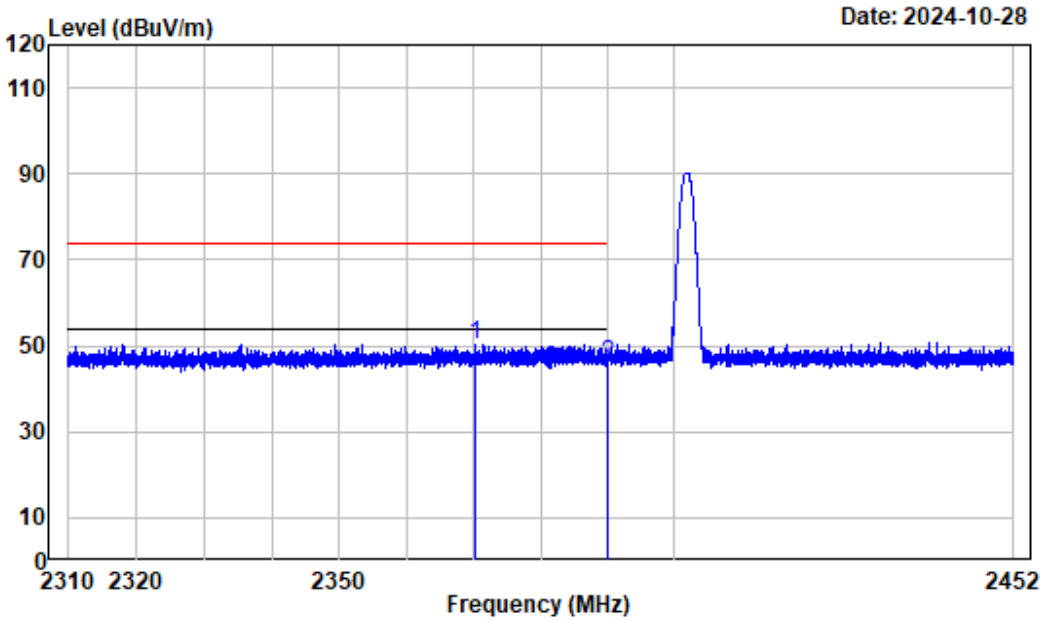

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2370.109	-3.17	53.63	50.46	74.00	-23.54	Peak
2	2390.000	-3.20	49.09	45.89	74.00	-28.11	Peak

BLE 1M			
Test Channel:	**2480MHz**	**Ant. Polar. :**	**Horizontal**

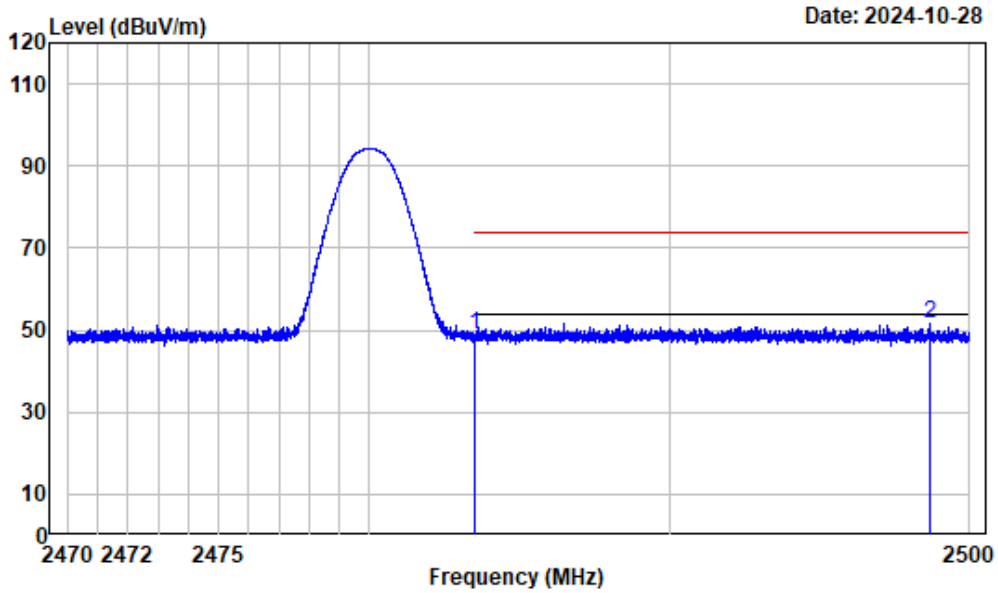

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	52.02	48.85	74.00	-25.15	Peak
2	2498.650	-3.20	54.80	51.60	74.00	-22.40	peak

BLE 1M			
Test Channel:	**2480MHz**	**Ant. Polar. :**	**Vertical**

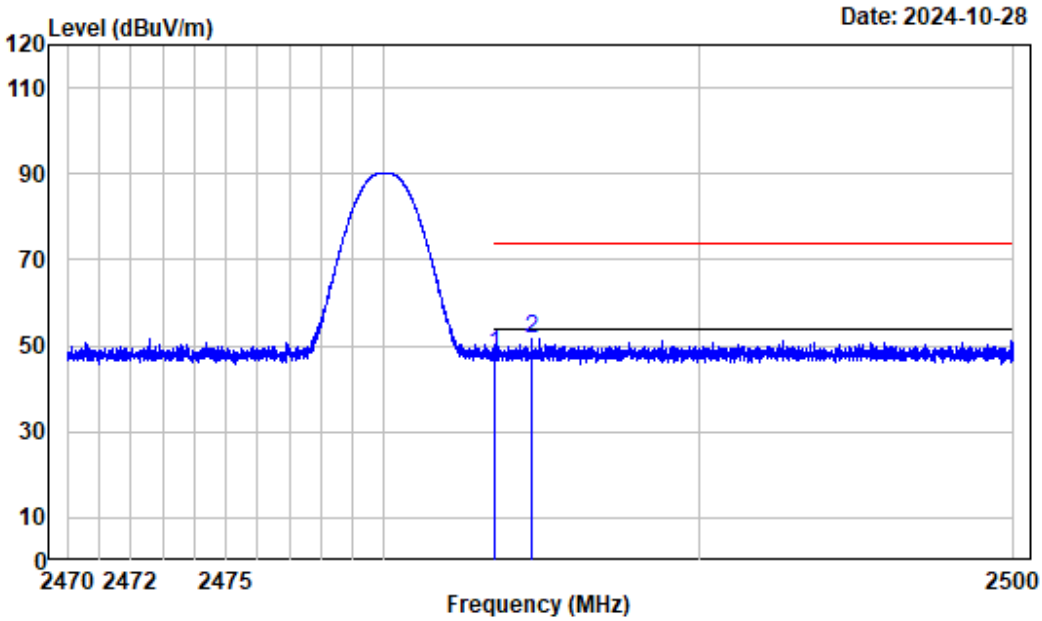

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	51.08	47.91	74.00	-26.09	Peak
2	2484.679	-3.17	54.70	51.53	74.00	-22.47	Peak

BLE 2M			
Test Channel:	**2402MHz**	**Ant. Polar. :**	**Horizontal**

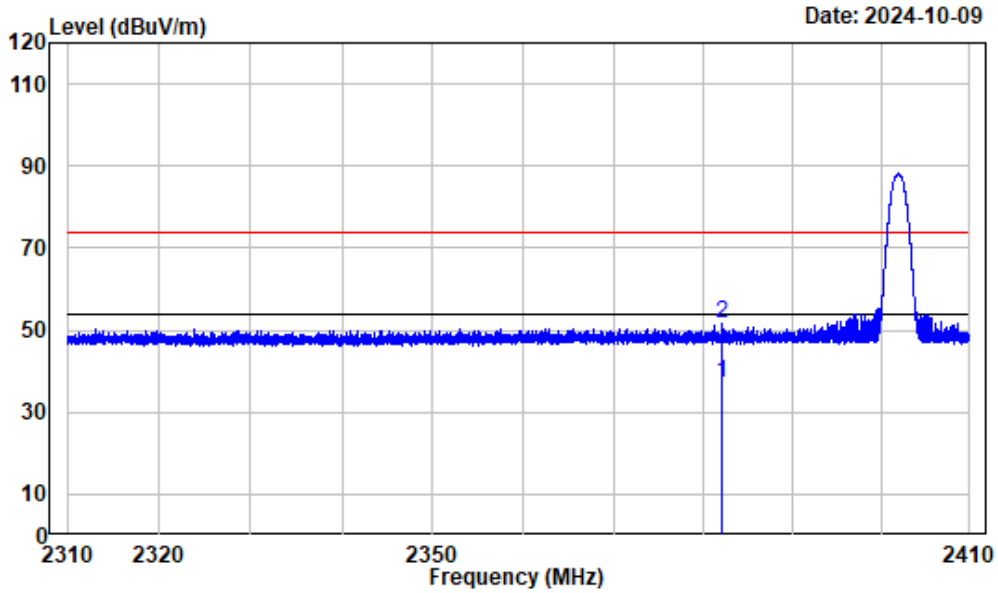

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2382.100	-3.19	40.53	37.34	54.00	-16.66	Average
2	2382.100	-3.19	54.95	51.76	74.00	-22.24	peak

BLE 2M			
Test Channel:	**2402MHz**	**Ant. Polar. :**	**Vertical**

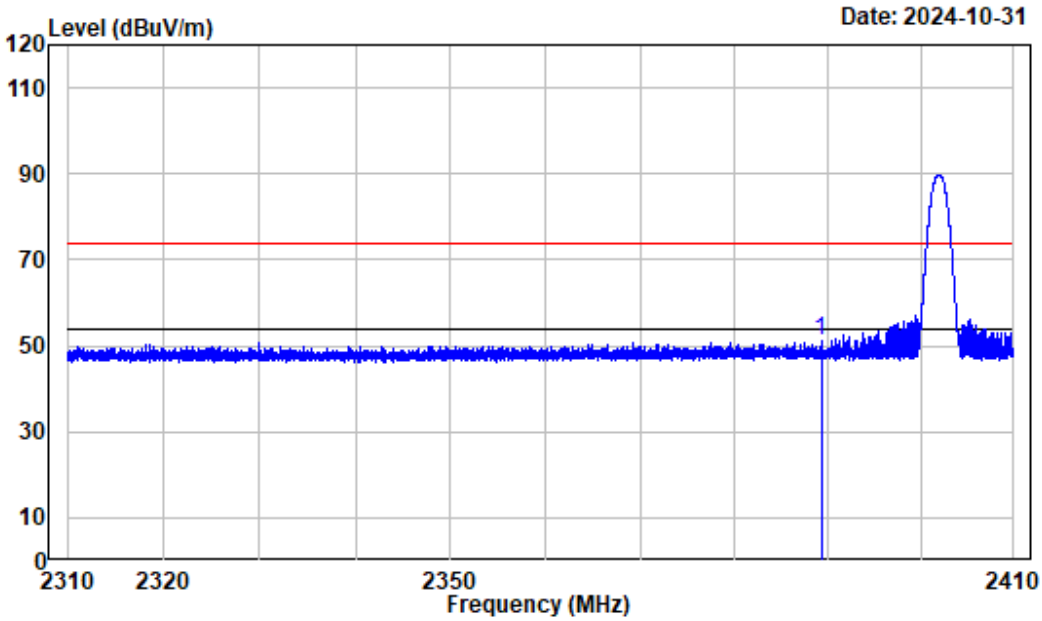

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.313	-3.20	54.17	50.97	74.00	-23.03	Peak

BLE 2M			
Test Channel:	**2480MHz**	**Ant. Polar. :**	**Horizontal**

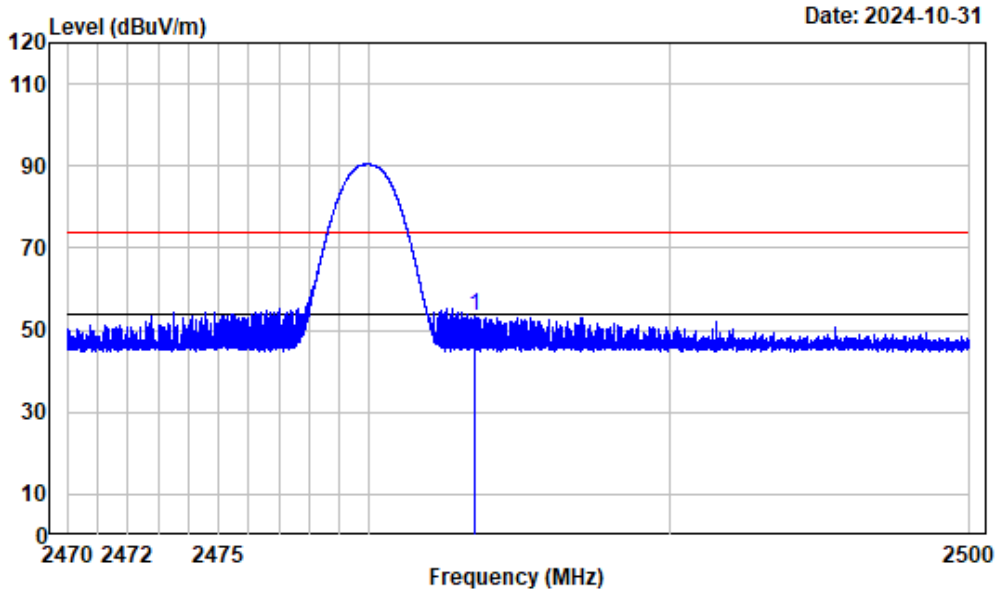

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	56.71	53.54	74.00	-20.46	Peak

BLE 2M			
Test Channel:	**2480MHz**	**Ant. Polar. :**	**Vertical**

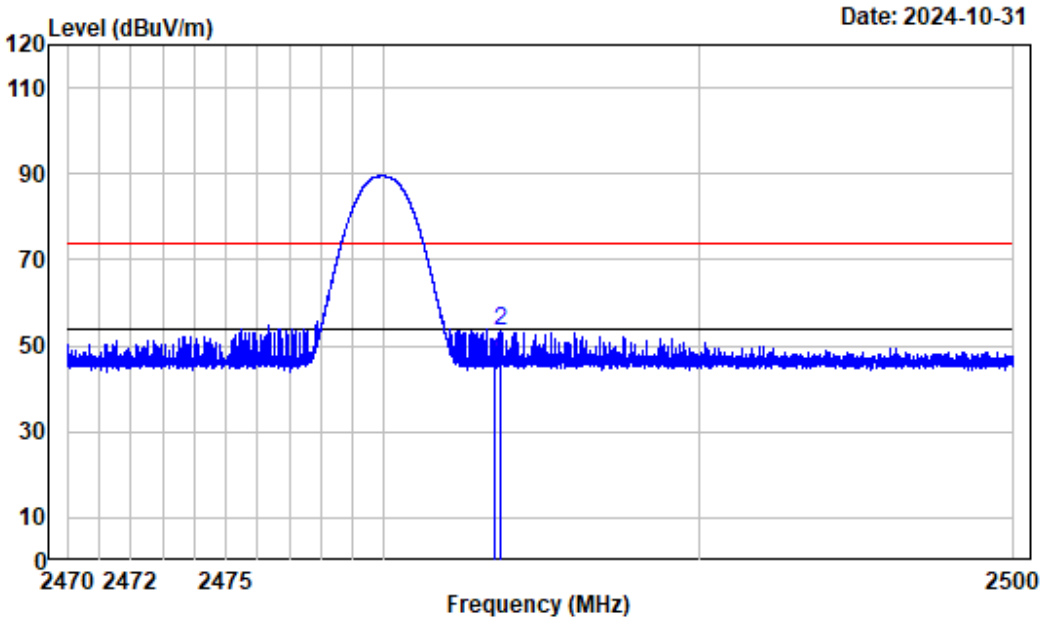

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	49.50	46.33	74.00	-27.67	Peak
2	2483.684	-3.17	56.76	53.59	74.00	-20.41	Peak

Listed with the worst harmonic margin test plot:
BLE 1M

Horizontal

1-4GHz

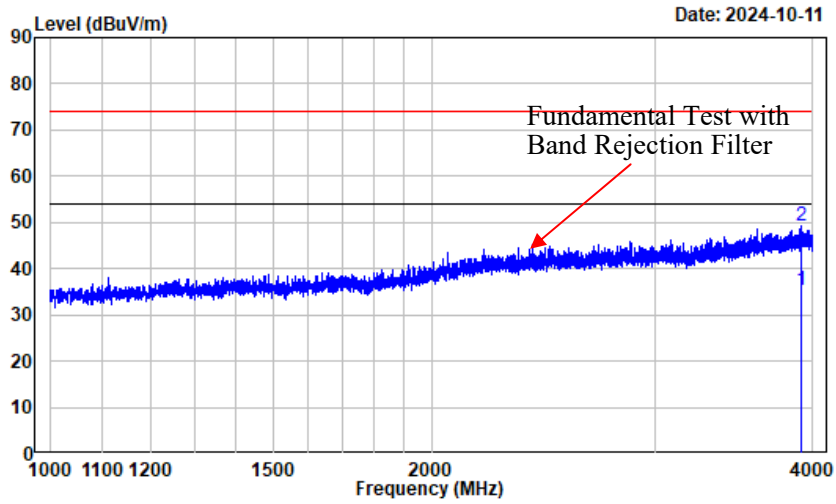

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3914.875	-0.42	35.62	35.20	54.00	-18.80	Average
2	3914.875	-0.42	49.81	49.39	74.00	-24.61	Peak

Vertical

1-4GHz

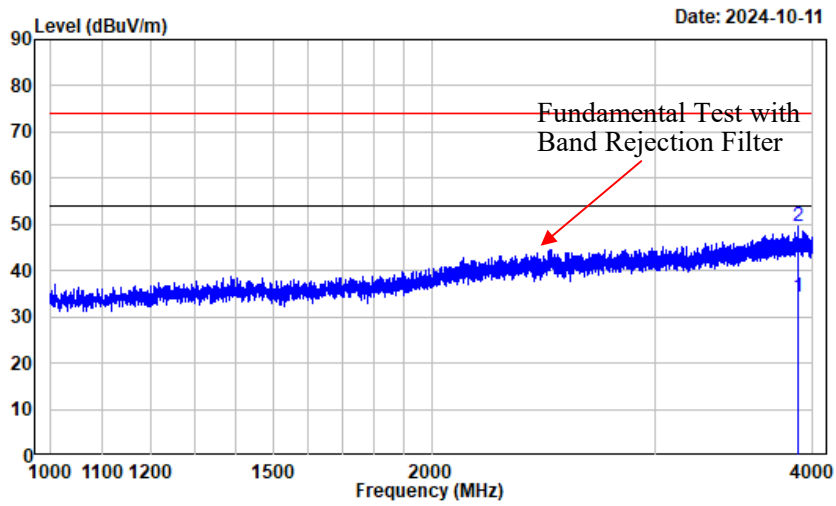

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3897.250	-0.54	34.86	34.32	54.00	-19.68	Average
2	3897.250	-0.54	50.21	49.67	74.00	-24.33	Peak

Horizontal-Peak

4-18GHz

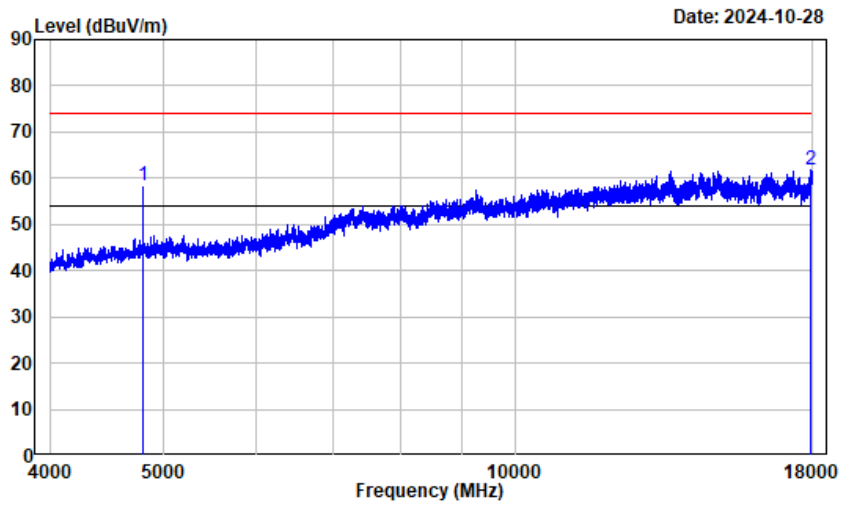

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	55.96	58.38	74.00	-15.62	Peak
2	17926.490	24.10	37.85	61.95	74.00	-12.05	Peak

Horizontal-Average

4-18GHz

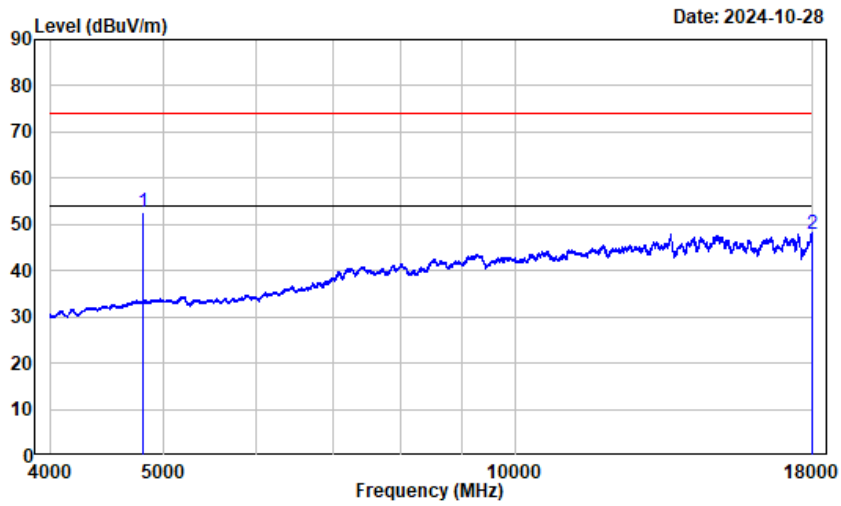

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	50.21	52.63	54.00	-1.37	Average
2	18000.000	24.62	23.21	47.83	54.00	-6.17	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

Vertical-Peak

4-18GHz

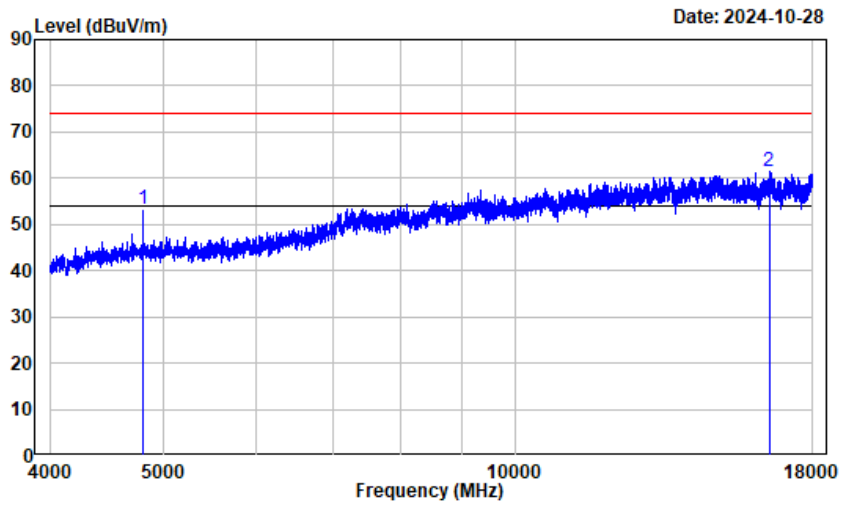

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	50.86	53.28	74.00	-20.72	Peak
2	16517.560	15.77	45.80	61.57	74.00	-12.43	Peak

Vertical-Average

4-18GHz

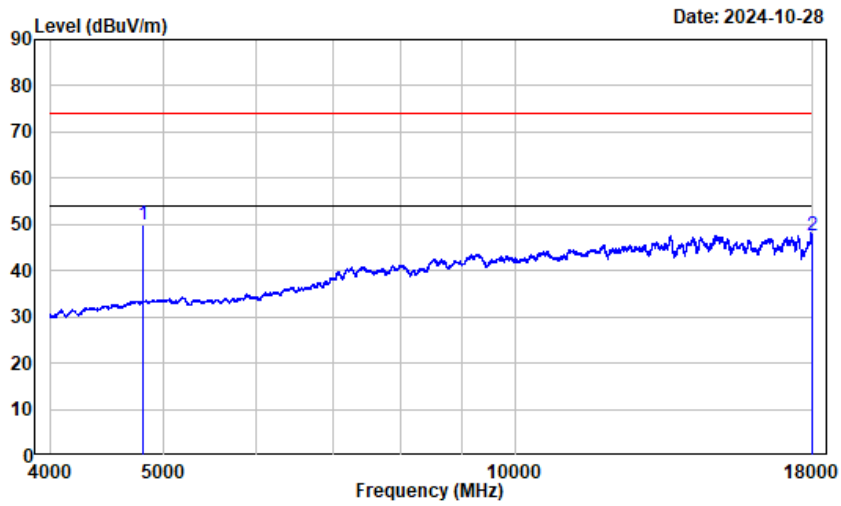

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	47.63	50.05	54.00	-3.95	Average
2	17994.750	24.58	22.93	47.51	54.00	-6.49	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

Horizontal

18-25GHz
(Worst Case)

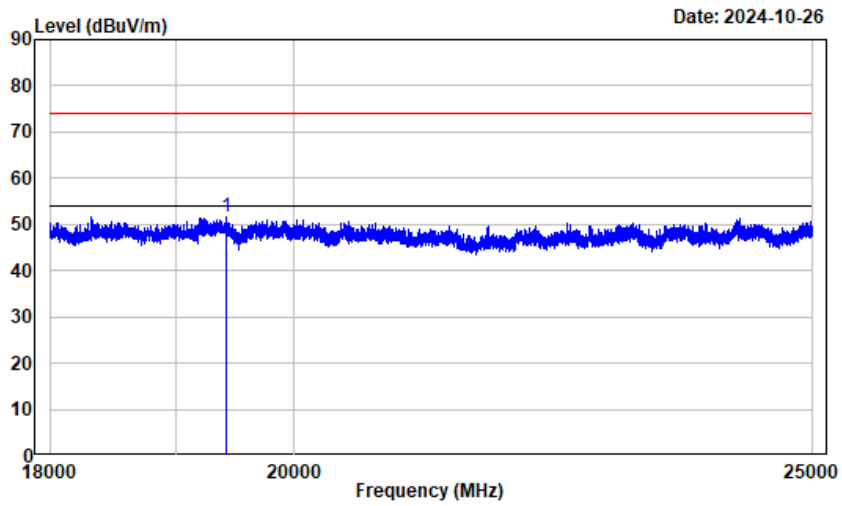

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19415.930	15.11	36.50	51.61	74.00	-22.39	Peak

Vertical

18-25GHz
(Worst Case)

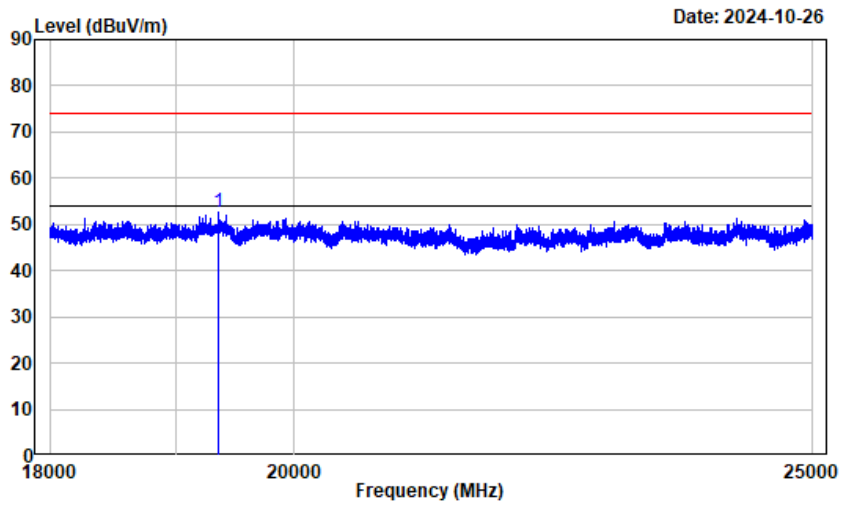

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19359.920	15.13	37.39	52.52	74.00	-21.48	Peak

BLE 2M

Horizontal	
1-4GHz	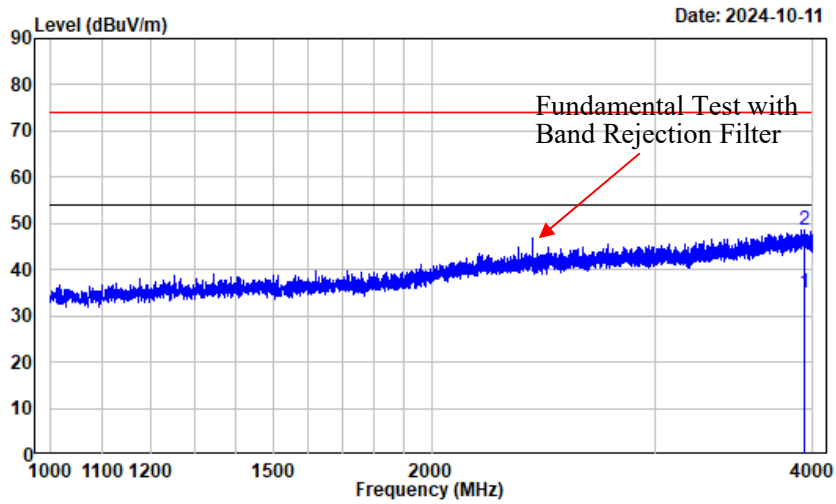 Condition : Horizontal Project No.: 2401X30305E-RF Tester : Dylan.Yang Note : BLE2M_2402 Freq Factor Read Level Level Limit Line Over Limit Remark MHz dB/m dBuV dBuV/m dBuV/m dB 1 3944.125 -0.22 35.34 35.12 54.00 -18.88 Average 2 3944.125 -0.22 48.75 48.53 74.00 -25.47 Peak

Vertical

1-4GHz

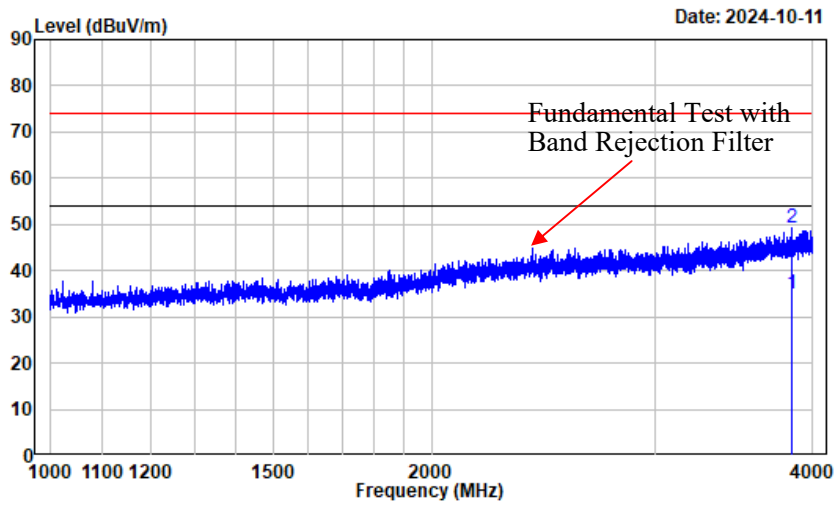

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3850.375	-0.78	35.85	35.07	54.00	-18.93	Average
2	3850.375	-0.78	50.01	49.23	74.00	-24.77	Peak

Horizontal-Peak

4-18GHz

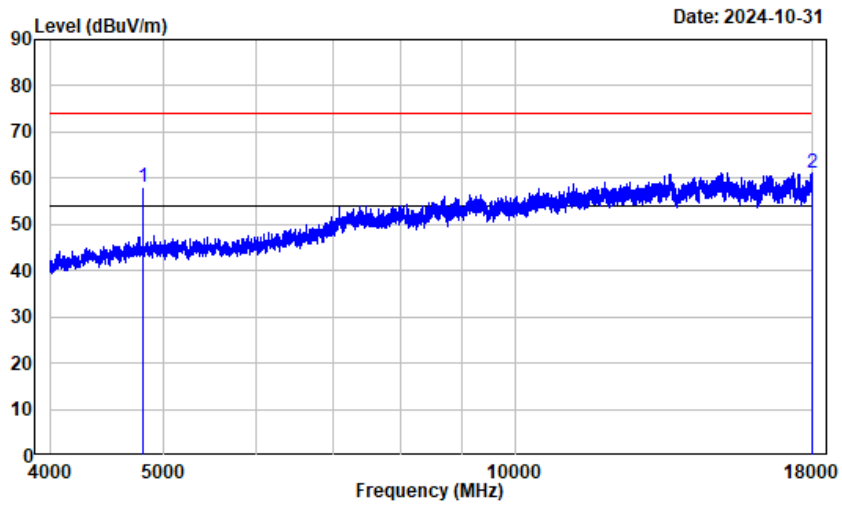

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	55.74	58.16	74.00	-15.84	Peak
2	17998.250	24.61	36.53	61.14	74.00	-12.86	Peak

Horizontal-Average

4-18GHz

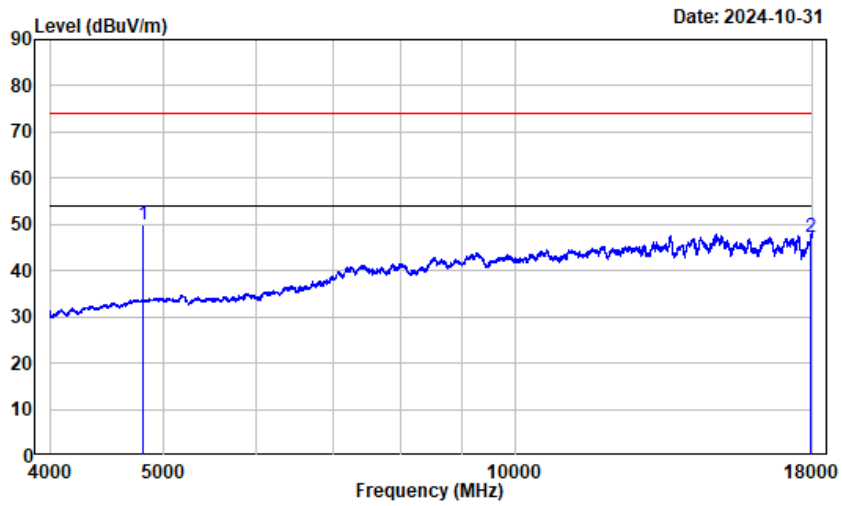

Condition : Horizontal
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	47.59	50.01	54.00	-3.99	Average
2	17924.740	24.09	23.07	47.16	54.00	-6.84	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

Vertical-Peak

4-18GHz

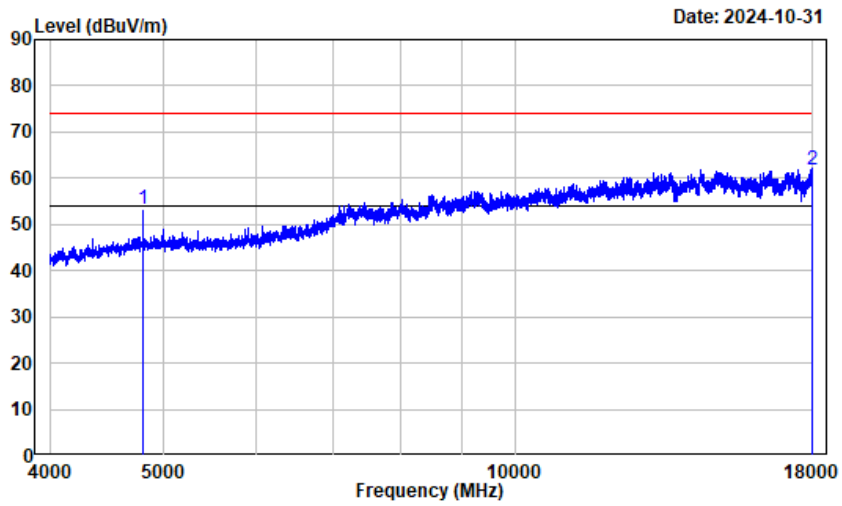

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE1M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	50.97	53.39	74.00	-20.61	Peak
2	17979.000	24.46	37.33	61.79	74.00	-12.21	Peak

Vertical-Average

4-18GHz

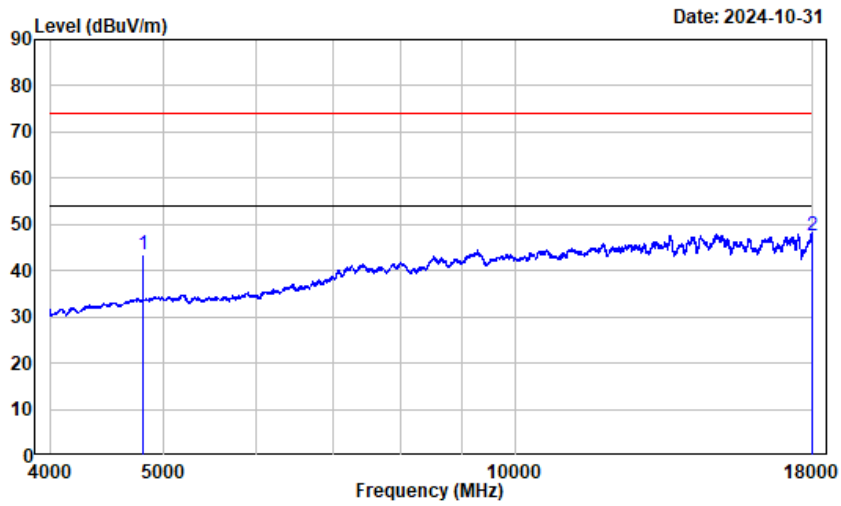

Condition : Vertical
Project No.: 2401X30305E-RF
Tester : Dylan.Yang
Note : BLE2M_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	41.21	43.63	54.00	-10.37	Average
2	18000.000	24.62	23.09	47.71	54.00	-6.29	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

FCC §15.247(a) (2) - 6 dB EMISSON BANDWIDTH

Standard Applicable

According to FCC §15.247(a) (2)
Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

a. Set RBW = 100 kHz.
b. Set the VBW ≥ [3×RBW].
c. Detector = peak.
d. Trace mode = max hold.
e. Sweep = auto couple.
f. Allow the trace to stabilize.
g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
d. Step a) through step c) might require iteration to adjust within the specified range.
e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

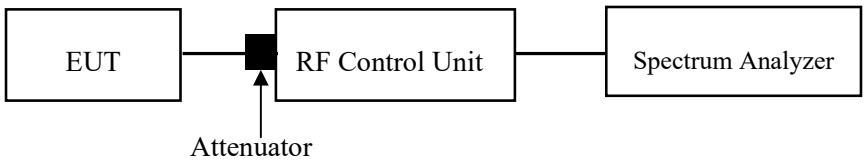

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-09-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.
4. Set the RBW ⩾ DTS bandwidth.
5. Set the VBW ≥ [3 × RBW].
6. Set span ⩾ [3 × RBW].
7. Sweep time = auto couple.
8. Detector = peak.
9. Trace mode = max hold.
10. Allow the trace to stabilize.
11. Use peak marker function to determine the peak amplitude level.

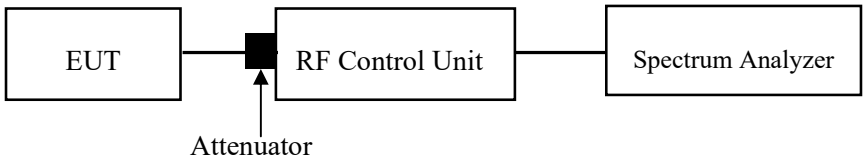

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-09-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.247(e):
For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set analyzer center frequency to DTS channel center frequency
3. Set the span to 1.5 times the DTS bandwidth.
4. Set the RBW to: 3kHz≤ RBW≤100 kHz.
5. Set the VBW ≥ 3×RBW.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

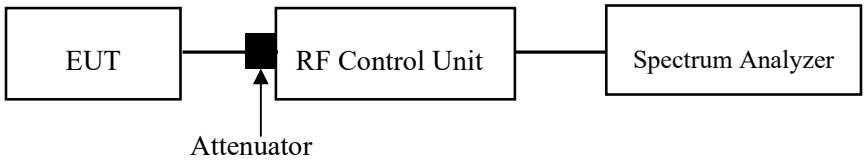

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-09-18.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW ≥ 3×RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.
   Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.
   Report the three highest emissions relative to the limit.

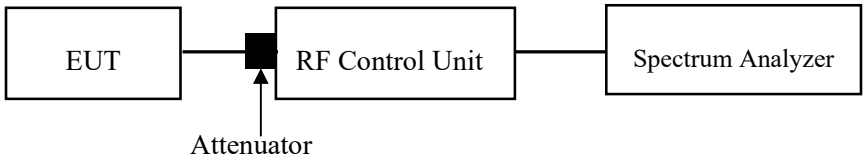

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-09-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

C63.10 §11.6- DUTY CYCLE

Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

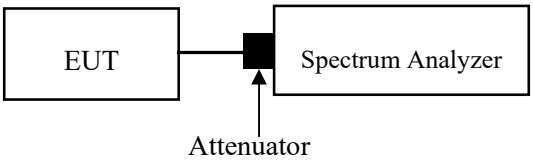

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-09-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401X30305E-RF External photo and 2401X30305E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401X30305E-RFA Test Setup photo.

APPENDIX

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	0.5	PASS
		2440	0.67	0.5	PASS
		2480	0.66	0.5	PASS
BLE_2M	Ant1	2402	1.24	0.5	PASS
		2440	1.19	0.5	PASS
		2480	1.19	0.5	PASS

Test Graphs

BLE_1M_Ant1_2402

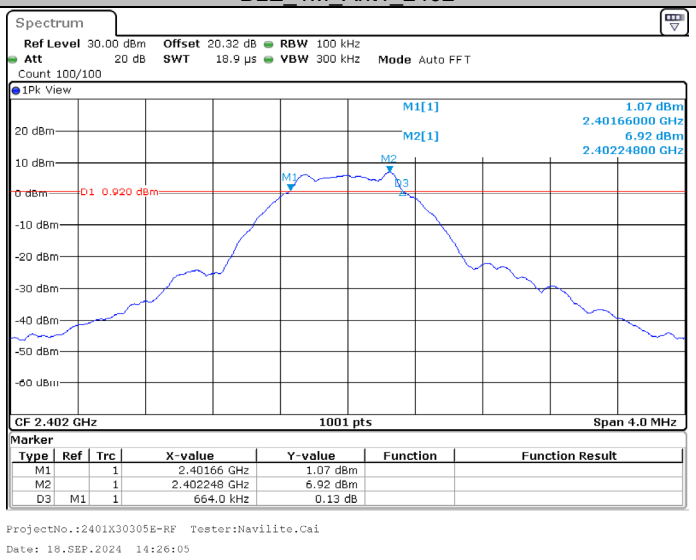

BLE_1M_Ant1_2440

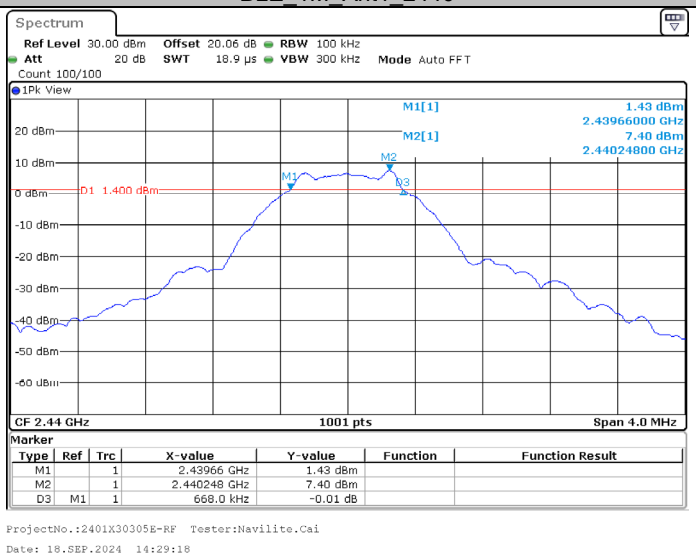

BLE_1M_Ant1_2480

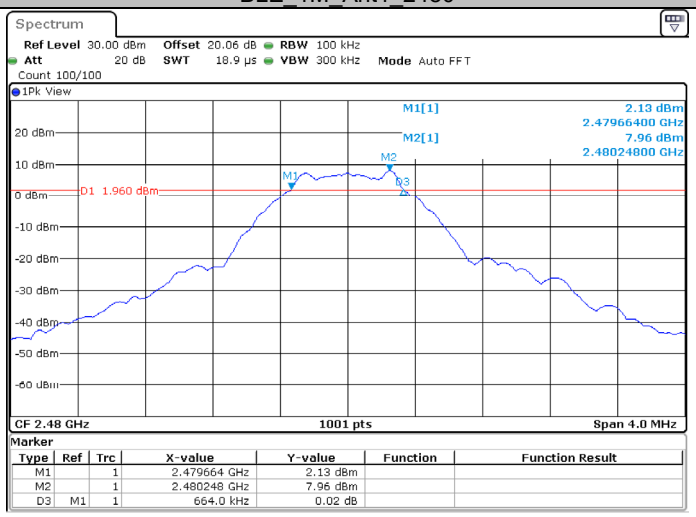

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:35:16

BLE_2M_Ant1_2402

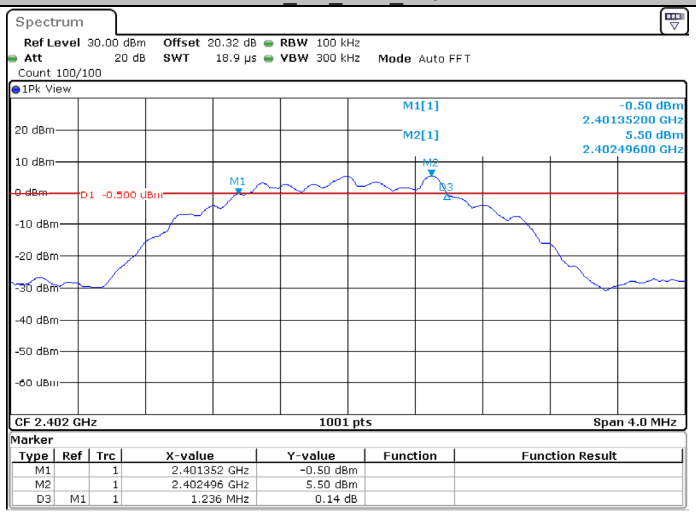

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:36:28

BLE_2M_Ant1_2440

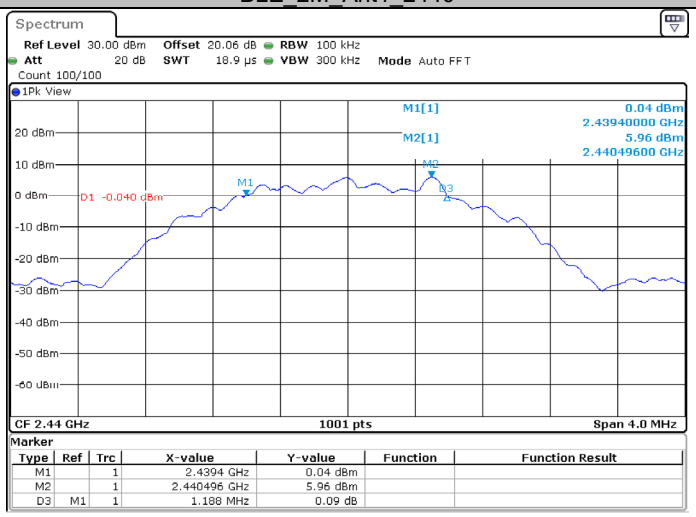

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4394 GHz	0.04 dBm		
M2		1	2.440496 GHz	5.96 dBm		
D3	M1	1	1.188 MHz	0.09 dB		

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:38:07

BLE_2M_Ant1_2480

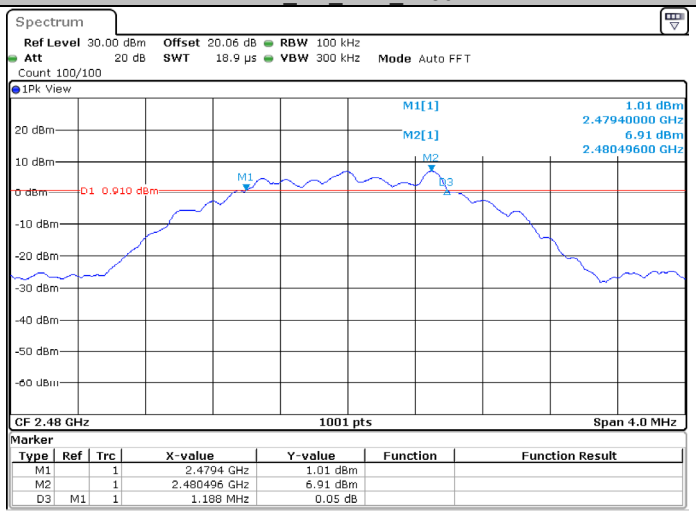

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4794 GHz	1.01 dBm		
M2		1	2.480496 GHz	6.91 dBm		
D3	M1	1	1.188 MHz	0.05 dB		

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:39:21

Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.019	---	---
		2440	1.023	---	---
		2480	1.023	---	---
BLE_2M	Ant1	2402	2.038	---	---
		2440	2.038	---	---
		2480	2.046	---	---

Test Graphs

BLE_1M_Ant1_2402

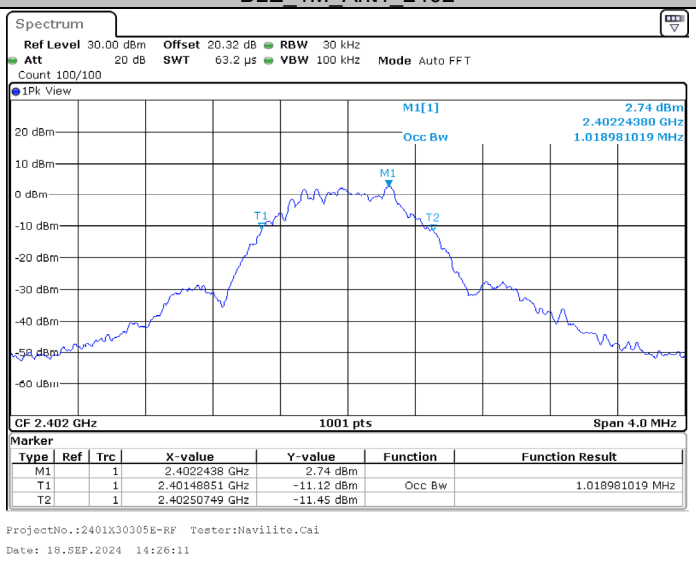

BLE_1M_Ant1_2440

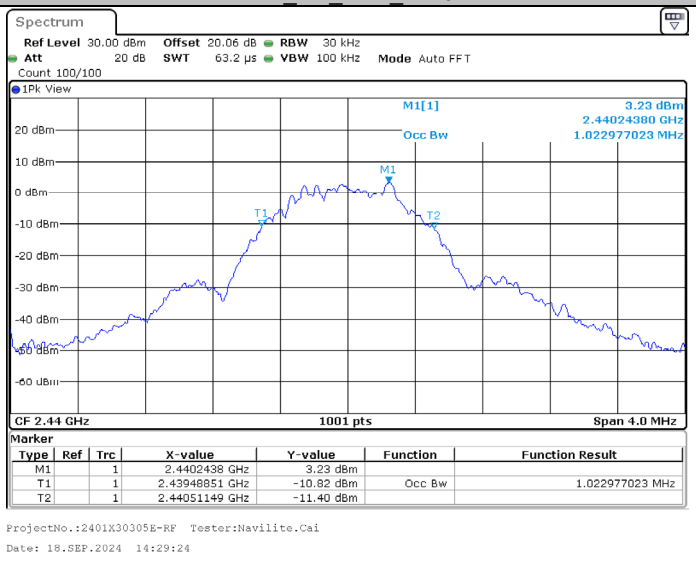

BLE_1M_Ant1_2480

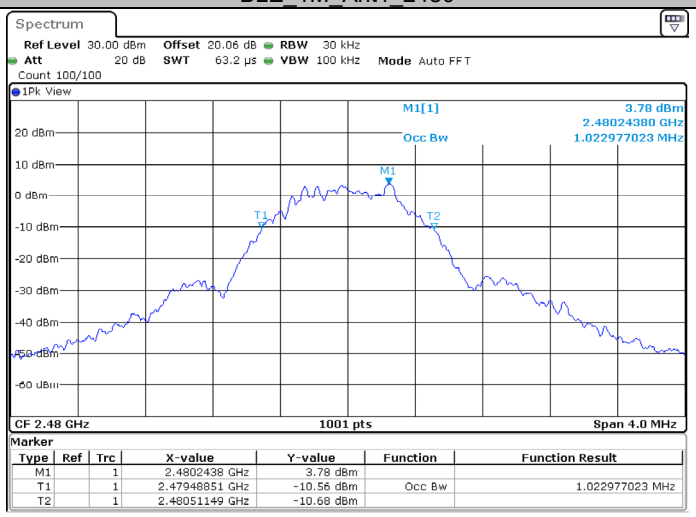

BLE_2M_Ant1_2402

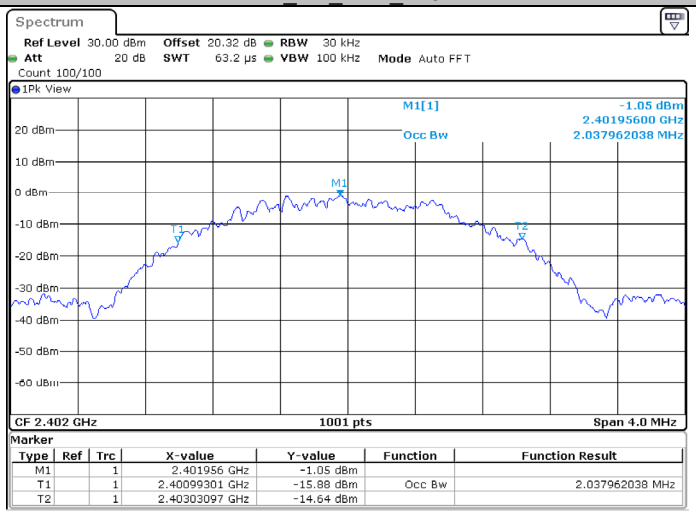

BLE_2M_Ant1_2440

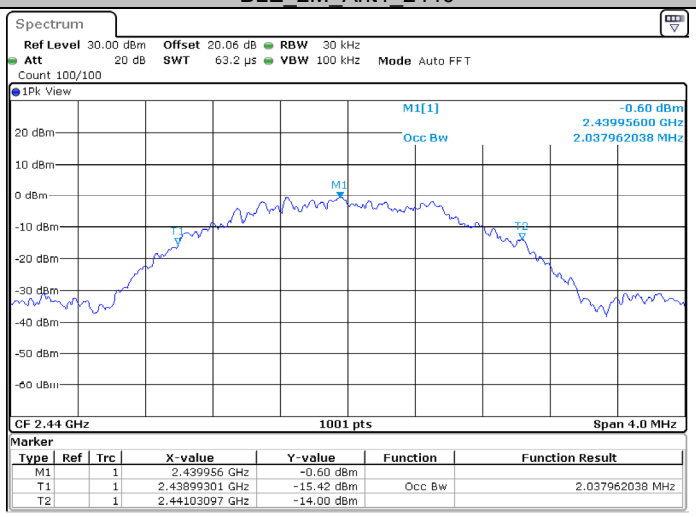

BLE_2M_Ant1_2480

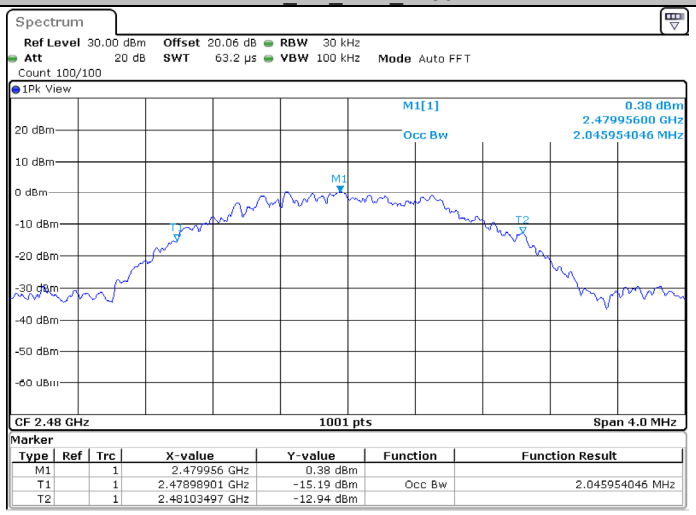

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.31	≤30	PASS
		2440	7.89	≤30	PASS
		2480	8.43	≤30	PASS
BLE_2M	Ant1	2402	6.80	≤30	PASS
		2440	7.36	≤30	PASS
		2480	8.32	≤30	PASS

Test Graphs Peak

BLE_1M_Ant1_2402

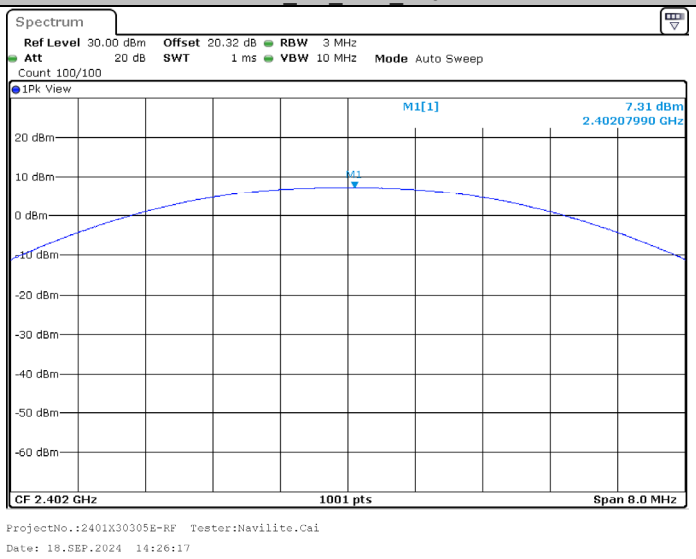

BLE_1M_Ant1_2440

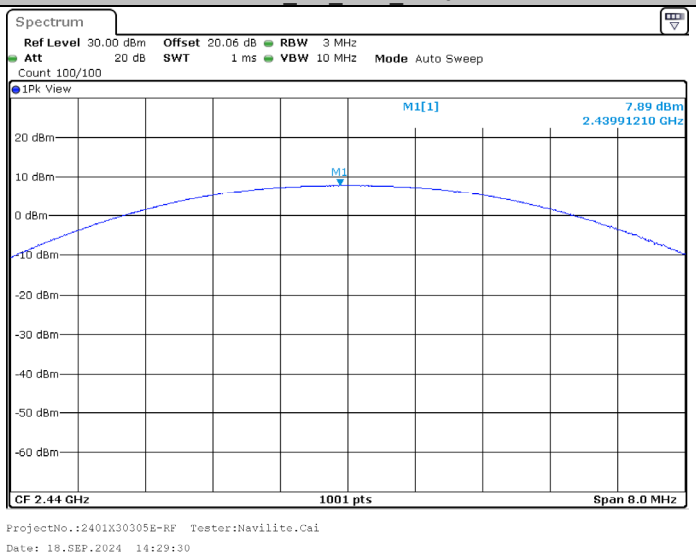

BLE_1M_Ant1_2480

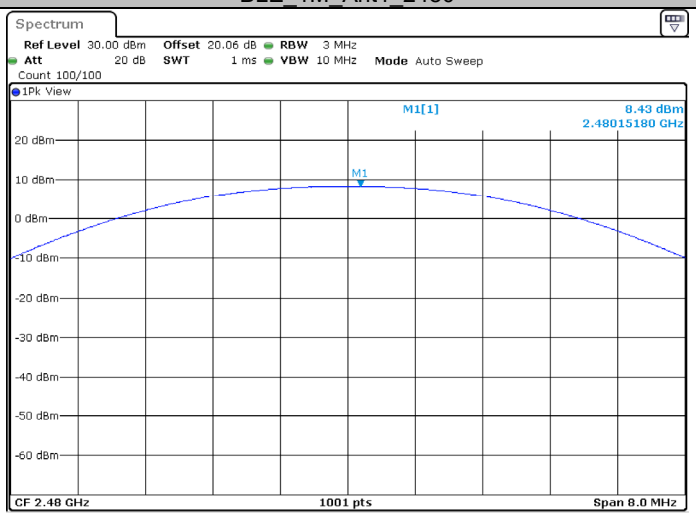

BLE_2M_Ant1_2402

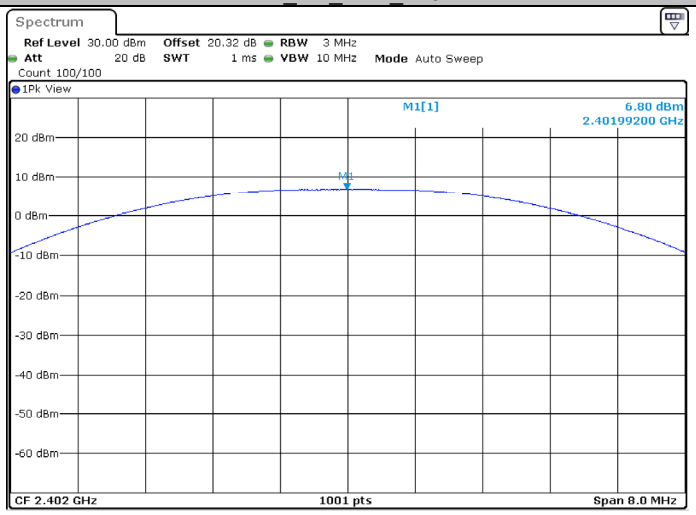

BLE_2M_Ant1_2440

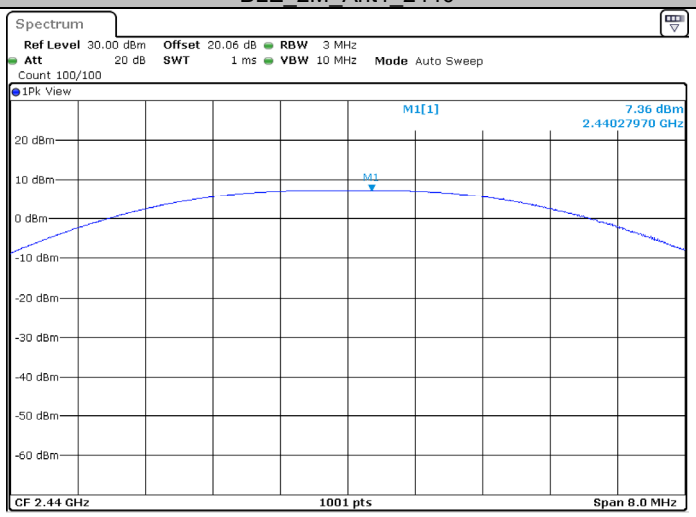

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:38:19

BLE_2M_Ant1_2480

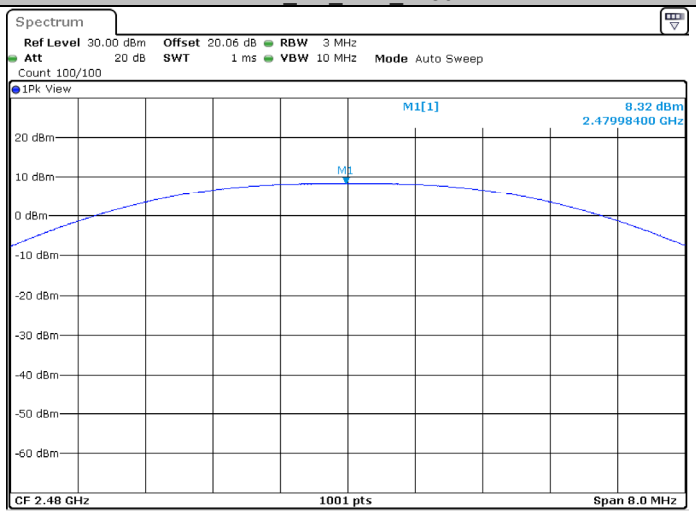

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:39:32

Appendix D: Maximum power spectral density

Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.60	≤8.00	PASS
		2440	-9.06	≤8.00	PASS
		2480	-8.52	≤8.00	PASS
BLE_2M	Ant1	2402	-12.81	≤8.00	PASS
		2440	-12.22	≤8.00	PASS
		2480	-11.25	≤8.00	PASS

Test Graphs

BLE_1M_Ant1_2402

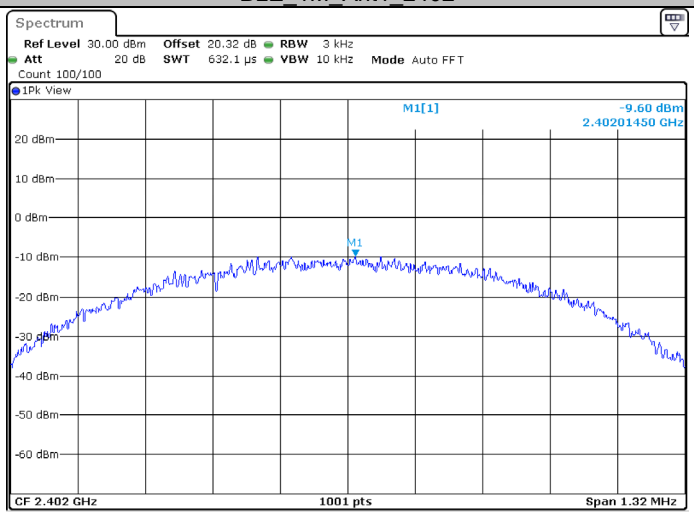

BLE_1M_Ant1_2440

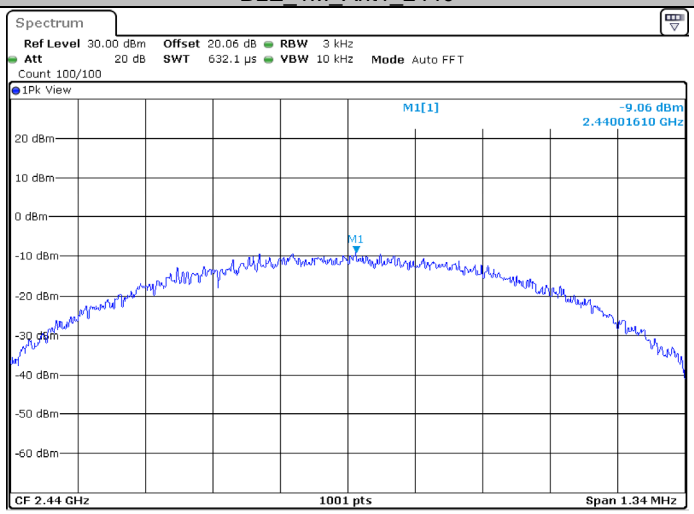

BLE_1M_Ant1_2480

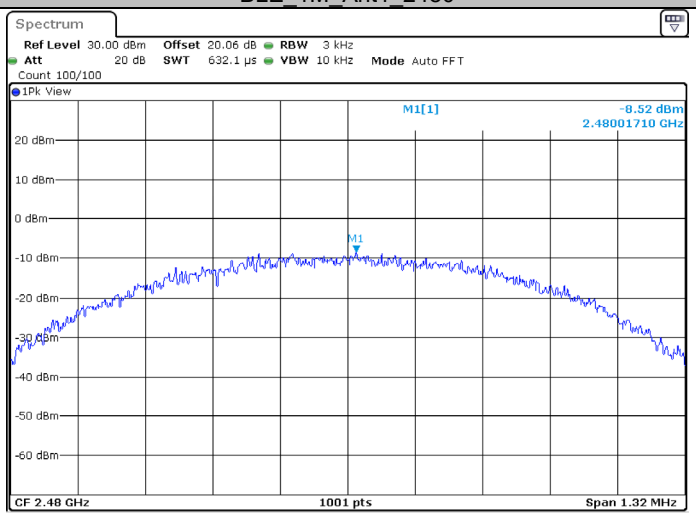

BLE_2M_Ant1_2402

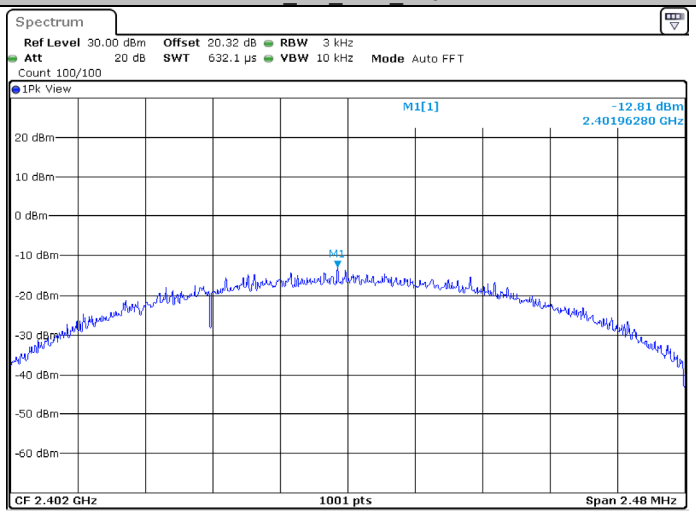

BLE_2M_Ant1_2440

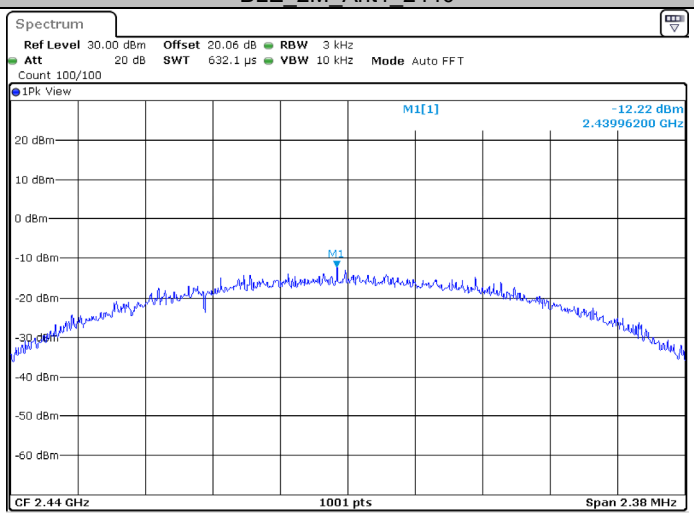

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:38:25

BLE_2M_Ant1_2480

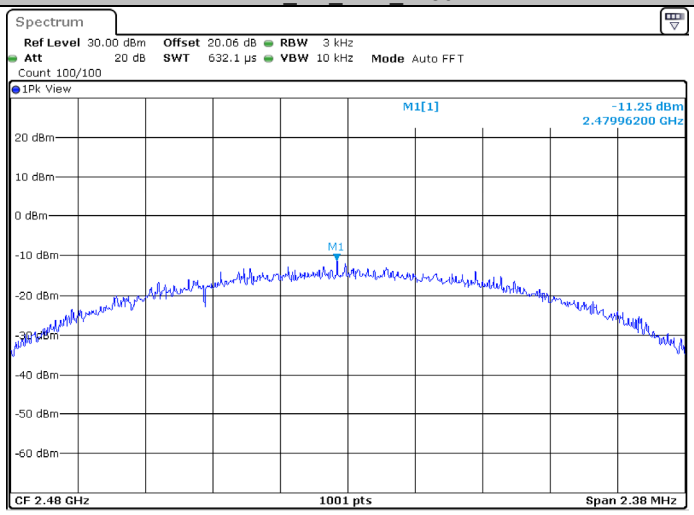

ProjectNo.:2401X30305E-RF Tester:Navilite.Cai
Date: 18.SEP.2024 14:39:39

Appendix E: Band edge measurements

Test Graphs

BLE_1M_Ant1_Low_2402

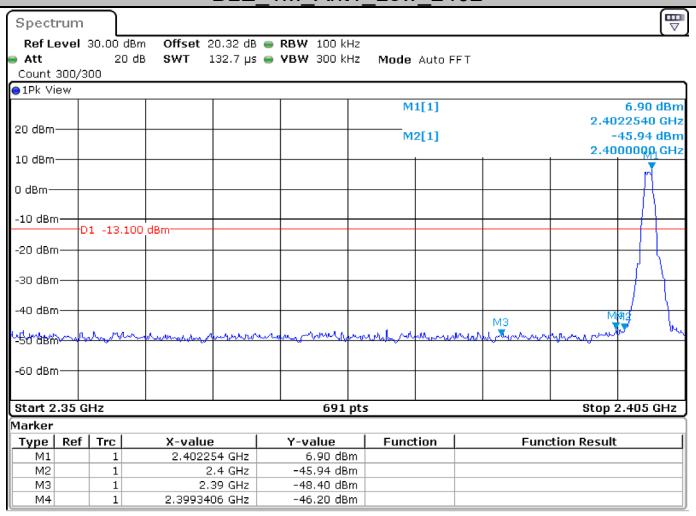

BLE_1M_Ant1_High_2480

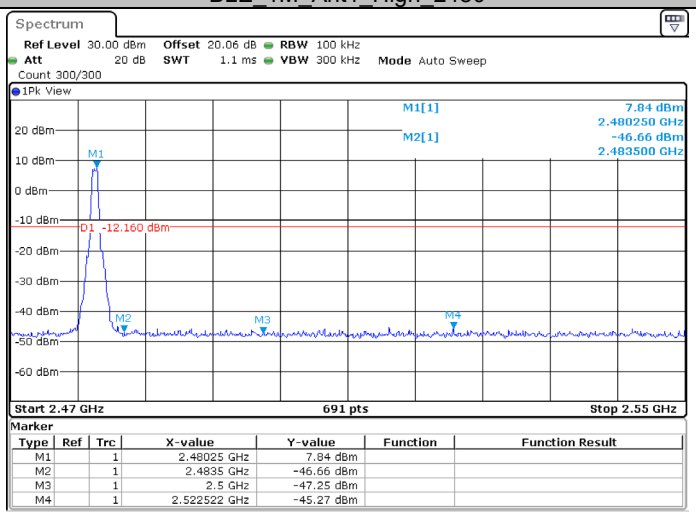

BLE_2M_Ant1_Low_2402

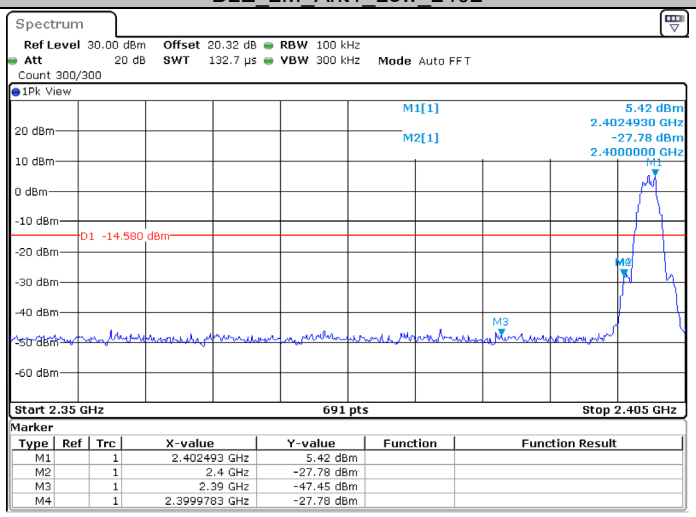

BLE_2M_Ant1_High_2480

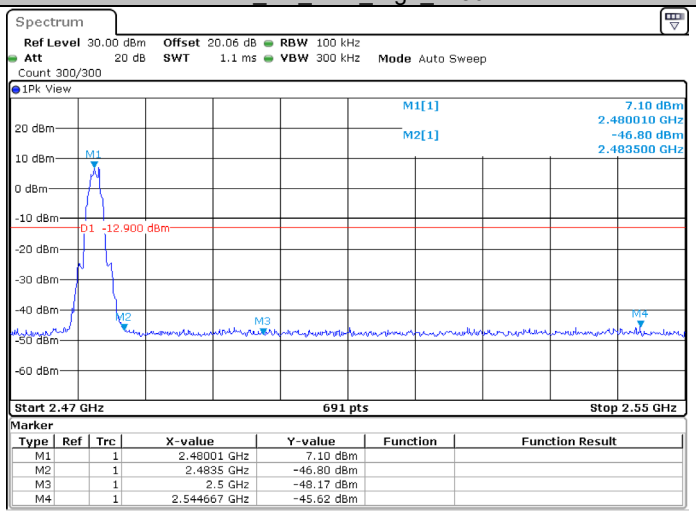

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [Hz]	VBW Setting [Hz]
BLE_1M	Ant1	2440	2.12	2.50	84.80	472	1000
BLE_2M	Ant1	2440	1.06	1.87	56.68	943	1000

Test Graphs

BLE_1M_Ant1_2440

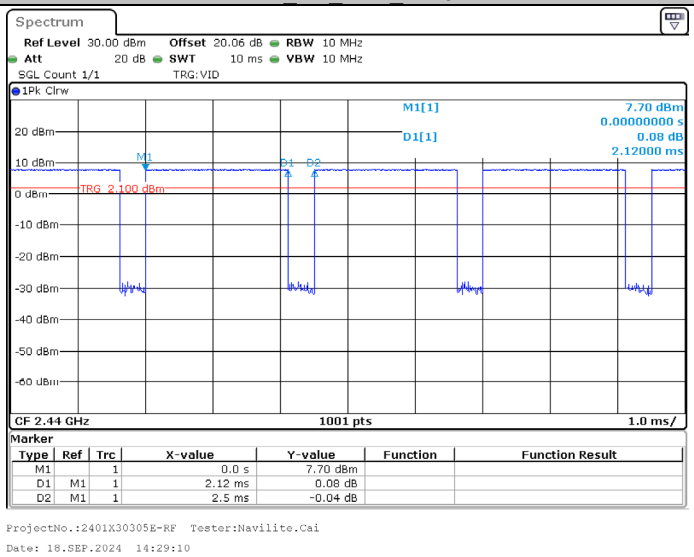

BLE_2M_Ant1_2440

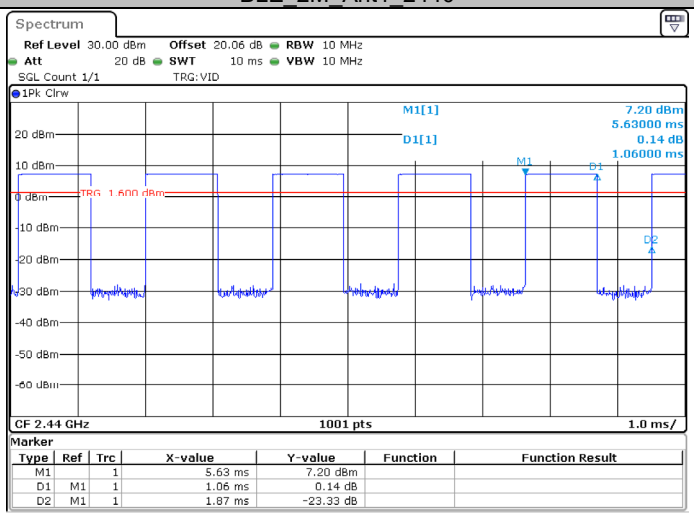

******* END OF REPORT *******