


STATUS	REV	CHANGE	LDC	BY	DATE	E.C.N
	A	Release to MP.		Gordon	2024/09/11	
	B	Update length of wire and remove tape.		Gordon	2024/10/08	

GENERAL TOLERANCE FOR ABS,PC,PMMA,PS BY INJECTION MOLDING		
UNLESS OTHERWISE SPECIFIED		
DIMENSION	TOLERANCE	
LINEAR	0~10	±0.10
	>10~50	±0.15
	>50~100	±0.25
	>100~150	±0.35
	>150~300	±0.55
ANGLE	±0.5°	

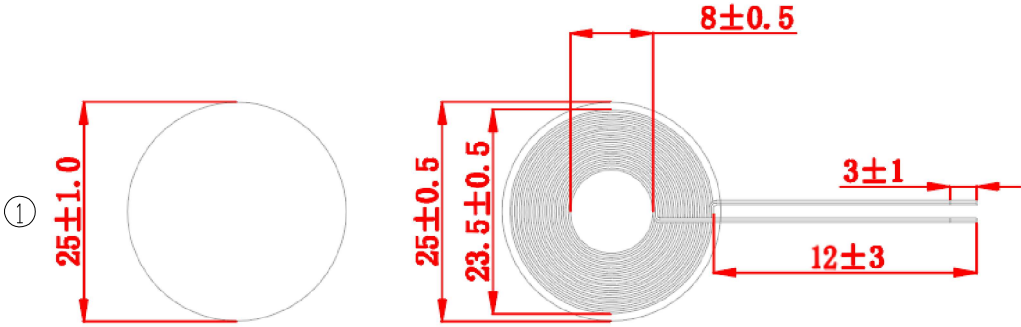


磁片

成品

Manufacturer:Dongguan Agilian Technology Co., Ltd

Address:Room 203, 2nd floor, No.3 Dongyi Street, Xingfa Community, Wusha Liwu, Chang ' an Town, Donguan City, Guangdong Province

Operation Frequency:121KHz
Gain:0dBi

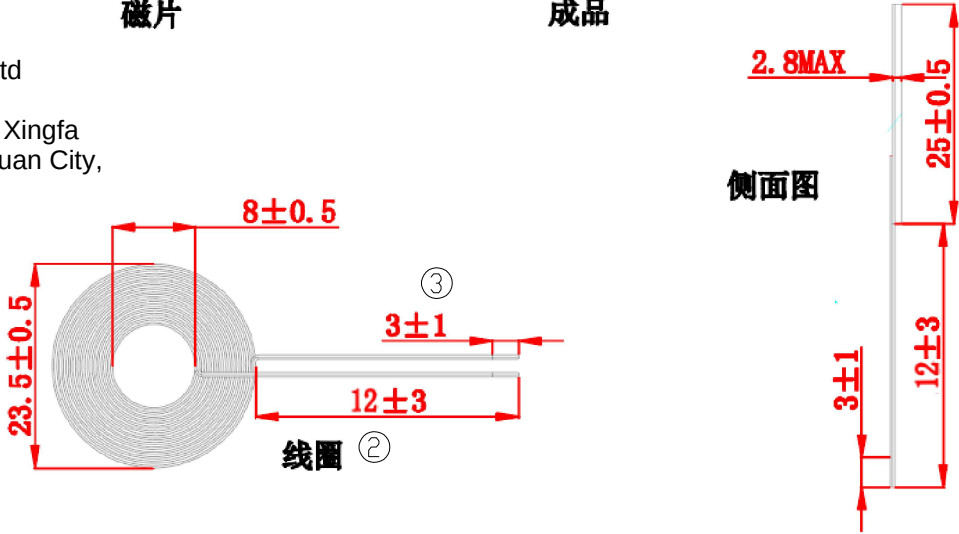

侧面图

线圈 ②

We, Dongguan Agilian Technology Co., Ltd, states that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

绕线方式绕绕：逆时针	线材：热风漆包线	线圈匝数：19ts线
线径规格：0.08*48p	电感：10.5 ± 10%uh	测试频率：100khz/1v
线材厂家：rs	DCR:85mΩ±10%	磁片材质：铁氧体硬磁片
磁片：25*1.0h	Q值：65 ± 10%	

SHEET		SCALE		UNIT	PART NAME	DRAWING NO.	VCA-018379R1		
1 OF 1		1:1		MM	Charge Coil	MODEL NO.	VCA		
MATERIAL:						THIRD ANGLE PROJECTION			
DESIGNER	Gordon	DATE	2024/10/08						
CHECKER	Gordon	DATE	2024/10/08						REV
APPROVER	Kevin	DATE	2024/10/08						B

THIS DRAWING IS THE PROPERTY OF AGILIAN . WITHOUT THE EXPRESS WRITTEN PERMISSION OF AGILIAN . VENDOR SHALL NOT DISCLOSE IT TO THE THIRD PARTY, REVISE ANY PHYSICAL,DIMENSIONAL, OR PERFORMANCE CHARACTERISTICS UNLESS AUTHORIZED IN WRITING BY AGILIAN .