

承認書

SPECIFICATION FOR APPROVAL

客 戶:

海芯 (Hi xin)

CUSTOMER:

客 戶 料 號:

CUST P/N:

音 澤 料 號:

BESOFTP/N:

產 品 型 號:

Slotted hard magnetic watch coil 14.9 - 0.08

DESC:

* 24 - 11T - 7.8UH - L13MM + magnet + BJ

日 期:

2024/07/09

DATE:

版 本:

A.0

Version:

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成 (Licheng He)	马莉 (Li Ma)	但可清 (Keping Dan)	

东莞市音泽电子科技有限公司

Dongguan Yinze Electronic Technology Co., LTD

工廠地址: 东莞市茶山镇兴韩路 (创富中心城) 2栋901号

Factory Address: No. 901, Building 2,

Chuangfu Central City, Xinghan Road, Chashan Town, Dongguan City

TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	Slotted hard magnetic watch coil 14.9 - 0.08 * 24 - 11T - 7.8UH - L13MM + magnet + BJ	版本 Rev: A.0	客戶 CUST:	海芯(Hi xin)
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

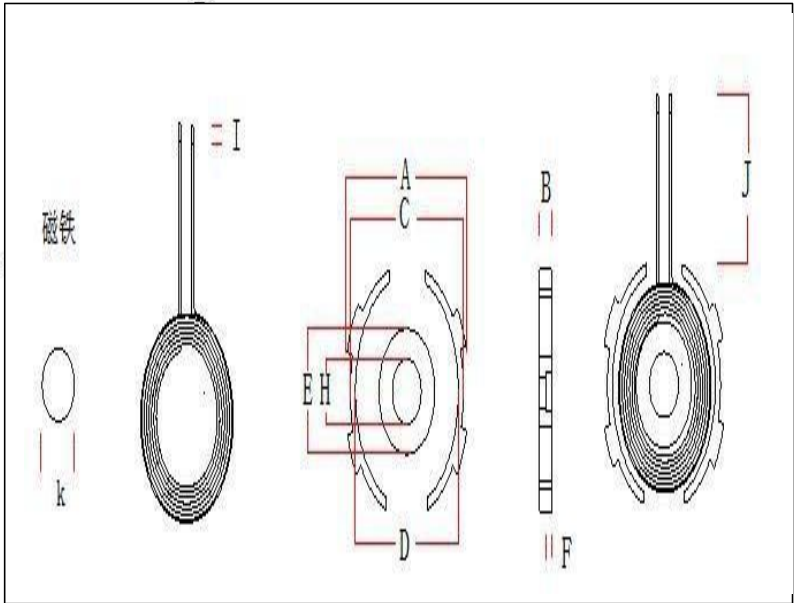

A	25±0.5
B	2.7±0.5
C	23.7±0.25
D	20.5±1
E	14.5±0.3
H	8±0.3
I	2±1
J	13±2
K	7.5*2.0

Note:
1.Coil with magnetic sheet attached, size of the magnetic sheet 25mm, thickness 2.7mm with a notch
2.On the back of the magnetic sheet, there is a circular tear-off area

二、原理图SCHEMATIC DIAGRAM:



三、

SPECIFICATION

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*24P	11TS	CCW

三、绕线参数 Winding Specification:
四、电气特性 ELECTRICAL CHARACTERISTICS:
温度 TEMPERATURE:25 ±10℃, 湿度 RELATIVE HUMIDITY:65 ±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.7uH ±20%	100KHz/1V	LCZ METER 1062B
2	IND.	S-F	7.8uH ±10%	100KHz/1V	LCZ METER 1062B
3	Q 值	S-Q	≤4	100KHz/1V	LCZ METER 1062B
4	DCR	S-R	≤105mΩ		