



求是 价值 双赢

深圳市千目通讯科技有限公司

Shenzhen Qianmu Communication Technology Co., Ltd.


4th Floor, Building A, Hangcheng High-Tech Industrial Park, Huafeng Zhigu, Hangkong Road, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen

专注天线方案、设计与生产



整机图片



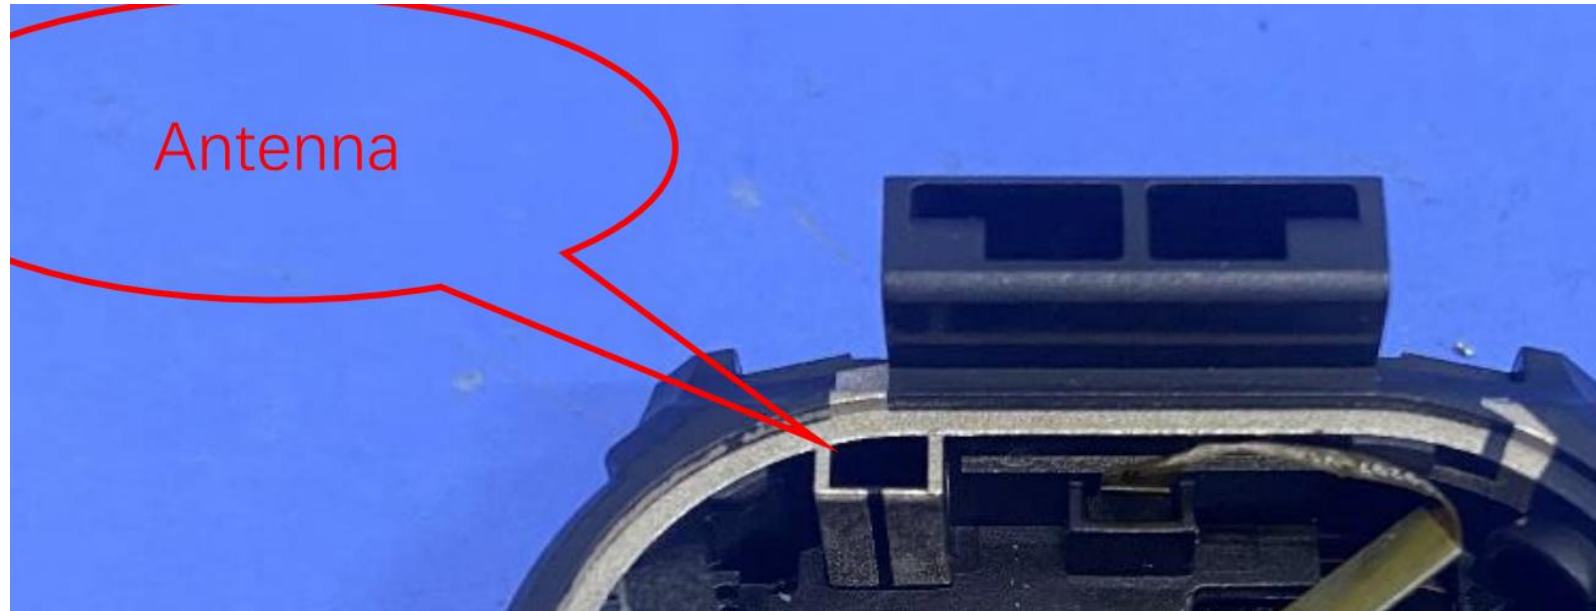




BT效率测试数据

FEITUKEJI											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-6.22	-6.36	-6.30	-6.15	-6.19	-6.25	-6.26	-6.23	-6.34	-6.39	-6.50
Peak EIRP (dBm)	-1.82	-1.85	-2.06	-2.00	-2.39	-2.38	-2.37	-2.44	-2.29	-2.41	-2.66
Directivity (dBi)	4.40	4.51	4.24	4.15	3.80	3.88	3.89	3.79	4.04	3.98	3.85
Efficiency (dB)	-6.22	-6.36	-6.30	-6.15	-6.19	-6.25	-6.26	-6.23	-6.34	-6.39	-6.50
Efficiency (%)	23.90	23.10	23.40	24.30	24.00	23.70	23.70	23.80	23.30	22.90	22.40
Gain (dBi)	-1.82	-1.85	-2.06	-2.00	-2.39	-2.38	-2.37	-2.44	-2.29	-2.41	-2.66
NHPRP $\pm\pi/4$ (dBm)	-7.48	-7.62	-7.60	-7.47	-7.54	-7.63	-7.65	-7.63	-7.73	-7.80	-7.93
NHPRP $\pm\pi/6$ (dBm)	-9.07	-9.21	-9.17	-9.02	-9.07	-9.16	-9.20	-9.14	-9.25	-9.31	-9.45
NHPRP $\pm\pi/8$ (dBm)	-10.35	-10.50	-10.46	-10.28	-10.30	-10.38	-10.43	-10.34	-10.48	-10.56	-10.72
Upper Hem. PRP (dBm)	-9.44	-9.52	-9.40	-9.23	-9.22	-9.25	-9.25	-9.19	-9.32	-9.34	-9.40
Lower Hem. PRP (dBm)	-9.03	-9.22	-9.23	-9.09	-9.19	-9.28	-9.28	-9.28	-9.37	-9.47	-9.63
Upper Hem. PRP (%)	11.39	11.17	11.49	11.93	11.98	11.88	11.88	12.04	11.70	11.65	11.47
Lower Hem. PRP (%)	12.49	11.96	11.95	12.34	12.06	11.81	11.79	11.80	11.55	11.29	10.89




BT-2.4G方向图


2400.00MHz@T45P45

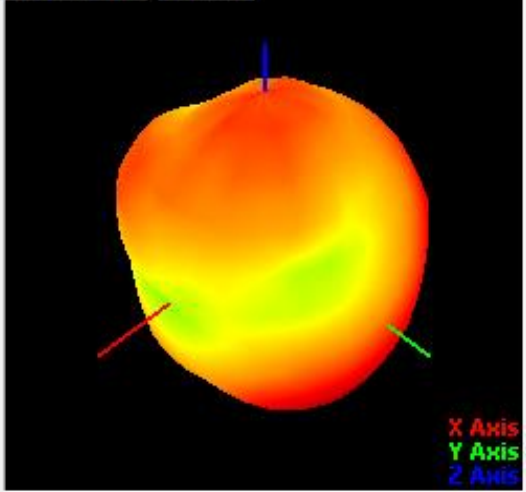

2450.00MHz@T45P45

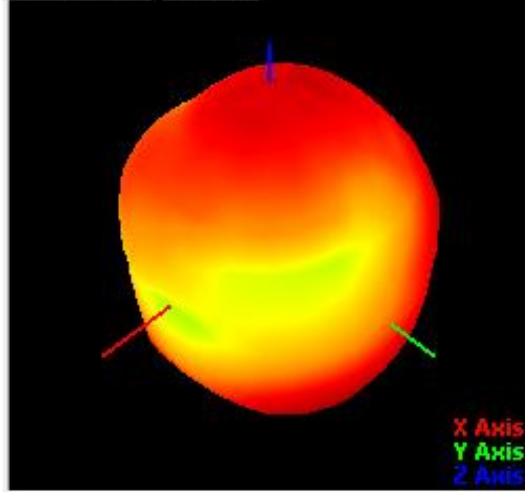

2500.00MHz@T45P45

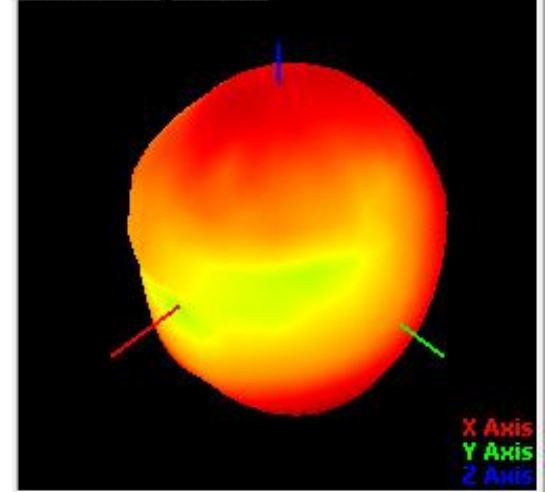



谢谢!

此报告中所包含的一切信息、版权归我司所有，再未经我司许可的情况下，请勿散播给第三方