

ANNEX TEST DATA BLE

FCC ID: 2BLN2-XL2-240

Applicant: Jiangxi Xingchi Electronic Technology Co., Ltd.

Address: Building B7. School Furniture Industrial Park, Nancheng County, Fuzhou City, Jiangxi

Manufacturer: Jiangxi Xingchi Electronic Technology Co., Ltd.

Address: Building B7. School Furniture Industrial Park, Nancheng County, Fuzhou City, Jiangxi

Product Name: Smart projector

Trade Mark: N/A

Model Number: XL2-240, VS6 Se, XL2-241, XL2-242, XL2-243, XL2-244, XL2-245, XL2-246, XL2-247, XL2-248, XL2-249, XL2-24A, XL2-24B, XL2-24C, XL2-24D, XL2-24E, VS6 Se, VS6 Se pro, VS6 Se Utra

Date of Receipt: Aug. 07, 2026

Test Date: Aug. 07, 2026 – Aug. 17, 2026

Date of Report: Aug. 17, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024


Test Result: Pass

Report Number: DLE-260807016R


Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	2.72	30	Pass
NVNT	BLE 1M	2440	Ant1	4.01	30	Pass
NVNT	BLE 1M	2480	Ant1	3.62	30	Pass


Report

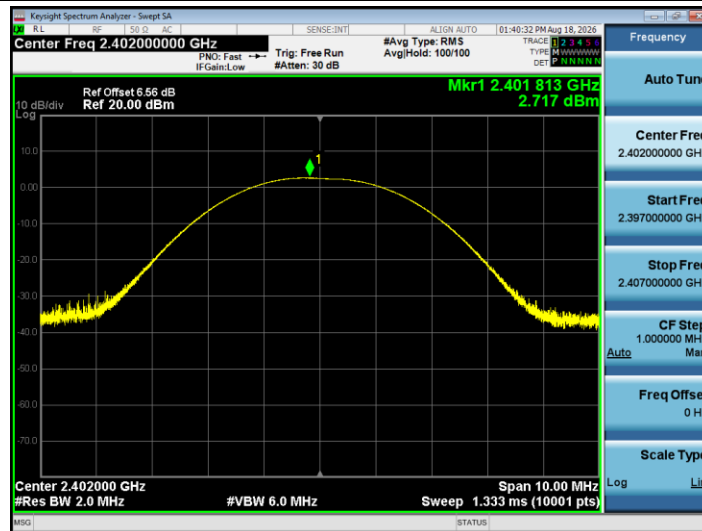

Peak Power NVNT BLE 1M 2402MHz Ant1

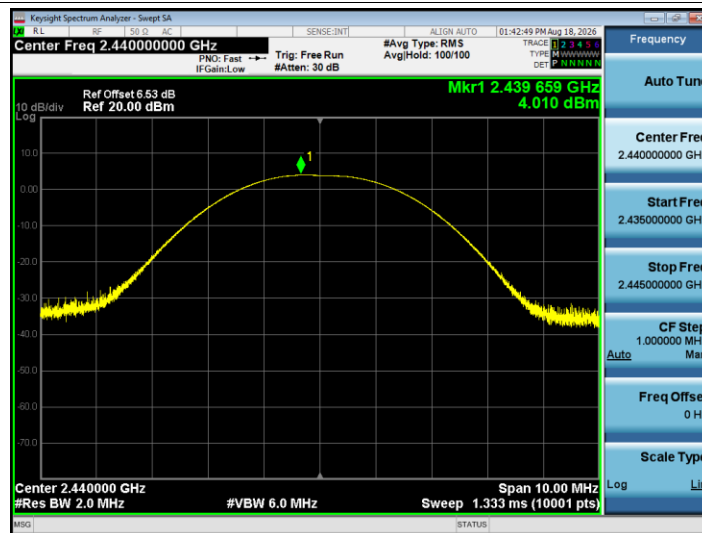

Peak Power NVNT BLE 1M 2440MHz Ant1

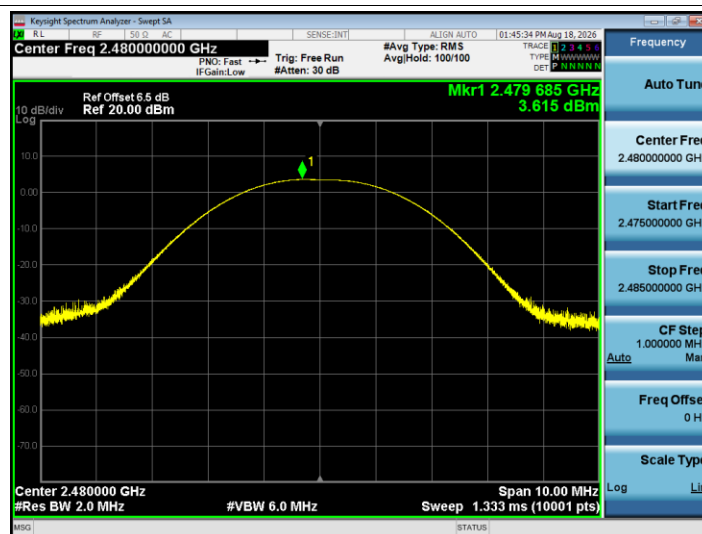

Peak Power NVNT BLE 1M 2480MHz Ant1

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6596	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6398	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6599	0.5	Pass

Report



-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-13.51	8	Pass
NVNT	BLE 1M	2440	Ant1	-12.06	8	Pass
NVNT	BLE 1M	2480	Ant1	-12.52	8	Pass


Report



PSD NVNT BLE 1M 2402MHz Ant1



PSD NVNT BLE 1M 2440MHz Ant1

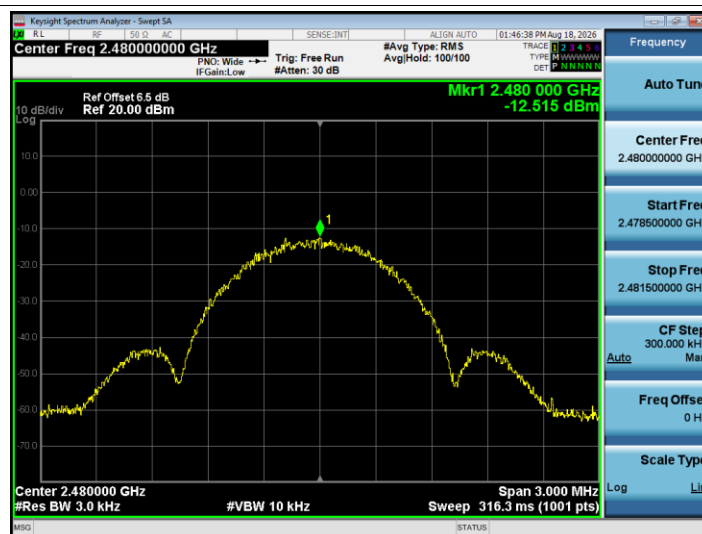


PSD NVNT BLE 1M 2480MHz Ant1


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-42.68	-20	Pass
NVNT	BLE 1M	2480	Ant1	-44.38	-20	Pass


Report

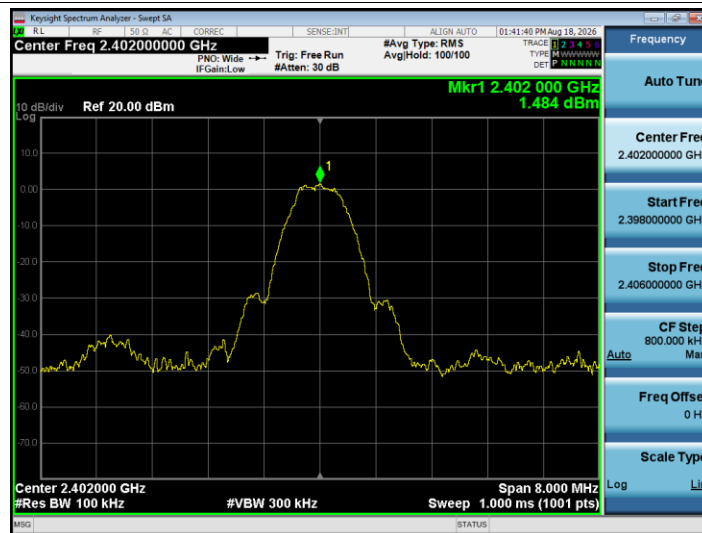

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

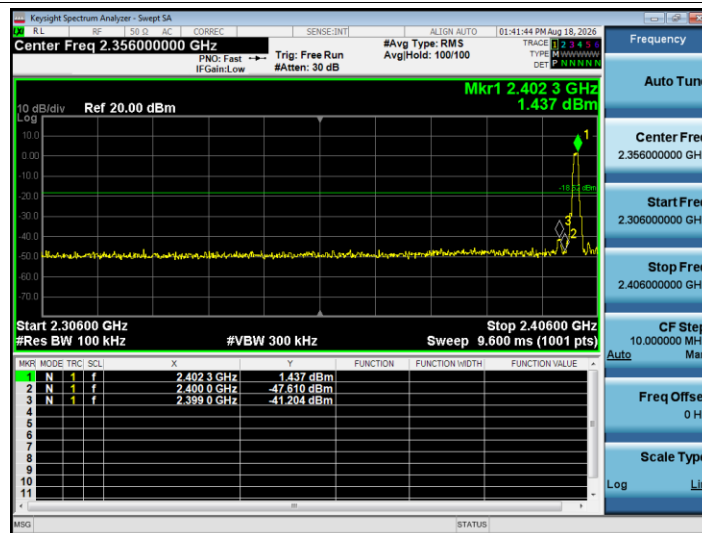


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

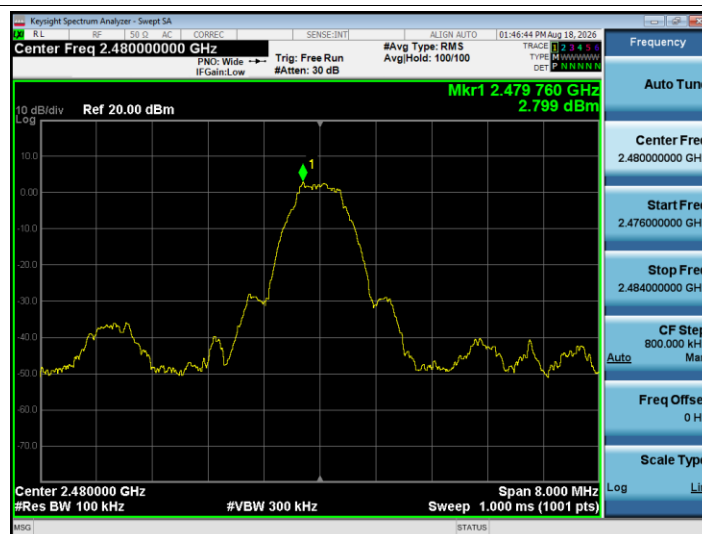

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

Report

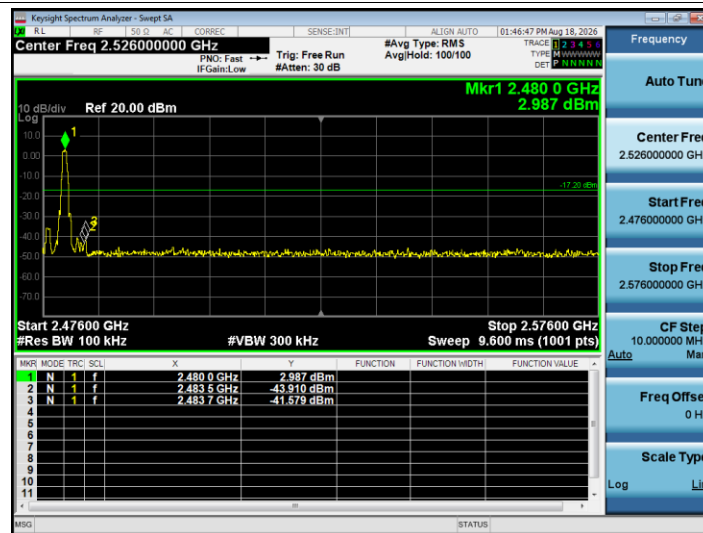

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-36.78	-20	Pass
NVNT	BLE 1M	2440	Ant1	-38.31	-20	Pass
NVNT	BLE 1M	2480	Ant1	-36.65	-20	Pass


Report



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

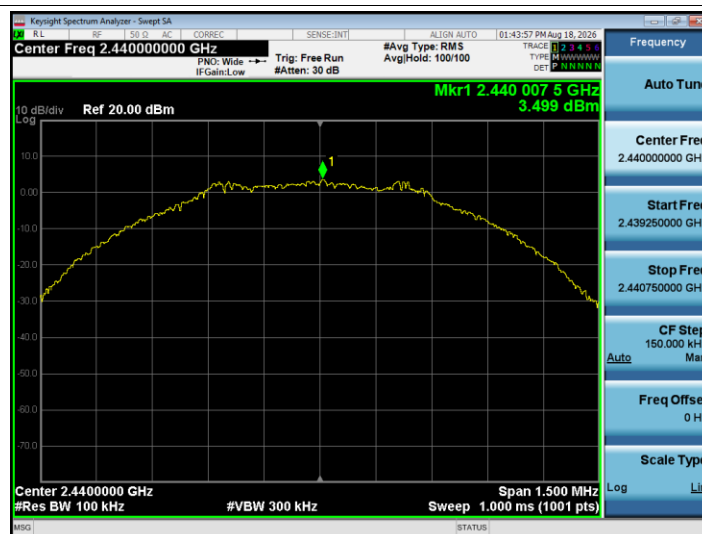


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref


Report

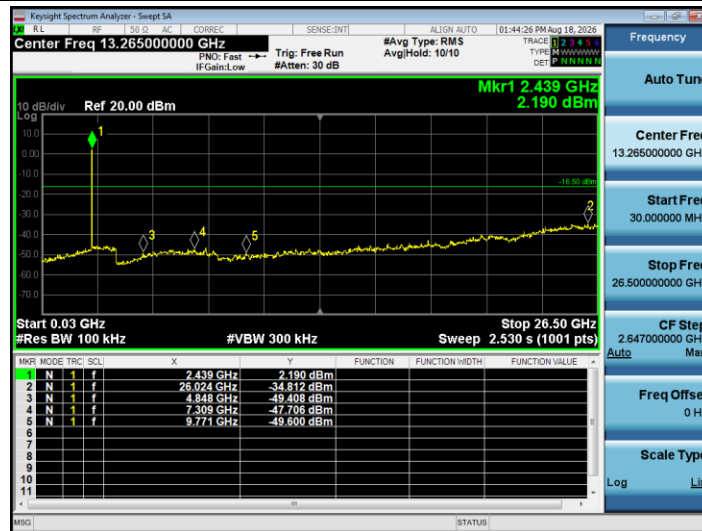

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

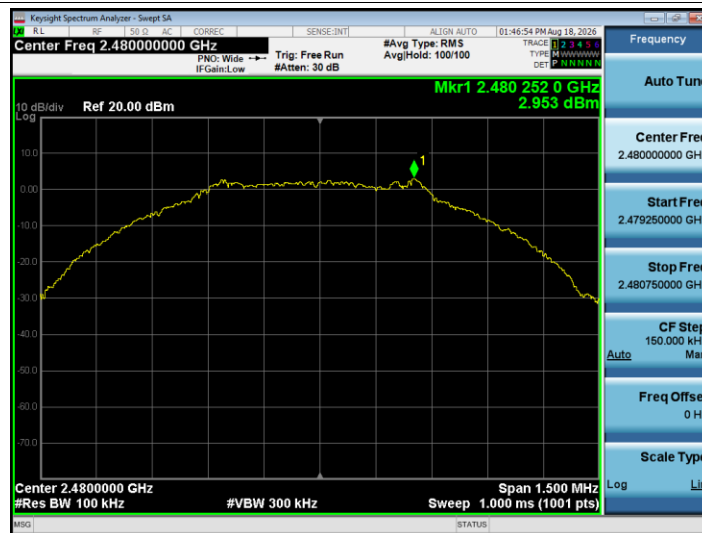

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

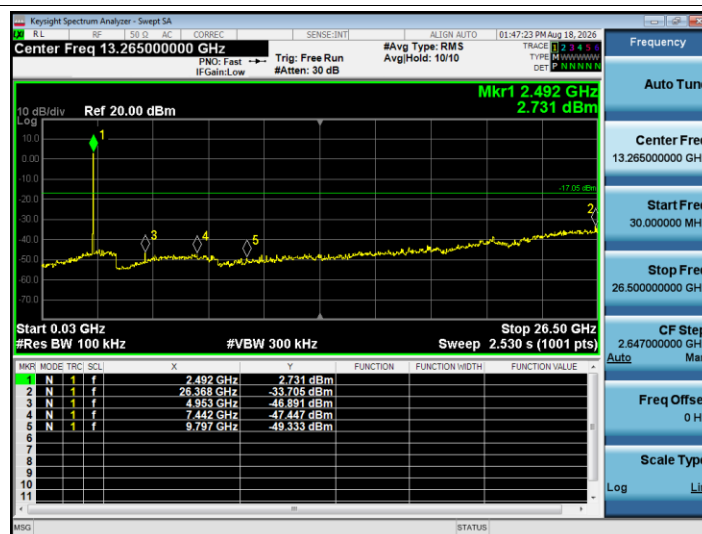

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission