



[Test mode:TX 802.11b High channel]; [Polarity: Vertical]

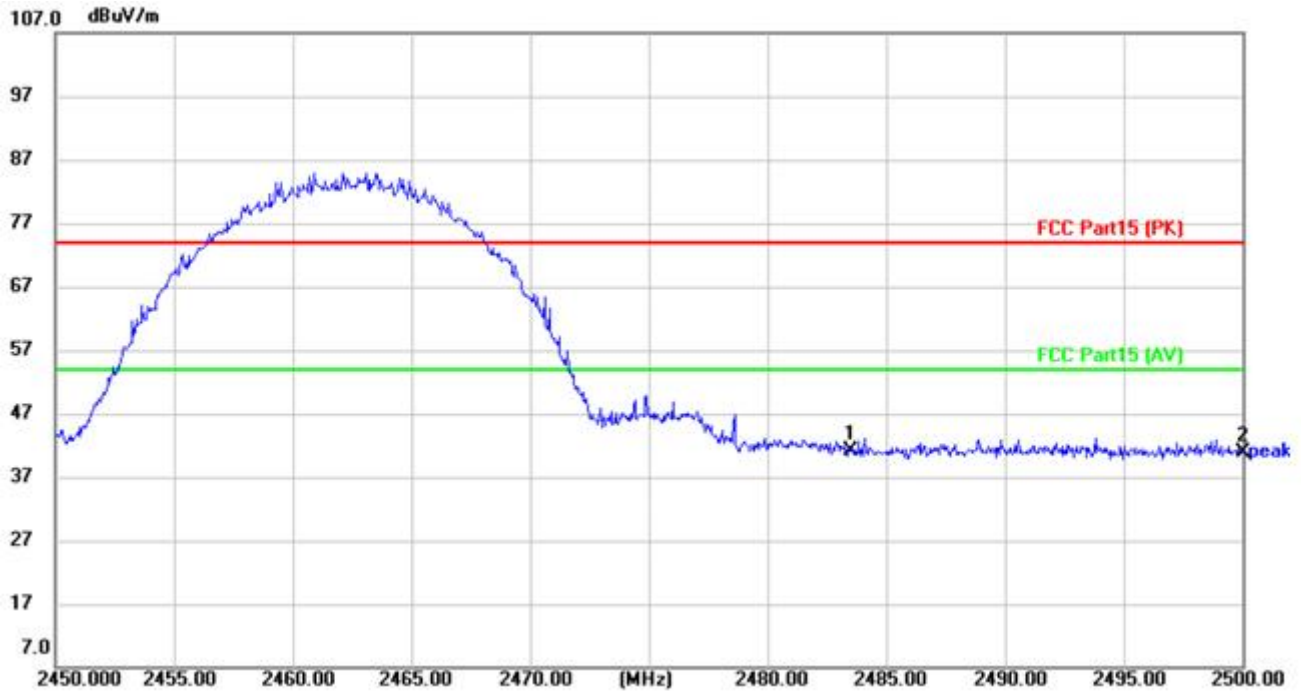

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	50.35	-9.14	41.21	74.00	-32.79	peak
2		2500.000	50.01	-9.11	40.90	74.00	-33.10	peak

Test Result: Pass


[Test mode: TX 802.11g low channel]; [Polarity: Horizontal]

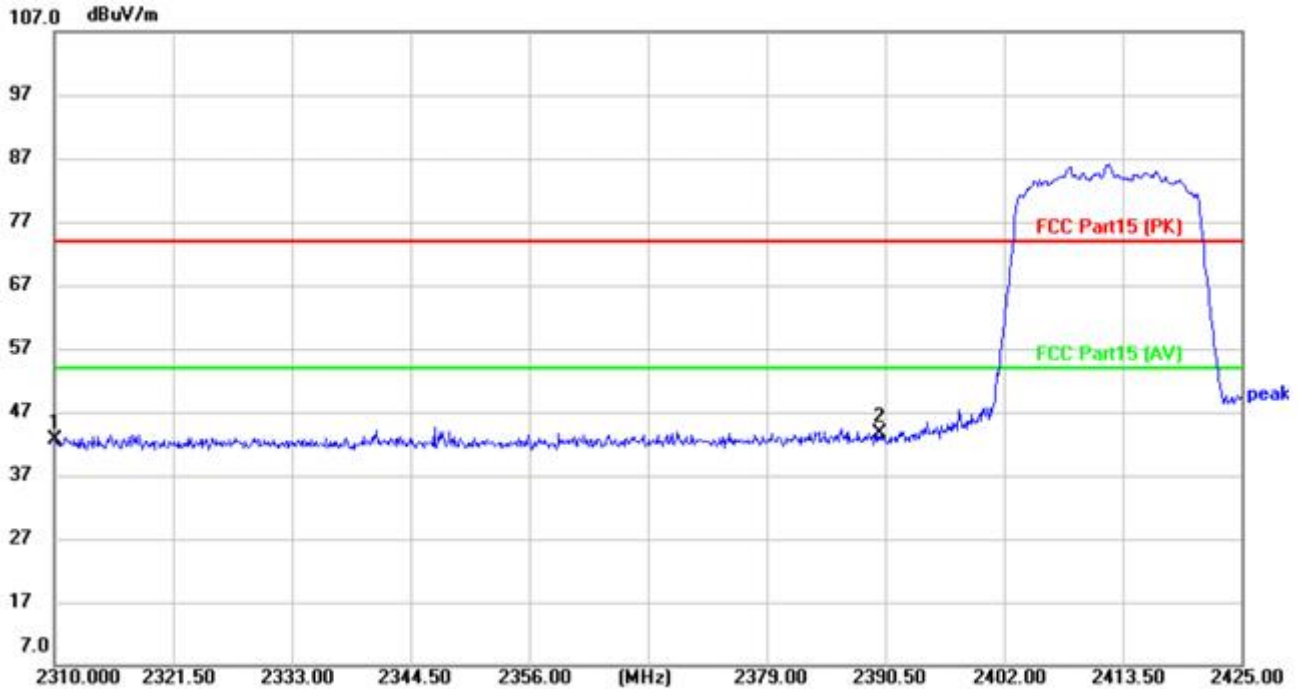

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	52.03	-9.51	42.52	74.00	-31.48	peak
2	*	2390.000	52.92	-9.19	43.73	74.00	-30.27	peak

Test Result: Pass

[Test mode:TX 802.11g low channel]; [Polarity: Vertical]

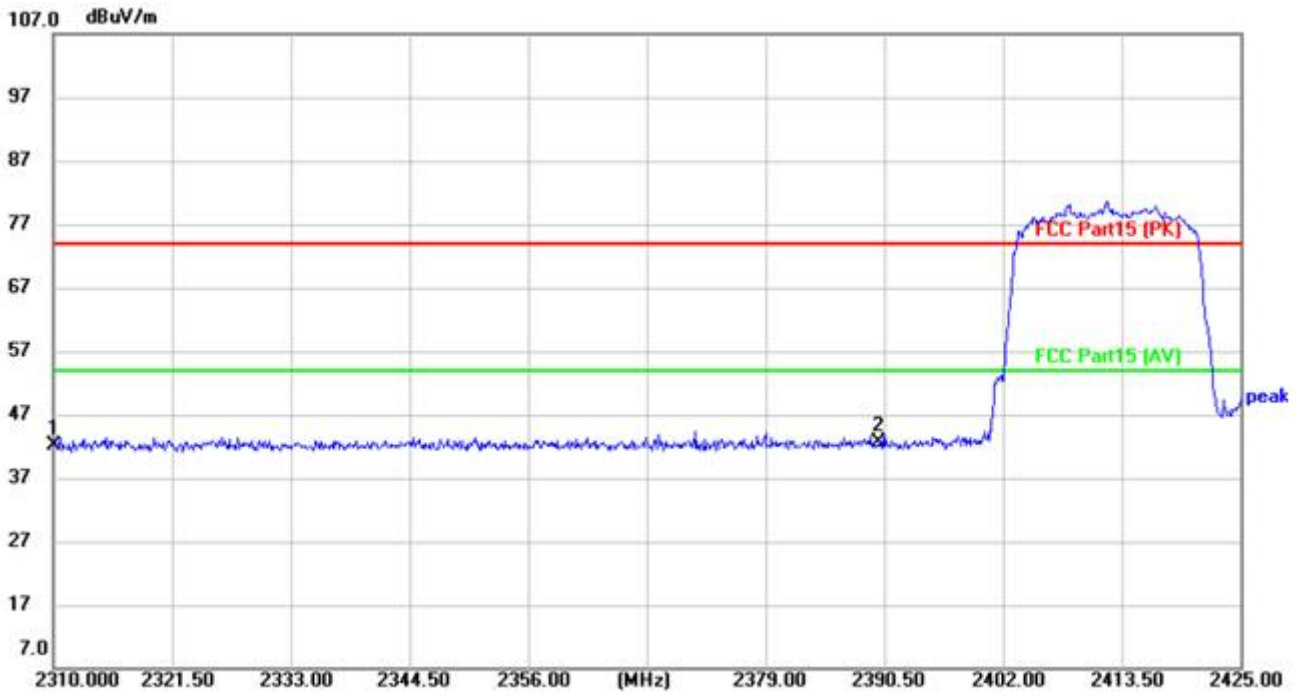

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	51.72	-9.51	42.21	74.00	-31.79	peak
2	*	2390.000	51.73	-9.19	42.54	74.00	-31.46	peak

Test Result: Pass

[Test mode: TX 802.11g High channel]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	57.92	-9.14	48.78	74.00	-25.22	peak
2		2500.000	52.34	-9.11	43.23	74.00	-30.77	peak

Test Result: Pass

[Test mode:TX 802.11g High channel]; [Polarity: Vertical]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	52.71	-9.14	43.57	74.00	-30.43	peak
2		2500.000	51.00	-9.11	41.89	74.00	-32.11	peak

Test Result: Pass


[Test mode: TX 802.11n20 low channel]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	50.27	-9.51	40.76	74.00	-33.24	peak
2	*	2390.000	51.00	-9.19	41.81	74.00	-32.19	peak

Test Result: Pass

[Test mode:TX 802.11n20 low channel]; [Polarity: Vertical]

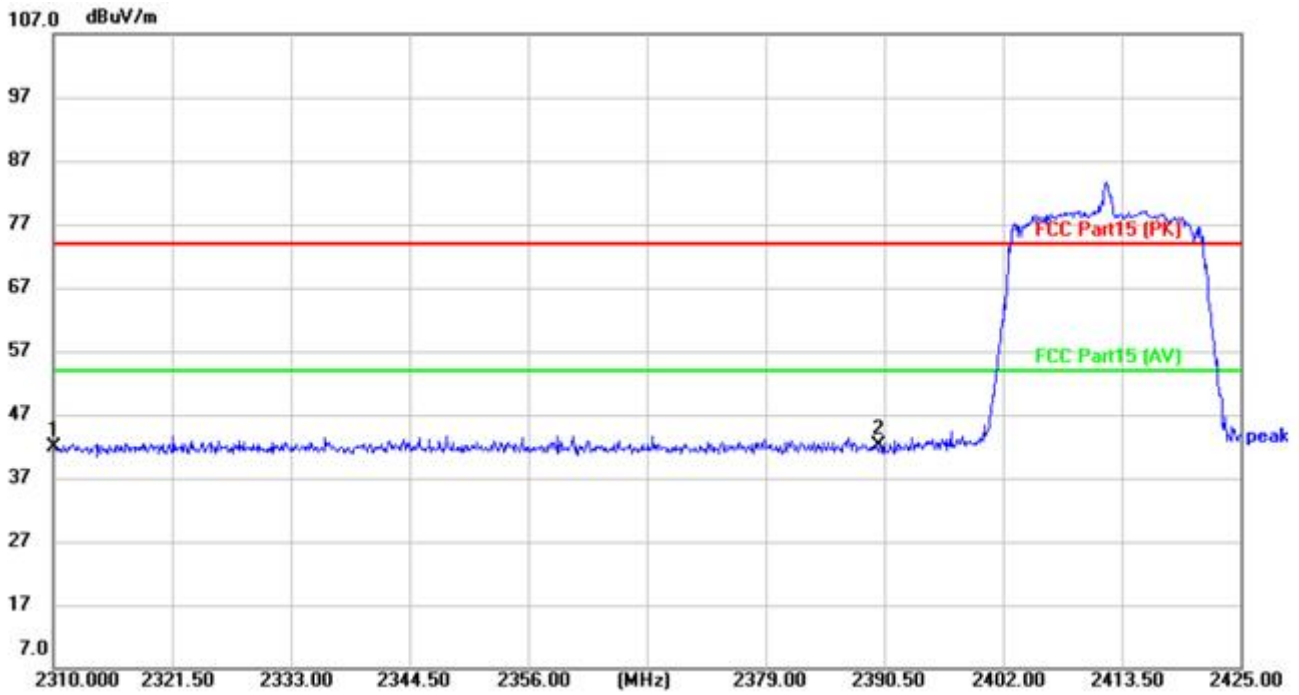

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	51.35	-9.51	41.84	74.00	-32.16	peak
2	*	2390.000	51.20	-9.19	42.01	74.00	-31.99	peak

Test Result: Pass

[Test mode: TX 802.11n20 High channel]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	55.10	-9.14	45.96	74.00	-28.04	peak
2		2500.000	51.40	-9.11	42.29	74.00	-31.71	peak

Test Result: Pass


[Test mode:TX 802.11n20 High channel]; [Polarity: Vertical]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	51.97	-9.14	42.83	74.00	-31.17	peak
2		2500.000	51.11	-9.11	42.00	74.00	-32.00	peak

Test Result: Pass


[Test mode: TX 802.11n40 low channel]; [Polarity: Horizontal]

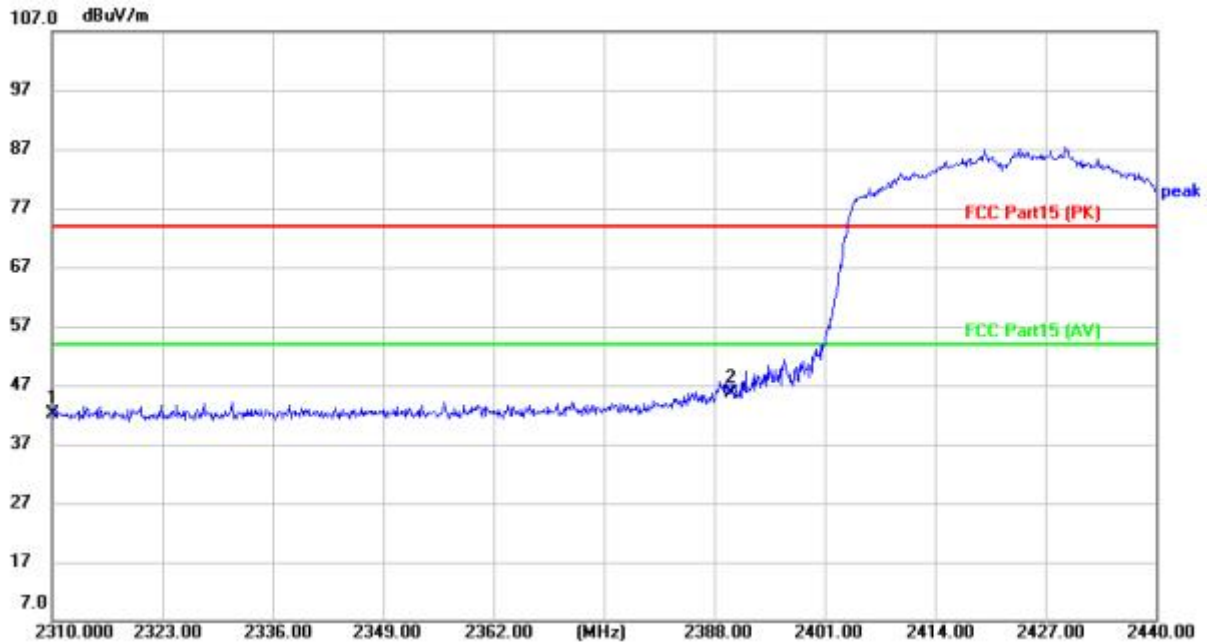

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	51.72	-9.51	42.21	74.00	-31.79	peak
2	*	2390.000	54.76	-9.19	45.57	74.00	-28.43	peak

Test Result: Pass

[Test mode:TX 802.11n40 low channel]; [Polarity: Vertical]

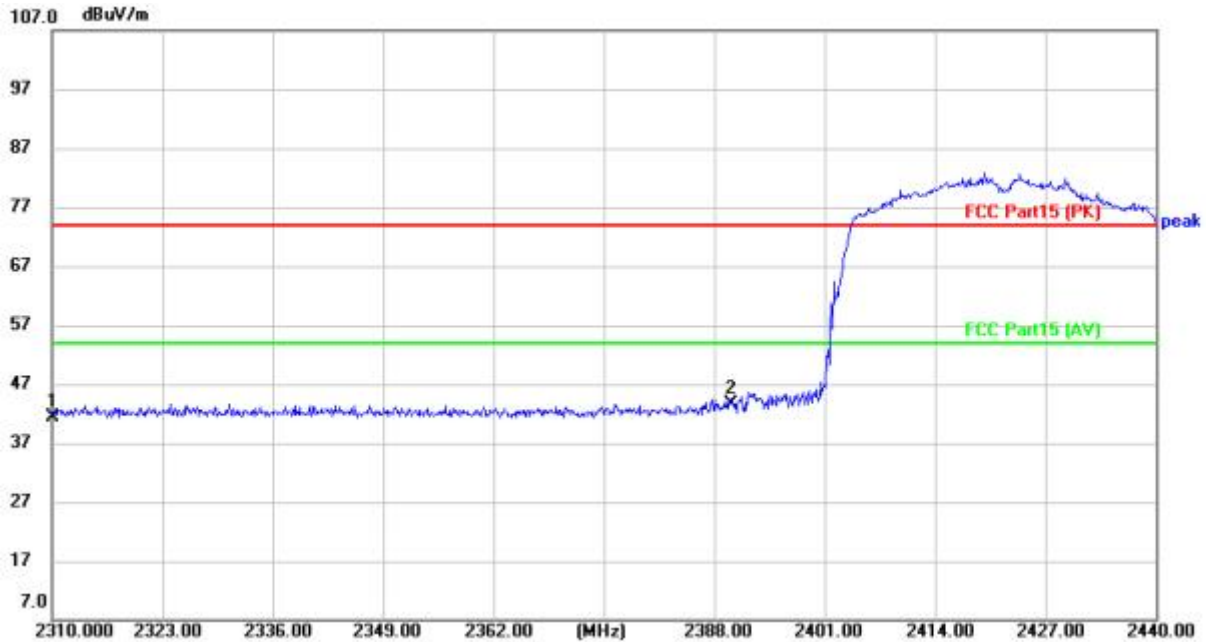

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	50.89	-9.51	41.38	74.00	-32.62	peak
2	*	2390.000	52.93	-9.19	43.74	74.00	-30.26	peak

Test Result: Pass

[Test mode: TX 802.11n40 High channel]; [Polarity: Horizontal]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	57.70	-9.14	48.56	74.00	-25.44	peak
2		2500.000	52.09	-9.11	42.98	74.00	-31.02	peak

Test Result: Pass

[Test mode:TX 802.11n40 High channel]; [Polarity: Vertical]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	53.62	-9.14	44.48	74.00	-29.52	peak
2		2500.000	50.23	-9.11	41.12	74.00	-32.88	peak

Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	8.544	30	Pass
NVNT	b	2437	Ant1	7.091	30	Pass
NVNT	b	2462	Ant1	5.105	30	Pass
NVNT	g	2412	Ant1	6.43	30	Pass
NVNT	g	2437	Ant1	5.373	30	Pass
NVNT	g	2462	Ant1	3.605	30	Pass
NVNT	n20	2412	Ant1	6.35	30	Pass
NVNT	n20	2437	Ant1	5.408	30	Pass
NVNT	n20	2462	Ant1	3.612	30	Pass
NVNT	n40	2422	Ant1	5.368	30	Pass
NVNT	n40	2437	Ant1	4.739	30	Pass
NVNT	n40	2452	Ant1	3.227	30	Pass


7.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.381	0.5	Pass
NVNT	b	2437	Ant1	12.028	0.5	Pass
NVNT	b	2462	Ant1	11.314	0.5	Pass
NVNT	g	2412	Ant1	17.153	0.5	Pass
NVNT	g	2437	Ant1	17.18	0.5	Pass
NVNT	g	2462	Ant1	17.3	0.5	Pass
NVNT	n20	2412	Ant1	15.904	0.5	Pass
NVNT	n20	2437	Ant1	15.783	0.5	Pass
NVNT	n20	2462	Ant1	16.08	0.5	Pass
NVNT	n40	2422	Ant1	35.508	0.5	Pass
NVNT	n40	2437	Ant1	34.377	0.5	Pass
NVNT	n40	2452	Ant1	33.462	0.5	Pass


-6dB Bandwidth NVNT b 2412MHz Ant1

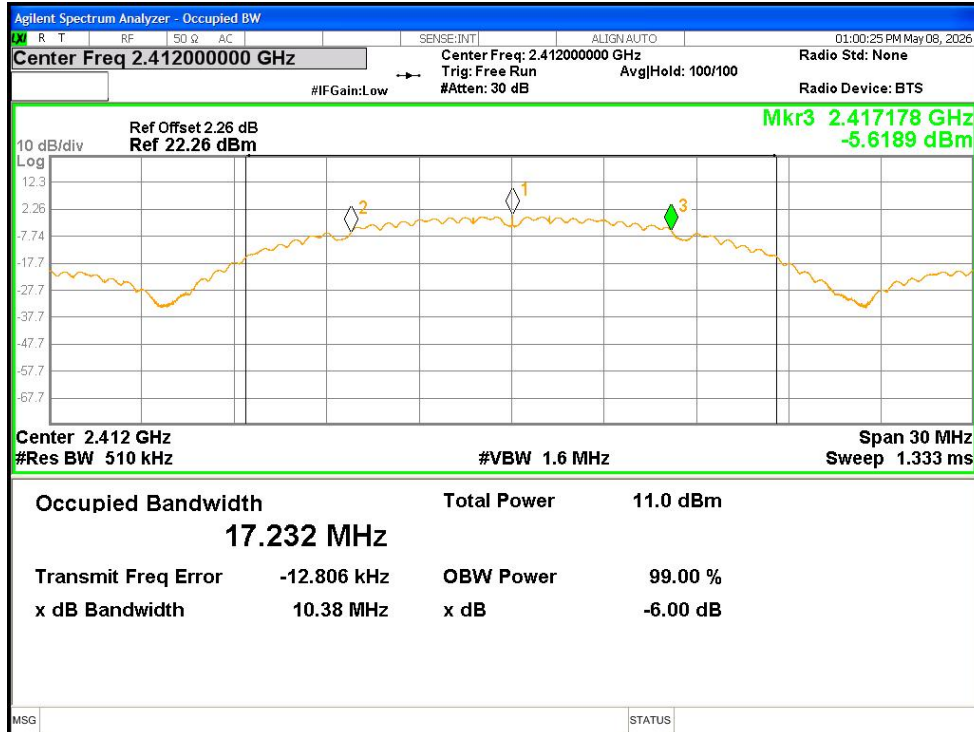


-6dB Bandwidth NVNT b 2437MHz Ant1

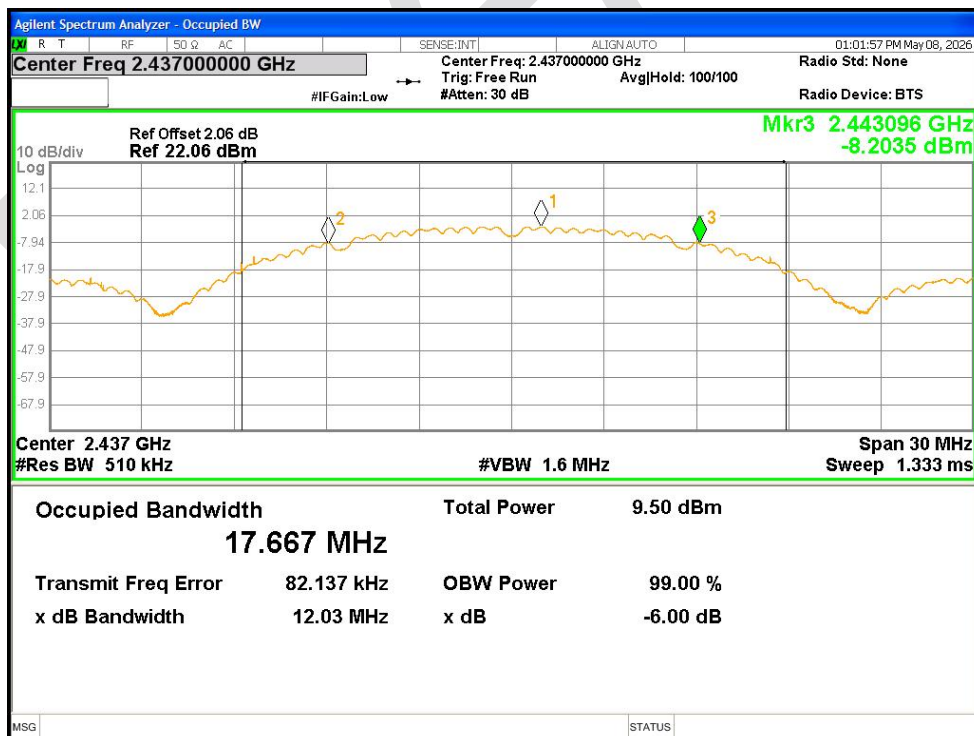


-6dB Bandwidth NVNT b 2462MHz Ant1

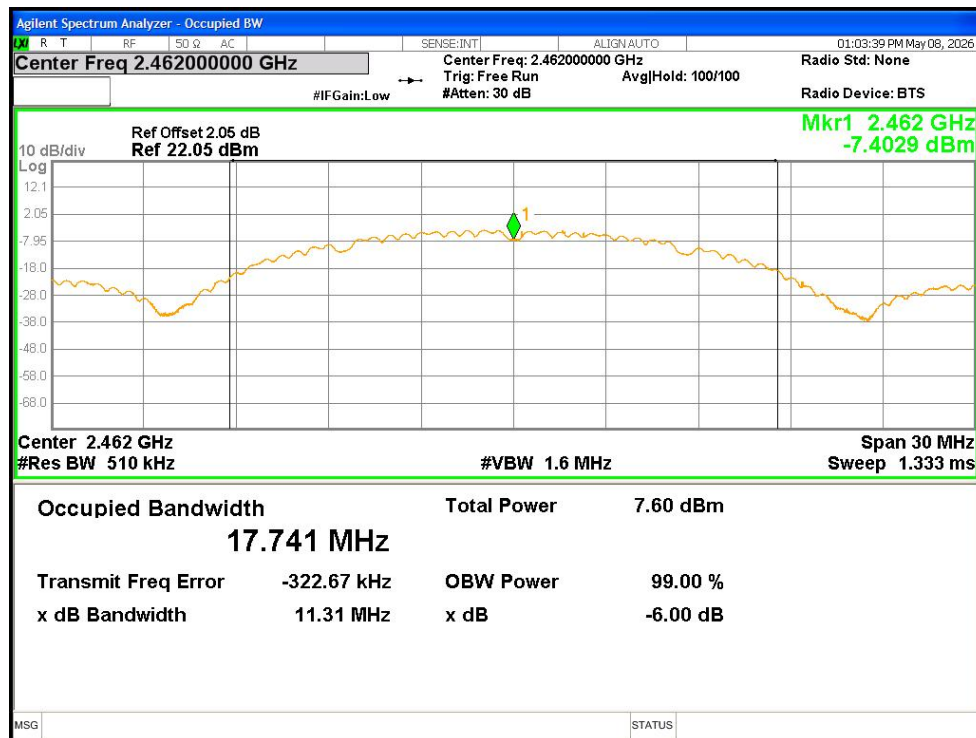


-6dB Bandwidth NVNT g 2412MHz Ant1

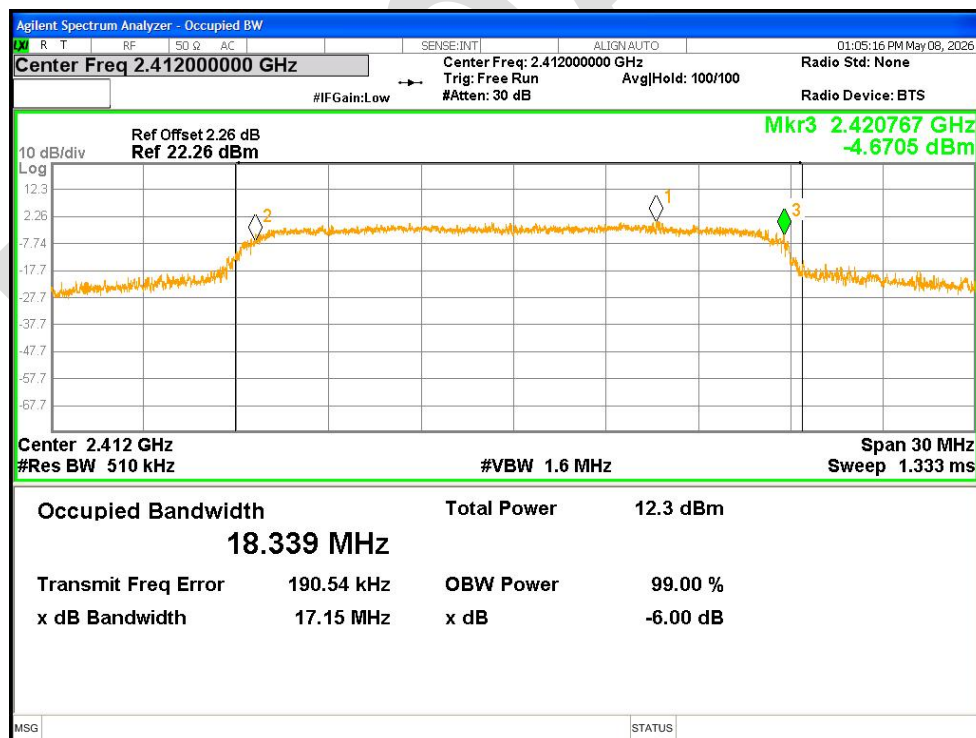


-6dB Bandwidth NVNT g 2437MHz Ant1

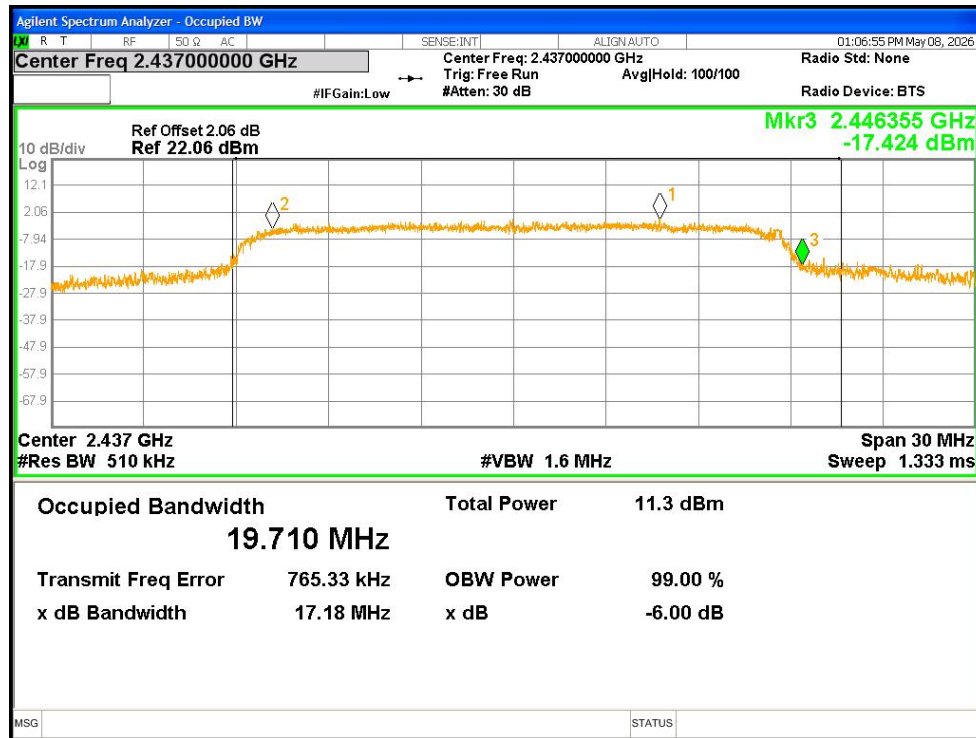


-6dB Bandwidth NVNT g 2462MHz Ant1

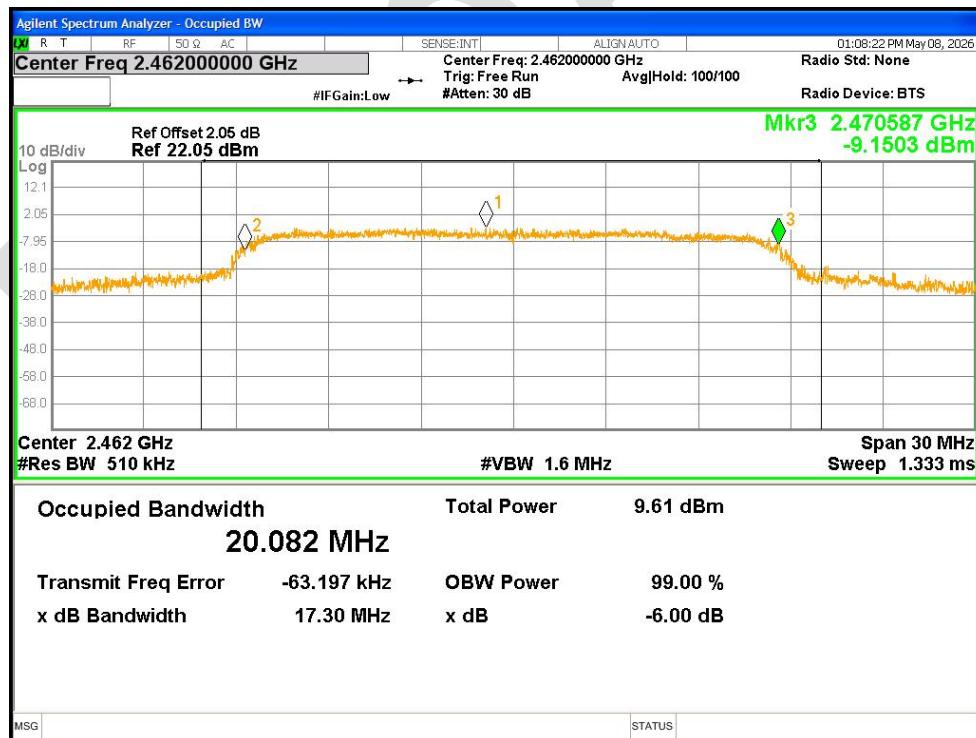


-6dB Bandwidth NVNT n20 2412MHz Ant1

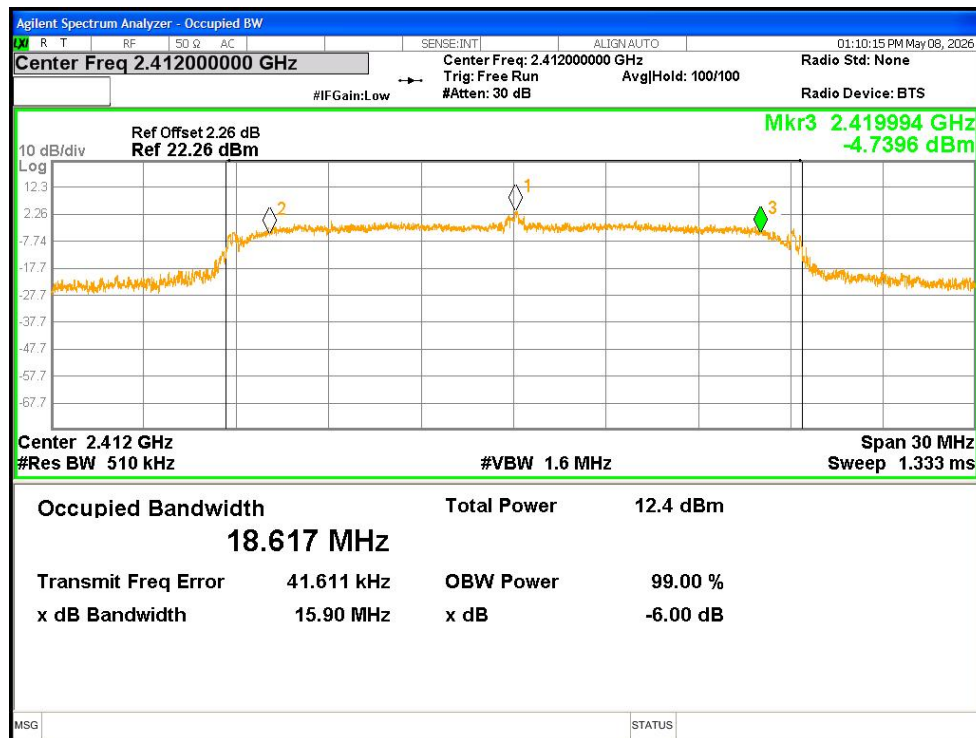

-6dB Bandwidth NVNT n20 2437MHz Ant1

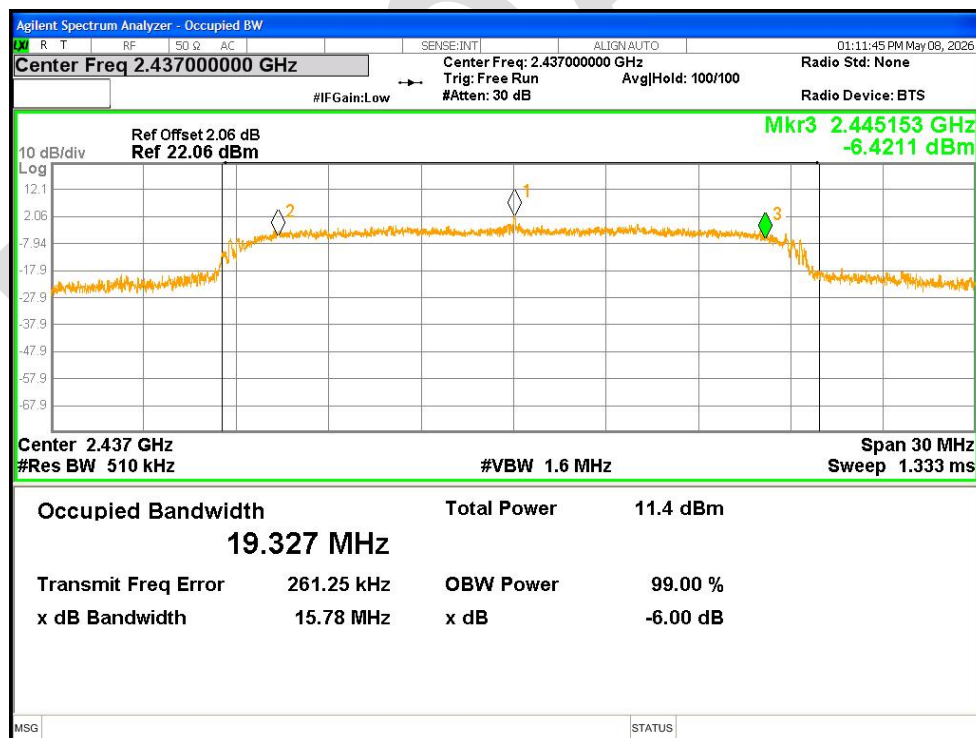

-6dB Bandwidth NVNT n20 2462MHz Ant1

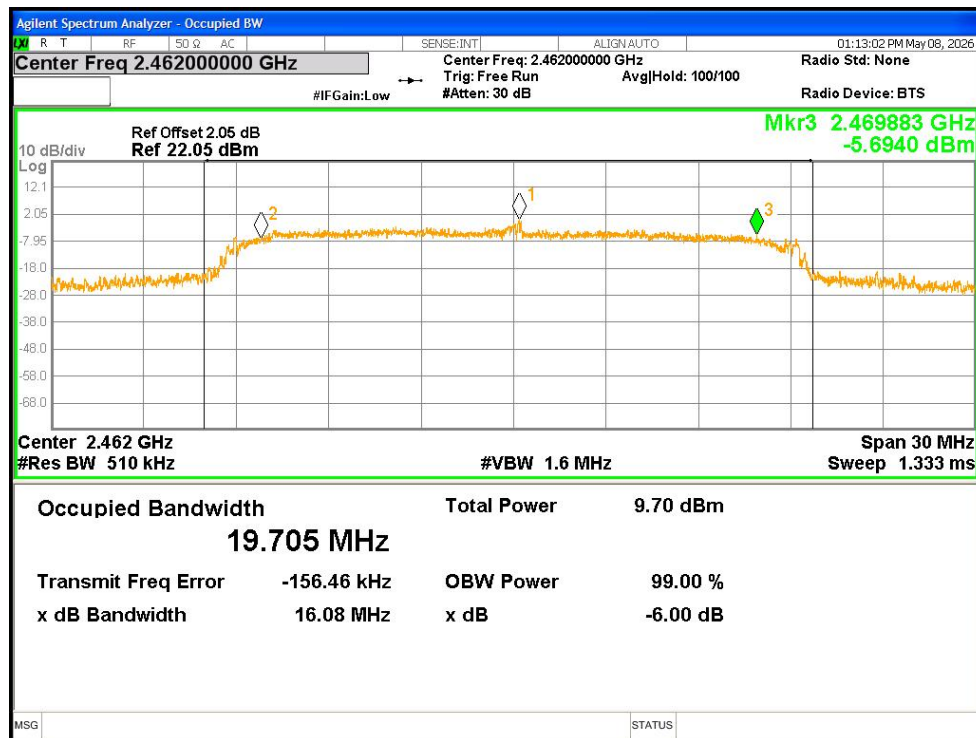

-6dB Bandwidth NVNT n40 2422MHz Ant1

