


Antenna specifications

1: Antenna model:1220, Inverted F Antenna (IFA)

2: Antenna type: PCB embedded antenna

3: Gain: 1.5 dB

4: Antenna dimensions as shown in Figure 1

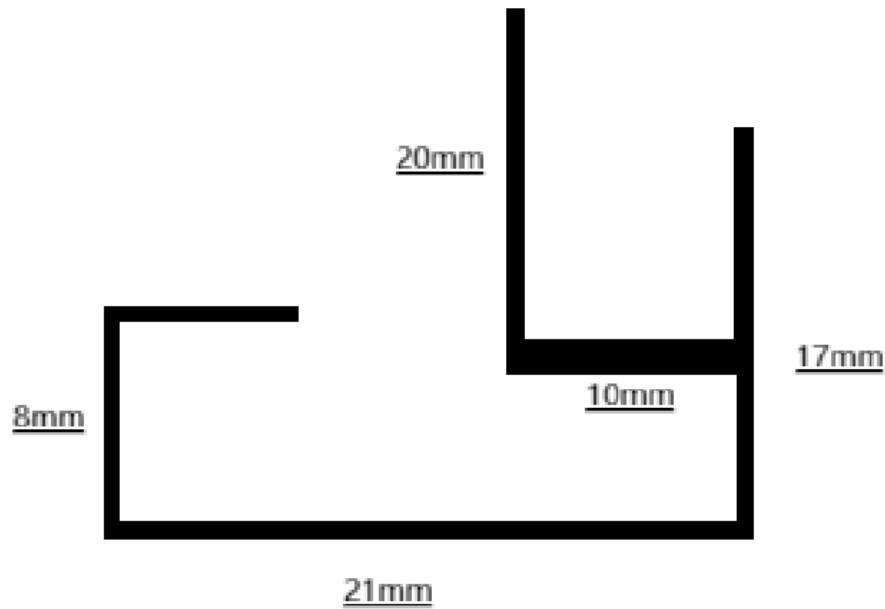

Antenna size

Figure 1 18.2*5.5mm

5: Antenna Efficiency

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	36.8	-4.3	0.8
2410	40.3	-3.9	1.3
2420	40.4	-3.8	1.4
2430	41.6	-3.8	1.5
2440	40.5	-3.7	1.4
2450	40.7	-3.7	1.4
2460	41.2	-3.8	1.5
2470	40.0	-4	1.4

Ningbo Yongxin Electronics Co., Ltd.

Guangxi Village (Industrial Zone), Yinzhang Town, Haishu District, Ningbo City,
Zhejiang Province

Antenna specifications

2480	38.0	-4.2	1.1
2490	35.9	-4.5	0.9
2500	34	-4.7	0.7

6. The antenna performance is shown in Figure 2, and the operating frequency band covers the entire 2.4G ISM frequency band.

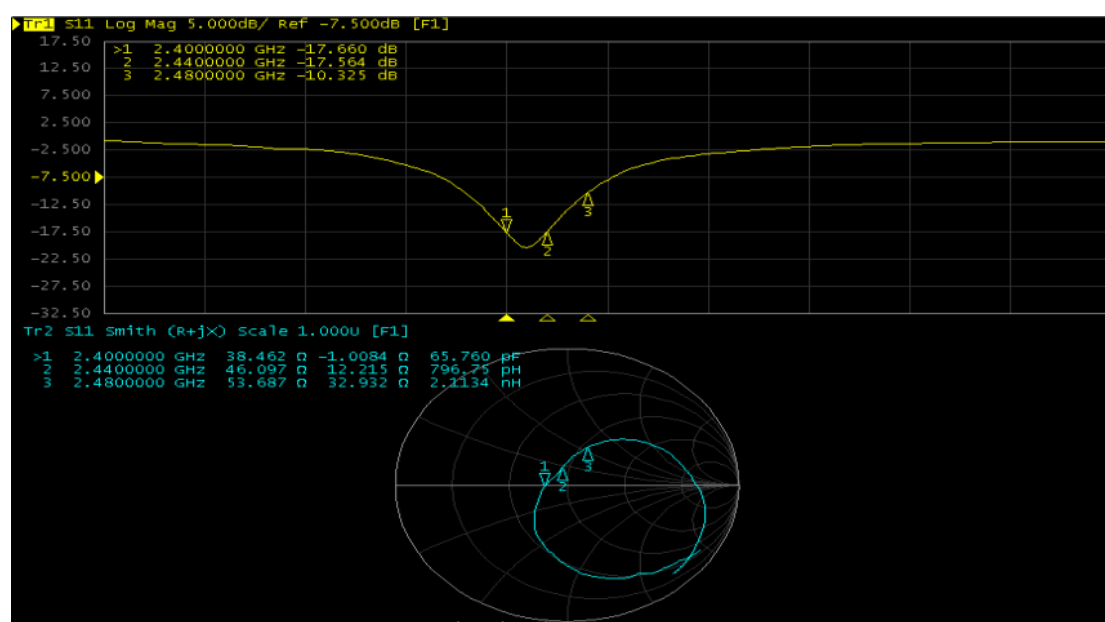


Figure 2

The 2D and 3D gains are as follows, reaching approximately 1.5 dB:

Ningbo Yongxin Electronics Co., Ltd.
Guangxi Village (Industrial Zone), Yinzhang Town, Haishu District, Ningbo City,
Zhejiang Province

Antenna specifications

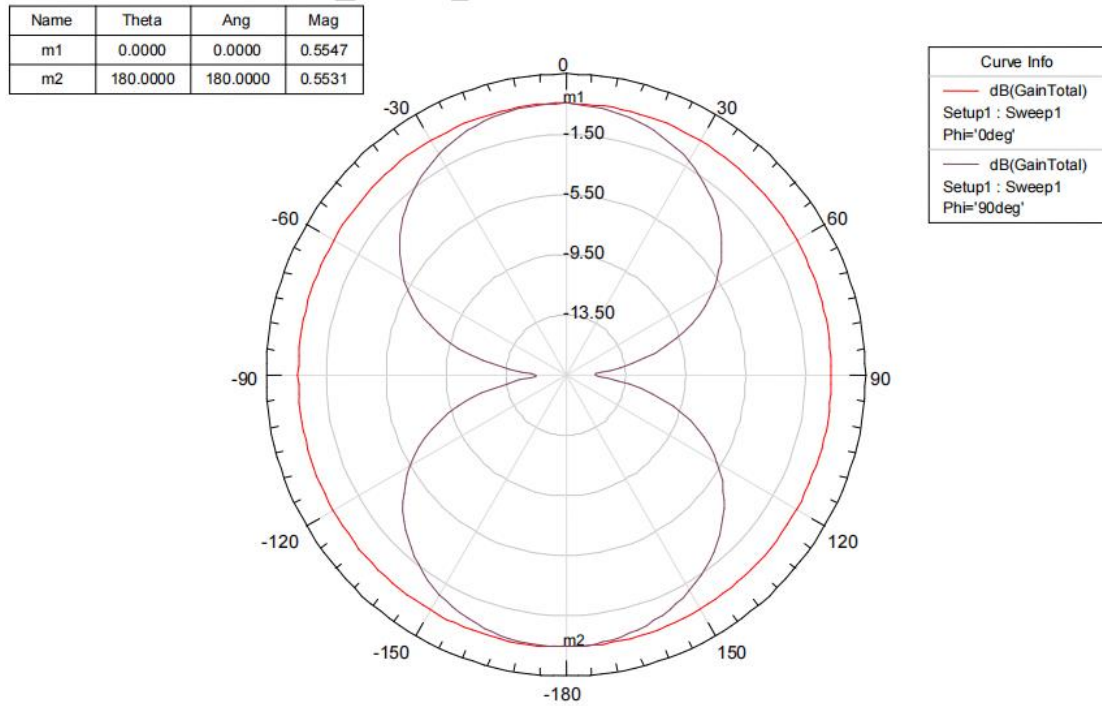


Figure 3

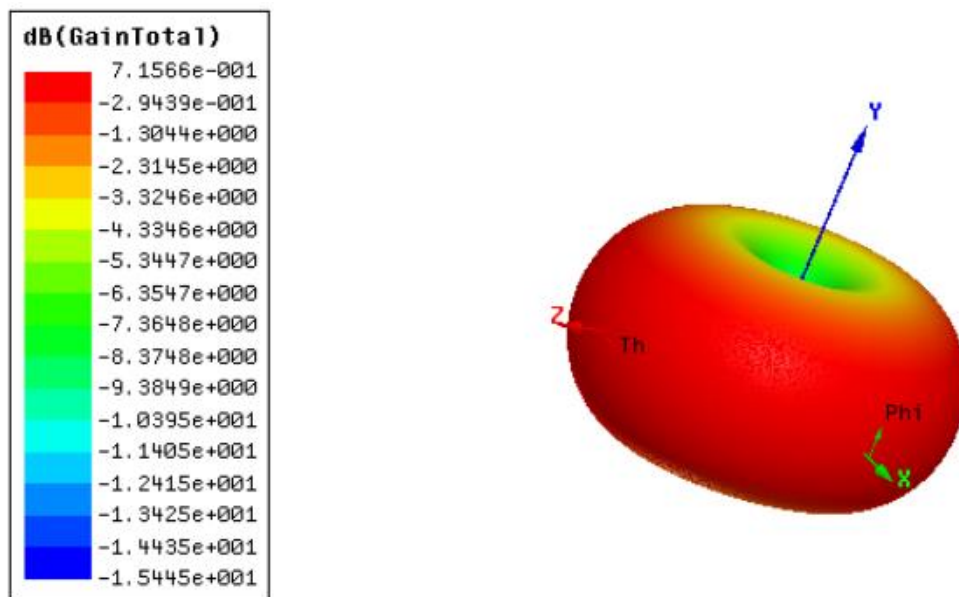


Figure 4 Antenna Gain

Ningbo Yongxin Electronics Co., Ltd.
Guangxi Village (Industrial Zone), Yinzhang Town, Haishu District, Ningbo City,
Zhejiang Province