1. Duty Cycle

1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK-1M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00

1.2 Test Graph

GFSK-1M_LCH_2402MHz_Ant1_NTNV

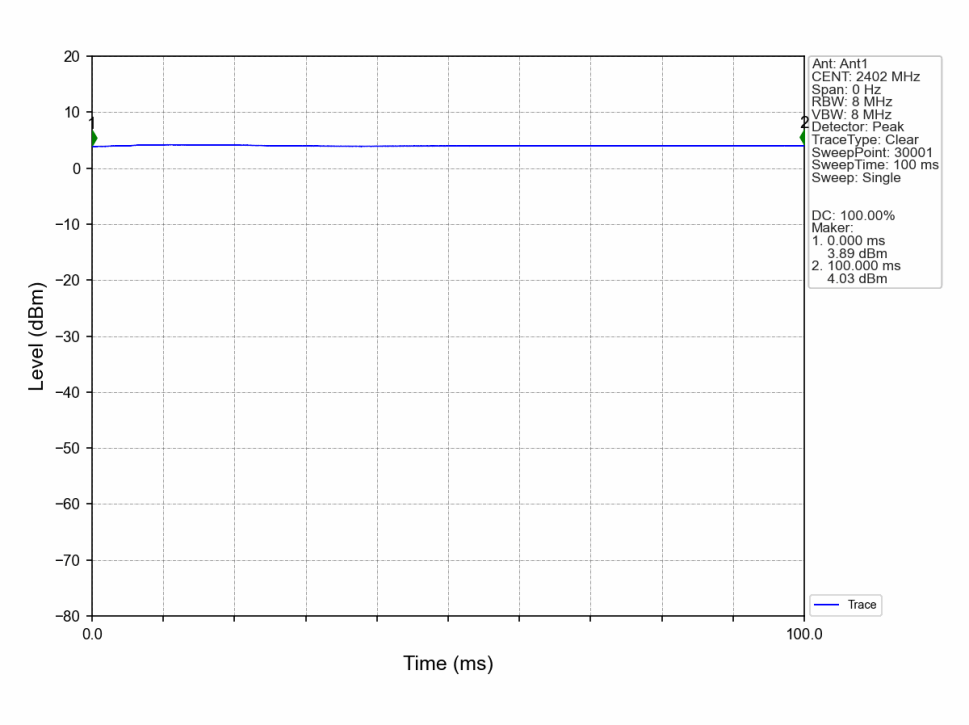

GFSK-1M_MCH_2440MHz_Ant1_NTNV

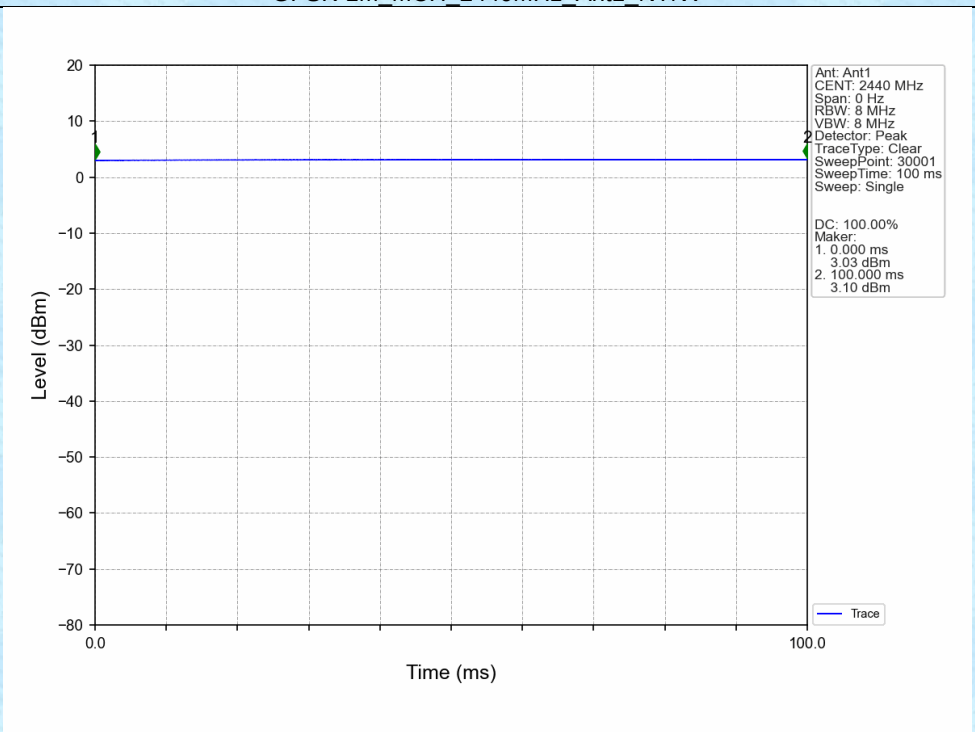

GFSK-1M_HCH_2480MHz_Ant1_NTNV

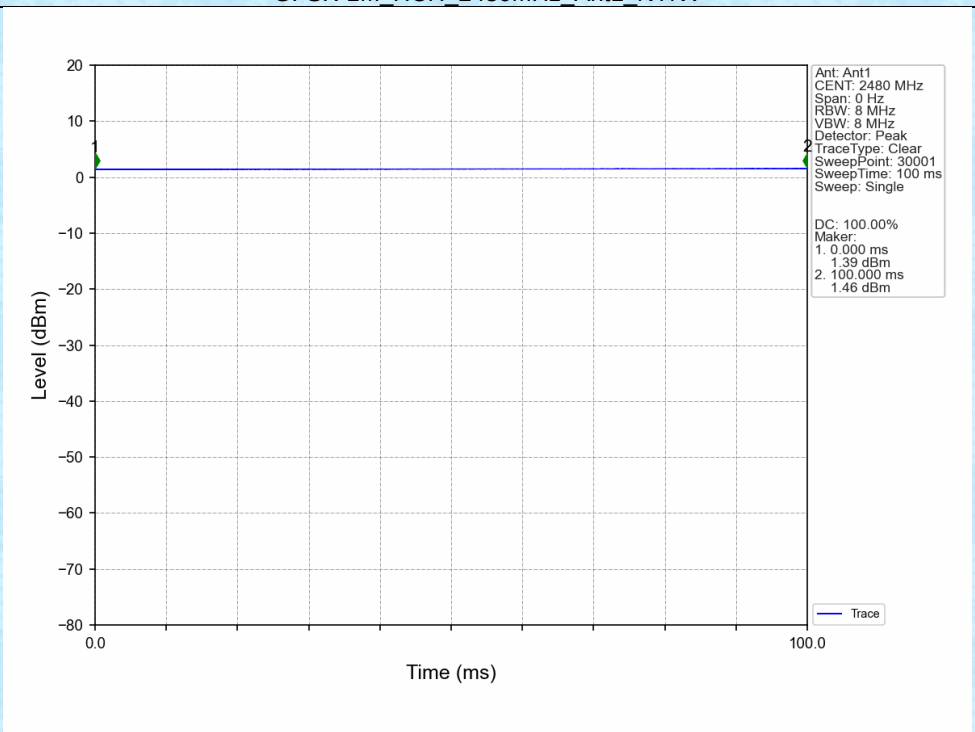

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
GFSK-1M	SISO	2402	1	1.056	/	Pass
		2440	1	1.068	/	Pass
		2480	1	1.074	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
GFSK-1M	SISO	2402	1	0.672	>=0.5	Pass
		2440	1	0.681	>=0.5	Pass
		2480	1	0.680	>=0.5	Pass

2.2 Test Graph

2.2.1 OBW

GFSK-1M_LCH_2402MHz_Ant1_NTNV

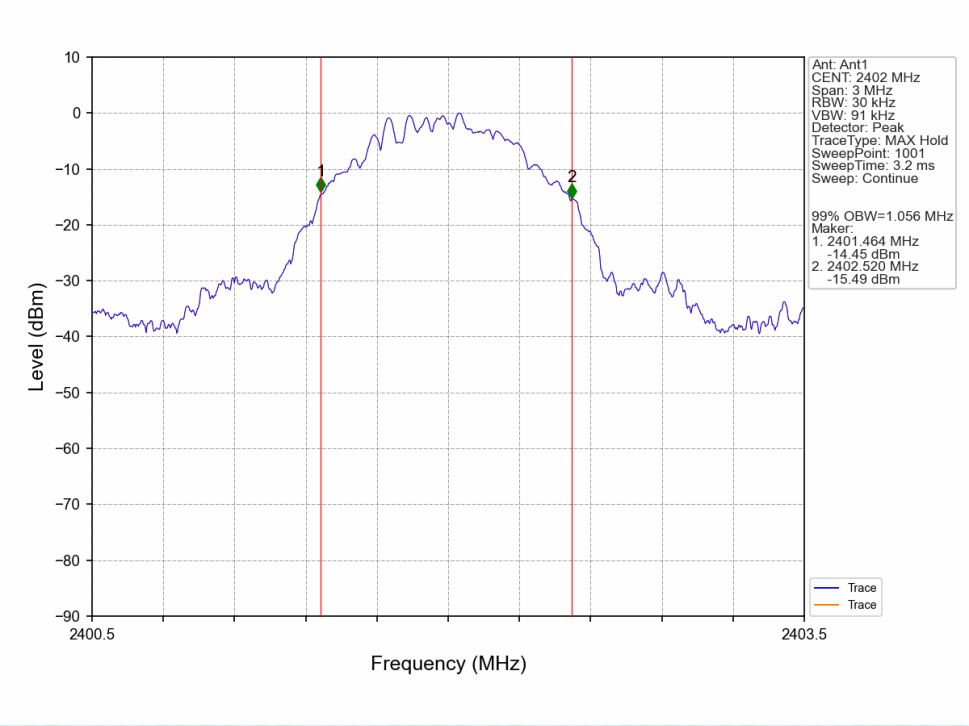

GFSK-1M_MCH_2440MHz_Ant1_NTNV

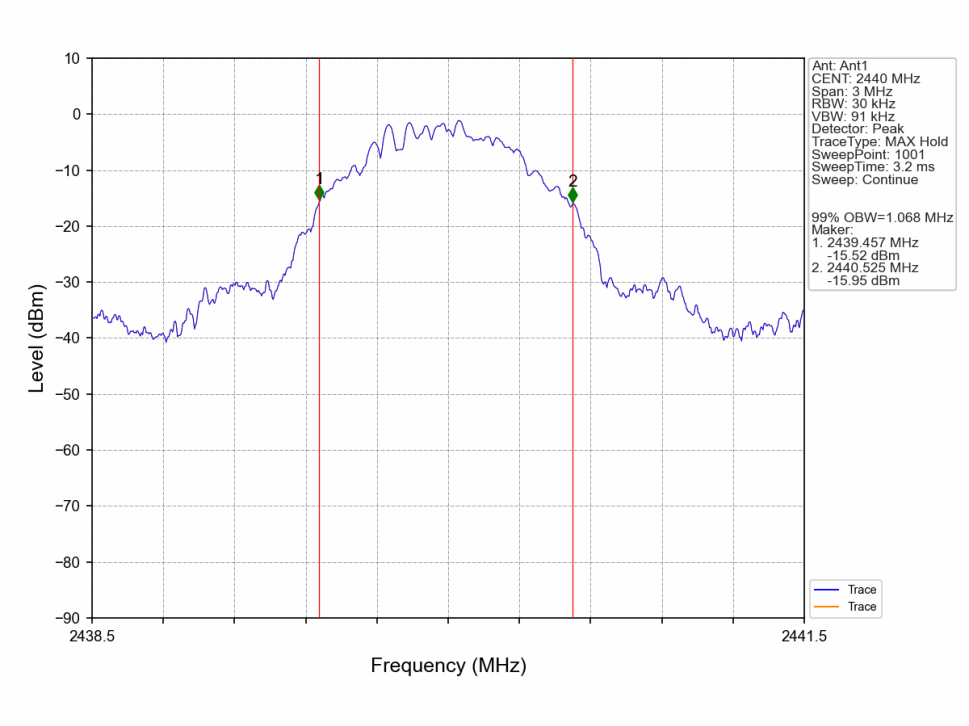

GFSK-1M_HCH_2480MHz_Ant1_NTNV

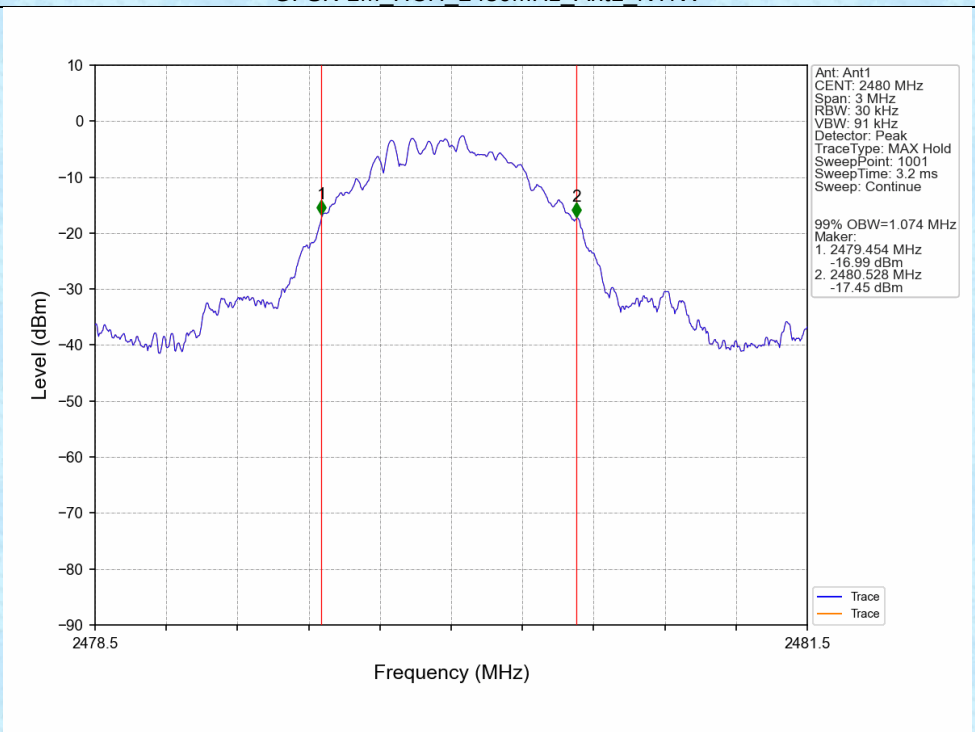

2.2.2 6dB BW

GFSK-1M_LCH_2402MHz_Ant1_NTNV

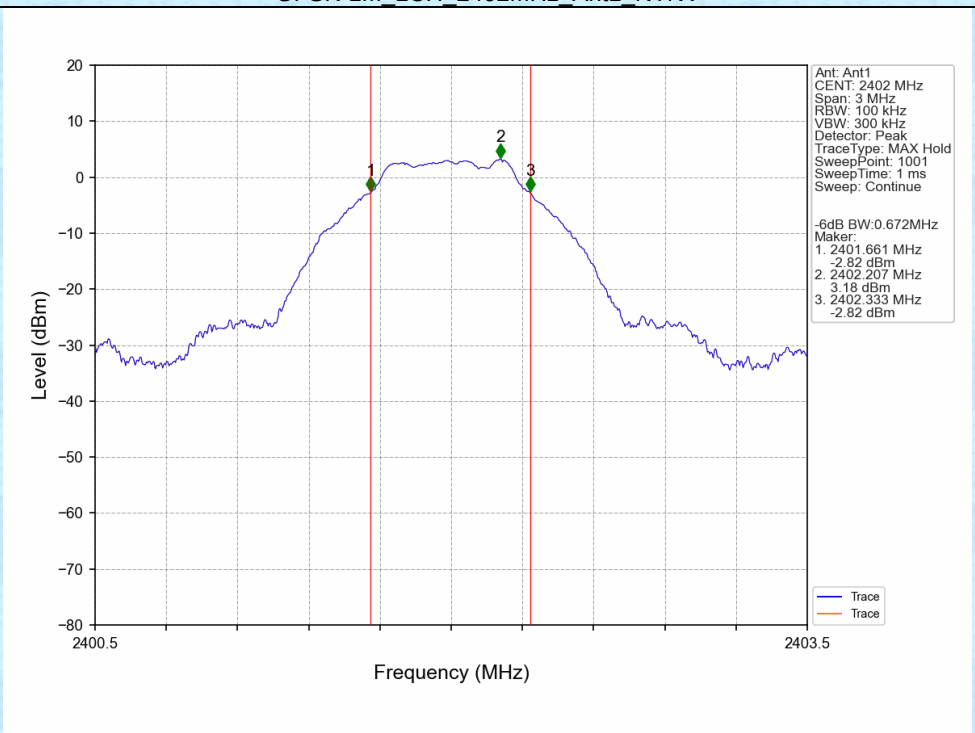

GFSK-1M_MCH_2440MHz_Ant1_NTNV

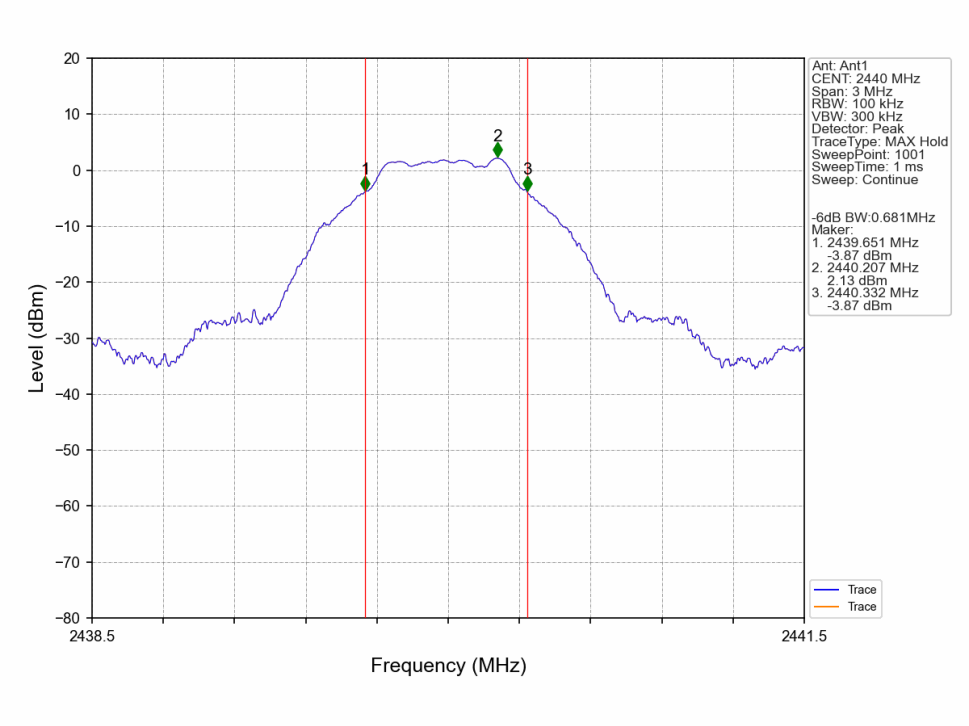

GFSK-1M_HCH_2480MHz_Ant1_NTNV

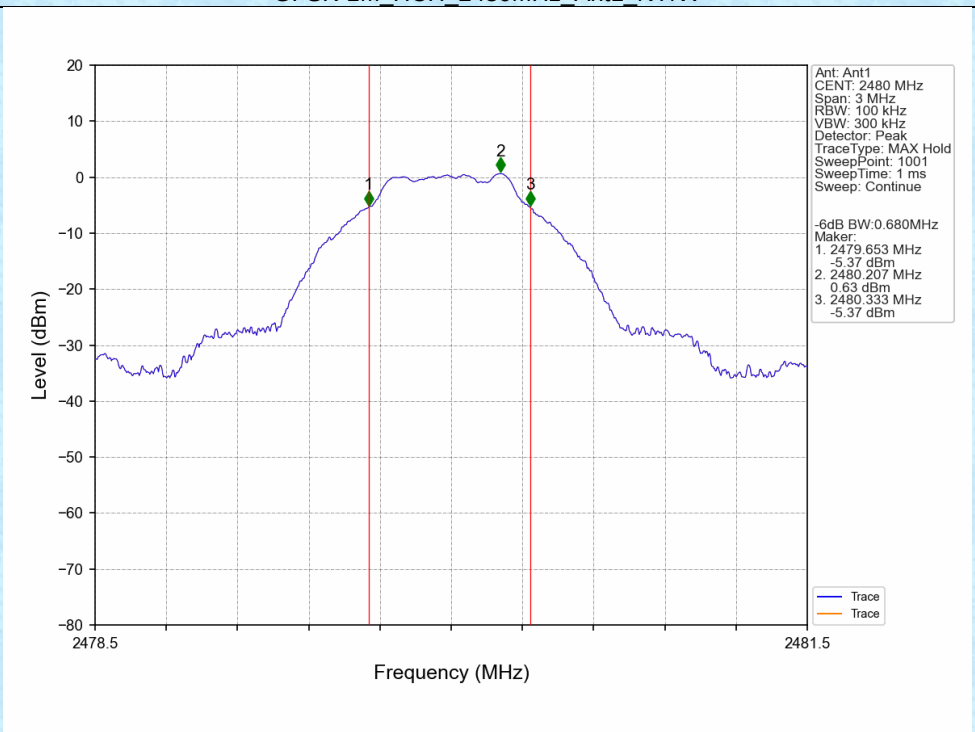

3. Maximum Conducted Output Power

3.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
GFSK-1M	SISO	2402	4.11	<=30	Pass
		2440	3.06	<=30	Pass
		2480	1.57	<=30	Pass

3.2 Test Graph

GFSK-1M_LCH_2402MHz_Ant1_NTNV

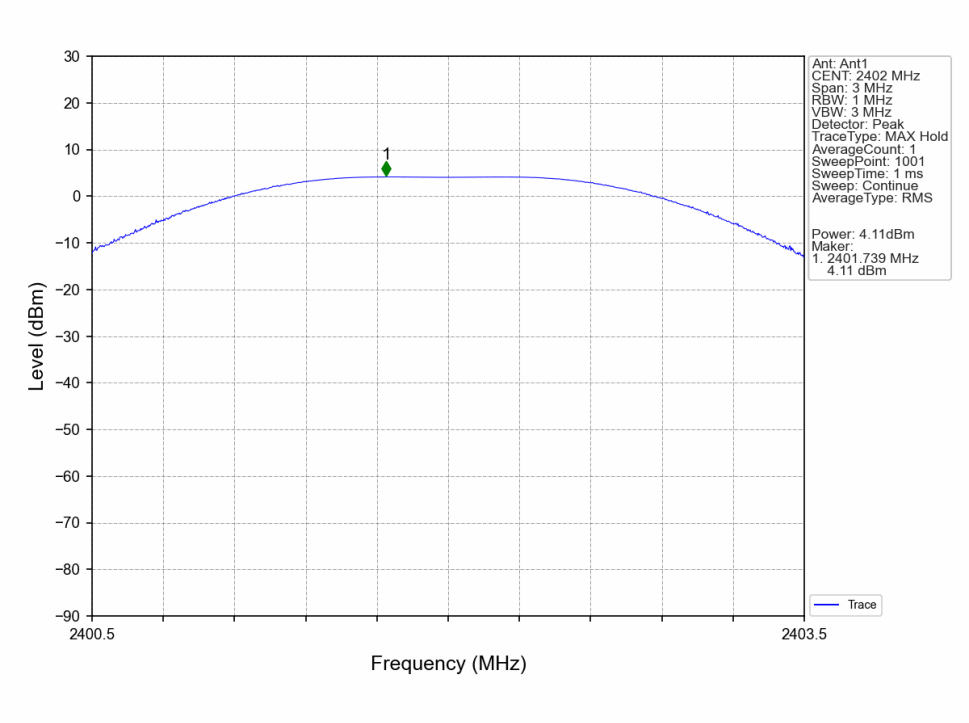

GFSK-1M_MCH_2440MHz_Ant1_NTNV

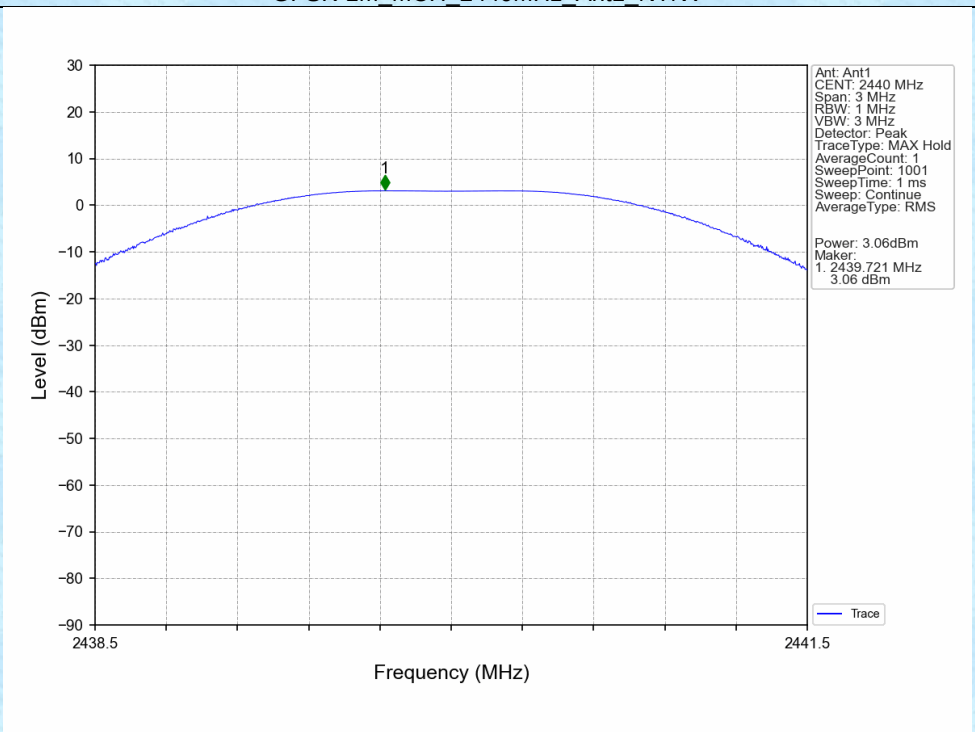

GFSK-1M_HCH_2480MHz_Ant1_NTNV

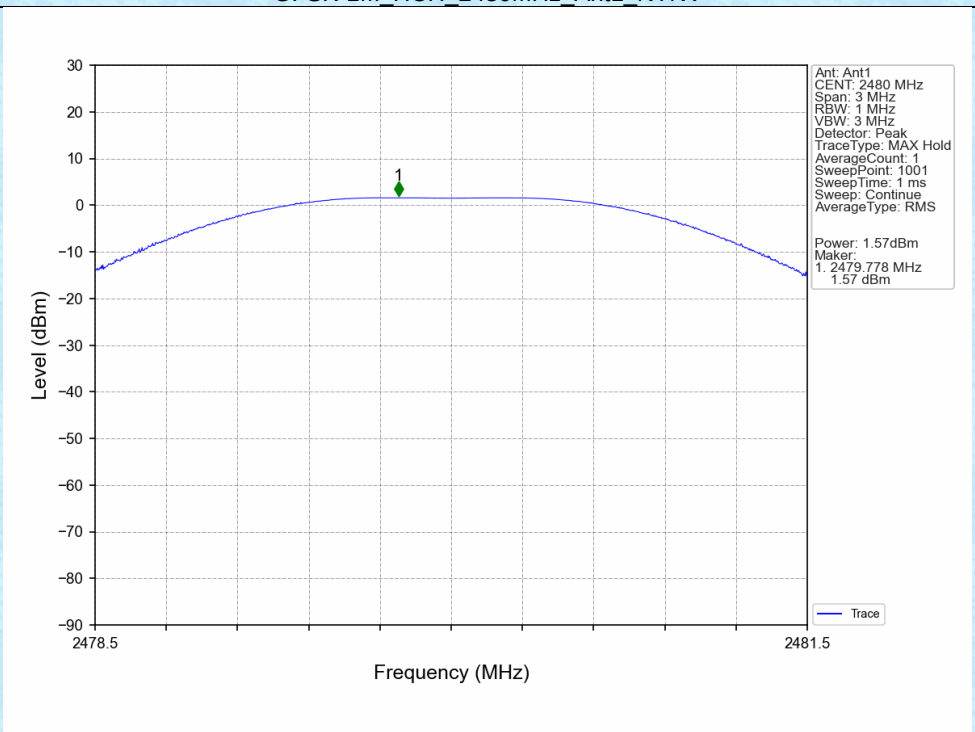

4. Maximum Power Spectral Density

4.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
GFSK-1M	SISO	2402	-9.30	<=8	Pass
		2440	-10.42	<=8	Pass
		2480	-11.94	<=8	Pass

4.2 Test Graph

GFSK-1M_LCH_2402MHz_Ant1_NTNV

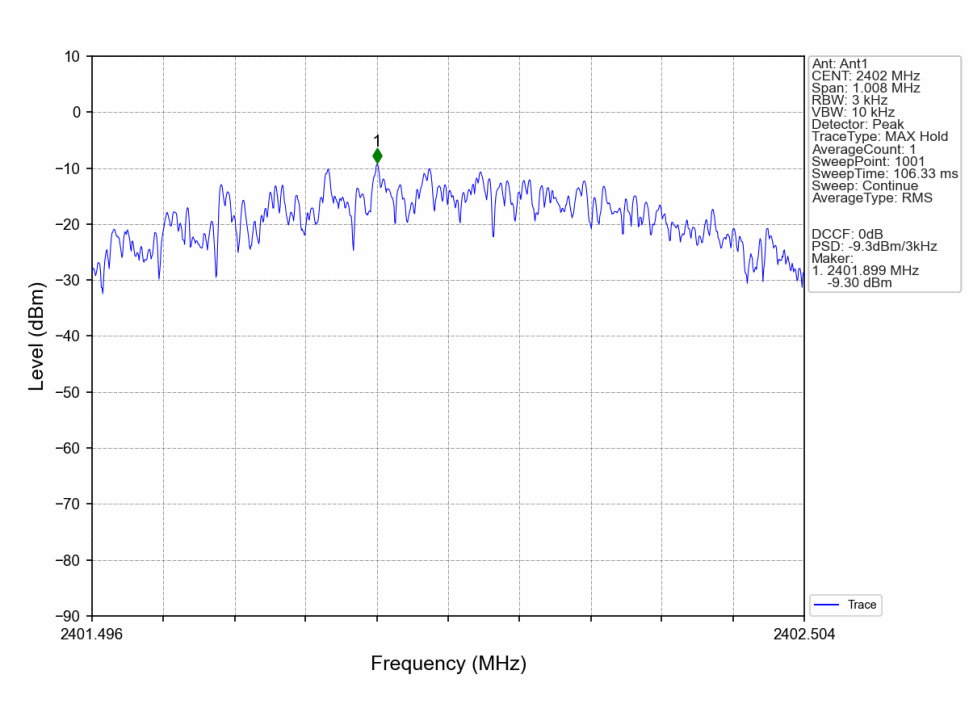

GFSK-1M_MCH_2440MHz_Ant1_NTNV

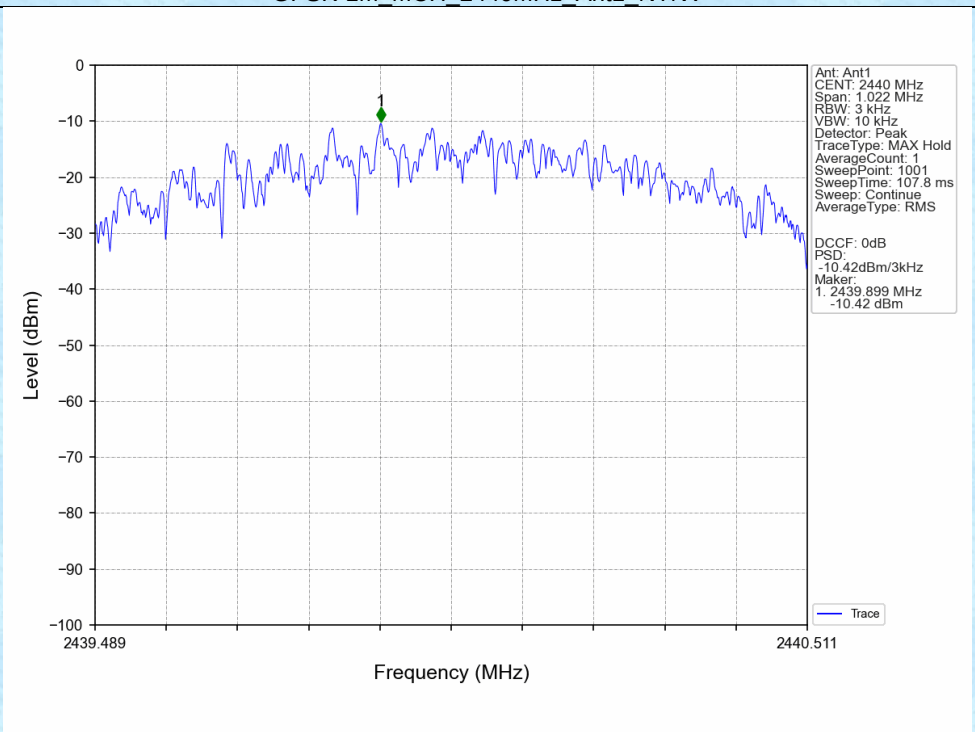

GFSK-1M_HCH_2480MHz_Ant1_NTNV

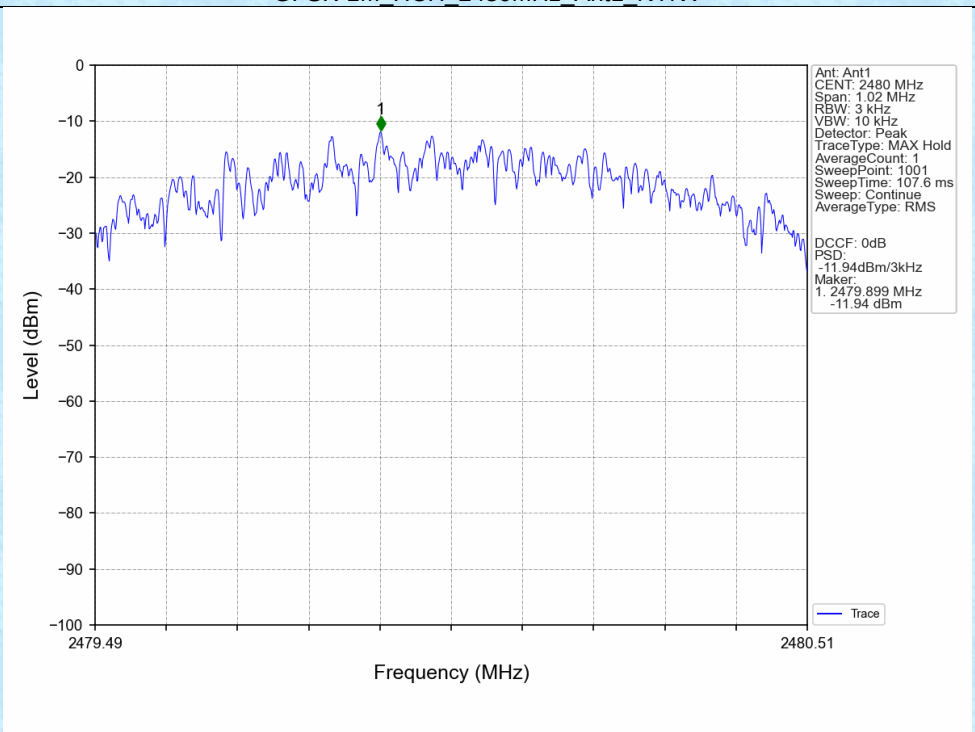

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
GFSK-1M	SISO	2402	1	3.17
		2440	1	2.12
		2480	1	0.64
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK-1M	SISO	2402	1	3.17	-16.83	Pass
		2440	1	3.17	-16.83	Pass
		2480	1	3.17	-16.83	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph

5.2.1 Ref

GFSK-1M_LCH_2402MHz_Ant1_NTNV

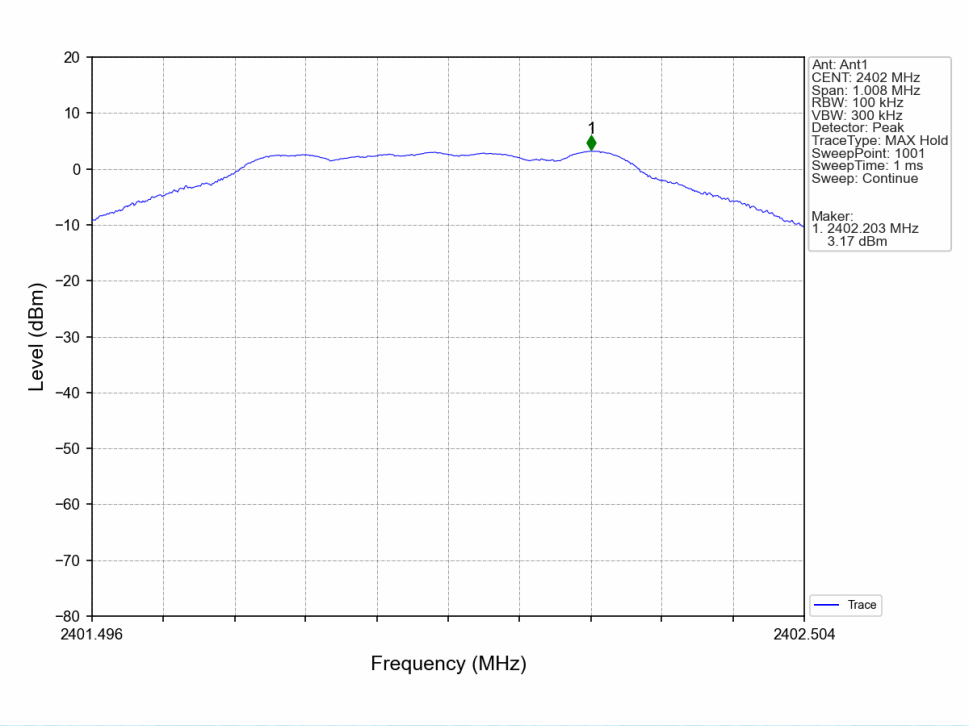

GFSK-1M_MCH_2440MHz_Ant1_NTNV

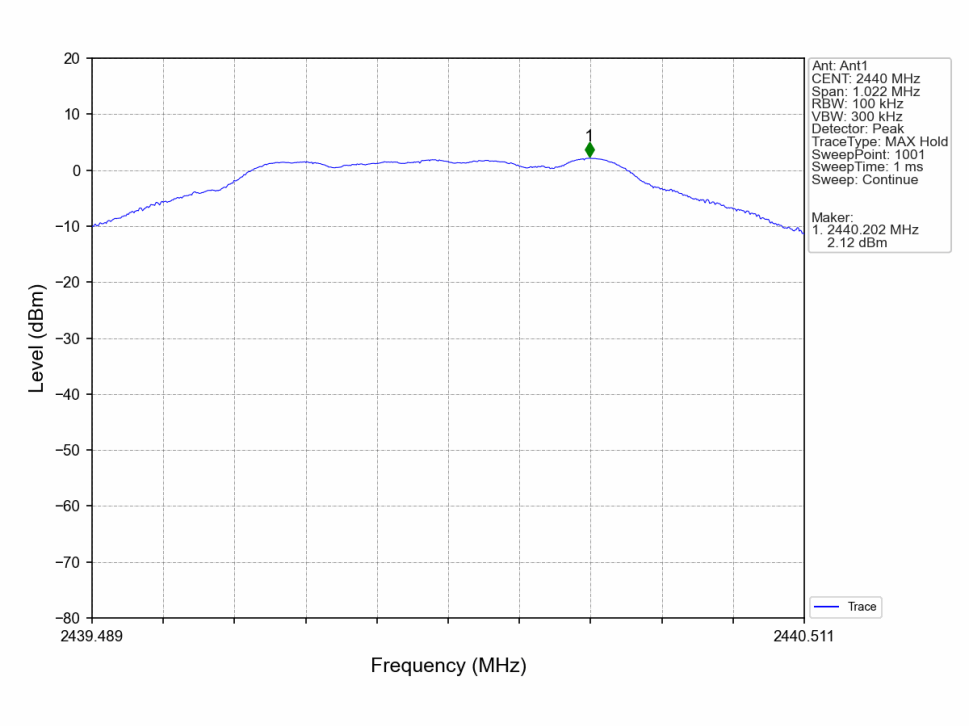

GFSK-1M_HCH_2480MHz_Ant1_NTNV

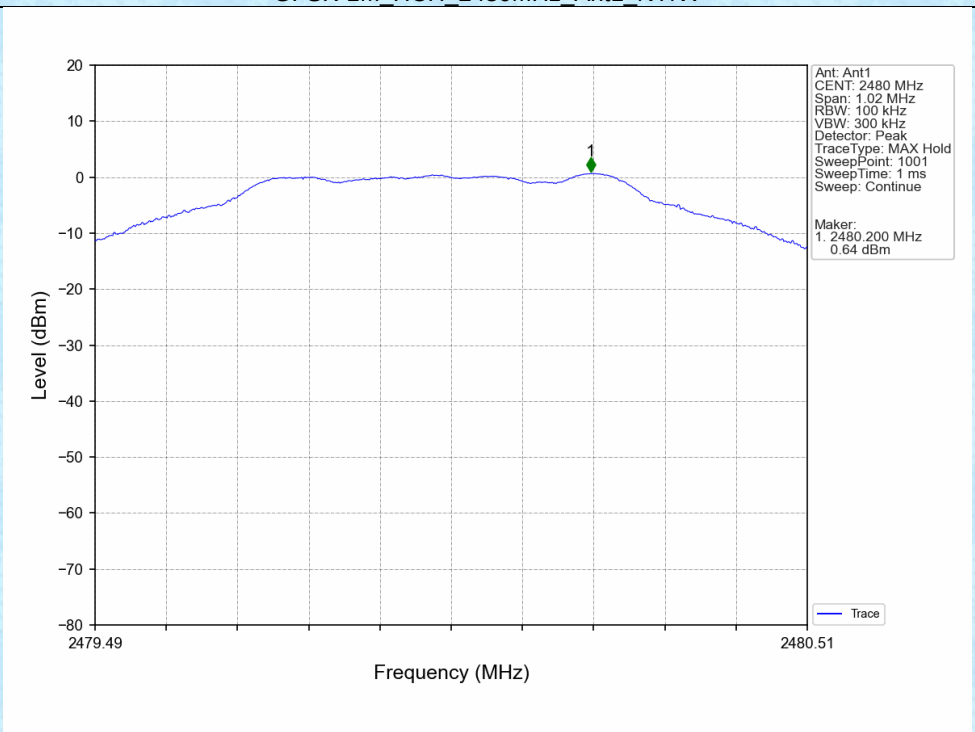

5.2.2 CSE

GFSK-1M_LCH_2402MHz_Ant1_NTNV

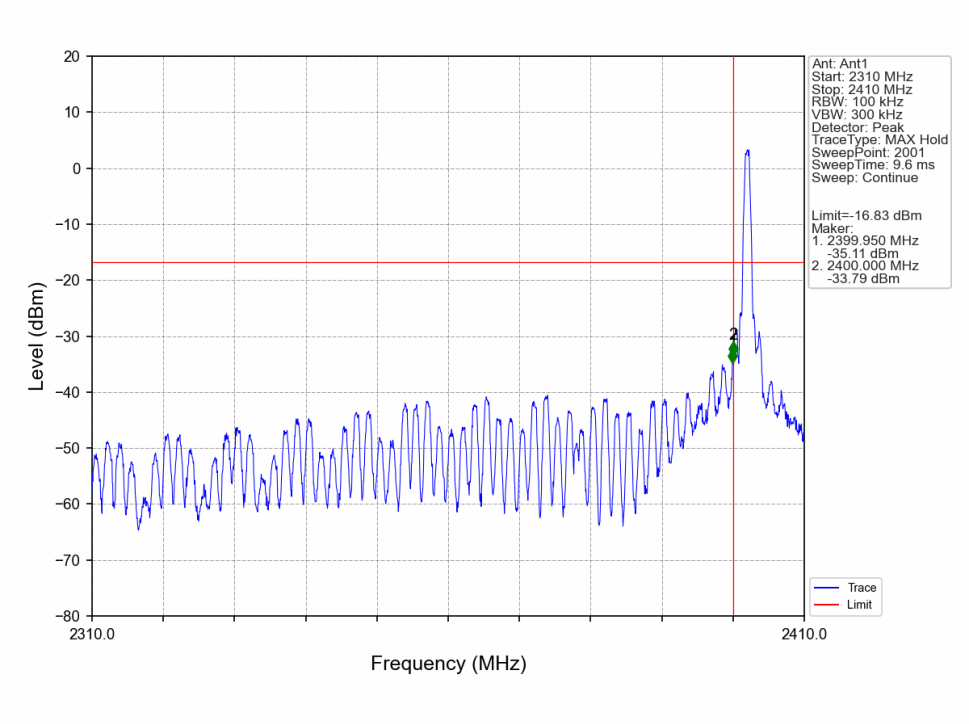

GFSK-1M_LCH_2402MHz_Ant1_NTNV

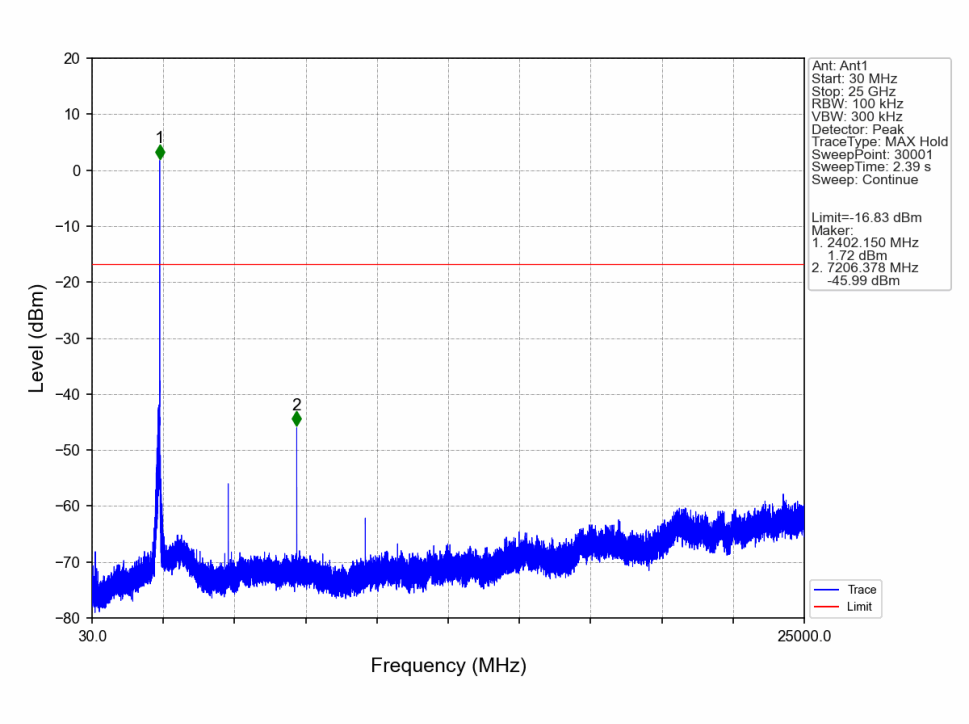

GFSK-1M_MCH_2440MHz_Ant1_NTNV

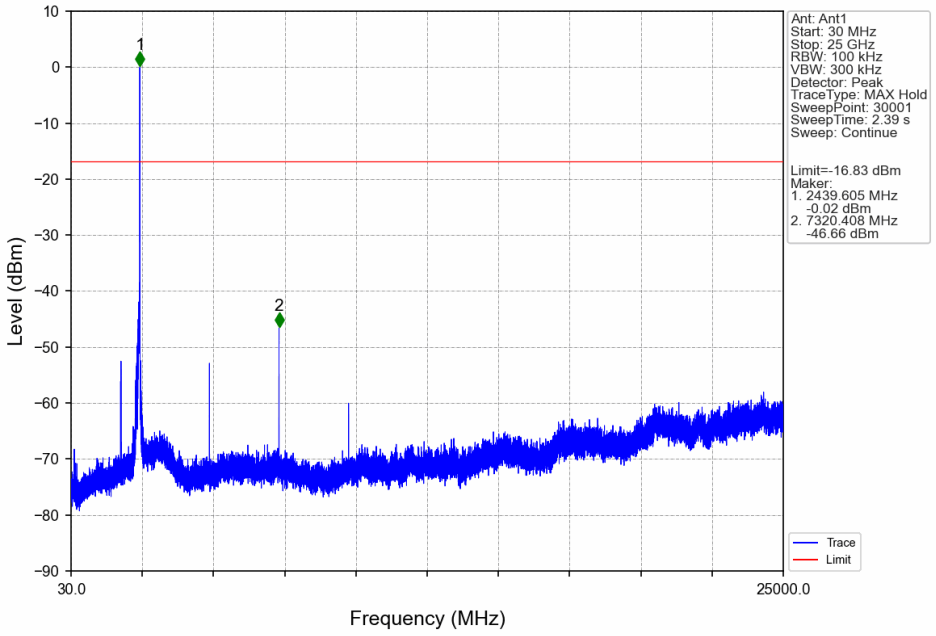

GFSK-1M_HCH_2480MHz_Ant1_NTNV

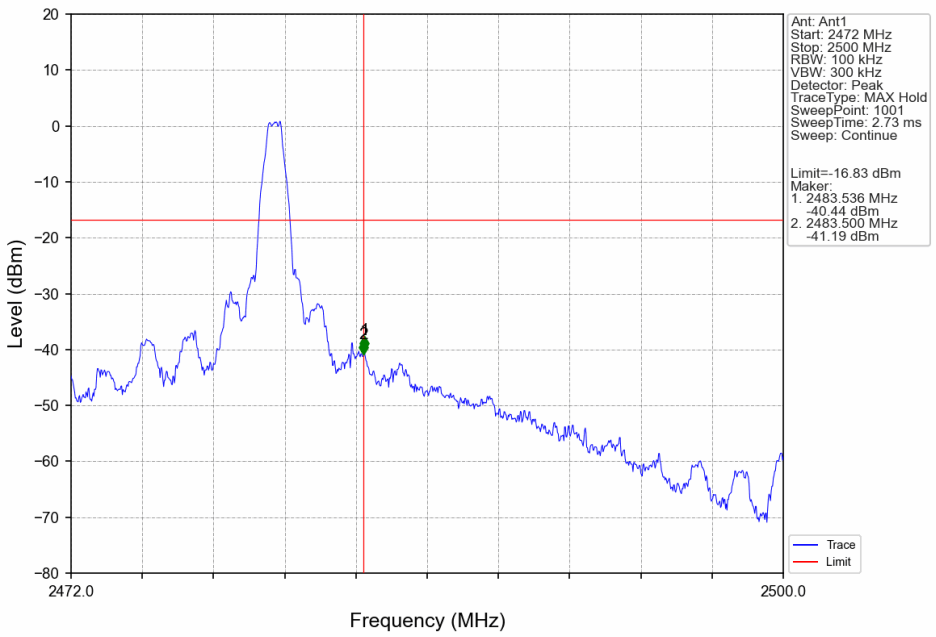

GFSK-1M_HCH_2480MHz_Ant1_NTNV

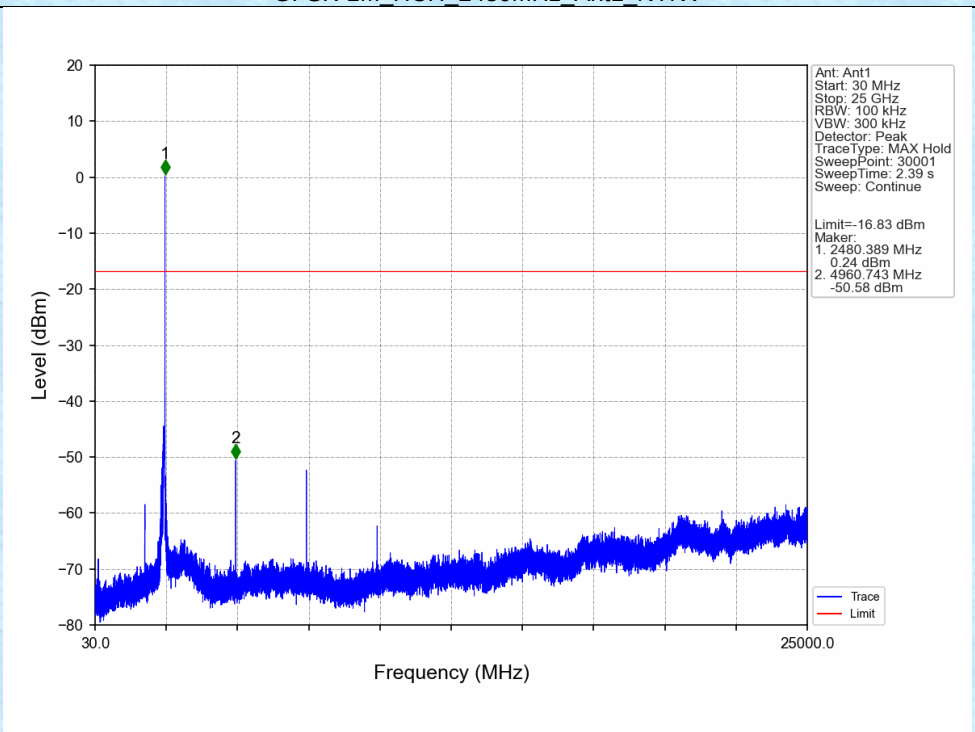

------End------