


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	0.66	0.79	0.68	-1.25	-0.46	-0.86
MAX. Gain	0.79dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	Guangzhou Junxingcheng Electronic Technology Co.,Ltd.					

Antenna Photo & Length (mm)

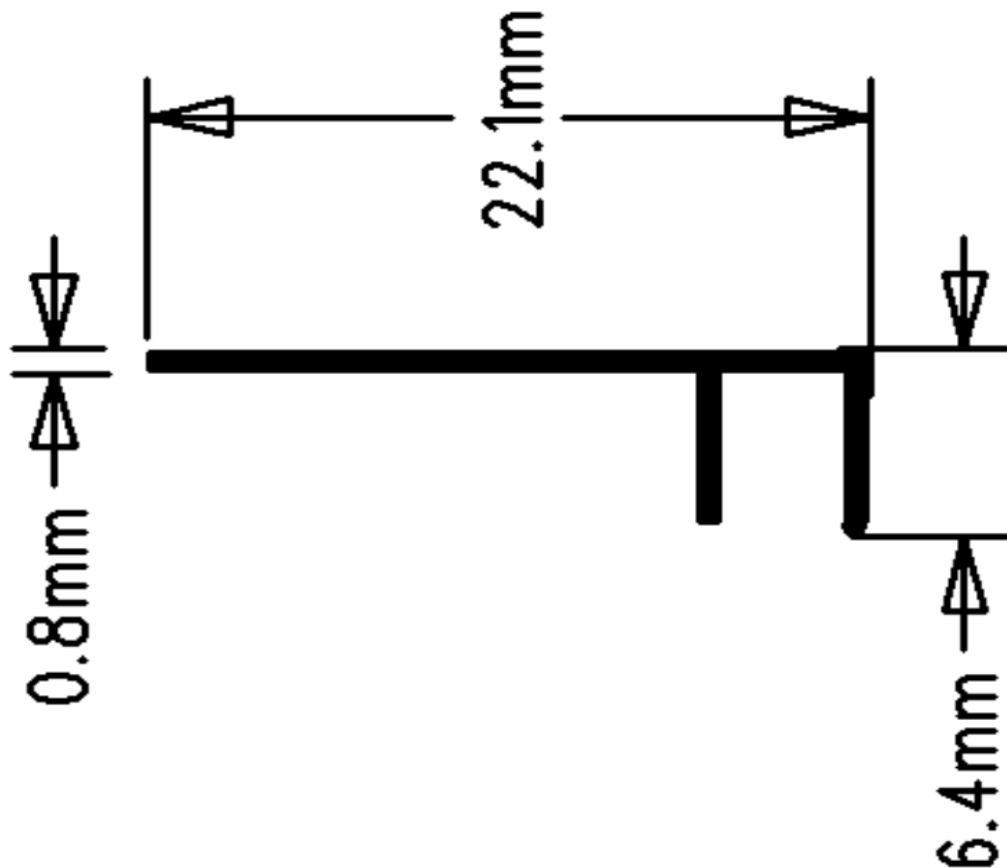

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div



Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	0.66	-22.09	-4.16
2450	0.79	-16.57	-3.49
2500	0.68	-20.09	-4.59

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div



Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.25	-22.32	-17.44
2450	-0.46	-21.67	-9.54
2500	-0.86	-23.65	-12.18

ANT Test Labs: Attestation of Global Compliance Co., Ltd.